

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	3222.3 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	42.2V x 67.5H
	At 50% of Imax	15.8V x 38.3H
	At 90% of Imax	5.9V x 16.6H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	719.9 lumens per klm.
	To 50% of Imax	343.3 lumens per klm.
	To 90% of Imax	76.4 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoHody-330mm-RGBW GREEN-1540D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15x40 DEG	DIM.:330mm	SERIAL No.:IES001526
MFR.:	SUR.:	Shielding Angle:

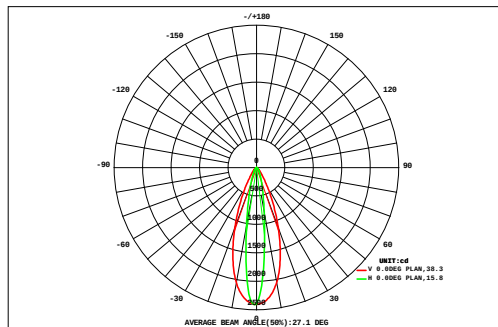

DATA OF LAMP		Eff:75.23lm/W	
MODEL	DLF RGBW 330MM	Imax(cd)	2407
NOMINAL POWER(W)	9.9	AVAILABILITY(%)	72.1
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	538.8
NOMINAL FLUX(lm)	747	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	747.0
TEST VOLTAGE(V)	221.4	q @50%(H,V)	38,16DEG

45 40 35 30 25 20 15 10 5 -5 -10 -15 -20 -25 -30 -35 -40 -45 -45	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	0.15	0.19	0.23	0.27	0.30	0.34	0.37	0.38	0.39	0.39	0.38	0.36	0.33	0.30	0.27	0.23	0.19	0.15	5.21	0.00		
	0.18	0.24	0.29	0.35	0.40	0.45	0.49	0.52	0.52	0.52	0.51	0.48	0.44	0.39	0.34	0.29	0.23	0.18	6.82	0.00		
	0.22	0.29	0.38	0.46	0.54	0.61	0.67	0.72	0.73	0.72	0.71	0.66	0.59	0.52	0.44	0.36	0.28	0.21	9.13	0.00		
	0.27	0.36	0.48	0.62	0.76	0.87	0.95	1.04	1.05	1.04	1.02	0.92	0.83	0.72	0.59	0.46	0.35	0.25	12.6	0.00		
	0.32	0.46	0.62	0.85	1.10	1.31	1.43	1.57	1.60	1.58	1.53	1.37	1.24	1.03	0.79	0.59	0.42	0.30	18.1	1.28		
	0.39	0.57	0.83	1.17	1.60	2.06	2.37	2.53	2.60	2.58	2.46	2.27	1.94	1.49	1.09	0.77	0.52	0.35	27.6	18.9		
	0.45	0.70	1.11	1.71	2.44	3.29	4.17	4.47	4.62	4.60	4.39	4.02	3.10	2.29	1.61	1.04	0.64	0.40	45.0	39.2		
	0.51	0.84	1.44	2.46	3.90	5.56	7.25	8.60	8.89	8.94	8.61	7.10	5.40	3.79	2.36	1.36	0.77	0.45	78.2	73.9		
	0.56	0.96	1.76	3.22	5.55	8.55	11.7	14.2	15.6	15.8	14.3	11.6	8.51	5.50	3.15	1.67	0.88	0.49	124	120		
	0.56	0.96	1.76	3.24	5.60	8.71	12.1	15.0	16.9	17.1	15.5	12.4	8.86	5.64	3.20	1.68	0.88	0.49	131	127		
	0.50	0.83	1.43	2.48	4.03	5.94	8.07	9.85	10.9	11.2	10.5	8.73	6.26	4.13	2.48	1.39	0.77	0.44	89.9	85.6		
	0.43	0.68	1.09	1.72	2.56	3.60	4.67	5.15	5.68	5.79	5.41	5.00	3.85	2.68	1.74	1.07	0.64	0.39	52.1	46.7		
	0.36	0.53	0.79	1.15	1.64	2.19	2.57	2.82	3.06	3.09	2.89	2.67	2.30	1.71	1.17	0.79	0.51	0.33	30.6	23.1		
	0.29	0.41	0.58	0.80	1.07	1.32	1.47	1.67	1.75	1.76	1.69	1.50	1.36	1.10	0.82	0.58	0.41	0.28	18.8	3.41		
	0.23	0.31	0.43	0.57	0.71	0.82	0.92	1.03	1.06	1.06	1.04	0.93	0.83	0.72	0.57	0.44	0.32	0.23	12.2	0.00		
	0.18	0.25	0.32	0.41	0.48	0.54	0.61	0.67	0.68	0.69	0.67	0.62	0.55	0.49	0.41	0.33	0.25	0.18	8.33	0.00		
	0.15	0.19	0.24	0.30	0.34	0.38	0.43	0.46	0.47	0.47	0.46	0.43	0.39	0.34	0.30	0.25	0.20	0.15	5.94	0.00		
	0.12	0.15	0.19	0.22	0.25	0.28	0.31	0.33	0.33	0.33	0.33	0.31	0.28	0.25	0.22	0.19	0.15	0.12	4.36	0.00		
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45		
F t	5.88	8.93	14.0	22.0	33.3	46.8	60.5	71.1	76.8	77.7	72.4	61.4	47.0	33.1	21.6	13.5	8.42	5.38	680	---		
F a	0.00	0.00	3.92	13.7	25.4	39.5	52.9	63.6	69.4	70.3	65.0	54.1	39.7	25.2	13.1	3.03	0.00	0.00	---	539		


one-half-peak spread: U:7.9,D:8.0 , L:19.3,R:19.3 Beam Type: Type 4 x 3 (H x V)

H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:DecoHody-330mm-RGBW GREEN-1540D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15x40 DEG	DIM.:330mm	SERIAL No.:IES001526
MFR.:	SUR.:	Shielding Angle:

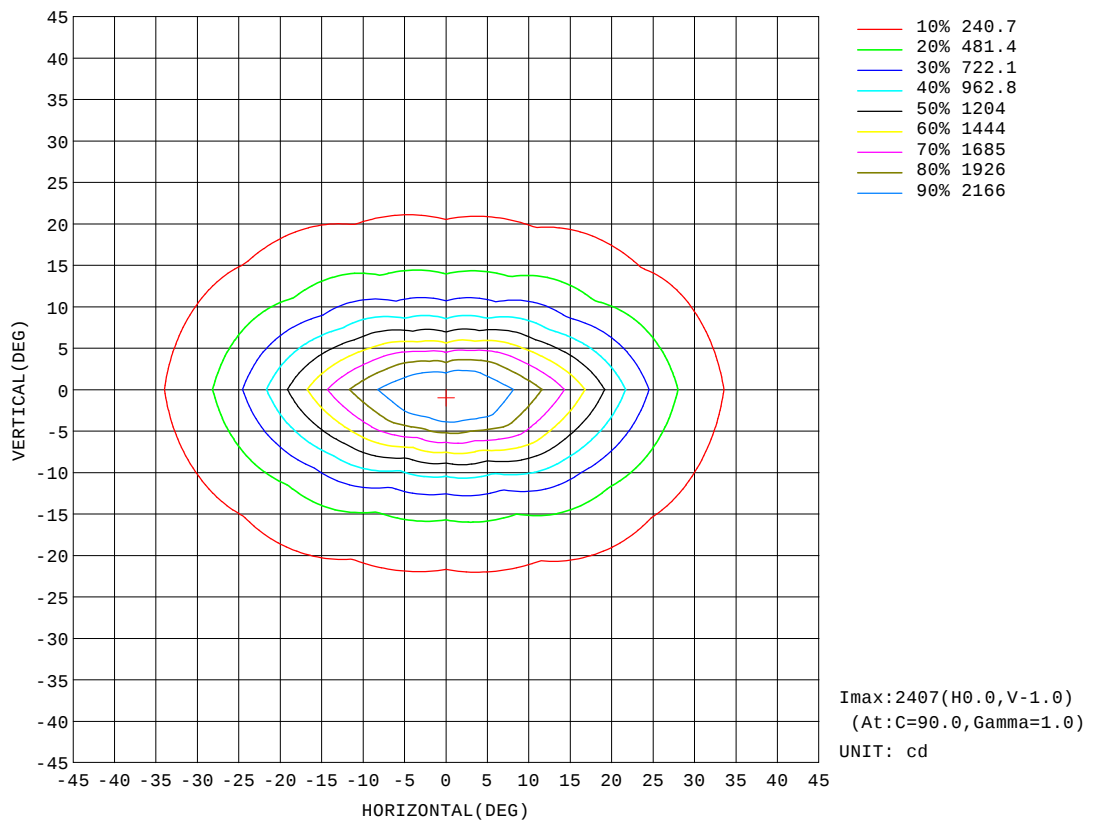


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoHody-330mm-RGBW GREEN-1540D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15x40 DEG	DIM.:330mm	SERIAL No.:IES001526
MFR.:	SUR.:	Shielding Angle:

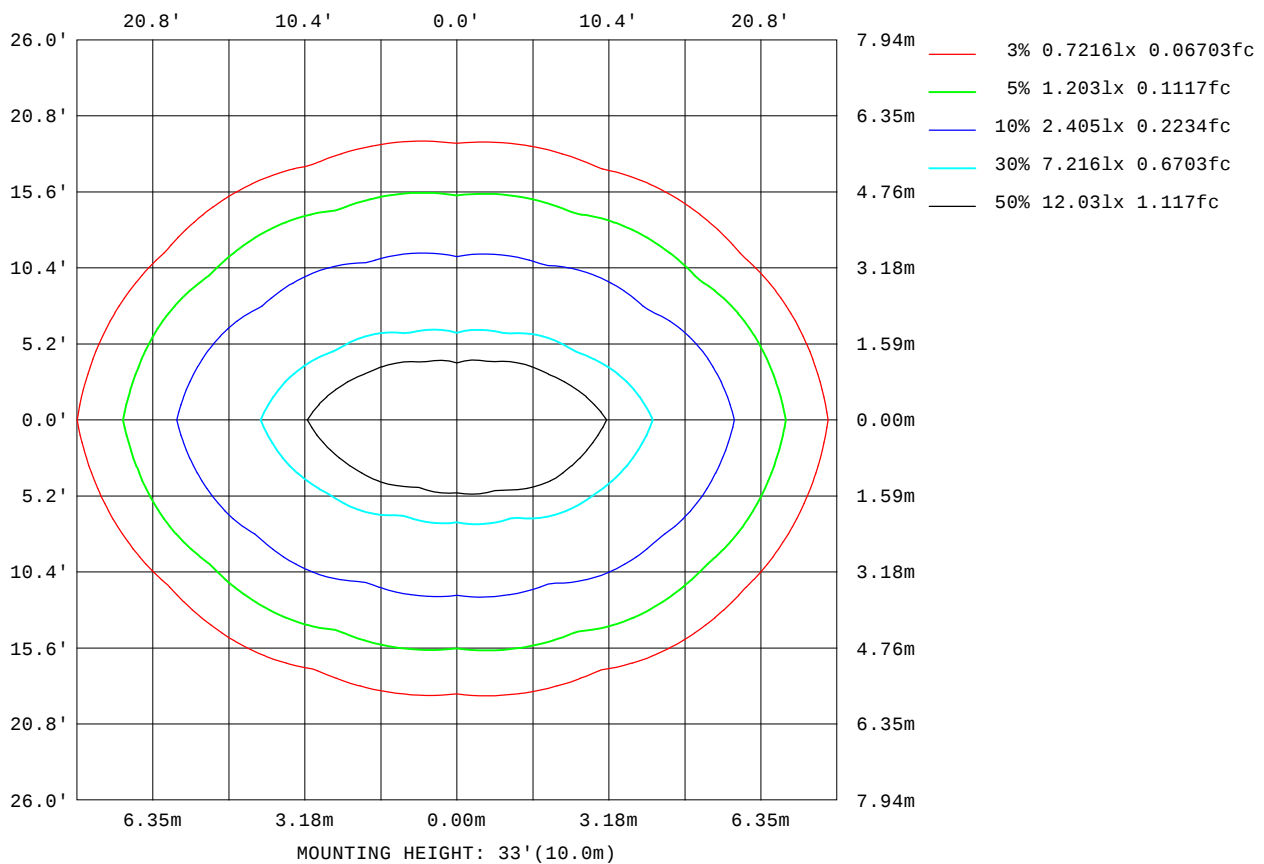

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

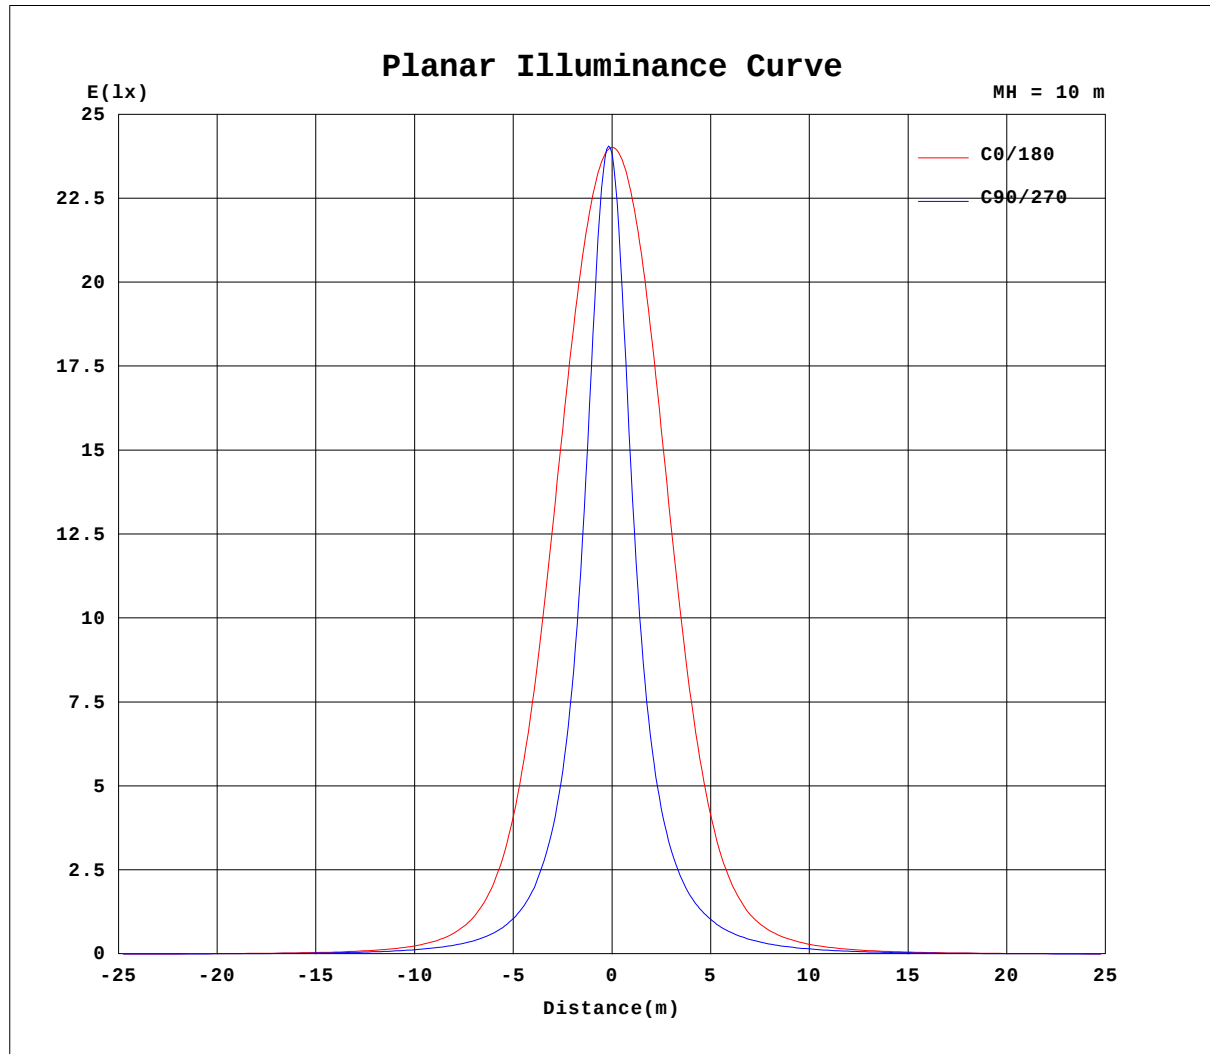


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoHody-330mm-RGBW GREEN-1540D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15x40 DEG	DIM.:330mm	SERIAL No.:IES001526
MFR.:	SUR.:	Shielding Angle:

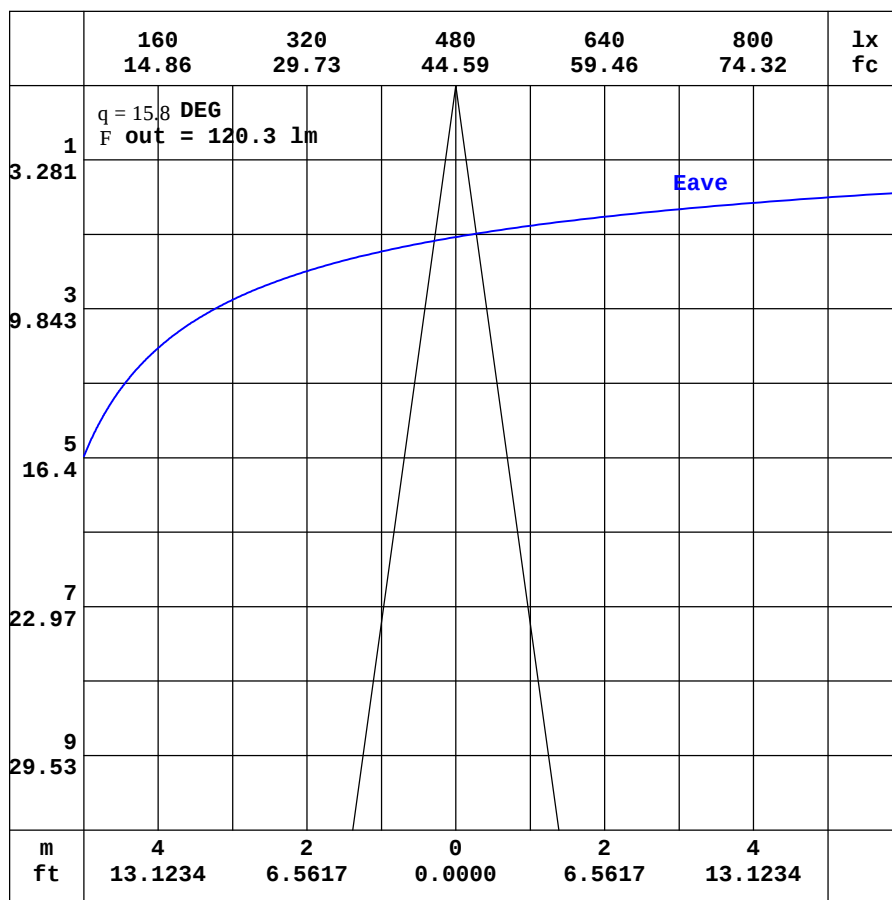

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoHody-330mm-RGBW GREEN-1540D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15x40 DEG	DIM.:330mm	SERIAL No.:IES001526
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.92	2.64	2.45	2.39	2.44	2.64	2.99	3.46	3.99	4.53	5.01	5.36	5.55	5.57	5.48	5.30	5.09	4.89	4.86
-170	2.92	2.60	2.37	2.28	2.27	2.37	2.58	2.85	3.16	3.46	3.74	3.94	4.09	4.18	4.22	4.33	4.62	4.90	5.12
-160	2.92	2.56	2.31	2.16	2.10	2.10	2.16	2.24	2.32	2.37	2.41	2.42	2.48	2.93	3.39	3.79	4.14	4.38	4.50
-150	2.92	2.54	2.26	2.06	1.94	1.85	1.79	1.72	1.61	1.44	1.30	1.50	1.76	2.06	2.36	2.65	2.90	3.07	3.13
-140	2.92	2.52	2.21	1.97	1.81	1.67	1.51	1.35	1.13	1.02	1.02	1.05	1.13	1.23	1.35	1.51	1.64	1.72	1.75
-130	2.92	2.51	2.19	1.92	1.71	1.53	1.34	1.12	1.02	1.00	0.96	0.91	0.87	0.82	0.81	0.83	0.86	0.87	0.87
-120	2.92	2.52	2.17	1.89	1.65	1.43	1.22	1.08	1.08	1.07	1.04	1.01	0.97	0.93	0.88	0.83	0.79	0.76	0.73
-110	2.92	2.53	2.18	1.87	1.61	1.38	1.14	1.08	1.09	1.10	1.11	1.12	1.13	1.14	1.13	1.12	1.11	1.10	1.09
-100	2.92	2.56	2.21	1.89	1.58	1.29	1.03	1.03	1.05	1.06	1.07	1.09	1.10	1.11	1.12	1.13	1.14	1.14	1.15
-90	2.92	2.59	2.26	1.93	1.60	1.26	0.93	0.93	0.93	0.94	0.94	0.94	0.94	0.93	0.93	0.93	0.92	0.92	0.92
-80	2.92	2.65	2.35	2.04	1.74	1.47	1.23	1.37	1.56	1.74	1.88	2.01	2.13	2.26	2.38	2.48	2.57	2.64	2.68
-70	2.92	2.71	2.53	2.45	2.57	2.65	2.76	3.24	3.84	4.33	4.76	5.16	5.52	5.98	6.41	6.76	7.02	7.19	7.27
-60	2.92	2.79	2.84	3.30	3.87	4.58	5.29	5.92	6.94	8.04	9.18	10.3	11.3	12.2	13.1	13.8	14.2	14.5	14.5
-50	2.92	2.92	3.36	4.34	5.55	6.97	8.21	9.37	11.2	13.5	15.8	18.1	20.2	21.9	23.7	25.3	26.4	26.9	26.8
-40	2.92	3.05	3.94	5.44	7.46	9.62	11.8	14.4	17.2	21.0	25.6	30.5	35.4	39.6	42.7	46.9	50.0	51.4	51.0
-30	2.92	3.16	4.52	6.57	9.48	12.4	16.1	20.5	26.0	32.5	40.5	51.5	64.1	76.8	87.0	93.8	105	110	108
-20	2.92	3.30	5.06	7.65	11.3	15.2	20.5	27.4	36.7	49.2	66.4	89.8	120	163	211	249	264	296	295
-10	2.92	3.43	5.47	8.50	12.7	17.6	24.4	34.0	47.7	68.3	100	153	244	381	543	727	908	961	1028
0	2.92	3.52	5.73	9.04	13.7	19.3	27.2	38.7	55.9	82.7	129	215	388	688	1121	1619	2053	2319	2402
10	2.92	3.50	5.62	8.78	13.2	18.3	25.5	35.5	49.8	70.9	104	156	245	370	509	651	798	807	787
20	2.92	3.43	5.35	8.17	12.2	16.6	22.4	30.2	40.5	54.2	72.6	96.7	126	166	207	237	247	267	253
30	2.92	3.36	4.94	7.27	10.7	14.3	18.6	24.1	30.8	38.8	48.3	59.8	72.5	85.1	95.2	102	111	114	111
40	2.92	3.30	4.45	6.29	8.89	11.8	14.8	18.3	22.4	27.1	32.3	37.8	43.0	47.6	51.0	55.1	57.8	58.8	57.9
50	2.92	3.22	3.95	5.33	6.96	9.16	11.3	13.4	15.7	18.4	21.1	23.8	26.3	28.4	30.4	31.9	33.0	33.3	32.9
60	2.92	3.12	3.52	4.32	5.36	6.53	8.03	9.41	10.7	12.0	13.3	14.6	15.8	16.8	17.8	18.5	19.0	19.2	19.1
70	2.92	3.06	3.26	3.55	4.02	4.61	5.18	5.87	6.60	7.31	7.92	8.40	8.80	9.28	9.72	10.0	10.3	10.4	10.4
80	2.92	3.00	3.07	3.16	3.28	3.40	3.53	3.69	3.88	4.07	4.27	4.46	4.63	4.76	4.87	4.95	5.00	5.02	5.02
90	2.92	2.94	2.95	2.96	2.97	2.98	2.99	2.97	2.95	2.93	2.90	2.88	2.86	2.85	2.84	2.82	2.81	2.80	2.79
100	2.92	2.88	2.83	2.79	2.75	2.71	2.67	2.60	2.54	2.48	2.43	2.38	2.33	2.31	2.30	2.29	2.29	2.29	2.29
110	2.92	2.83	2.74	2.65	2.57	2.50	2.44	2.38	2.33	2.29	2.25	2.23	2.21	2.20	2.20	2.19	2.18	2.17	2.17
120	2.92	2.78	2.65	2.54	2.45	2.38	2.34	2.32	2.30	2.30	2.32	2.34	2.36	2.39	2.42	2.44	2.44	2.43	2.41
130	2.92	2.74	2.58	2.46	2.38	2.35	2.34	2.38	2.47	2.58	2.71	2.87	3.04	3.22	3.41	3.58	3.73	3.82	3.86
140	2.92	2.71	2.53	2.41	2.37	2.37	2.44	2.60	2.83	3.10	3.40	3.75	4.12	4.49	4.83	5.12	5.34	5.49	5.57
150	2.92	2.68	2.49	2.39	2.37	2.43	2.61	2.89	3.25	3.67	4.12	4.60	5.05	5.45	5.76	5.98	6.10	6.17	6.19
160	2.92	2.66	2.47	2.38	2.39	2.52	2.79	3.17	3.64	4.14	4.67	5.15	5.58	5.90	6.12	6.27	6.35	6.41	6.48
170	2.92	2.65	2.45	2.39	2.42	2.60	2.92	3.37	3.89	4.44	4.96	5.39	5.71	5.88	5.98	5.97	5.87	5.86	6.13
180	2.92	2.64	2.45	2.39	2.44	2.64	2.99	3.46	3.99	4.53	5.01	5.36	5.55	5.57	5.48	5.30	5.09	4.89	4.88

H_b Range: -90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-08-14

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoHody-330mm-RGBW GREEN-1540D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15x40 DEG	DIM.:330mm	SERIAL No.:IES001526
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	4.44	4.22	3.98	3.71	3.37	2.95	2.51	2.08	1.69	1.38	1.18	1.08	1.06	1.06	1.06	1.02	0.93	0.84
-170	4.98	4.71	4.40	3.98	3.48	2.96	2.46	2.00	1.62	1.33	1.15	1.07	1.06	1.06	1.06	1.02	0.93	0.84
-160	4.40	4.19	3.87	3.48	3.05	2.60	2.14	1.75	1.44	1.23	1.11	1.06	1.06	1.07	1.07	1.02	0.93	0.84
-150	3.11	2.97	2.76	2.48	2.18	1.89	1.62	1.41	1.24	1.13	1.07	1.06	1.06	1.07	1.06	1.02	0.93	0.84
-140	1.75	1.70	1.60	1.47	1.35	1.23	1.15	1.10	1.08	1.07	1.06	1.06	1.07	1.07	1.05	1.01	0.92	0.84
-130	0.89	0.90	0.89	0.88	0.89	0.93	0.96	1.00	1.03	1.05	1.06	1.07	1.08	1.07	1.05	0.99	0.91	0.84
-120	0.77	0.81	0.85	0.90	0.94	0.98	1.03	1.05	1.07	1.08	1.09	1.09	1.08	1.06	1.03	0.96	0.90	0.84
-110	1.10	1.11	1.12	1.13	1.14	1.15	1.14	1.13	1.12	1.11	1.10	1.09	1.07	1.04	0.99	0.94	0.87	0.84
-100	1.15	1.15	1.14	1.14	1.13	1.12	1.11	1.11	1.10	1.09	1.07	1.05	1.02	0.99	0.95	0.90	0.86	0.84
-90	0.93	0.94	0.95	0.96	0.97	0.99	0.98	0.98	0.98	0.97	0.97	0.97	0.95	0.93	0.90	0.88	0.86	0.84
-80	2.64	2.58	2.49	2.38	2.26	2.13	2.02	1.90	1.76	1.61	1.43	1.29	1.14	1.04	0.99	0.93	0.86	0.84
-70	7.23	7.10	6.87	6.56	6.17	5.73	5.29	4.82	4.36	3.88	3.38	2.72	2.14	1.73	1.31	1.02	0.92	0.84
-60	14.6	14.4	13.9	13.3	12.4	11.5	10.6	9.45	8.26	7.03	5.91	4.89	3.88	2.74	1.95	1.28	0.97	0.84
-50	27.0	26.5	25.5	24.0	22.3	20.6	18.5	16.2	13.9	11.5	9.33	7.32	5.68	4.19	2.64	1.66	1.01	0.84
-40	51.5	50.1	47.2	43.0	40.0	35.8	31.0	26.1	21.5	17.3	13.6	10.4	7.62	5.51	3.57	2.04	1.06	0.84
-30	111	105	94.7	87.9	77.6	64.8	52.2	41.0	31.9	24.5	18.5	13.7	9.73	6.74	4.42	2.33	1.15	0.84
-20	300	269	257	219	167	123	88.8	63.3	45.2	32.6	23.5	16.8	11.6	7.79	5.06	2.59	1.23	0.84
-10	1005	979	790	571	387	241	147	91.6	59.7	40.2	27.8	19.2	13.1	8.58	5.49	2.78	1.27	0.84
0	2312	2047	1621	1122	683	376	202	114	69.5	44.9	30.2	20.5	13.8	8.94	5.67	2.84	1.28	0.84
10	803	782	622	484	353	232	145	92.6	61.3	41.7	29.0	20.1	13.7	8.99	5.75	2.92	1.34	0.84
20	262	237	225	194	155	117	89.9	66.5	48.6	35.4	25.7	18.4	12.8	8.59	5.56	2.87	1.36	0.84
30	113	108	98.8	91.5	81.3	69.2	57.2	46.4	36.6	28.3	21.4	15.9	11.3	7.83	5.12	2.74	1.35	0.84
40	58.5	57.2	54.3	50.2	46.6	42.0	36.8	31.5	26.5	21.6	17.0	12.9	9.50	6.82	4.38	2.55	1.31	0.84
50	33.2	32.8	31.7	30.1	28.1	26.0	23.5	20.9	18.1	15.5	12.8	9.99	7.66	5.59	3.57	2.23	1.30	0.84
60	19.2	18.9	18.5	17.7	16.8	15.7	14.5	13.2	11.8	10.4	9.04	7.47	5.80	4.14	2.97	1.94	1.29	0.84
70	10.4	10.3	10.0	9.71	9.27	8.75	8.28	7.76	7.19	6.58	5.86	4.99	4.05	3.15	2.38	1.74	1.26	0.84
80	5.00	4.95	4.88	4.78	4.66	4.53	4.40	4.23	4.04	3.86	3.69	3.53	3.04	2.55	2.10	1.66	1.22	0.84
90	2.80	2.82	2.84	2.85	2.87	2.89	2.91	2.94	2.97	2.99	3.02	3.05	2.68	2.31	1.94	1.57	1.21	0.84
100	2.29	2.29	2.29	2.29	2.31	2.32	2.37	2.42	2.48	2.54	2.60	2.63	2.39	2.12	1.83	1.52	1.19	0.84
110	2.18	2.19	2.20	2.22	2.23	2.24	2.25	2.27	2.29	2.32	2.37	2.36	2.18	1.97	1.74	1.48	1.17	0.84
120	2.44	2.46	2.46	2.45	2.42	2.40	2.38	2.35	2.32	2.31	2.33	2.19	2.01	1.84	1.66	1.43	1.16	0.84
130	3.85	3.77	3.64	3.48	3.30	3.11	2.93	2.77	2.63	2.51	2.32	2.07	1.89	1.73	1.57	1.38	1.13	0.84
140	5.52	5.41	5.23	4.96	4.62	4.24	3.86	3.50	3.18	2.79	2.33	1.99	1.77	1.62	1.47	1.32	1.10	0.84
150	6.18	6.14	6.05	5.86	5.56	5.18	4.73	4.24	3.48	2.79	2.26	1.89	1.64	1.50	1.38	1.25	1.07	0.84
160	6.47	6.46	6.36	6.20	5.99	5.68	4.87	4.01	3.22	2.56	2.05	1.70	1.49	1.36	1.29	1.18	1.02	0.84
170	6.09	6.11	6.18	5.82	5.22	4.57	3.89	3.22	2.59	2.07	1.68	1.42	1.29	1.22	1.17	1.10	0.98	0.84
180	4.44	4.22	3.98	3.71	3.37	2.95	2.51	2.08	1.69	1.38	1.18	1.08	1.06	1.06	1.06	1.02	0.93	0.84

H_b Range: -90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-08-14

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: