

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		3472.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	39.6V x 65.8H
	At 50% of Imax	15.0V x 37.8H
	At 90% of Imax	5.7V x 16.4H
Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	715.8 lumens per klm.
	To 50% of Imax	349.8 lumens per klm.
	To 90% of Imax	77.5 lumens per klm.
Upward LOR		2.2 %
Downward LOR		97.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoHody-330mm-RGBW RED-1540D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:15x40 DEG	DIM.:330mm	SERIAL No.:IES001525
MFR.:	SUR.:	Shielding Angle:

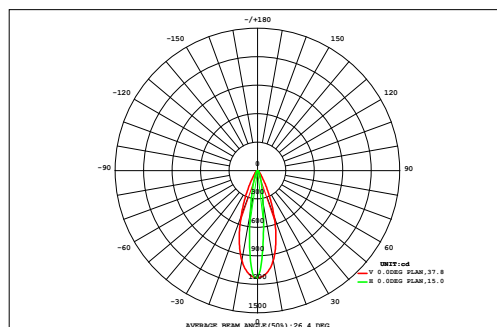

DATA OF LAMP		Eff:38.86lm/W	
MODEL	DLF RGBW 330MM	Imax(cd)	1136
NOMINAL POWER(W)	8.41	AVAILABILITY(%)	71.7
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	234.6
NOMINAL FLUX(lm)	327.2	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	327.2
TEST VOLTAGE(V)	221.4	q @50%(H,V)	38,15DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.06	0.08	0.10	0.11	0.13	0.14	0.15	0.16	0.16	0.16	0.16	0.15	0.14	0.13	0.11	0.09	0.08	0.06	2.18	0.00
45	0.06	0.08	0.10	0.11	0.13	0.14	0.15	0.16	0.16	0.16	0.16	0.15	0.14	0.13	0.11	0.09	0.08	0.06	2.18	0.00
40	0.08	0.10	0.12	0.15	0.17	0.19	0.21	0.22	0.22	0.22	0.21	0.20	0.18	0.16	0.14	0.12	0.10	0.08	2.85	0.00
35	0.09	0.12	0.16	0.19	0.23	0.25	0.28	0.30	0.31	0.30	0.30	0.28	0.25	0.22	0.19	0.15	0.12	0.09	3.82	0.00
30	0.11	0.15	0.20	0.26	0.32	0.36	0.40	0.44	0.44	0.44	0.43	0.39	0.35	0.30	0.25	0.19	0.15	0.11	5.26	0.00
25	0.13	0.19	0.26	0.35	0.45	0.55	0.60	0.65	0.66	0.66	0.64	0.58	0.52	0.43	0.33	0.25	0.18	0.12	7.53	0.00
20	0.16	0.24	0.34	0.48	0.66	0.87	0.99	1.04	1.08	1.07	1.02	0.95	0.81	0.62	0.45	0.32	0.22	0.14	11.5	6.29
15	0.19	0.29	0.46	0.72	1.03	1.40	1.78	1.90	1.97	1.96	1.86	1.71	1.31	0.97	0.68	0.43	0.27	0.17	19.1	16.2
10	0.21	0.35	0.60	1.05	1.71	2.46	3.22	3.85	3.96	3.99	3.85	3.15	2.38	1.66	1.02	0.57	0.32	0.19	34.5	32.4
5	0.24	0.41	0.74	1.40	2.49	3.90	5.38	6.62	7.29	7.39	6.67	5.37	3.89	2.48	1.38	0.71	0.37	0.20	56.9	55.1
0	0.23	0.40	0.74	1.40	2.51	3.98	5.58	7.03	7.94	8.04	7.24	5.74	4.06	2.53	1.40	0.71	0.37	0.20	60.1	58.3
-5	0.21	0.35	0.60	1.06	1.76	2.63	3.62	4.45	4.91	5.05	4.76	3.93	2.79	1.81	1.06	0.58	0.32	0.18	40.1	37.9
-10	0.18	0.28	0.46	0.73	1.08	1.53	2.02	2.21	2.43	2.48	2.33	2.17	1.64	1.13	0.73	0.44	0.26	0.16	22.3	19.6
-15	0.15	0.22	0.33	0.48	0.68	0.91	1.07	1.17	1.26	1.27	1.20	1.11	0.95	0.70	0.48	0.32	0.21	0.13	12.7	8.47
-20	0.12	0.17	0.24	0.33	0.44	0.54	0.60	0.68	0.71	0.72	0.69	0.61	0.55	0.45	0.33	0.24	0.16	0.11	7.70	0.42
-25	0.10	0.13	0.18	0.23	0.29	0.34	0.37	0.42	0.43	0.43	0.42	0.38	0.34	0.29	0.23	0.18	0.13	0.09	4.97	0.00
-30	0.08	0.10	0.13	0.17	0.20	0.22	0.25	0.27	0.28	0.28	0.27	0.25	0.22	0.20	0.17	0.13	0.10	0.07	3.39	0.00
-35	0.06	0.08	0.10	0.12	0.14	0.16	0.18	0.19	0.19	0.19	0.19	0.18	0.16	0.14	0.12	0.10	0.08	0.06	2.42	0.00
-40	0.05	0.06	0.08	0.09	0.10	0.12	0.13	0.13	0.14	0.14	0.13	0.13	0.11	0.10	0.09	0.08	0.06	0.05	1.78	0.00
-45	0.05	0.06	0.08	0.09	0.10	0.12	0.13	0.13	0.14	0.14	0.13	0.13	0.11	0.10	0.09	0.08	0.06	0.05	1.78	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
F t	2.45	3.72	5.84	9.31	14.4	20.5	26.8	31.7	34.4	34.8	32.4	27.3	20.7	14.3	9.18	5.62	3.48	2.22	299	---
F a	0.00	0.00	1.08	5.40	10.7	17.1	23.3	28.2	31.0	31.3	28.8	23.7	17.2	10.6	5.36	0.87	0.00	0.00	---	235


one-half-peak spread: U:7.5,D:7.6 , L:19.0,R:19.0 Beam Type: Type 4 x 3 (H x V)

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:DecoHody-330mm-RGBW RED-1540D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:15x40 DEG	DIM.:330mm	SERIAL No.:IES001525
MFR.:	SUR.:	Shielding Angle:

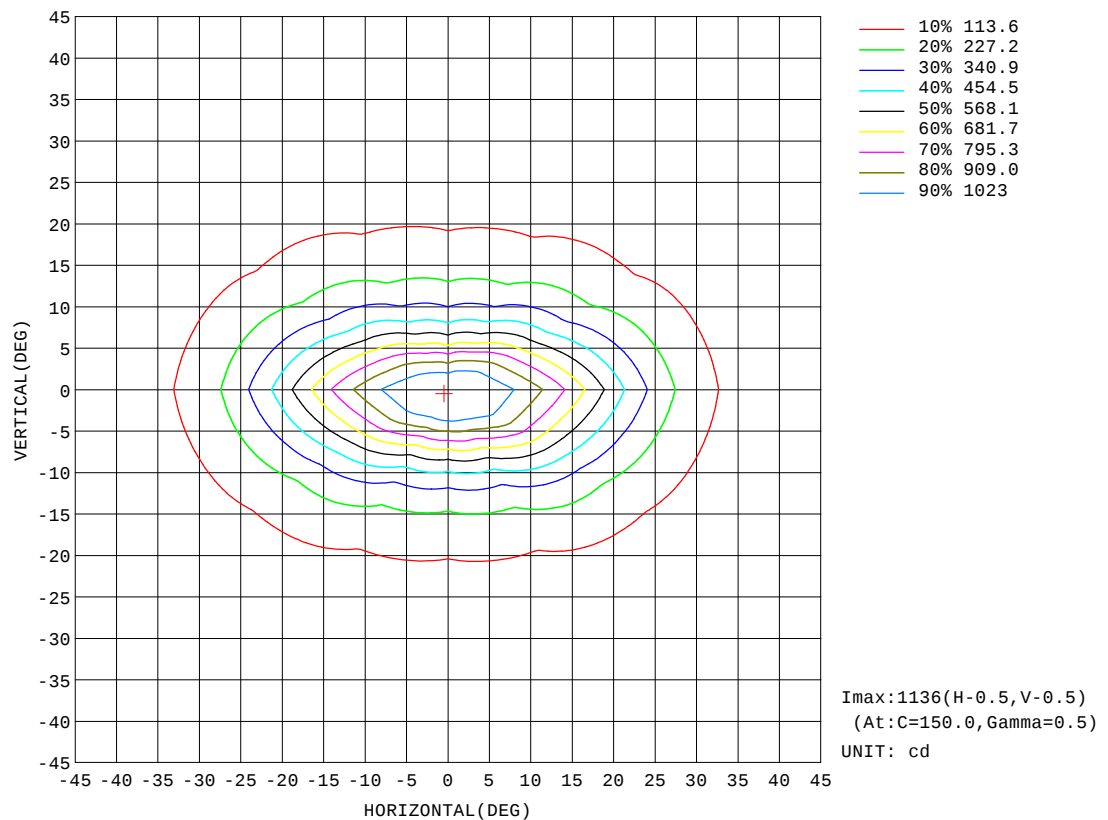


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoHody-330mm-RGBW RED-1540D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:15x40 DEG	DIM.:330mm	SERIAL No.:IES001525
MFR.:	SUR.:	Shielding Angle:

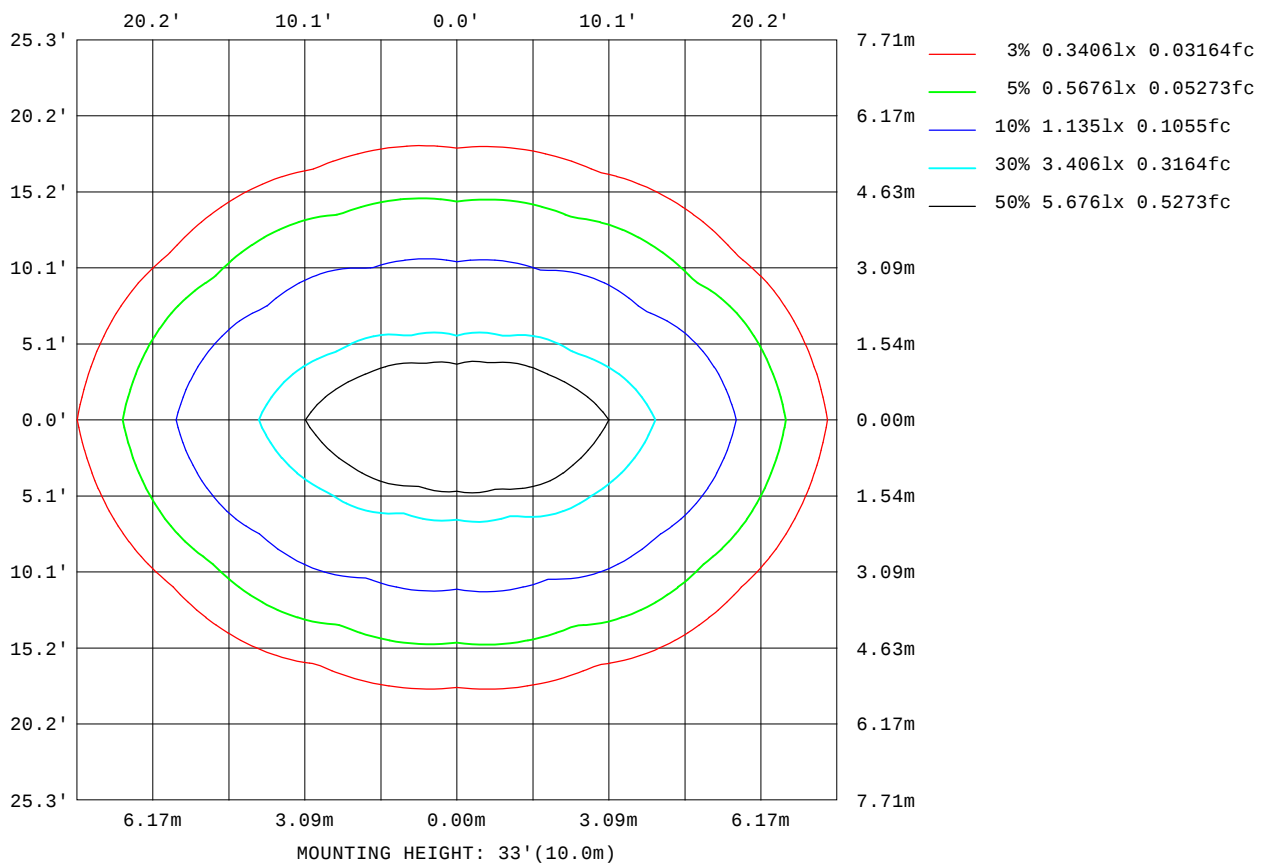

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

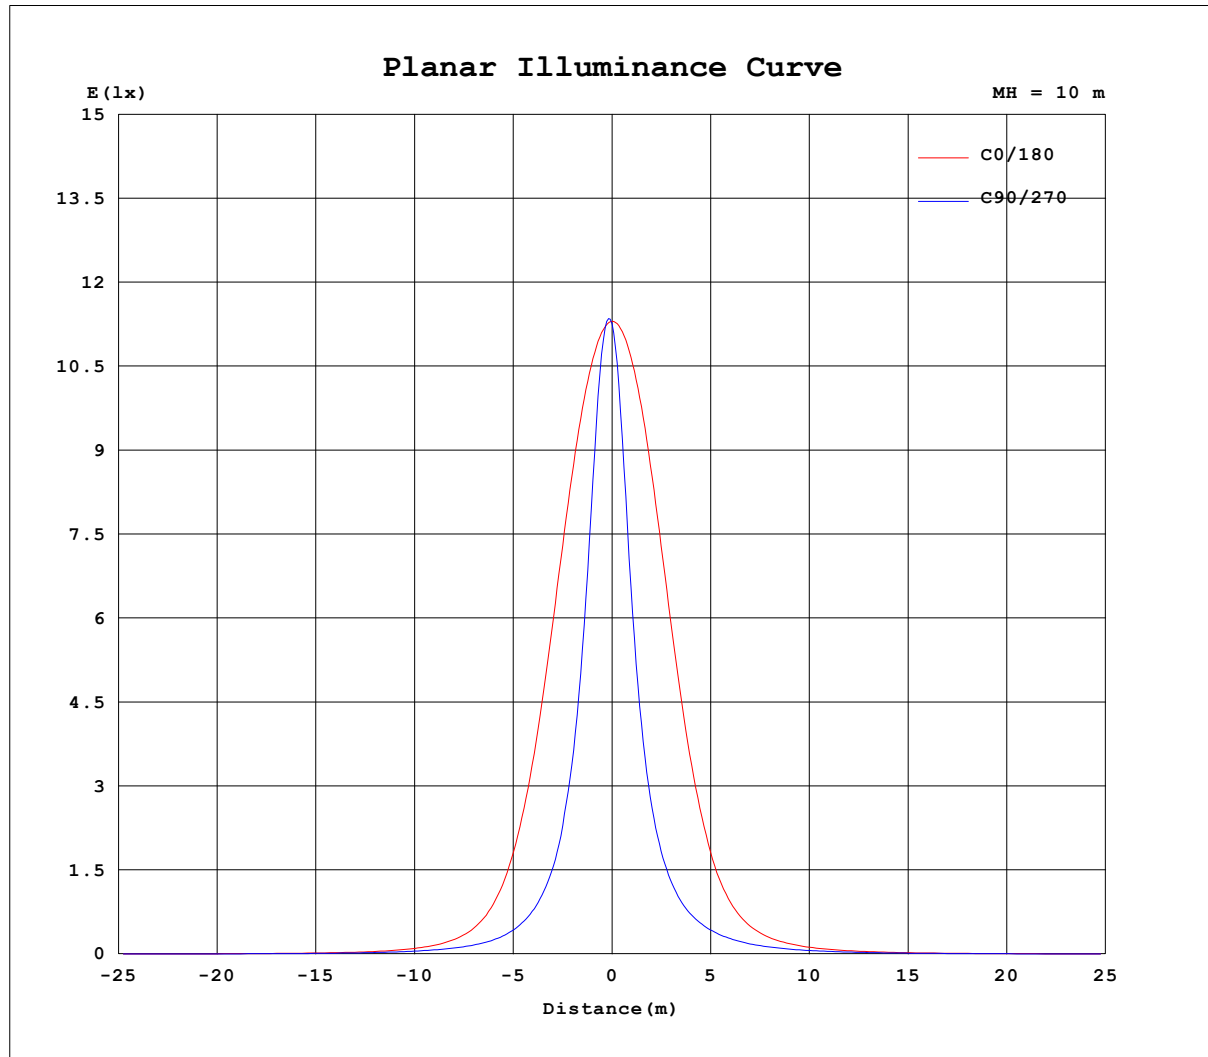


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoHody-330mm-RGBW RED-1540D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:15x40 DEG	DIM.:330mm	SERIAL No.:IES001525
MFR.:	SUR.:	Shielding Angle:

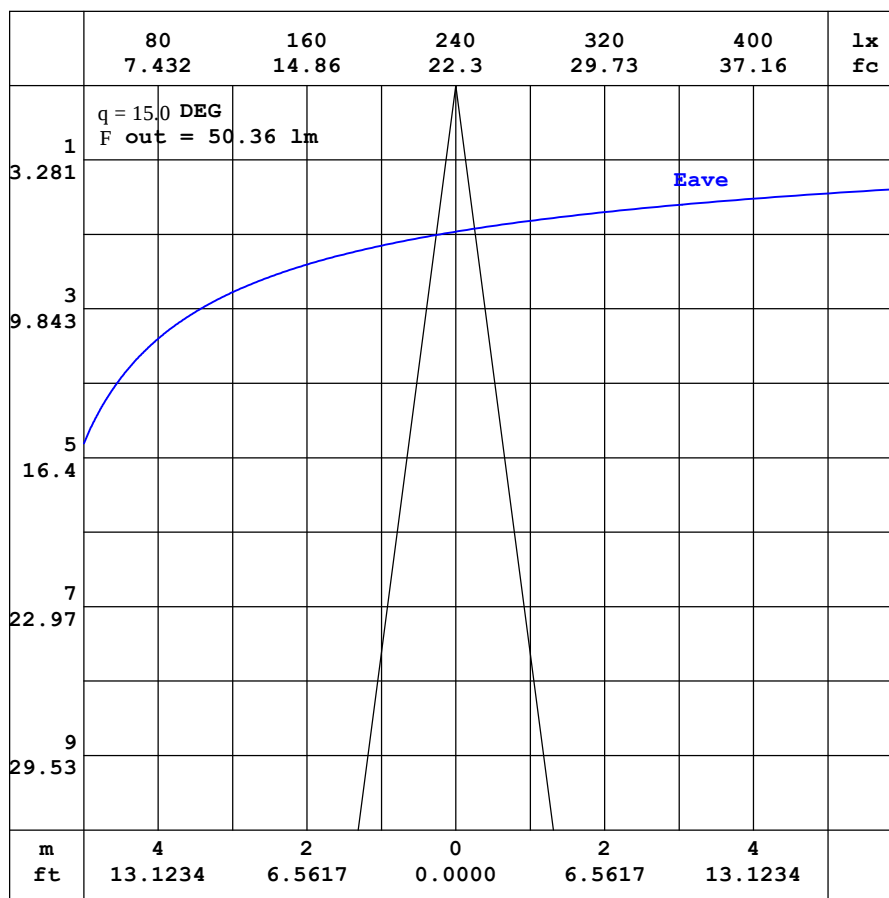

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoHody-330mm-RGBW RED-1540D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:15x40 DEG	DIM.:330mm	SERIAL No.:IES001525
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.23	1.11	1.01	1.01	1.04	1.12	1.27	1.49	1.73	1.98	2.20	2.35	2.43	2.42	2.37	2.28	2.19	2.10	2.09
-170	1.23	1.09	0.98	0.96	0.96	1.00	1.10	1.22	1.36	1.50	1.63	1.73	1.80	1.84	1.88	1.95	2.06	2.18	2.28
-160	1.23	1.08	0.96	0.91	0.88	0.88	0.91	0.95	0.98	1.01	1.03	1.03	1.07	1.28	1.48	1.67	1.84	1.96	2.03
-150	1.23	1.07	0.93	0.87	0.82	0.78	0.75	0.72	0.67	0.59	0.53	0.61	0.73	0.86	1.00	1.12	1.25	1.34	1.38
-140	1.23	1.06	0.93	0.83	0.76	0.70	0.63	0.56	0.47	0.41	0.41	0.41	0.43	0.47	0.52	0.59	0.66	0.70	0.72
-130	1.23	1.05	0.92	0.80	0.72	0.64	0.56	0.46	0.42	0.41	0.39	0.36	0.34	0.32	0.31	0.31	0.31	0.32	0.32
-120	1.23	1.06	0.92	0.80	0.69	0.60	0.51	0.45	0.45	0.45	0.44	0.43	0.41	0.39	0.35	0.33	0.30	0.28	0.27
-110	1.23	1.07	0.92	0.80	0.68	0.58	0.48	0.46	0.46	0.46	0.47	0.47	0.48	0.48	0.48	0.47	0.47	0.46	0.45
-100	1.23	1.08	0.94	0.80	0.68	0.56	0.45	0.45	0.46	0.46	0.46	0.47	0.48	0.48	0.48	0.49	0.49	0.49	0.49
-90	1.23	1.10	0.96	0.82	0.68	0.54	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.40	0.40	0.40
-80	1.23	1.12	0.99	0.86	0.73	0.60	0.49	0.54	0.62	0.70	0.76	0.82	0.88	0.92	0.95	0.98	1.01	1.02	1.03
-70	1.23	1.14	1.06	1.02	1.05	1.07	1.10	1.29	1.55	1.76	1.94	2.11	2.26	2.43	2.59	2.72	2.82	2.87	2.89
-60	1.23	1.18	1.19	1.36	1.59	1.87	2.16	2.41	2.84	3.30	3.77	4.22	4.61	4.97	5.32	5.60	5.78	5.87	5.87
-50	1.23	1.23	1.40	1.80	2.30	2.87	3.39	3.88	4.62	5.57	6.51	7.43	8.29	9.03	9.76	10.4	10.8	10.9	10.8
-40	1.23	1.29	1.64	2.25	3.09	4.00	4.91	5.98	7.15	8.65	10.6	12.6	14.6	16.3	17.6	19.2	20.4	21.0	20.8
-30	1.23	1.33	1.89	2.75	3.95	5.19	6.70	8.56	10.8	13.5	16.7	21.2	26.4	31.6	35.6	38.2	42.6	44.8	43.9
-20	1.23	1.39	2.12	3.20	4.71	6.37	8.54	11.5	15.3	20.4	27.6	37.2	49.9	67.6	87.1	102	108	122	119
-10	1.23	1.44	2.29	3.56	5.33	7.40	10.2	14.3	20.0	28.5	41.9	64.5	103	161	233	317	400	419	447
0	1.23	1.48	2.40	3.78	5.75	8.11	11.4	16.3	23.4	34.7	54.0	91.2	166	307	511	752	962	1090	1131
10	1.23	1.47	2.35	3.68	5.53	7.69	10.7	14.9	20.8	29.6	43.2	65.6	103	157	220	281	347	349	340
20	1.23	1.45	2.25	3.42	5.09	6.92	9.34	12.6	16.8	22.5	30.1	40.0	51.9	68.3	85.8	99.2	103	110	105
30	1.23	1.42	2.08	3.05	4.47	5.95	7.75	10.0	12.8	16.0	19.9	24.7	30.0	35.3	39.7	42.7	46.6	48.1	46.9
40	1.23	1.40	1.88	2.63	3.70	4.90	6.13	7.57	9.30	11.2	13.3	15.6	17.9	19.8	21.3	23.0	24.2	24.7	24.3
50	1.23	1.36	1.67	2.25	2.92	3.81	4.67	5.52	6.48	7.60	8.79	9.90	10.9	11.8	12.6	13.3	13.8	13.9	13.8
60	1.23	1.32	1.49	1.83	2.27	2.74	3.34	3.89	4.42	4.95	5.49	6.03	6.53	6.97	7.40	7.72	7.92	8.01	7.98
70	1.23	1.29	1.39	1.51	1.71	1.96	2.21	2.46	2.75	3.03	3.27	3.48	3.65	3.84	4.02	4.16	4.25	4.30	4.31
80	1.23	1.27	1.31	1.35	1.41	1.46	1.53	1.59	1.66	1.72	1.80	1.87	1.93	1.99	2.04	2.08	2.11	2.13	2.13
90	1.23	1.24	1.25	1.26	1.27	1.28	1.29	1.27	1.26	1.24	1.23	1.21	1.20	1.20	1.20	1.20	1.20	1.21	1.21
100	1.23	1.21	1.20	1.18	1.17	1.15	1.14	1.10	1.07	1.04	1.01	0.99	0.96	0.96	0.95	0.95	0.96	0.96	0.96
110	1.23	1.20	1.15	1.12	1.09	1.06	1.03	1.00	0.98	0.96	0.95	0.93	0.92	0.92	0.92	0.92	0.91	0.91	0.91
120	1.23	1.17	1.12	1.07	1.03	1.01	0.99	0.98	0.97	0.96	0.96	0.98	0.99	1.00	1.00	1.01	1.00	1.00	0.99
130	1.23	1.15	1.08	1.03	1.01	0.99	0.99	0.99	1.02	1.07	1.13	1.21	1.29	1.38	1.46	1.53	1.60	1.63	1.64
140	1.23	1.14	1.06	1.01	1.00	1.00	1.01	1.08	1.18	1.30	1.45	1.61	1.79	1.97	2.12	2.26	2.35	2.41	2.45
150	1.23	1.13	1.03	1.01	1.00	1.02	1.09	1.21	1.37	1.57	1.77	1.99	2.21	2.40	2.55	2.65	2.70	2.72	2.72
160	1.23	1.12	1.03	1.01	1.01	1.06	1.17	1.35	1.56	1.79	2.03	2.25	2.44	2.59	2.70	2.76	2.80	2.83	2.86
170	1.23	1.11	1.02	1.01	1.02	1.10	1.24	1.44	1.68	1.94	2.17	2.37	2.51	2.58	2.62	2.64	2.59	2.58	2.73
180	1.23	1.11	1.01	1.01	1.04	1.12	1.27	1.49	1.73	1.98	2.20	2.35	2.43	2.42	2.37	2.28	2.19	2.10	2.13

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-08-14

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoHody-330mm-RGBW RED-1540D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:15x40 DEG	DIM.:330mm	SERIAL No.:IES001525
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.91	1.82	1.72	1.60	1.44	1.26	1.05	0.86	0.68	0.55	0.46	0.44	0.44	0.44	0.44	0.43	0.39	0.36	
-170	2.22	2.09	1.96	1.76	1.52	1.28	1.04	0.83	0.65	0.53	0.45	0.44	0.44	0.44	0.44	0.43	0.39	0.36	
-160	1.97	1.85	1.70	1.52	1.33	1.12	0.91	0.73	0.58	0.49	0.44	0.44	0.44	0.44	0.44	0.43	0.39	0.36	
-150	1.35	1.28	1.17	1.05	0.92	0.78	0.67	0.57	0.50	0.46	0.44	0.44	0.44	0.44	0.44	0.42	0.39	0.36	
-140	0.72	0.69	0.64	0.57	0.52	0.48	0.45	0.44	0.44	0.44	0.43	0.44	0.44	0.45	0.44	0.42	0.38	0.36	
-130	0.33	0.33	0.33	0.33	0.35	0.37	0.39	0.41	0.42	0.43	0.43	0.44	0.45	0.45	0.44	0.42	0.38	0.36	
-120	0.28	0.30	0.33	0.36	0.39	0.41	0.43	0.45	0.45	0.45	0.45	0.45	0.45	0.44	0.43	0.41	0.37	0.36	
-110	0.46	0.47	0.48	0.49	0.49	0.49	0.48	0.48	0.47	0.47	0.46	0.45	0.45	0.44	0.42	0.39	0.37	0.36	
-100	0.49	0.49	0.49	0.48	0.48	0.47	0.47	0.47	0.47	0.46	0.46	0.46	0.44	0.42	0.40	0.39	0.37	0.36	
-90	0.41	0.41	0.41	0.42	0.42	0.43	0.43	0.43	0.42	0.42	0.42	0.42	0.41	0.40	0.39	0.38	0.37	0.36	
-80	1.02	1.00	0.97	0.94	0.90	0.85	0.81	0.76	0.71	0.65	0.57	0.51	0.46	0.43	0.42	0.40	0.37	0.36	
-70	2.88	2.82	2.73	2.60	2.45	2.27	2.09	1.90	1.72	1.53	1.32	1.07	0.86	0.70	0.54	0.43	0.40	0.36	
-60	5.88	5.79	5.62	5.34	4.99	4.63	4.22	3.77	3.29	2.79	2.33	1.93	1.54	1.10	0.80	0.54	0.42	0.36	
-50	10.9	10.8	10.4	9.77	9.05	8.30	7.44	6.52	5.55	4.60	3.73	2.93	2.26	1.68	1.08	0.69	0.44	0.36	
-40	21.0	20.4	19.2	17.5	16.2	14.5	12.5	10.5	8.60	6.97	5.47	4.18	3.08	2.21	1.44	0.85	0.45	0.36	
-30	44.9	42.8	38.3	35.7	31.5	26.3	21.1	16.5	12.9	9.88	7.50	5.52	3.95	2.73	1.79	0.96	0.49	0.36	
-20	123	110	105	89.6	68.7	50.0	36.2	25.8	18.4	13.3	9.57	6.85	4.75	3.18	2.06	1.07	0.52	0.36	
-10	439	434	346	245	165	102	60.6	37.7	24.5	16.5	11.4	7.90	5.36	3.51	2.23	1.15	0.54	0.36	
0	1087	961	755	514	305	163	84.3	47.2	28.7	18.5	12.4	8.47	5.66	3.67	2.31	1.18	0.55	0.36	
10	347	339	268	209	151	98.0	60.4	38.5	25.4	17.3	12.0	8.33	5.66	3.70	2.36	1.22	0.57	0.36	
20	108	99.3	94.3	80.8	64.1	49.1	37.6	27.7	20.2	14.7	10.7	7.65	5.31	3.55	2.30	1.20	0.58	0.36	
30	47.5	45.5	41.5	38.3	34.1	29.0	24.0	19.5	15.3	11.9	8.98	6.59	4.70	3.24	2.11	1.15	0.58	0.36	
40	24.6	24.0	22.8	21.0	19.6	17.6	15.4	13.2	11.1	9.11	7.09	5.38	3.96	2.83	1.81	1.08	0.57	0.36	
50	13.9	13.8	13.3	12.6	11.8	10.9	9.88	8.77	7.60	6.49	5.35	4.18	3.20	2.33	1.51	0.96	0.57	0.36	
60	8.01	7.93	7.73	7.42	7.02	6.57	6.07	5.52	4.93	4.35	3.80	3.14	2.42	1.75	1.27	0.84	0.56	0.36	
70	4.31	4.27	4.19	4.06	3.88	3.68	3.48	3.26	3.03	2.77	2.47	2.13	1.73	1.36	1.03	0.76	0.55	0.36	
80	2.12	2.10	2.06	2.02	1.96	1.90	1.85	1.79	1.72	1.66	1.59	1.53	1.32	1.11	0.92	0.72	0.53	0.36	
90	1.21	1.21	1.22	1.22	1.22	1.23	1.24	1.26	1.28	1.29	1.31	1.33	1.16	1.00	0.84	0.68	0.52	0.36	
100	0.96	0.96	0.96	0.96	0.95	0.96	0.99	1.02	1.05	1.09	1.12	1.14	1.04	0.92	0.79	0.66	0.51	0.36	
110	0.91	0.92	0.92	0.93	0.93	0.94	0.95	0.96	0.97	0.99	1.01	1.01	0.94	0.85	0.75	0.63	0.50	0.36	
120	1.00	1.01	1.02	1.02	1.02	1.00	1.00	0.98	0.97	0.98	0.98	0.93	0.86	0.79	0.71	0.61	0.49	0.36	
130	1.65	1.62	1.56	1.50	1.42	1.33	1.24	1.16	1.10	1.04	0.96	0.88	0.80	0.73	0.67	0.59	0.48	0.36	
140	2.43	2.39	2.31	2.20	2.03	1.85	1.66	1.49	1.35	1.17	0.97	0.82	0.74	0.68	0.62	0.56	0.46	0.36	
150	2.73	2.72	2.69	2.59	2.46	2.28	2.06	1.83	1.49	1.17	0.94	0.78	0.68	0.63	0.58	0.53	0.45	0.36	
160	2.86	2.87	2.83	2.75	2.65	2.50	2.12	1.73	1.37	1.07	0.85	0.71	0.62	0.57	0.53	0.50	0.43	0.36	
170	2.70	2.71	2.76	2.57	2.29	2.00	1.68	1.38	1.09	0.85	0.68	0.59	0.54	0.51	0.49	0.46	0.41	0.36	
180	1.91	1.82	1.72	1.60	1.44	1.26	1.05	0.86	0.68	0.55	0.46	0.44	0.44	0.44	0.44	0.43	0.39	0.36	

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-08-14

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: