

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	6669.4 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	36.1V x 35.5H
	At 50% of Imax	15.7V x 15.6H
	At 90% of Imax	5.9V x 5.9H

Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	635.5 lumens per klm.
	To 50% of Imax	282.1 lumens per klm.
	To 90% of Imax	57.9 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoBody-330mm-RGBW 3000K-15D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15 DEG	DIM.:330mm	SERIAL No.:IES001501
MFR.:	SUR.:	Shielding Angle:

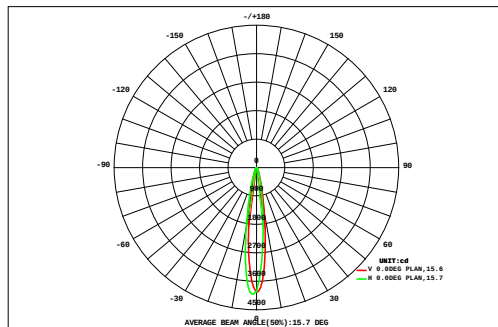

DATA OF LAMP			Eff:55.97lm/W	
MODEL			Imax(cd)	4032
NOMINAL POWER(W)	10.8		AVAILABILITY(%)	63.4
RATED VOLTAGE(V)	220		Avai. FLUX(lm)	383.2
NOMINAL FLUX(lm)	604.5		LOR(%)	100.0
LAMPS INSIDE	1		TOTAL FLUX(lm)	604.5
TEST VOLTAGE(V)	221.4		q @50%(H,V)	16,16DEG

AREA FLUX DIAGRAM																	UNIT:lm		F t	F a
27	0.17	0.20	0.23	0.27	0.31	0.35	0.38	0.41	0.42	0.42	0.40	0.38	0.34	0.30	0.26	0.22	0.19	0.16	5.43	0.00
24	0.19	0.23	0.28	0.34	0.39	0.45	0.50	0.54	0.56	0.56	0.53	0.48	0.43	0.38	0.32	0.27	0.22	0.18	6.86	0.00
21	0.22	0.28	0.34	0.41	0.50	0.58	0.67	0.74	0.77	0.76	0.72	0.64	0.56	0.47	0.39	0.32	0.26	0.21	8.84	0.00
18	0.25	0.32	0.41	0.51	0.64	0.78	0.93	1.04	1.10	1.09	1.01	0.88	0.74	0.60	0.48	0.38	0.30	0.24	11.7	1.47
15	0.29	0.37	0.48	0.63	0.82	1.06	1.32	1.55	1.66	1.64	1.48	1.24	0.98	0.76	0.58	0.45	0.35	0.27	15.9	9.31
12	0.33	0.43	0.57	0.77	1.05	1.45	1.94	2.42	2.68	2.62	2.27	1.78	1.31	0.96	0.70	0.53	0.40	0.30	22.5	16.9
9	0.36	0.48	0.66	0.92	1.33	1.95	2.85	3.84	4.40	4.27	3.55	2.56	1.74	1.20	0.86	0.62	0.45	0.33	32.4	27.6
6	0.38	0.52	0.74	1.08	1.64	2.56	3.96	5.72	6.93	6.72	5.25	3.56	2.37	1.57	1.05	0.71	0.50	0.35	45.6	41.4
3	0.40	0.55	0.80	1.19	1.88	3.10	5.07	7.51	9.37	9.21	7.38	5.11	3.20	1.93	1.21	0.79	0.53	0.37	59.6	55.6
0	0.41	0.57	0.83	1.27	2.07	3.54	5.99	8.99	10.8	10.5	8.73	5.93	3.57	2.09	1.28	0.82	0.54	0.37	68.3	64.8
-3	0.40	0.56	0.84	1.29	2.12	3.64	6.02	8.41	9.79	9.51	7.75	5.38	3.30	1.98	1.23	0.79	0.53	0.36	63.9	60.2
-6	0.38	0.53	0.79	1.20	1.91	3.02	4.54	6.17	7.29	7.10	5.72	4.07	2.66	1.70	1.09	0.73	0.49	0.34	49.7	45.8
-9	0.34	0.48	0.70	1.02	1.50	2.18	3.08	3.99	4.65	4.55	3.75	2.80	1.97	1.34	0.92	0.63	0.44	0.31	34.7	30.4
-12	0.30	0.42	0.58	0.81	1.12	1.53	2.01	2.49	2.80	2.75	2.37	1.87	1.40	1.02	0.74	0.53	0.38	0.28	23.4	18.4
-15	0.26	0.35	0.47	0.63	0.83	1.07	1.33	1.57	1.72	1.70	1.51	1.25	1.00	0.77	0.58	0.43	0.32	0.24	16.0	9.62
-18	0.22	0.29	0.38	0.49	0.62	0.76	0.91	1.03	1.11	1.10	1.00	0.87	0.71	0.57	0.45	0.35	0.27	0.21	11.3	1.73
-21	0.19	0.24	0.30	0.38	0.46	0.55	0.63	0.70	0.75	0.74	0.69	0.61	0.52	0.43	0.35	0.28	0.22	0.18	8.21	0.00
-24	0.16	0.20	0.24	0.29	0.35	0.40	0.45	0.49	0.52	0.51	0.48	0.44	0.38	0.32	0.27	0.22	0.18	0.15	6.07	0.00
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)	6	9	12	15	18	21	24	27			
F t	5.25	7.02	9.63	13.5	19.5	29.0	42.6	57.6	67.3	65.8	54.6	39.8	27.2	18.4	12.8	9.08	6.58	4.85	490	---
F a	0.00	0.00	0.00	5.67	13.6	23.9	38.0	53.4	63.0	61.6	50.3	35.3	21.8	12.1	4.56	0.00	0.00	0.00	---	383

one-half-peak spread: U:7.7,D:8.2 , L:8.1,R:7.6


NEMA Beam Type: Type 3

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:DecoBody-330mm-RGBW 3000K-15D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15 DEG	DIM.:330mm	SERIAL No.:IES001501
MFR.:	SUR.:	Shielding Angle:

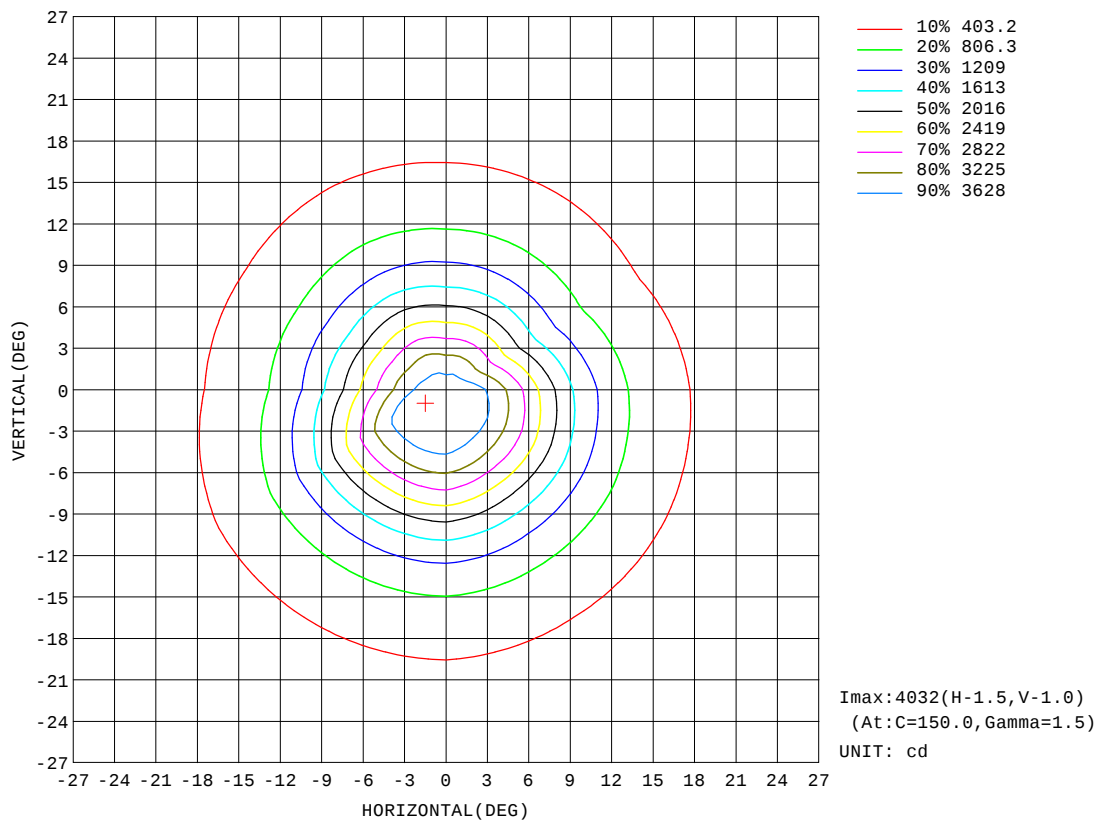


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoBody-330mm-RGBW 3000K-15D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15 DEG	DIM.:330mm	SERIAL No.:IES001501
MFR.:	SUR.:	Shielding Angle:

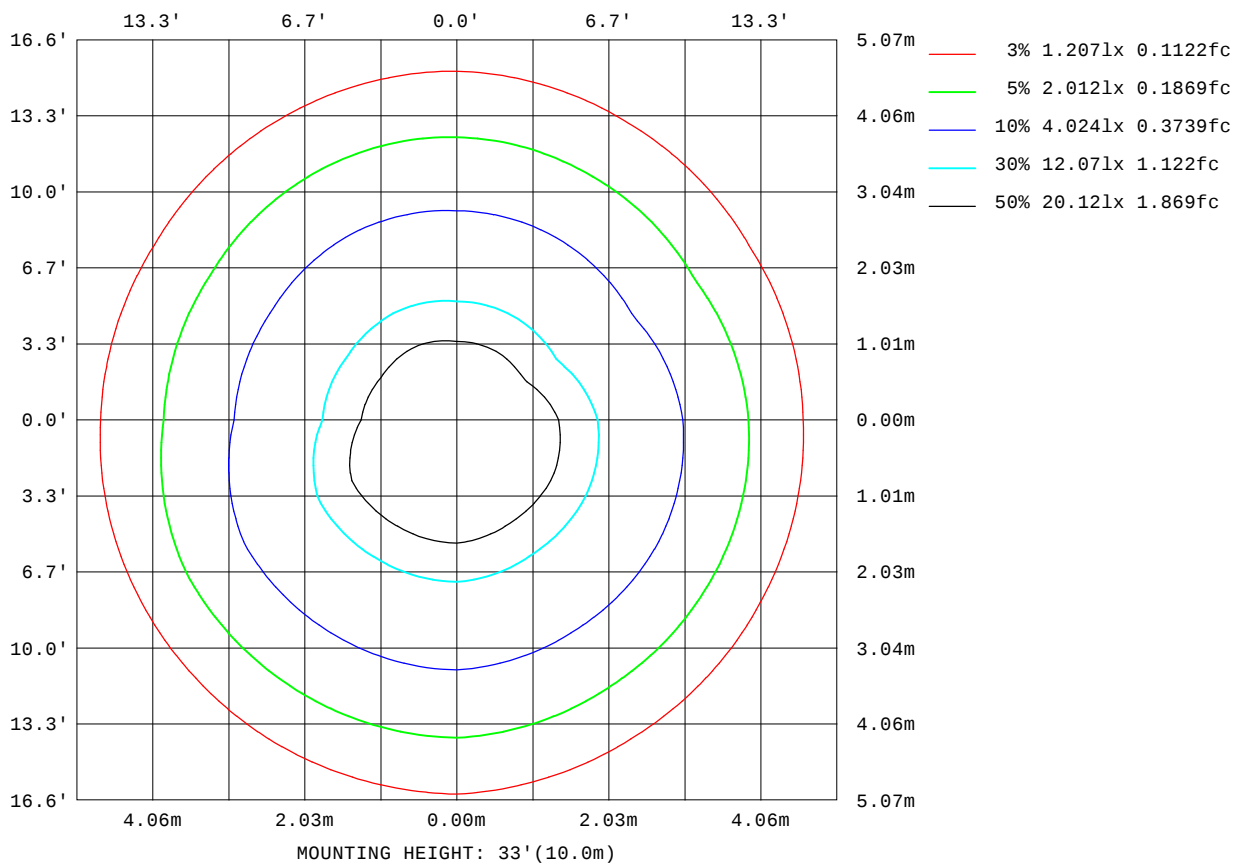

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

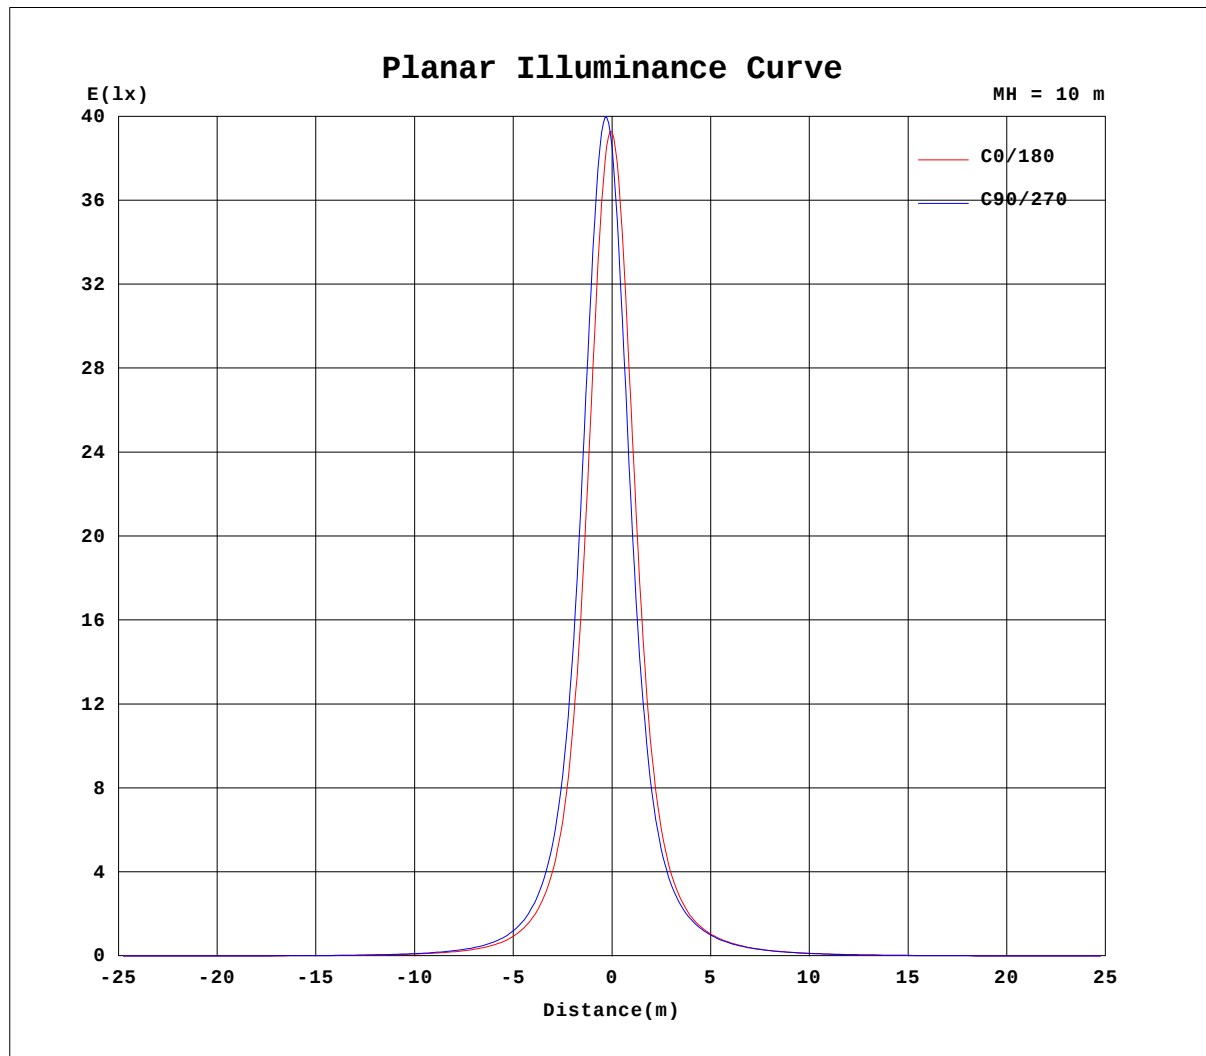


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoBody-330mm-RGBW 3000K-15D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15 DEG	DIM.:330mm	SERIAL No.:IES001501
MFR.:	SUR.:	Shielding Angle:

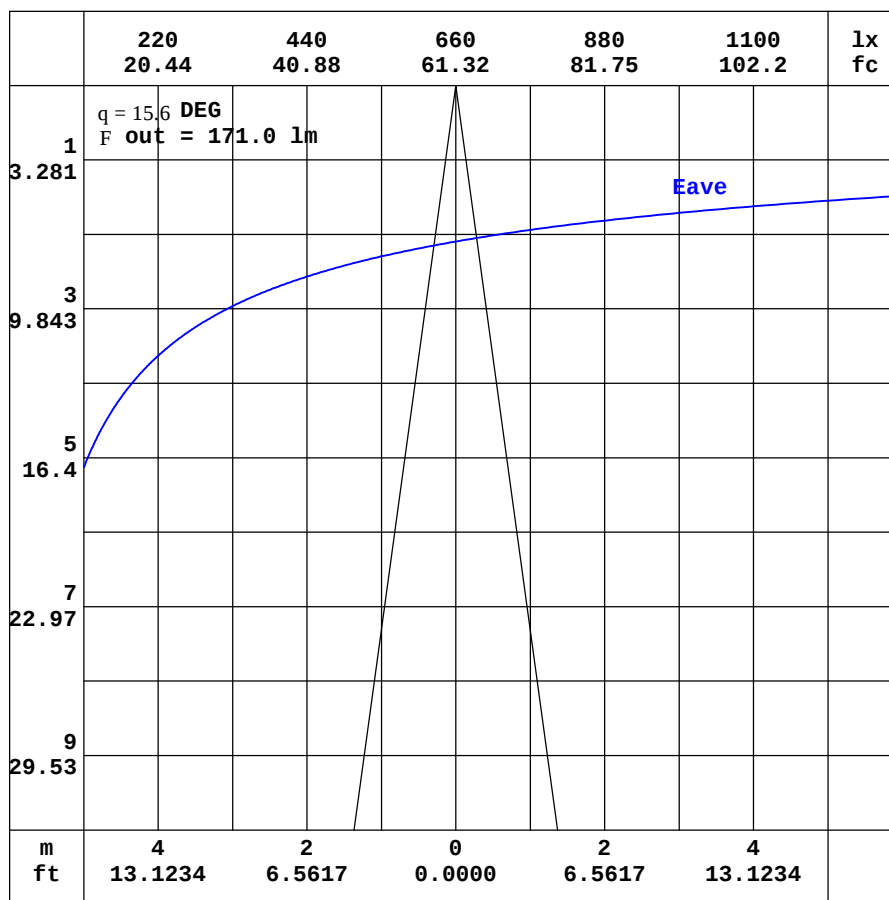

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

$H(b)$ Range:-90 - 90DEG
 $H(b)$ Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-08-14

$V(B)$ Range:-180 - 180DEG
 $V(B)$ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-330mm-RGBW 3000K-15D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15 DEG	DIM.:330mm	SERIAL No.:IES001501
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°)\V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.21	1.88	1.68	1.64	1.65	1.71	1.92	2.35	3.11	3.94	4.55	4.86	4.86	4.75	4.67	4.55	4.30	3.94	4.01
-170	2.21	1.86	1.65	1.59	1.57	1.58	1.66	1.90	2.35	2.85	3.22	3.42	3.49	3.54	3.64	3.80	4.01	4.18	4.24
-160	2.21	1.85	1.63	1.54	1.50	1.45	1.41	1.44	1.57	1.73	1.83	1.85	1.89	2.36	2.81	3.19	3.49	3.68	3.76
-150	2.21	1.84	1.61	1.49	1.43	1.35	1.25	1.11	1.00	0.88	0.75	0.97	1.25	1.56	1.87	2.15	2.37	2.52	2.57
-140	2.21	1.85	1.59	1.45	1.38	1.30	1.17	0.99	0.76	0.62	0.62	0.64	0.73	0.86	1.00	1.16	1.28	1.37	1.40
-130	2.21	1.86	1.60	1.45	1.34	1.25	1.14	1.00	0.87	0.78	0.71	0.64	0.62	0.62	0.62	0.63	0.65	0.68	0.69
-120	2.21	1.87	1.62	1.44	1.32	1.21	1.11	1.04	1.02	1.00	0.96	0.92	0.87	0.83	0.78	0.74	0.71	0.69	0.67
-110	2.21	1.90	1.65	1.45	1.30	1.18	1.08	1.05	1.05	1.05	1.06	1.06	1.06	1.06	1.06	1.05	1.04	1.03	1.02
-100	2.21	1.93	1.69	1.47	1.28	1.12	0.98	0.98	1.00	1.01	1.02	1.02	1.03	1.04	1.06	1.06	1.07	1.07	1.08
-90	2.21	1.97	1.73	1.50	1.26	1.02	0.78	0.78	0.78	0.78	0.78	0.78	0.78	0.79	0.81	0.82	0.83	0.84	0.85
-80	2.21	2.03	1.81	1.58	1.35	1.12	0.89	0.96	1.07	1.17	1.27	1.37	1.47	1.57	1.65	1.73	1.79	1.84	1.87
-70	2.21	2.08	1.95	1.86	1.82	1.81	1.81	2.06	2.43	2.81	3.18	3.54	3.86	4.21	4.53	4.82	5.05	5.21	5.31
-60	2.21	2.15	2.19	2.35	2.60	2.92	3.27	3.73	4.50	5.31	6.13	7.01	7.86	8.68	9.47	10.2	10.7	11.1	11.3
-50	2.21	2.25	2.50	2.95	3.57	4.30	5.09	5.94	7.12	8.60	10.3	12.1	14.0	16.0	18.0	19.8	21.4	22.6	23.2
-40	2.21	2.36	2.84	3.62	4.63	5.84	7.20	8.76	10.4	12.8	15.9	19.6	23.9	28.6	33.7	38.9	43.6	47.1	49.0
-30	2.21	2.47	3.19	4.28	5.70	7.44	9.52	12.0	14.9	18.5	23.2	30.3	39.4	50.9	64.9	81.3	97.7	111	117
-20	2.21	2.57	3.49	4.88	6.68	8.93	11.8	15.3	19.9	25.8	33.9	45.2	62.1	90.5	135	197	274	346	381
-10	2.21	2.66	3.73	5.35	7.48	10.2	13.8	18.3	24.4	32.7	44.6	63.0	93.5	148	260	484	903	1510	1886
0	2.21	2.73	3.90	5.67	8.00	11.0	15.0	20.2	27.3	37.0	51.2	73.4	110	171	295	572	1307	2828	3927
10	2.21	2.71	3.85	5.55	7.78	10.7	14.4	19.3	25.7	34.3	46.5	65.0	93.7	140	215	349	591	923	1062
20	2.21	2.68	3.71	5.26	7.26	9.80	13.1	17.1	22.3	28.9	37.6	49.4	66.0	90.3	123	165	211	251	264
30	2.21	2.62	3.51	4.83	6.51	8.60	11.2	14.3	18.0	22.5	28.1	35.1	43.9	54.5	66.9	80.3	92.5	101	105
40	2.21	2.55	3.25	4.29	5.61	7.19	9.08	11.3	13.8	16.8	20.2	24.1	28.4	33.0	37.7	42.2	46.0	48.6	49.7
50	2.21	2.47	2.97	3.72	4.67	5.78	7.03	8.45	10.1	11.9	13.8	15.9	18.0	20.0	22.0	23.8	25.2	26.1	26.5
60	2.21	2.39	2.71	3.17	3.76	4.45	5.21	6.03	6.93	7.89	8.89	9.89	10.9	11.9	12.7	13.5	14.0	14.4	14.5
70	2.21	2.34	2.49	2.71	2.99	3.33	3.70	4.10	4.54	4.97	5.39	5.81	6.20	6.55	6.87	7.13	7.32	7.44	7.49
80	2.21	2.28	2.34	2.41	2.49	2.58	2.67	2.77	2.88	3.00	3.11	3.22	3.32	3.42	3.50	3.56	3.60	3.63	3.63
90	2.21	2.21	2.22	2.22	2.22	2.22	2.23	2.22	2.21	2.20	2.19	2.18	2.18	2.18	2.19	2.19	2.19	2.20	2.20
100	2.21	2.16	2.10	2.04	1.99	1.94	1.90	1.86	1.82	1.78	1.75	1.72	1.71	1.70	1.70	1.70	1.71	1.71	1.72
110	2.21	2.10	1.99	1.89	1.81	1.76	1.72	1.69	1.67	1.66	1.66	1.66	1.66	1.66	1.67	1.67	1.67	1.67	1.68
120	2.21	2.04	1.89	1.77	1.71	1.67	1.66	1.66	1.66	1.66	1.67	1.70	1.75	1.80	1.84	1.88	1.92	1.94	1.94
130	2.21	2.00	1.82	1.71	1.66	1.66	1.65	1.65	1.67	1.77	1.90	2.07	2.29	2.51	2.75	2.95	3.12	3.23	3.27
140	2.21	1.96	1.76	1.66	1.65	1.65	1.66	1.72	1.88	2.15	2.53	2.99	3.48	3.89	4.21	4.42	4.55	4.62	4.65
150	2.21	1.92	1.73	1.65	1.65	1.66	1.72	1.90	2.25	2.79	3.45	4.04	4.47	4.75	4.93	5.05	5.11	5.14	5.16
160	2.21	1.90	1.71	1.65	1.65	1.68	1.81	2.12	2.68	3.44	4.13	4.60	4.88	5.04	5.16	5.27	5.33	5.37	5.42
170	2.21	1.89	1.69	1.65	1.65	1.70	1.89	2.30	3.00	3.83	4.46	4.82	4.96	5.01	5.06	5.07	4.95	4.86	4.91
180	2.21	1.88	1.68	1.64	1.65	1.71	1.92	2.35	3.11	3.94	4.55	4.86	4.86	4.75	4.67	4.55	4.30	3.94	4.02

H_(b) Range:-90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-08-14

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-330mm-RGBW 3000K-15D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15 DEG	DIM.:330mm	SERIAL No.:IES001501
MFR.:	SUR.:	Shielding Angle:

Table--2
UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	3.66	3.64	3.53	3.30	2.94	2.51	2.00	1.45	0.99	0.70	0.62	0.69	0.87	1.03	1.07	1.02	0.93	0.76
-170	4.11	3.97	3.78	3.42	2.93	2.40	1.86	1.35	0.93	0.67	0.62	0.70	0.88	1.03	1.06	1.02	0.93	0.76
-160	3.68	3.50	3.21	2.84	2.40	1.94	1.47	1.08	0.78	0.63	0.63	0.74	0.91	1.04	1.06	1.02	0.92	0.76
-150	2.53	2.39	2.17	1.90	1.60	1.29	1.00	0.78	0.64	0.62	0.67	0.82	0.97	1.05	1.05	1.01	0.91	0.76
-140	1.37	1.30	1.18	1.03	0.88	0.75	0.65	0.62	0.61	0.67	0.79	0.93	1.02	1.06	1.04	1.00	0.91	0.76
-130	0.68	0.66	0.63	0.62	0.61	0.62	0.64	0.68	0.77	0.86	0.94	1.02	1.05	1.05	1.03	0.98	0.88	0.76
-120	0.68	0.70	0.73	0.76	0.81	0.85	0.90	0.95	1.00	1.02	1.03	1.04	1.05	1.04	1.01	0.94	0.86	0.76
-110	1.03	1.04	1.05	1.06	1.06	1.06	1.06	1.06	1.06	1.05	1.05	1.05	1.04	1.00	0.95	0.90	0.83	0.76
-100	1.07	1.07	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.01	0.99	0.97	0.94	0.91	0.88	0.84	0.80	0.76
-90	0.84	0.83	0.82	0.81	0.81	0.80	0.80	0.79	0.79	0.79	0.79	0.79	0.78	0.78	0.77	0.77	0.76	0.76
-80	1.84	1.80	1.74	1.66	1.58	1.49	1.40	1.31	1.21	1.11	1.01	0.91	0.84	0.79	0.77	0.76	0.76	0.76
-70	5.20	5.03	4.79	4.50	4.17	3.84	3.52	3.18	2.82	2.46	2.11	1.75	1.42	1.15	0.93	0.80	0.76	0.76
-60	11.1	10.7	10.1	9.34	8.53	7.73	6.91	6.07	5.26	4.47	3.73	3.00	2.32	1.73	1.26	0.92	0.77	0.76
-50	22.4	21.1	19.5	17.6	15.6	13.7	11.8	10.1	8.49	7.04	5.70	4.47	3.39	2.44	1.67	1.10	0.79	0.76
-40	46.6	42.6	37.7	32.4	27.5	23.0	18.9	15.5	12.5	9.99	7.89	6.05	4.50	3.18	2.10	1.29	0.83	0.76
-30	109	94.2	77.1	61.3	48.1	37.4	28.9	22.3	17.2	13.3	10.1	7.62	5.55	3.85	2.50	1.47	0.87	0.76
-20	336	258	183	125	84.1	58.0	41.3	30.1	22.2	16.4	12.2	8.94	6.41	4.40	2.82	1.62	0.90	0.76
-10	1402	813	433	233	135	82.1	53.6	36.9	26.2	18.8	13.6	9.86	6.98	4.75	3.01	1.71	0.92	0.76
0	3014	1401	603	293	158	92.0	58.5	39.5	27.6	19.6	14.1	10.2	7.16	4.86	3.08	1.74	0.93	0.76
10	859	536	317	200	128	83.6	56.2	39.1	27.9	20.1	14.5	10.5	7.41	5.03	3.20	1.82	0.97	0.76
20	243	201	156	117	86.2	63.2	46.3	34.2	25.3	18.8	13.9	10.2	7.22	4.95	3.18	1.84	1.00	0.76
30	100	90.5	77.8	64.7	52.8	42.6	34.1	27.2	21.2	16.3	12.4	9.20	6.64	4.62	3.02	1.79	1.01	0.76
40	48.3	45.4	41.5	36.9	32.3	27.7	23.5	19.7	16.3	13.2	10.3	7.82	5.78	4.12	2.74	1.69	1.01	0.76
50	26.0	25.0	23.5	21.7	19.8	17.7	15.6	13.6	11.6	9.83	8.06	6.30	4.80	3.50	2.41	1.56	1.01	0.76
60	14.4	14.0	13.4	12.6	11.7	10.8	9.75	8.74	7.74	6.80	5.93	4.85	3.80	2.86	2.06	1.43	1.01	0.76
70	7.43	7.30	7.09	6.83	6.50	6.14	5.75	5.33	4.91	4.49	4.08	3.59	2.90	2.29	1.76	1.33	1.01	0.76
80	3.63	3.60	3.55	3.49	3.41	3.32	3.22	3.12	3.00	2.89	2.77	2.64	2.26	1.90	1.58	1.28	1.00	0.76
90	2.20	2.19	2.18	2.18	2.17	2.16	2.17	2.17	2.18	2.19	2.19	2.20	1.96	1.72	1.48	1.24	1.00	0.76
100	1.71	1.71	1.70	1.69	1.69	1.70	1.71	1.73	1.76	1.79	1.83	1.86	1.74	1.60	1.43	1.24	1.01	0.76
110	1.68	1.67	1.67	1.67	1.67	1.67	1.66	1.66	1.66	1.67	1.68	1.67	1.58	1.49	1.37	1.22	1.02	0.76
120	1.94	1.93	1.89	1.85	1.81	1.76	1.71	1.68	1.66	1.66	1.65	1.59	1.51	1.42	1.33	1.20	1.02	0.76
130	3.24	3.14	2.99	2.79	2.55	2.32	2.10	1.92	1.79	1.69	1.61	1.53	1.45	1.38	1.29	1.18	1.02	0.76
140	4.63	4.57	4.45	4.25	3.95	3.54	3.06	2.58	2.19	1.84	1.56	1.43	1.39	1.33	1.25	1.16	1.01	0.76
150	5.15	5.12	5.06	4.95	4.78	4.51	4.10	3.53	2.61	1.90	1.49	1.31	1.28	1.27	1.21	1.13	0.99	0.76
160	5.39	5.36	5.30	5.19	5.07	4.90	4.23	3.40	2.51	1.77	1.32	1.15	1.15	1.19	1.17	1.10	0.97	0.76
170	4.86	4.98	5.14	4.89	4.41	3.87	3.25	2.59	1.92	1.34	1.03	0.94	1.01	1.11	1.12	1.06	0.95	0.76
180	3.66	3.64	3.53	3.30	2.94	2.51	2.00	1.45	0.99	0.70	0.62	0.69	0.87	1.03	1.07	1.02	0.93	0.76

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: