

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	6821.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	35.7V x 35.0H
	At 50% of Imax	15.4V x 15.4H
	At 90% of Imax	5.4V x 5.8H

Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	629.7 lumens per klm.
	To 50% of Imax	274.7 lumens per klm.
	To 90% of Imax	49.6 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoBody-330mm-RGBW ALL-15D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:15 DEG	DIM.:330mm	SERIAL No.:IES001497
MFR.:	SUR.:	Shielding Angle:

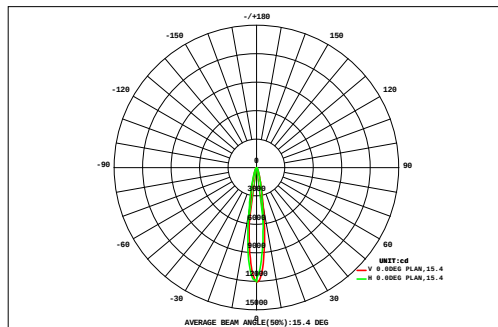

DATA OF LAMP		Eff:54.37lm/W	
MODEL		Imax(cd)	12054
NOMINAL POWER(W)	32.3	AVAILABILITY(%)	63.1
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1115
NOMINAL FLUX(lm)	1767	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1767
TEST VOLTAGE(V)	221.4	q @50%(H,V)	15,15DEG

		AREA FLUX DIAGRAM															UNIT:lm				F t	F a
		0.51	0.61	0.73	0.86	0.98	1.10	1.21	1.28	1.32	1.31	1.25	1.16	1.05	0.93	0.80	0.68	0.57	0.48	16.8	0.00	
VERTICAL (DEG)	27	0.59	0.73	0.88	1.05	1.24	1.42	1.58	1.70	1.76	1.74	1.65	1.51	1.34	1.16	0.98	0.82	0.68	0.55	21.4	0.00	
	24	0.69	0.86	1.06	1.30	1.57	1.87	2.14	2.35	2.45	2.41	2.26	2.01	1.73	1.45	1.20	0.98	0.79	0.63	27.7	0.00	
	21	0.79	1.00	1.27	1.60	2.02	2.51	3.00	3.38	3.57	3.51	3.21	2.76	2.28	1.83	1.46	1.15	0.91	0.72	37.0	9.38	
	18	0.89	1.15	1.50	1.97	2.61	3.41	4.34	5.10	5.47	5.33	4.75	3.90	3.05	2.32	1.76	1.35	1.04	0.81	50.8	32.1	
	15	0.99	1.31	1.76	2.40	3.34	4.67	6.43	8.13	8.92	8.62	7.37	5.61	4.06	2.93	2.11	1.57	1.18	0.89	72.3	56.9	
	12	1.09	1.46	2.02	2.87	4.18	6.28	9.37	12.9	14.8	14.1	11.4	8.02	5.31	3.64	2.59	1.85	1.33	0.97	104	90.4	
	9	1.16	1.58	2.24	3.29	5.06	8.07	12.8	18.9	22.8	21.6	16.5	10.9	7.16	4.69	3.13	2.12	1.47	1.04	144	132	
		1.20	1.65	2.37	3.56	5.65	9.44	15.6	23.6	29.6	28.2	22.5	15.5	9.51	5.73	3.59	2.34	1.57	1.08	183	171	
		1.20	1.67	2.43	3.71	6.02	10.3	17.3	26.1	31.5	31.3	25.7	17.3	10.3	6.06	3.72	2.40	1.59	1.08	200	189	
		1.17	1.64	2.40	3.68	5.99	10.1	16.6	23.3	27.2	26.3	21.3	14.7	9.13	5.53	3.48	2.27	1.52	1.05	177	166	
		1.09	1.53	2.22	3.36	5.26	8.27	12.2	16.5	19.3	18.7	14.9	10.7	7.15	4.62	3.04	2.04	1.40	0.98	133	121	
		0.99	1.37	1.95	2.83	4.11	5.89	8.14	10.5	12.0	11.7	9.60	7.23	5.19	3.62	2.52	1.76	1.24	0.89	91.4	77.9	
	0.86	1.17	1.62	2.24	3.08	4.11	5.32	6.48	7.23	7.08	6.07	4.82	3.70	2.75	2.01	1.46	1.06	0.78	61.9	46.0		
	0.74	0.98	1.31	1.74	2.27	2.91	3.56	4.13	4.48	4.40	3.94	3.30	2.64	2.06	1.58	1.19	0.90	0.67	42.8	22.2		
	0.62	0.81	1.04	1.33	1.68	2.05	2.43	2.75	2.92	2.88	2.64	2.28	1.89	1.54	1.22	0.96	0.75	0.57	30.4	1.11		
	0.52	0.66	0.83	1.03	1.25	1.48	1.70	1.88	1.98	1.96	1.82	1.62	1.39	1.15	0.95	0.77	0.61	0.49	22.1	0.00		
	0.44	0.54	0.66	0.79	0.94	1.09	1.22	1.33	1.39	1.38	1.29	1.17	1.03	0.88	0.74	0.61	0.51	0.41	16.4	0.00		
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27		
F t	15.5	20.7	28.3	39.6	57.2	85.0	125	170	199	192	158	115	77.9	52.9	36.9	26.3	19.1	14.1	1433	---		
F a	0.00	0.00	0.00	14.7	39.8	70.3	112	158	187	180	145	100	62.3	34.0	12.2	0.00	0.00	0.00	---	1115		

one-half-peak spread: U:8.7,D:6.8 , L:8.0,R:7.5


NEMA Beam Type: Type 3

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:DecoBody-330mm-RGBW ALL-15D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:15 DEG	DIM.:330mm	SERIAL No.:IES001497
MFR.:	SUR.:	Shielding Angle:

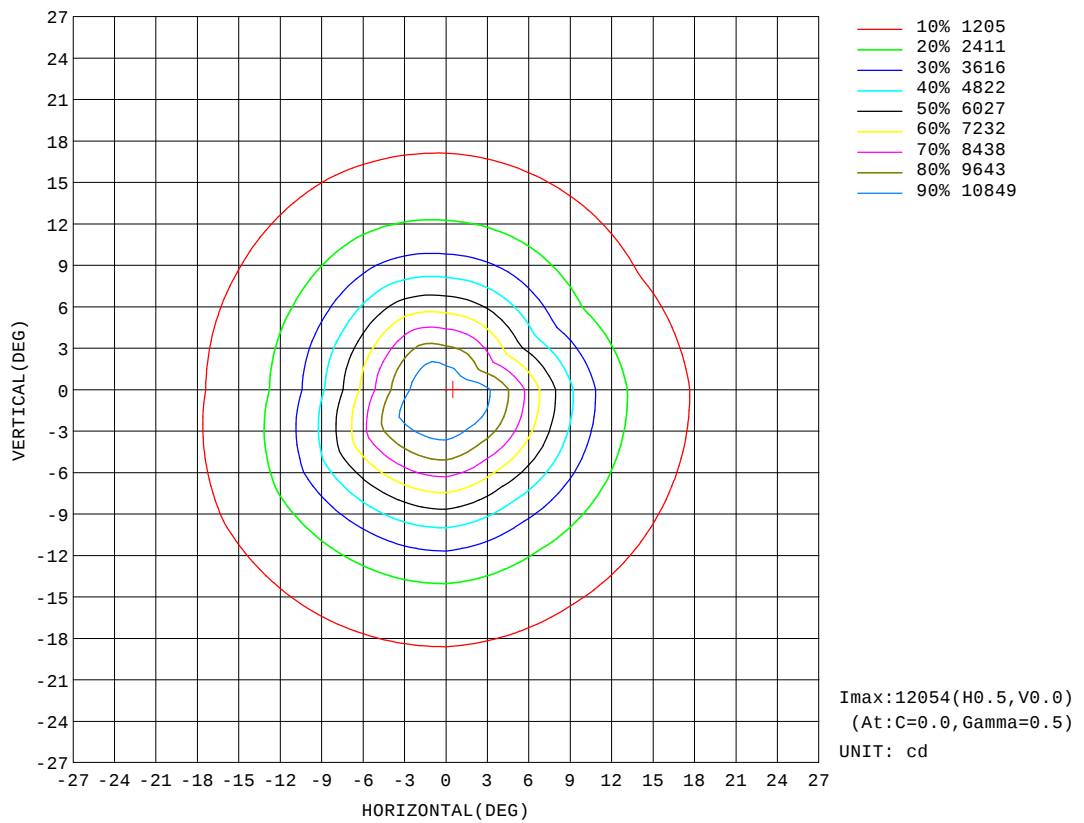


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoBody-330mm-RGBW ALL-15D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:15 DEG	DIM.:330mm	SERIAL No.:IES001497
MFR.:	SUR.:	Shielding Angle:

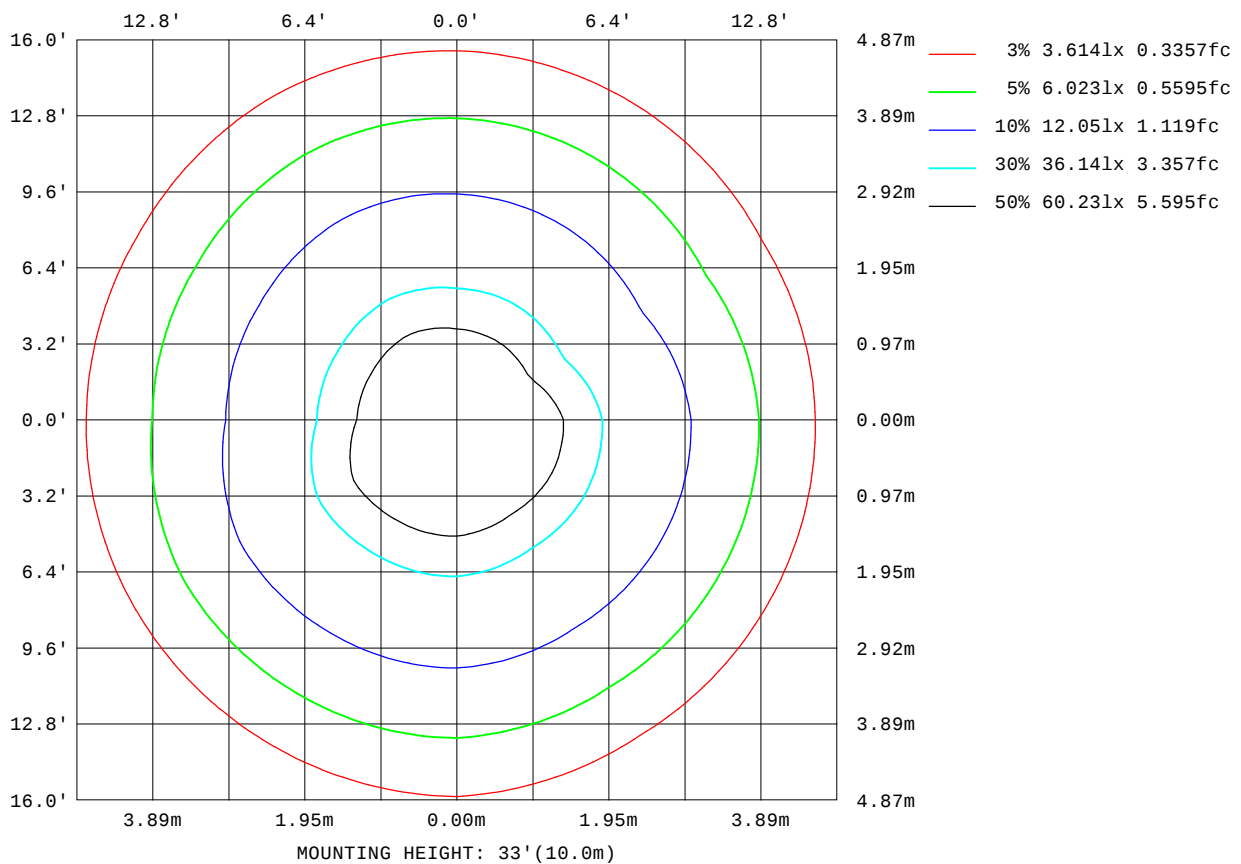

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

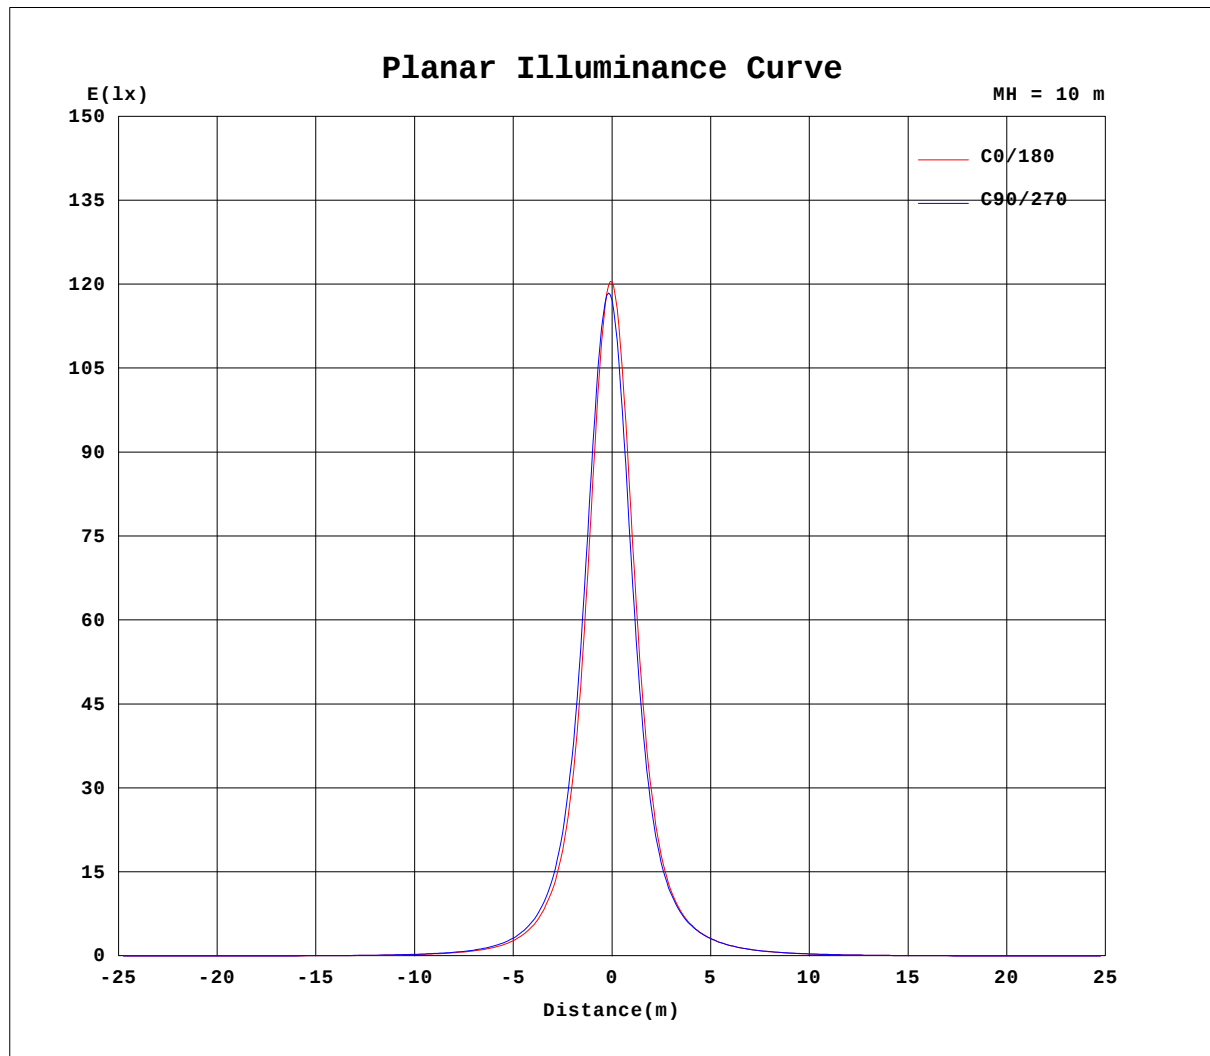


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoBody-330mm-RGBW ALL-15D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:15 DEG	DIM.:330mm	SERIAL No.:IES001497
MFR.:	SUR.:	Shielding Angle:

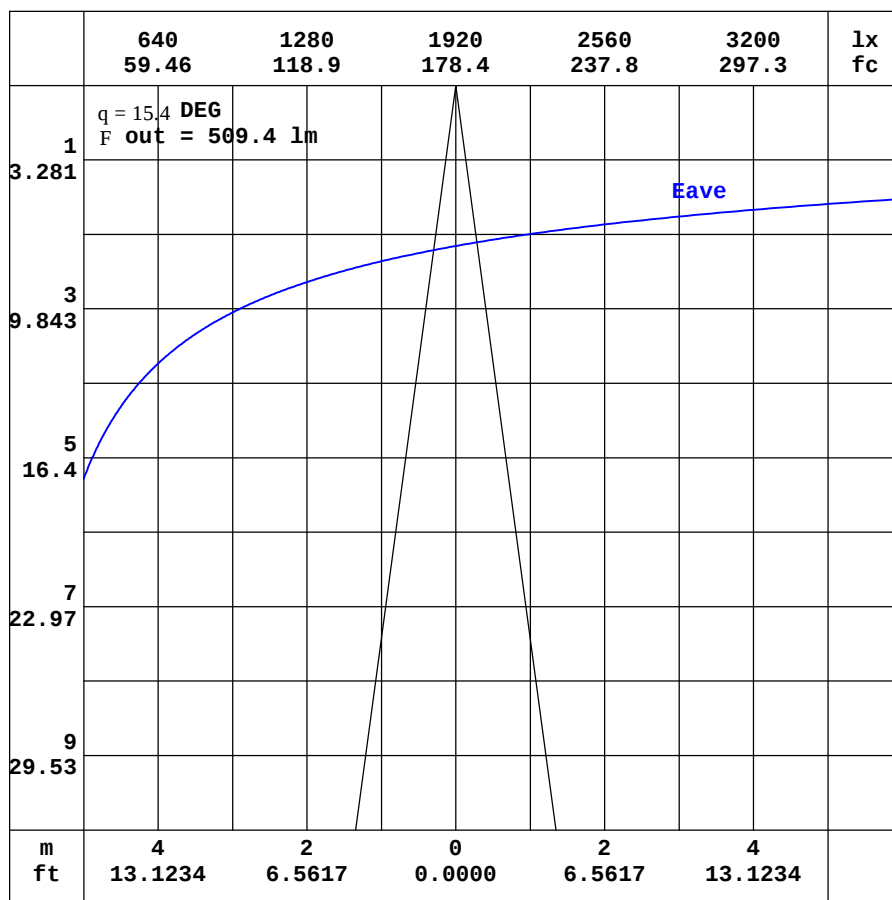

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-330mm-RGBW ALL-15D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:15 DEG	DIM.:330mm	SERIAL No.:IES001497
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.69	0.58	0.52	0.50	0.50	0.52	0.58	0.70	0.92	1.17	1.35	1.44	1.45	1.42	1.40	1.36	1.28	1.16	1.18
-170	0.69	0.58	0.51	0.48	0.48	0.48	0.50	0.57	0.70	0.85	0.96	1.02	1.04	1.06	1.08	1.12	1.18	1.23	1.25
-160	0.69	0.57	0.50	0.47	0.45	0.44	0.43	0.43	0.47	0.52	0.55	0.56	0.57	0.71	0.84	0.96	1.05	1.11	1.13
-150	0.69	0.57	0.49	0.46	0.43	0.41	0.38	0.34	0.30	0.27	0.23	0.30	0.39	0.48	0.58	0.66	0.73	0.77	0.79
-140	0.69	0.57	0.49	0.45	0.42	0.39	0.36	0.30	0.23	0.19	0.19	0.20	0.24	0.28	0.33	0.37	0.41	0.43	0.44
-130	0.69	0.57	0.49	0.44	0.41	0.38	0.35	0.30	0.27	0.24	0.21	0.20	0.19	0.19	0.19	0.20	0.21	0.22	0.22
-120	0.69	0.58	0.50	0.44	0.40	0.37	0.34	0.32	0.31	0.30	0.29	0.27	0.25	0.24	0.23	0.22	0.21	0.21	0.21
-110	0.69	0.59	0.51	0.44	0.39	0.35	0.32	0.32	0.32	0.32	0.32	0.32	0.32	0.32	0.32	0.31	0.31	0.31	0.31
-100	0.69	0.60	0.52	0.45	0.39	0.34	0.29	0.29	0.30	0.30	0.31	0.31	0.31	0.32	0.32	0.32	0.32	0.32	0.33
-90	0.69	0.61	0.54	0.46	0.39	0.31	0.24	0.24	0.24	0.24	0.24	0.25	0.25	0.25	0.25	0.25	0.25	0.26	0.26
-80	0.69	0.63	0.56	0.49	0.42	0.34	0.27	0.29	0.31	0.34	0.36	0.38	0.41	0.43	0.46	0.47	0.49	0.50	0.51
-70	0.69	0.64	0.60	0.57	0.55	0.54	0.53	0.59	0.69	0.79	0.89	0.99	1.08	1.18	1.26	1.34	1.40	1.44	1.46
-60	0.69	0.67	0.67	0.71	0.77	0.85	0.94	1.06	1.28	1.50	1.73	1.97	2.20	2.43	2.65	2.84	2.99	3.09	3.14
-50	0.69	0.70	0.76	0.89	1.05	1.25	1.47	1.69	2.02	2.45	2.91	3.41	3.93	4.46	5.00	5.49	5.90	6.19	6.33
-40	0.69	0.73	0.86	1.08	1.36	1.70	2.08	2.51	2.98	3.64	4.50	5.52	6.68	7.96	9.31	10.7	11.8	12.7	13.1
-30	0.69	0.76	0.96	1.27	1.67	2.16	2.76	3.47	4.29	5.29	6.57	8.52	11.0	14.2	17.9	22.3	26.6	30.1	31.5
-20	0.69	0.79	1.05	1.45	1.96	2.61	3.44	4.45	5.75	7.42	9.67	12.8	17.4	25.1	37.3	53.9	73.8	92.1	100
-10	0.69	0.82	1.13	1.59	2.20	3.00	4.03	5.34	7.09	9.48	12.9	18.1	26.8	42.5	72.7	133	243	397	483
0	0.69	0.84	1.18	1.68	2.35	3.25	4.42	5.93	7.99	10.8	15.0	21.4	32.5	50.8	86.7	170	389	859	1204
10	0.69	0.83	1.16	1.66	2.30	3.16	4.27	5.69	7.59	10.2	13.8	19.4	28.4	42.5	66.2	110	191	313	349
20	0.69	0.82	1.13	1.58	2.16	2.92	3.89	5.10	6.65	8.65	11.3	15.1	20.3	28.0	38.4	51.9	67.7	79.9	84.0
30	0.69	0.81	1.07	1.46	1.95	2.57	3.35	4.30	5.44	6.81	8.52	10.7	13.4	16.7	20.6	24.8	28.9	31.6	32.5
40	0.69	0.79	0.99	1.30	1.69	2.17	2.74	3.42	4.20	5.10	6.14	7.34	8.66	10.1	11.5	12.9	14.1	15.0	15.3
50	0.69	0.76	0.91	1.14	1.42	1.76	2.14	2.57	3.07	3.63	4.23	4.86	5.50	6.15	6.74	7.26	7.69	7.96	8.07
60	0.69	0.74	0.83	0.98	1.16	1.37	1.60	1.86	2.13	2.42	2.73	3.05	3.36	3.65	3.91	4.13	4.30	4.40	4.44
70	0.69	0.72	0.77	0.84	0.93	1.03	1.15	1.28	1.41	1.54	1.67	1.80	1.92	2.03	2.13	2.20	2.26	2.30	2.31
80	0.69	0.71	0.72	0.74	0.77	0.80	0.83	0.87	0.91	0.94	0.98	1.02	1.05	1.08	1.10	1.12	1.13	1.14	1.14
90	0.69	0.69	0.69	0.69	0.69	0.69	0.69	0.69	0.69	0.69	0.69	0.69	0.69	0.69	0.69	0.69	0.68	0.68	0.68
100	0.69	0.67	0.65	0.63	0.62	0.60	0.59	0.57	0.56	0.55	0.54	0.54	0.53	0.53	0.52	0.52	0.52	0.52	0.52
110	0.69	0.65	0.61	0.58	0.56	0.54	0.52	0.51	0.51	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50
120	0.69	0.63	0.58	0.55	0.52	0.51	0.50	0.50	0.50	0.50	0.50	0.51	0.52	0.53	0.54	0.55	0.56	0.57	0.57
130	0.69	0.62	0.56	0.52	0.51	0.50	0.50	0.50	0.51	0.53	0.56	0.61	0.66	0.72	0.78	0.84	0.89	0.92	0.93
140	0.69	0.61	0.54	0.51	0.50	0.50	0.50	0.52	0.56	0.63	0.73	0.86	1.00	1.12	1.21	1.28	1.32	1.35	1.36
150	0.69	0.60	0.53	0.50	0.50	0.50	0.52	0.57	0.66	0.82	1.00	1.18	1.31	1.39	1.45	1.48	1.50	1.51	1.51
160	0.69	0.59	0.52	0.50	0.50	0.51	0.54	0.63	0.79	1.01	1.22	1.36	1.44	1.49	1.53	1.55	1.58	1.59	1.60
170	0.69	0.59	0.52	0.50	0.50	0.51	0.57	0.68	0.89	1.13	1.32	1.43	1.47	1.49	1.51	1.52	1.49	1.47	1.47
180	0.69	0.58	0.52	0.50	0.50	0.52	0.58	0.70	0.92	1.17	1.35	1.44	1.45	1.42	1.40	1.36	1.28	1.16	1.18

H_b Range: -90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-08-14

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-330mm-RGBW ALL-15D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:15 DEG	DIM.:330mm	SERIAL No.:IES001497
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: ×10cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	1.07	1.08	1.06	0.99	0.89	0.76	0.61	0.45	0.31	0.22	0.19	0.21	0.26	0.31	0.32	0.31	0.29	0.24
-170	1.22	1.17	1.12	1.02	0.88	0.73	0.57	0.42	0.29	0.21	0.19	0.21	0.27	0.31	0.32	0.31	0.29	0.24
-160	1.11	1.06	0.98	0.87	0.74	0.60	0.46	0.34	0.25	0.20	0.19	0.23	0.28	0.31	0.32	0.31	0.29	0.24
-150	0.78	0.74	0.68	0.60	0.50	0.41	0.32	0.24	0.20	0.19	0.21	0.25	0.29	0.32	0.32	0.31	0.28	0.24
-140	0.43	0.41	0.38	0.34	0.29	0.24	0.21	0.19	0.19	0.21	0.24	0.28	0.31	0.32	0.32	0.31	0.28	0.24
-130	0.22	0.21	0.20	0.19	0.19	0.19	0.19	0.21	0.23	0.26	0.29	0.31	0.32	0.32	0.32	0.30	0.28	0.24
-120	0.21	0.21	0.22	0.22	0.23	0.25	0.27	0.28	0.30	0.31	0.32	0.32	0.32	0.32	0.31	0.29	0.27	0.24
-110	0.31	0.31	0.31	0.31	0.32	0.32	0.32	0.32	0.32	0.32	0.32	0.32	0.31	0.30	0.29	0.28	0.26	0.24
-100	0.32	0.32	0.32	0.32	0.32	0.32	0.31	0.31	0.31	0.31	0.30	0.30	0.29	0.28	0.27	0.26	0.25	0.24
-90	0.26	0.26	0.26	0.26	0.26	0.26	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.24	0.24	0.24	0.24
-80	0.50	0.49	0.47	0.45	0.43	0.40	0.38	0.36	0.34	0.32	0.30	0.27	0.26	0.24	0.24	0.23	0.23	0.24
-70	1.43	1.39	1.33	1.25	1.16	1.06	0.98	0.88	0.79	0.69	0.59	0.50	0.42	0.34	0.28	0.24	0.23	0.24
-60	3.08	2.96	2.80	2.61	2.38	2.16	1.94	1.71	1.48	1.26	1.05	0.85	0.67	0.51	0.37	0.28	0.24	0.24
-50	6.15	5.82	5.38	4.88	4.34	3.83	3.33	2.85	2.41	1.99	1.62	1.28	0.97	0.71	0.49	0.33	0.24	0.24
-40	12.5	11.6	10.3	8.93	7.66	6.44	5.34	4.38	3.56	2.85	2.25	1.74	1.30	0.92	0.62	0.39	0.25	0.24
-30	29.4	25.6	21.0	16.9	13.4	10.5	8.16	6.33	4.92	3.80	2.92	2.20	1.61	1.12	0.73	0.44	0.26	0.24
-20	88.4	68.4	49.5	34.3	23.3	16.3	11.7	8.59	6.36	4.74	3.52	2.59	1.86	1.29	0.83	0.49	0.27	0.24
-10	360	214	118	65.7	38.2	23.3	15.4	10.6	7.54	5.45	3.96	2.87	2.04	1.40	0.89	0.52	0.28	0.24
0	917	420	178	86.3	46.2	27.0	17.1	11.4	8.00	5.72	4.13	2.97	2.10	1.44	0.91	0.53	0.28	0.24
10	279	166	96.0	59.7	38.1	24.7	16.6	11.4	8.16	5.89	4.28	3.09	2.19	1.49	0.95	0.55	0.30	0.24
20	76.7	62.8	47.9	35.5	25.9	18.9	13.8	10.1	7.46	5.54	4.10	3.00	2.14	1.47	0.95	0.56	0.30	0.24
30	31.0	27.9	23.6	19.5	15.9	12.7	10.1	8.07	6.28	4.83	3.66	2.72	1.97	1.38	0.90	0.54	0.31	0.24
40	14.8	13.9	12.6	11.2	9.72	8.31	7.03	5.88	4.87	3.94	3.06	2.33	1.72	1.23	0.83	0.51	0.31	0.24
50	7.91	7.59	7.13	6.59	5.97	5.33	4.69	4.07	3.48	2.94	2.41	1.88	1.44	1.05	0.73	0.47	0.31	0.24
60	4.38	4.25	4.07	3.83	3.57	3.27	2.95	2.64	2.33	2.04	1.78	1.46	1.14	0.86	0.63	0.44	0.31	0.24
70	2.29	2.24	2.18	2.09	1.99	1.87	1.75	1.62	1.49	1.36	1.23	1.08	0.88	0.70	0.53	0.40	0.31	0.24
80	1.13	1.12	1.10	1.08	1.06	1.03	0.99	0.96	0.92	0.89	0.85	0.80	0.69	0.58	0.48	0.39	0.31	0.24
90	0.68	0.68	0.68	0.68	0.68	0.67	0.67	0.67	0.67	0.67	0.67	0.67	0.60	0.53	0.45	0.38	0.31	0.24
100	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.53	0.54	0.54	0.55	0.56	0.53	0.49	0.44	0.38	0.32	0.24
110	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.48	0.45	0.42	0.38	0.32	0.24
120	0.57	0.56	0.56	0.54	0.53	0.52	0.51	0.50	0.49	0.49	0.49	0.48	0.45	0.43	0.40	0.37	0.32	0.24
130	0.92	0.90	0.85	0.79	0.73	0.67	0.61	0.57	0.53	0.51	0.48	0.46	0.43	0.41	0.39	0.36	0.32	0.24
140	1.35	1.33	1.29	1.23	1.14	1.02	0.88	0.75	0.65	0.55	0.47	0.43	0.41	0.40	0.38	0.35	0.31	0.24
150	1.51	1.50	1.48	1.44	1.39	1.32	1.20	1.03	0.76	0.56	0.45	0.40	0.38	0.38	0.37	0.34	0.31	0.24
160	1.59	1.57	1.55	1.52	1.48	1.44	1.24	1.00	0.74	0.52	0.40	0.35	0.35	0.36	0.35	0.34	0.30	0.24
170	1.46	1.47	1.51	1.44	1.30	1.14	0.97	0.77	0.58	0.41	0.31	0.28	0.30	0.33	0.34	0.33	0.30	0.24
180	1.07	1.08	1.06	0.99	0.89	0.76	0.61	0.45	0.31	0.22	0.19	0.21	0.26	0.31	0.32	0.31	0.29	0.24

H_b Range: -90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-08-14

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks: