

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	6648.2 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	36.3V x 35.4H
	At 50% of Imax	15.6V x 15.4H
	At 90% of Imax	5.7V x 5.8H

Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	631.6 lumens per klm.
	To 50% of Imax	275.4 lumens per klm.
	To 90% of Imax	56.1 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoBody-330mm-RGBW GREEN-15D-Rev1	TYPE:RGBW-Green	WEIGHT:
SPEC.:15 DEG	DIM.:330mm	SERIAL No.:IES001499
MFR.:	SUR.:	Shielding Angle:

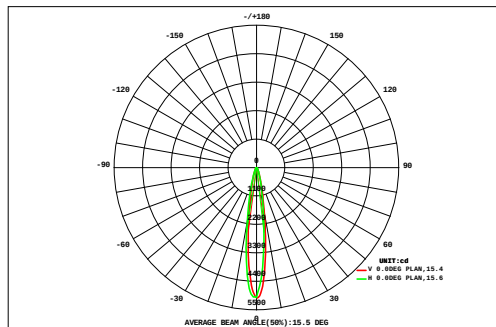

DATA OF LAMP		Eff:76.32lm/W	
MODEL		Imax(cd)	5033
NOMINAL POWER(W)	9.9	AVAILABILITY(%)	63.3
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	479.0
NOMINAL FLUX(lm)	757.1	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	757.1
TEST VOLTAGE(V)	221.4	q @50%(H,V)	15,16DEG

AREA FLUX DIAGRAM																	UNIT:lm		F t	F a
27	0.22	0.26	0.31	0.36	0.42	0.47	0.51	0.55	0.56	0.56	0.53	0.49	0.45	0.39	0.34	0.29	0.25	0.21	7.17	0.00
24	0.25	0.31	0.38	0.45	0.53	0.60	0.67	0.73	0.75	0.74	0.71	0.64	0.57	0.49	0.42	0.35	0.29	0.24	9.12	0.00
21	0.29	0.37	0.45	0.55	0.67	0.80	0.92	1.00	1.04	1.03	0.96	0.86	0.74	0.62	0.51	0.42	0.34	0.27	11.9	0.00
18	0.34	0.43	0.54	0.69	0.87	1.07	1.28	1.44	1.51	1.48	1.37	1.18	0.98	0.79	0.63	0.50	0.39	0.31	15.8	4.29
15	0.38	0.50	0.65	0.85	1.12	1.46	1.84	2.16	2.31	2.25	2.02	1.67	1.31	1.00	0.76	0.58	0.45	0.35	21.6	13.8
12	0.43	0.56	0.76	1.03	1.43	1.98	2.70	3.39	3.72	3.60	3.10	2.39	1.74	1.25	0.91	0.68	0.51	0.38	30.6	24.0
9	0.47	0.63	0.87	1.23	1.79	2.67	3.91	5.36	6.11	5.86	4.80	3.39	2.28	1.56	1.11	0.80	0.58	0.42	43.8	37.9
	0.50	0.68	0.97	1.41	2.16	3.41	5.32	7.82	9.48	9.02	6.93	4.60	3.05	2.01	1.34	0.91	0.63	0.45	60.7	55.6
	0.51	0.71	1.03	1.54	2.42	3.99	6.54	9.81	12.3	11.9	9.44	6.47	3.99	2.44	1.53	1.00	0.67	0.46	76.8	72.0
	0.51	0.73	1.06	1.61	2.59	4.39	7.38	11.1	13.4	13.1	10.8	7.24	4.33	2.58	1.59	1.03	0.68	0.47	84.6	80.1
	0.50	0.72	1.05	1.61	2.60	4.40	7.18	10.0	11.6	11.2	9.03	6.24	3.87	2.37	1.50	0.98	0.66	0.45	76.0	71.3
-9	0.47	0.67	0.98	1.48	2.32	3.62	5.35	7.17	8.37	8.05	6.38	4.58	3.06	1.99	1.32	0.89	0.61	0.42	57.7	52.7
	0.43	0.60	0.87	1.26	1.82	2.62	3.62	4.61	5.28	5.09	4.16	3.14	2.25	1.57	1.10	0.77	0.54	0.38	40.1	34.5
-12	0.38	0.51	0.72	1.00	1.37	1.84	2.38	2.90	3.21	3.12	2.67	2.11	1.61	1.20	0.88	0.64	0.46	0.34	27.3	20.8
-15	0.32	0.43	0.58	0.77	1.01	1.29	1.59	1.85	2.00	1.96	1.74	1.44	1.16	0.91	0.69	0.52	0.39	0.29	19.0	10.5
-18	0.28	0.36	0.46	0.59	0.75	0.92	1.09	1.23	1.31	1.29	1.17	1.01	0.84	0.68	0.54	0.42	0.33	0.25	13.5	1.45
-21	0.23	0.29	0.37	0.46	0.56	0.66	0.76	0.84	0.89	0.88	0.81	0.72	0.61	0.51	0.42	0.34	0.27	0.21	9.85	0.00
-24	0.20	0.24	0.29	0.35	0.42	0.48	0.54	0.59	0.62	0.61	0.57	0.52	0.45	0.39	0.33	0.27	0.22	0.18	7.28	0.00
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)	6	9	12	15	18	21	24	27			
F t	6.71	9.00	12.3	17.2	24.8	36.7	53.6	72.5	84.5	81.8	67.2	48.7	33.3	22.8	15.9	11.4	8.25	6.09	613	---
F a	0.00	0.00	0.00	7.61	17.7	30.4	48.0	67.5	79.4	76.7	61.9	42.9	26.7	14.7	5.51	0.00	0.00	0.00	---	479

one-half-peak spread: U:9.0,D:6.7 , L:8.0,R:7.5


NEMA Beam Type: Type 3

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:DecoBody-330mm-RGBW GREEN-15D-Rev1	TYPE:RGBW-Green	WEIGHT:
SPEC.:15 DEG	DIM.:330mm	SERIAL No.:IES001499
MFR.:	SUR.:	Shielding Angle:

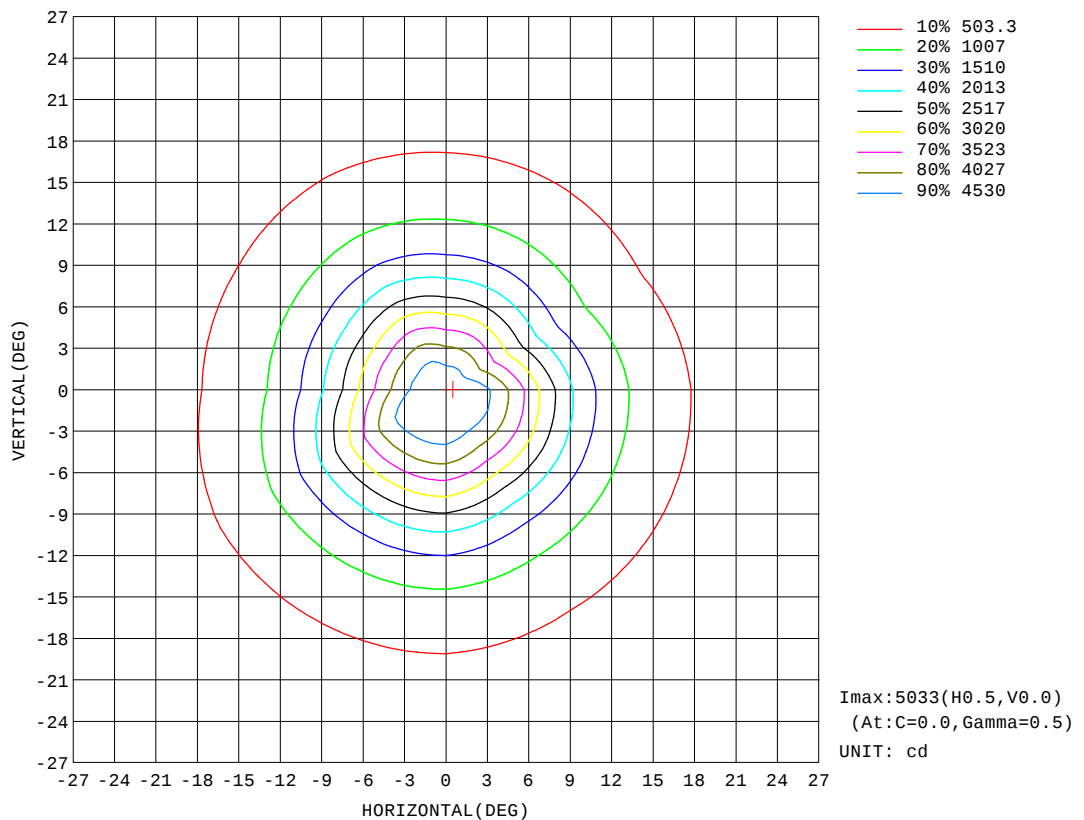


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoBody-330mm-RGBW GREEN-15D-Rev1	TYPE:RGBW-Green	WEIGHT:
SPEC.:15 DEG	DIM.:330mm	SERIAL No.:IES001499
MFR.:	SUR.:	Shielding Angle:

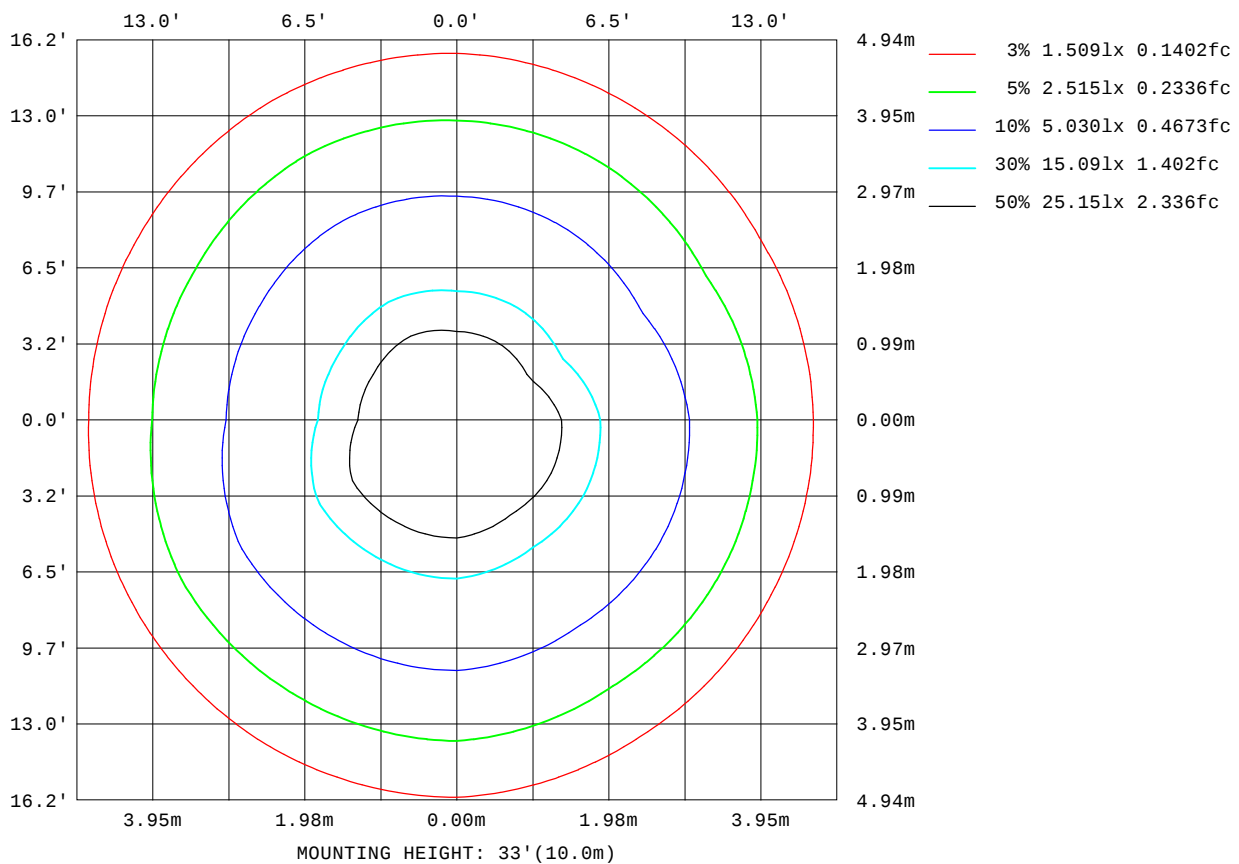

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

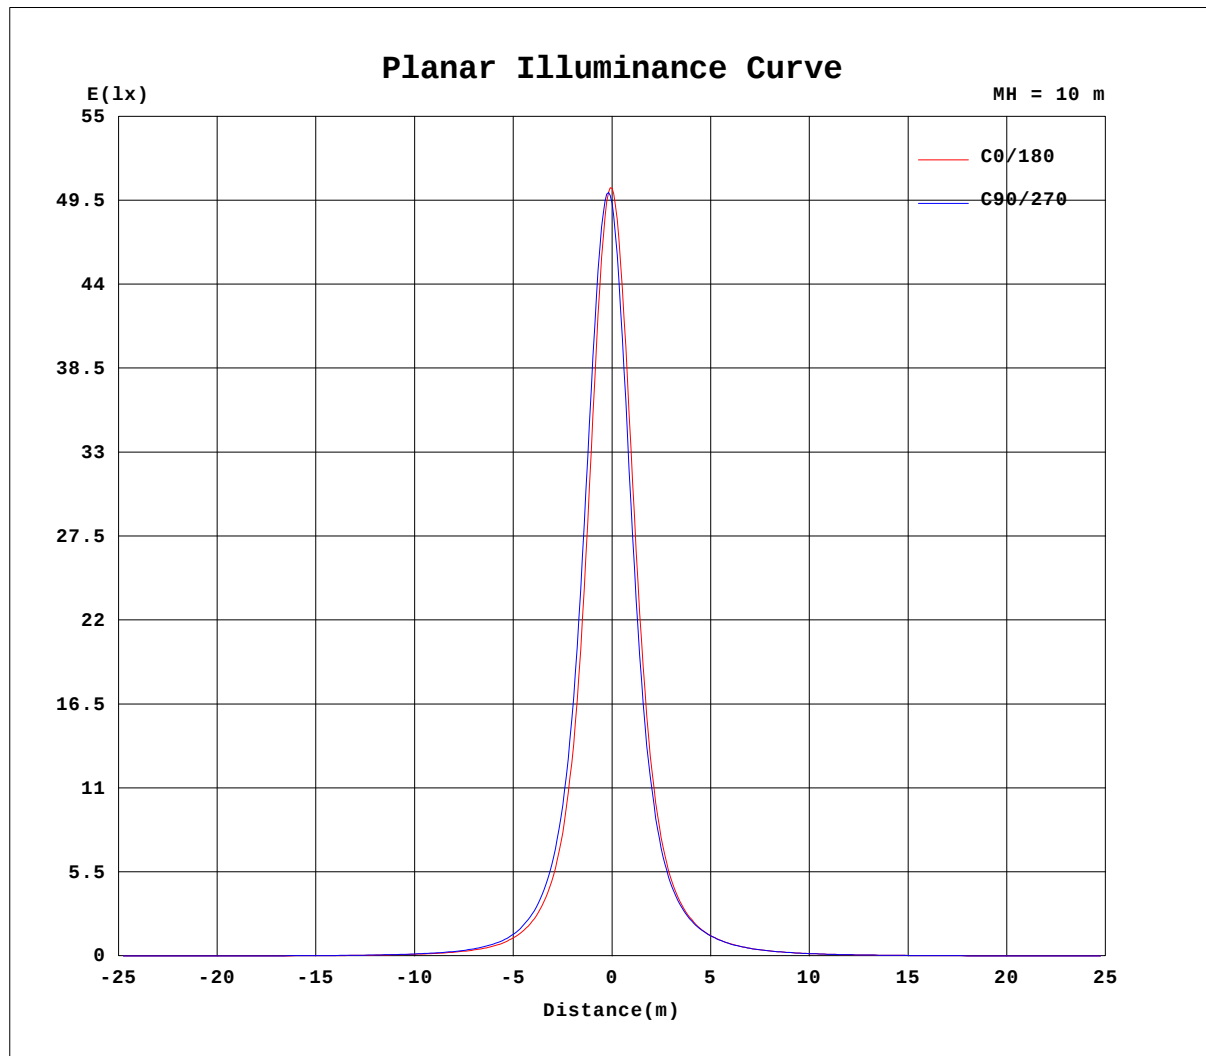


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoBody-330mm-RGBW GREEN-15D-Rev1	TYPE:RGBW-Green	WEIGHT:
SPEC.:15 DEG	DIM.:330mm	SERIAL No.:IES001499
MFR.:	SUR.:	Shielding Angle:

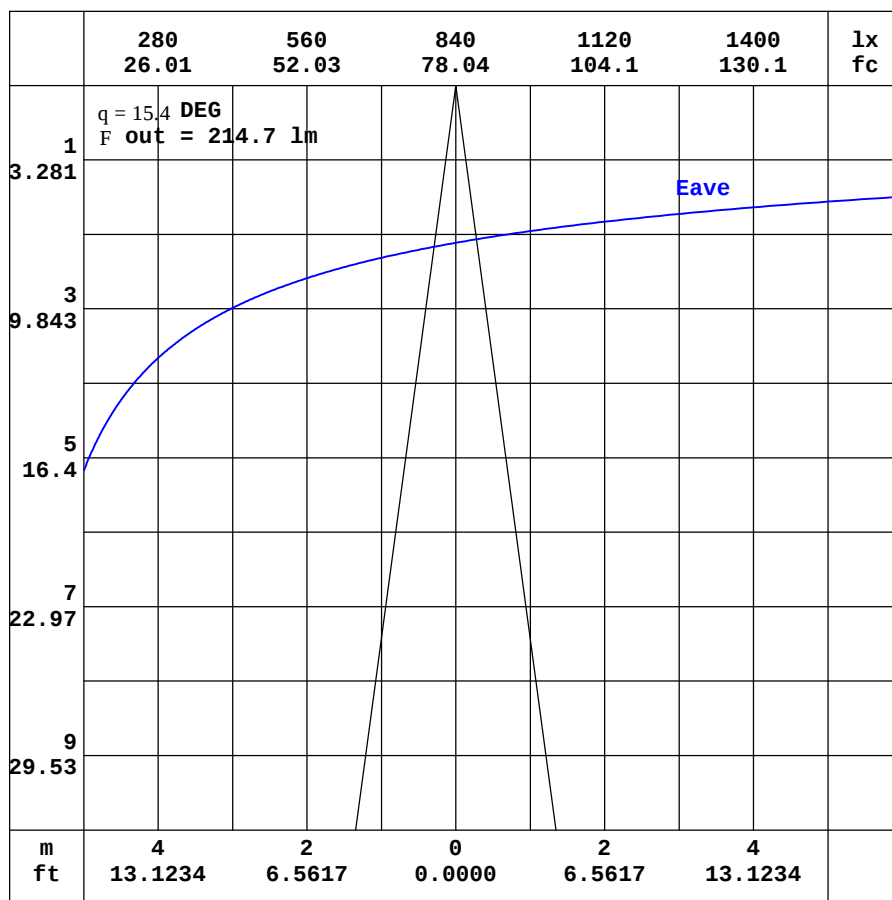

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-330mm-RGBW GREEN-15D-Rev1	TYPE:RGBW-Green	WEIGHT:
SPEC.:15 DEG	DIM.:330mm	SERIAL No.:IES001499
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°)\V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.81	2.39	2.14	2.09	2.09	2.16	2.42	2.95	3.87	4.92	5.68	6.06	6.08	5.96	5.84	5.70	5.36	4.88	5.02
-170	2.81	2.36	2.09	2.01	1.99	1.99	2.09	2.39	2.93	3.58	4.04	4.28	4.38	4.45	4.55	4.74	5.00	5.19	5.26
-160	2.81	2.34	2.05	1.94	1.88	1.82	1.77	1.81	1.97	2.18	2.32	2.35	2.41	3.00	3.55	4.03	4.40	4.64	4.74
-150	2.81	2.33	2.03	1.88	1.80	1.69	1.56	1.39	1.27	1.11	0.98	1.25	1.62	2.02	2.41	2.77	3.05	3.23	3.30
-140	2.81	2.33	2.01	1.83	1.73	1.61	1.45	1.22	0.93	0.78	0.78	0.84	0.96	1.14	1.33	1.52	1.68	1.79	1.83
-130	2.81	2.35	2.02	1.81	1.67	1.55	1.41	1.22	1.07	0.95	0.86	0.80	0.78	0.78	0.78	0.82	0.86	0.89	0.91
-120	2.81	2.37	2.04	1.80	1.63	1.49	1.37	1.26	1.24	1.21	1.16	1.11	1.05	0.99	0.94	0.89	0.86	0.84	0.83
-110	2.81	2.41	2.07	1.81	1.61	1.45	1.31	1.28	1.28	1.28	1.28	1.28	1.28	1.28	1.28	1.26	1.25	1.23	1.23
-100	2.81	2.45	2.13	1.84	1.59	1.37	1.18	1.19	1.21	1.22	1.23	1.24	1.25	1.27	1.28	1.29	1.29	1.30	1.30
-90	2.81	2.50	2.19	1.88	1.57	1.26	0.96	0.96	0.96	0.96	0.97	0.97	0.97	0.98	0.99	1.00	1.02	1.03	1.04
-80	2.81	2.56	2.29	1.99	1.69	1.40	1.12	1.20	1.32	1.43	1.54	1.65	1.74	1.86	1.97	2.06	2.13	2.19	2.22
-70	2.81	2.64	2.46	2.36	2.31	2.30	2.29	2.59	3.04	3.50	3.93	4.36	4.76	5.17	5.57	5.92	6.19	6.37	6.47
-60	2.81	2.72	2.77	2.99	3.31	3.70	4.12	4.69	5.64	6.66	7.67	8.73	9.76	10.8	11.7	12.6	13.2	13.7	13.9
-50	2.81	2.85	3.18	3.76	4.53	5.43	6.42	7.48	8.93	10.8	12.9	15.1	17.4	19.8	22.1	24.3	26.1	27.3	27.9
-40	2.81	2.99	3.62	4.62	5.87	7.36	9.08	11.0	13.2	16.2	20.0	24.5	29.6	35.3	41.3	47.2	52.3	56.1	57.8
-30	2.81	3.13	4.06	5.45	7.22	9.38	12.0	15.2	18.9	23.4	29.2	37.8	48.8	62.6	79.2	98.4	117	132	138
-20	2.81	3.26	4.45	6.21	8.42	11.3	14.9	19.4	25.1	32.6	42.6	56.6	77.4	112	165	240	330	413	448
-10	2.81	3.38	4.77	6.80	9.42	12.9	17.4	23.1	30.8	41.3	56.2	79.1	117	185	322	592	1084	1751	2120
0	2.81	3.46	4.98	7.20	10.1	14.0	19.1	25.6	34.5	46.8	64.8	92.7	139	217	376	731	1652	3592	5030
10	2.81	3.45	4.92	7.07	9.85	13.6	18.4	24.6	32.8	43.9	59.7	83.6	121	183	286	470	812	1296	1444
20	2.81	3.40	4.75	6.73	9.23	12.5	16.7	22.0	28.7	37.3	48.8	64.6	86.8	119	164	221	290	342	357
30	2.81	3.32	4.49	6.18	8.34	11.0	14.4	18.5	23.4	29.4	36.8	46.2	57.7	71.9	88.6	107	123	134	139
40	2.81	3.23	4.16	5.52	7.22	9.26	11.7	14.7	18.1	22.0	26.5	31.6	37.4	43.6	49.8	55.6	60.4	63.8	64.9
50	2.81	3.14	3.80	4.79	6.03	7.47	9.13	11.0	13.2	15.6	18.2	20.9	23.7	26.5	29.1	31.2	33.1	34.2	34.6
60	2.81	3.04	3.45	4.08	4.86	5.78	6.78	7.89	9.10	10.4	11.7	13.1	14.5	15.7	16.8	17.8	18.5	18.9	19.1
70	2.81	2.97	3.17	3.47	3.86	4.32	4.82	5.38	5.95	6.53	7.11	7.68	8.20	8.66	9.08	9.41	9.66	9.81	9.86
80	2.81	2.89	2.98	3.07	3.18	3.31	3.44	3.60	3.76	3.93	4.09	4.25	4.39	4.51	4.60	4.68	4.73	4.75	4.75
90	2.81	2.82	2.83	2.83	2.84	2.85	2.85	2.85	2.85	2.85	2.85	2.84	2.84	2.84	2.84	2.84	2.83	2.83	2.83
100	2.81	2.74	2.67	2.60	2.54	2.48	2.43	2.37	2.33	2.28	2.25	2.22	2.19	2.18	2.17	2.17	2.17	2.18	2.18
110	2.81	2.67	2.52	2.40	2.30	2.23	2.18	2.14	2.12	2.11	2.10	2.10	2.10	2.10	2.10	2.11	2.11	2.11	2.11
120	2.81	2.60	2.40	2.26	2.17	2.12	2.11	2.10	2.10	2.10	2.11	2.14	2.19	2.25	2.29	2.34	2.38	2.41	2.42
130	2.81	2.53	2.31	2.16	2.11	2.10	2.09	2.10	2.11	2.22	2.36	2.56	2.79	3.05	3.32	3.58	3.78	3.91	3.97
140	2.81	2.48	2.24	2.11	2.09	2.09	2.10	2.17	2.34	2.65	3.09	3.65	4.23	4.75	5.15	5.44	5.61	5.71	5.75
150	2.81	2.44	2.19	2.10	2.09	2.10	2.17	2.38	2.78	3.42	4.23	4.97	5.52	5.89	6.12	6.27	6.35	6.40	6.41
160	2.81	2.41	2.16	2.09	2.09	2.12	2.28	2.64	3.31	4.24	5.12	5.72	6.06	6.28	6.44	6.57	6.68	6.72	6.76
170	2.81	2.40	2.14	2.09	2.09	2.15	2.37	2.87	3.73	4.76	5.56	6.01	6.19	6.28	6.35	6.39	6.28	6.19	6.22
180	2.81	2.39	2.14	2.09	2.09	2.16	2.42	2.95	3.87	4.92	5.68	6.06	6.08	5.96	5.84	5.70	5.36	4.88	5.04

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-08-14

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-330mm-RGBW GREEN-15D-Rev1	TYPE:RGBW-Green	WEIGHT:
SPEC.:15 DEG	DIM.:330mm	SERIAL No.:IES001499
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	4.52	4.53	4.42	4.12	3.69	3.16	2.51	1.85	1.27	0.89	0.78	0.86	1.06	1.25	1.28	1.23	1.14	0.93
-170	5.12	4.92	4.72	4.28	3.69	3.05	2.37	1.72	1.20	0.87	0.78	0.87	1.07	1.25	1.28	1.24	1.13	0.93
-160	4.65	4.44	4.09	3.63	3.08	2.49	1.91	1.39	1.01	0.80	0.79	0.91	1.11	1.26	1.28	1.23	1.13	0.93
-150	3.26	3.09	2.84	2.49	2.10	1.69	1.31	1.02	0.83	0.78	0.83	1.00	1.18	1.27	1.28	1.23	1.12	0.93
-140	1.80	1.71	1.57	1.38	1.18	1.00	0.85	0.78	0.78	0.82	0.97	1.13	1.24	1.28	1.26	1.21	1.10	0.93
-130	0.90	0.86	0.83	0.78	0.77	0.77	0.79	0.83	0.92	1.03	1.14	1.22	1.27	1.28	1.25	1.18	1.08	0.93
-120	0.84	0.85	0.87	0.91	0.96	1.01	1.08	1.14	1.19	1.23	1.26	1.28	1.28	1.28	1.22	1.15	1.06	0.93
-110	1.23	1.24	1.26	1.27	1.29	1.28	1.28	1.28	1.28	1.28	1.28	1.28	1.25	1.21	1.16	1.10	1.02	0.93
-100	1.30	1.29	1.29	1.28	1.28	1.26	1.25	1.25	1.23	1.23	1.21	1.19	1.15	1.12	1.08	1.03	0.98	0.93
-90	1.03	1.03	1.02	1.02	1.01	1.00	1.00	1.00	1.00	1.00	0.99	0.99	0.98	0.97	0.96	0.95	0.94	0.93
-80	2.18	2.13	2.05	1.96	1.86	1.75	1.66	1.55	1.45	1.34	1.23	1.12	1.04	0.98	0.95	0.94	0.93	0.93
-70	6.35	6.14	5.85	5.49	5.09	4.67	4.28	3.88	3.44	3.01	2.58	2.16	1.77	1.43	1.16	0.99	0.94	0.93
-60	13.6	13.1	12.4	11.5	10.5	9.52	8.53	7.52	6.53	5.54	4.61	3.72	2.89	2.16	1.58	1.15	0.95	0.93
-50	27.1	25.7	23.7	21.5	19.1	16.9	14.6	12.5	10.6	8.72	7.10	5.58	4.23	3.07	2.10	1.39	0.99	0.93
-40	55.3	51.0	45.5	39.4	33.8	28.4	23.5	19.2	15.6	12.5	9.85	7.59	5.64	3.99	2.65	1.64	1.04	0.93
-30	129	112	92.3	74.3	58.9	46.1	35.9	27.8	21.6	16.7	12.7	9.56	6.99	4.86	3.16	1.87	1.09	0.93
-20	393	302	217	150	103	71.8	51.5	37.7	27.8	20.7	15.3	11.3	8.10	5.56	3.57	2.06	1.13	0.93
-10	1552	927	512	287	165	101	66.6	46.1	32.8	23.6	17.2	12.4	8.84	6.01	3.83	2.18	1.16	0.93
0	3818	1753	757	369	199	115	72.8	49.2	34.6	24.7	17.8	12.8	9.10	6.16	3.91	2.22	1.17	0.93
10	1170	712	414	257	164	106	70.8	49.3	35.3	25.5	18.5	13.4	9.46	6.41	4.08	2.33	1.23	0.93
20	328	270	204	152	110	80.6	59.0	43.6	32.3	24.0	17.8	13.0	9.26	6.32	4.06	2.35	1.26	0.93
30	132	118	102	84.2	68.3	54.8	43.9	35.0	27.2	20.9	15.9	11.8	8.54	5.92	3.87	2.29	1.28	0.93
40	63.1	59.4	54.2	48.3	42.0	36.0	30.5	25.5	21.1	17.1	13.3	10.1	7.45	5.27	3.53	2.16	1.28	0.93
50	34.0	32.7	30.7	28.4	25.8	23.0	20.3	17.6	15.1	12.7	10.4	8.16	6.17	4.50	3.09	2.00	1.27	0.93
60	18.8	18.3	17.5	16.5	15.4	14.1	12.7	11.4	10.1	8.84	7.67	6.26	4.89	3.67	2.64	1.81	1.26	0.93
70	9.77	9.59	9.31	8.95	8.53	8.04	7.52	6.95	6.39	5.82	5.27	4.61	3.73	2.93	2.24	1.68	1.25	0.93
80	4.74	4.70	4.64	4.55	4.44	4.32	4.18	4.03	3.87	3.72	3.56	3.38	2.88	2.42	1.99	1.60	1.25	0.93
90	2.82	2.81	2.81	2.80	2.79	2.78	2.78	2.78	2.79	2.79	2.79	2.79	2.48	2.17	1.86	1.55	1.24	0.93
100	2.17	2.16	2.16	2.16	2.15	2.16	2.18	2.21	2.24	2.28	2.32	2.36	2.19	2.01	1.80	1.54	1.25	0.93
110	2.11	2.11	2.11	2.10	2.11	2.10	2.10	2.10	2.10	2.11	2.12	2.11	1.99	1.87	1.72	1.52	1.26	0.93
120	2.42	2.40	2.36	2.32	2.27	2.21	2.16	2.11	2.10	2.09	2.09	2.00	1.89	1.77	1.65	1.49	1.27	0.93
130	3.94	3.83	3.65	3.41	3.14	2.87	2.62	2.41	2.25	2.14	2.04	1.92	1.81	1.71	1.59	1.46	1.25	0.93
140	5.73	5.65	5.50	5.24	4.86	4.36	3.78	3.21	2.74	2.32	1.97	1.79	1.73	1.64	1.54	1.42	1.24	0.93
150	6.41	6.37	6.29	6.15	5.94	5.60	5.09	4.37	3.25	2.37	1.87	1.65	1.59	1.56	1.49	1.38	1.22	0.93
160	6.72	6.69	6.60	6.46	6.31	6.11	5.28	4.23	3.13	2.21	1.66	1.44	1.43	1.47	1.42	1.34	1.20	0.93
170	6.14	6.26	6.42	6.10	5.51	4.83	4.07	3.25	2.41	1.69	1.29	1.17	1.24	1.36	1.35	1.29	1.17	0.93
180	4.52	4.53	4.42	4.12	3.69	3.16	2.51	1.85	1.27	0.89	0.78	0.86	1.06	1.25	1.28	1.23	1.14	0.93

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks: