

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		7334.4 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	34.2V x 33.3H
	At 50% of Imax	15.1V x 14.8H
	At 90% of Imax	5.7V x 5.6H
Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	629.4 lumens per klm.
	To 50% of Imax	281.8 lumens per klm.
	To 90% of Imax	53.5 lumens per klm.
	Upward LOR	2.1 %
	Downward LOR	97.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoHody-330mm-RGBW RED-15D-Rev1	TYPE:RGBW-Red	WEIGHT:
SPEC.:15 DEG	DIM.:330mm	SERIAL No.:IES001498
MFR.:	SUR.:	Shielding Angle:

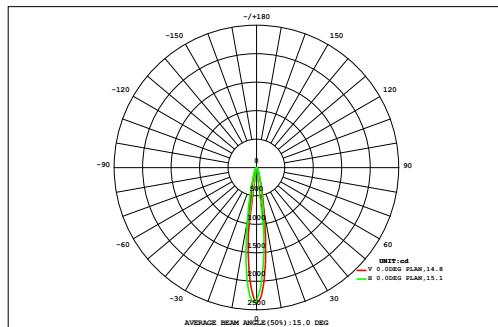

DATA OF LAMP		Eff:38.63lm/W	
MODEL		Imax (cd)	2386
NOMINAL POWER (W)	8.4	AVAILABILITY (%)	62.9
RATED VOLTAGE (V)	220	Avai. FLUX (lm)	204.6
NOMINAL FLUX (lm)	325.3	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	325.3
TEST VOLTAGE (V)	221.4	q @50% (H,V)	15,15DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	27	0.09	0.11	0.13	0.15	0.17	0.19	0.21	0.23	0.23	0.23	0.22	0.21	0.19	0.16	0.14	0.12	0.10	0.09	2.97	0.00	
	24	0.10	0.13	0.15	0.18	0.22	0.25	0.28	0.30	0.31	0.31	0.29	0.27	0.24	0.20	0.17	0.15	0.12	0.10	3.76	0.00	
	21	0.12	0.15	0.19	0.23	0.27	0.33	0.37	0.41	0.43	0.42	0.40	0.35	0.30	0.26	0.21	0.17	0.14	0.11	4.87	0.00	
	18	0.14	0.17	0.22	0.28	0.35	0.44	0.52	0.59	0.63	0.62	0.56	0.48	0.40	0.32	0.26	0.21	0.16	0.13	6.48	0.70	
	15	0.16	0.20	0.26	0.34	0.45	0.60	0.77	0.91	0.98	0.95	0.85	0.70	0.54	0.41	0.31	0.24	0.19	0.14	8.99	5.04	
	12	0.17	0.23	0.31	0.42	0.58	0.83	1.15	1.46	1.62	1.56	1.32	1.01	0.73	0.52	0.38	0.28	0.21	0.16	12.9	9.76	
	9	0.19	0.25	0.35	0.50	0.74	1.12	1.70	2.39	2.76	2.62	2.10	1.46	0.97	0.65	0.46	0.33	0.23	0.17	19.0	16.2	
		0.20	0.28	0.39	0.58	0.90	1.45	2.36	3.58	4.39	4.15	3.13	2.03	1.31	0.84	0.55	0.37	0.26	0.18	26.9	24.4	
		0.21	0.29	0.41	0.62	1.01	1.71	2.92	4.54	5.80	5.57	4.35	2.90	1.73	1.02	0.63	0.41	0.27	0.19	34.6	32.1	
		0.21	0.29	0.42	0.66	1.08	1.89	3.32	5.17	6.34	6.17	4.97	3.25	1.88	1.08	0.66	0.42	0.27	0.19	38.3	36.1	
		0.20	0.29	0.42	0.66	1.09	1.89	3.23	4.64	5.46	5.23	4.14	2.76	1.66	0.99	0.61	0.40	0.26	0.18	34.1	31.8	
	-9	0.19	0.27	0.39	0.60	0.97	1.54	2.34	3.23	3.82	3.67	2.87	2.00	1.30	0.83	0.53	0.36	0.24	0.17	25.3	22.9	
	-12	0.17	0.24	0.35	0.51	0.75	1.09	1.53	2.00	2.31	2.24	1.81	1.34	0.94	0.64	0.44	0.30	0.21	0.15	17.0	14.3	
	-15	0.15	0.21	0.29	0.40	0.55	0.75	0.98	1.21	1.35	1.32	1.13	0.88	0.67	0.49	0.35	0.25	0.18	0.13	11.3	8.04	
	-18	0.13	0.17	0.23	0.31	0.41	0.52	0.65	0.76	0.83	0.81	0.72	0.59	0.47	0.36	0.28	0.21	0.15	0.12	7.72	3.25	
-21	0.11	0.14	0.18	0.24	0.30	0.37	0.44	0.49	0.52	0.52	0.47	0.41	0.34	0.27	0.21	0.17	0.13	0.10	5.41	0.00		
-24	0.09	0.12	0.15	0.18	0.22	0.26	0.30	0.33	0.35	0.35	0.32	0.28	0.24	0.20	0.16	0.13	0.11	0.09	3.90	0.00		
-27	0.08	0.10	0.12	0.14	0.17	0.19	0.22	0.23	0.24	0.24	0.23	0.21	0.18	0.15	0.13	0.11	0.09	0.07	2.88	0.00		
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27		
F t	2.73	3.64	4.96	7.00	10.2	15.4	23.3	32.5	38.4	37.0	29.9	21.1	14.1	9.42	6.50	4.62	3.34	2.46	266	---		
F a	0.00	0.00	0.00	1.57	6.63	12.4	20.5	29.9	35.9	34.5	27.2	18.2	10.9	5.56	1.24	0.00	0.00	0.00	---	205		

one-half-peak spread: U:7.7,D:7.5 , L:7.7,R:7.2


NEMA Beam Type: Type 3

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:DecoHody-330mm-RGBW RED-15D-Rev1	TYPE:RGBW-Red	WEIGHT:
SPEC.:15 DEG	DIM.:330mm	SERIAL No.:IES001498
MFR.:	SUR.:	Shielding Angle:

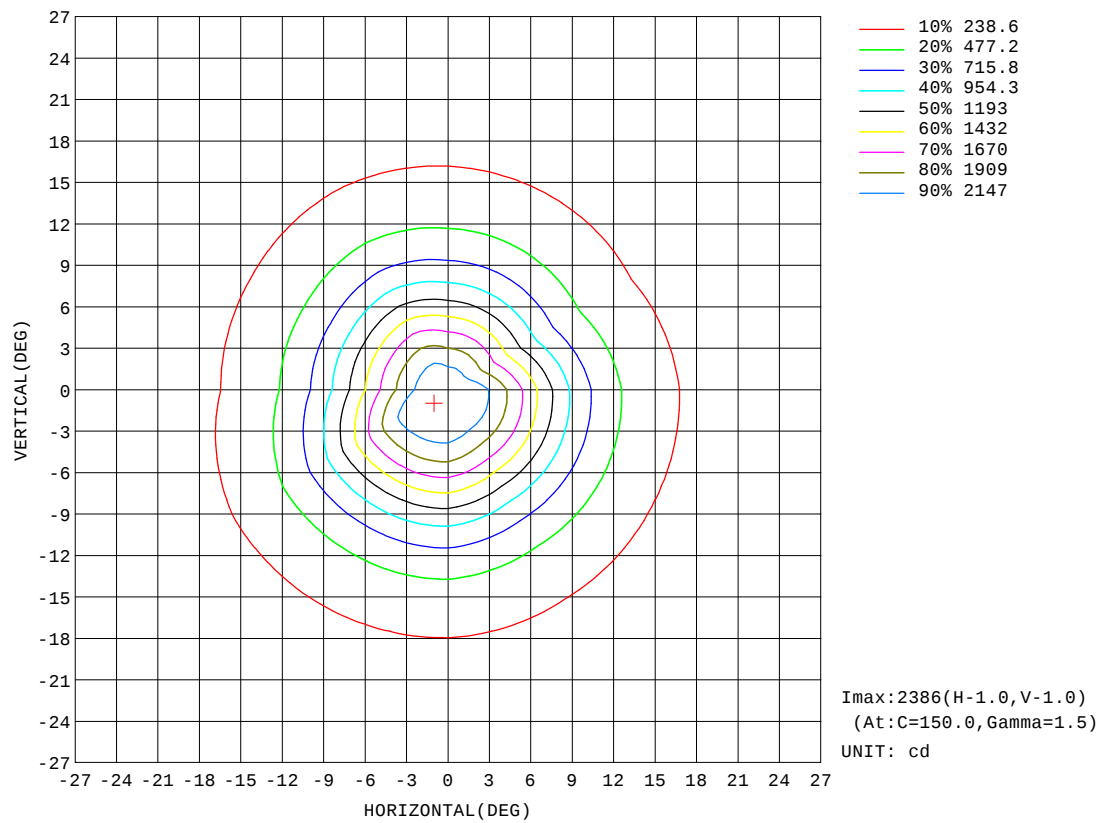


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoHody-330mm-RGBW RED-15D-Rev1	TYPE:RGBW-Red	WEIGHT:
SPEC.:15 DEG	DIM.:330mm	SERIAL No.:IES001498
MFR.:	SUR.:	Shielding Angle:

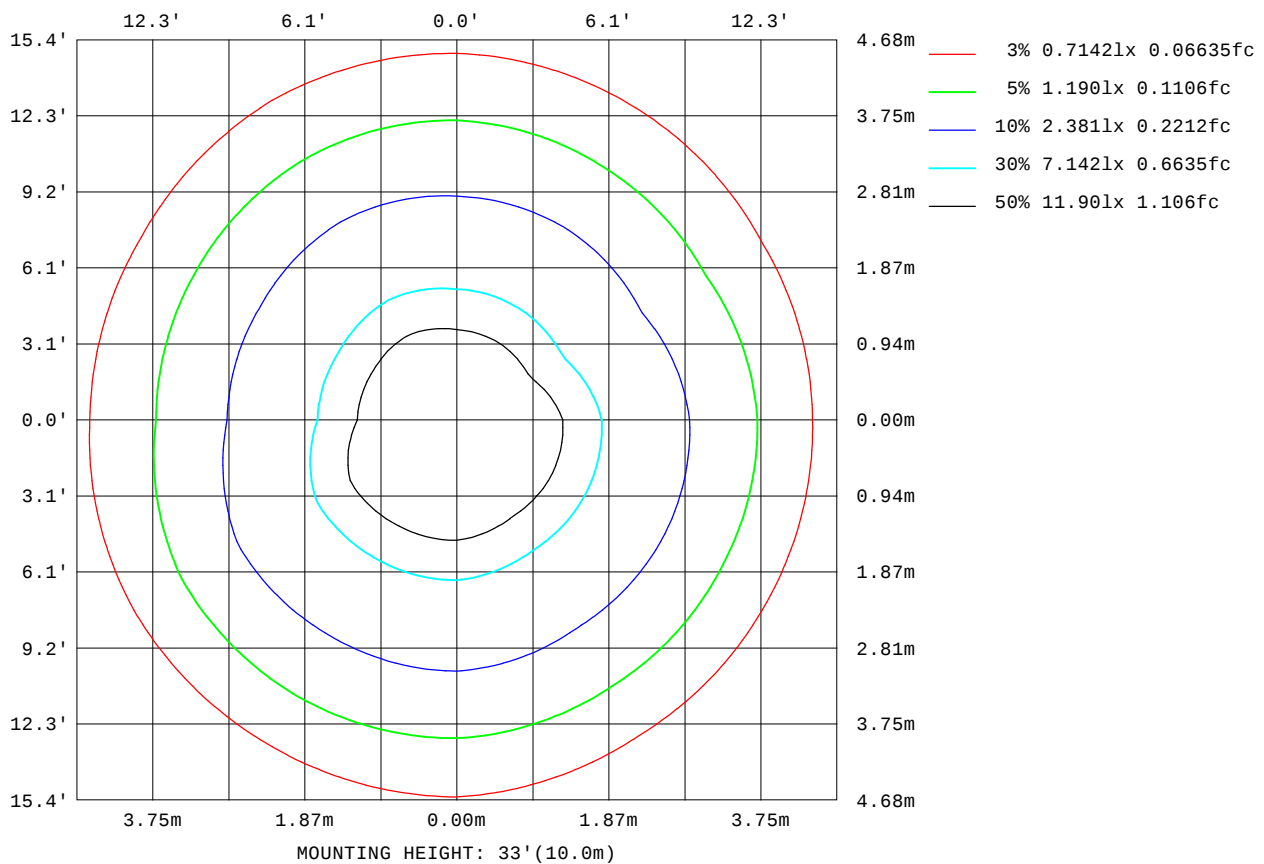

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

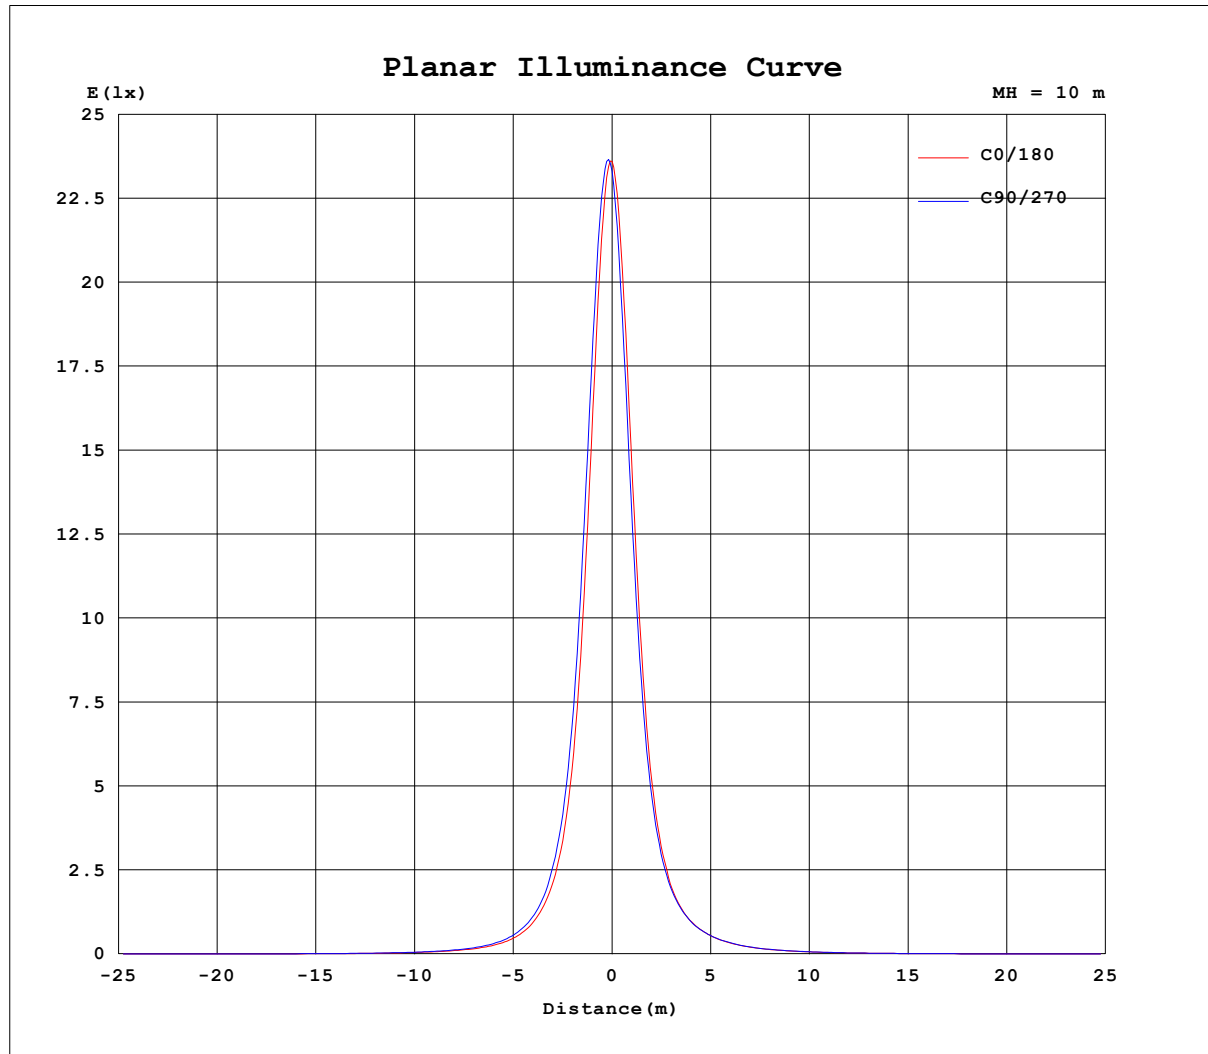


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoHody-330mm-RGBW RED-15D-Rev1	TYPE:RGBW-Red	WEIGHT:
SPEC.:15 DEG	DIM.:330mm	SERIAL No.:IES001498
MFR.:	SUR.:	Shielding Angle:

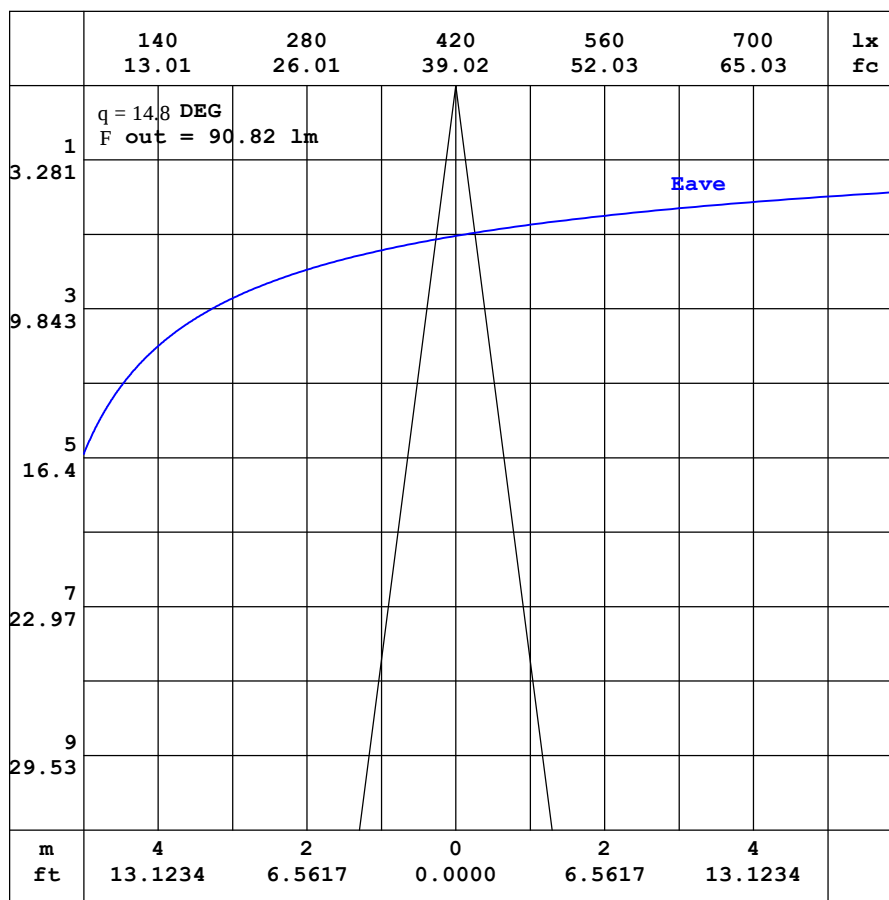

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoHody-330mm-RGBW RED-15D-Rev1	TYPE:RGBW-Red	WEIGHT:
SPEC.:15 DEG	DIM.:330mm	SERIAL No.:IES001498
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.16	0.96	0.85	0.84	0.84	0.87	0.97	1.22	1.63	2.11	2.45	2.59	2.58	2.51	2.46	2.39	2.24	2.02	2.13
-170	1.16	0.95	0.83	0.81	0.80	0.80	0.84	0.97	1.22	1.51	1.72	1.83	1.87	1.91	1.99	2.10	2.19	2.29	2.29
-160	1.16	0.95	0.81	0.79	0.76	0.73	0.71	0.72	0.80	0.89	0.96	0.98	1.01	1.28	1.54	1.75	1.92	2.04	2.09
-150	1.16	0.95	0.81	0.76	0.73	0.69	0.62	0.54	0.49	0.43	0.37	0.48	0.64	0.82	1.00	1.16	1.29	1.38	1.42
-140	1.16	0.95	0.81	0.74	0.71	0.66	0.59	0.48	0.35	0.28	0.28	0.30	0.34	0.41	0.49	0.59	0.66	0.72	0.74
-130	1.16	0.97	0.82	0.72	0.68	0.64	0.58	0.50	0.43	0.37	0.33	0.30	0.29	0.29	0.29	0.30	0.31	0.32	0.34
-120	1.16	0.97	0.83	0.73	0.67	0.62	0.57	0.53	0.52	0.51	0.49	0.46	0.44	0.41	0.37	0.35	0.32	0.30	0.29
-110	1.16	0.99	0.86	0.75	0.67	0.61	0.55	0.54	0.54	0.55	0.55	0.56	0.56	0.56	0.55	0.54	0.53	0.52	0.51
-100	1.16	1.01	0.88	0.77	0.68	0.59	0.53	0.52	0.53	0.53	0.53	0.53	0.53	0.54	0.55	0.56	0.56	0.56	0.56
-90	1.16	1.03	0.91	0.79	0.66	0.54	0.41	0.41	0.41	0.41	0.41	0.40	0.40	0.41	0.42	0.43	0.43	0.44	0.45
-80	1.16	1.06	0.95	0.83	0.70	0.56	0.42	0.45	0.50	0.55	0.59	0.64	0.69	0.72	0.76	0.79	0.81	0.83	0.83
-70	1.16	1.09	1.02	0.95	0.91	0.88	0.86	0.97	1.16	1.35	1.52	1.70	1.86	2.03	2.18	2.31	2.41	2.49	2.53
-60	1.16	1.13	1.13	1.19	1.30	1.44	1.59	1.79	2.19	2.60	3.01	3.44	3.85	4.25	4.64	4.98	5.25	5.43	5.52
-50	1.16	1.18	1.29	1.50	1.79	2.13	2.52	2.93	3.52	4.28	5.11	6.00	6.94	7.93	8.87	9.73	10.4	10.9	11.2
-40	1.16	1.24	1.46	1.84	2.33	2.92	3.60	4.38	5.24	6.42	7.99	9.79	11.9	14.2	16.6	19.0	21.0	22.5	23.2
-30	1.16	1.29	1.64	2.18	2.87	3.74	4.81	6.07	7.56	9.34	11.7	15.2	19.6	25.1	31.7	39.2	46.7	52.5	54.9
-20	1.16	1.35	1.80	2.49	3.38	4.54	6.00	7.82	10.1	13.1	17.2	22.8	31.1	44.9	65.9	95.5	133	165	179
-10	1.16	1.39	1.93	2.73	3.79	5.21	7.03	9.35	12.4	16.7	22.8	32.1	47.5	75.1	129	240	452	760	937
0	1.16	1.43	2.03	2.90	4.07	5.66	7.72	10.4	14.0	19.0	26.3	37.9	56.8	88.4	150	303	709	1649	2361
10	1.16	1.42	2.00	2.86	3.98	5.50	7.47	9.98	13.3	17.9	24.4	34.2	49.8	74.2	115	192	340	561	635
20	1.16	1.41	1.94	2.72	3.74	5.07	6.80	8.95	11.7	15.2	20.0	26.4	35.6	49.1	67.3	90.7	118	140	148
30	1.16	1.38	1.84	2.52	3.38	4.47	5.86	7.55	9.59	12.0	15.0	18.9	23.7	29.6	36.6	44.2	51.0	55.8	57.5
40	1.16	1.35	1.71	2.25	2.94	3.76	4.77	5.99	7.38	9.00	10.9	13.0	15.3	17.9	20.5	23.0	25.0	26.5	27.1
50	1.16	1.31	1.57	1.97	2.47	3.05	3.72	4.49	5.38	6.37	7.45	8.57	9.73	10.8	11.9	12.9	13.6	14.1	14.3
60	1.16	1.27	1.44	1.69	2.01	2.38	2.80	3.24	3.72	4.23	4.78	5.35	5.92	6.44	6.90	7.29	7.59	7.78	7.85
70	1.16	1.24	1.33	1.45	1.62	1.80	2.02	2.23	2.45	2.68	2.91	3.13	3.34	3.54	3.71	3.85	3.96	4.03	4.05
80	1.16	1.20	1.25	1.29	1.35	1.41	1.46	1.52	1.58	1.64	1.70	1.76	1.81	1.86	1.91	1.95	1.98	2.00	2.00
90	1.16	1.17	1.18	1.19	1.19	1.20	1.21	1.21	1.20	1.19	1.19	1.18	1.18	1.18	1.19	1.19	1.20	1.21	1.21
100	1.16	1.14	1.11	1.08	1.06	1.03	1.01	0.98	0.95	0.93	0.90	0.88	0.87	0.87	0.87	0.88	0.88	0.89	0.90
110	1.16	1.10	1.04	0.98	0.94	0.91	0.90	0.88	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.87
120	1.16	1.07	0.98	0.91	0.88	0.86	0.86	0.85	0.85	0.85	0.86	0.87	0.89	0.92	0.93	0.95	0.96	0.96	0.96
130	1.16	1.04	0.93	0.87	0.85	0.85	0.85	0.85	0.85	0.88	0.94	1.03	1.15	1.27	1.39	1.49	1.58	1.64	1.66
140	1.16	1.01	0.89	0.85	0.85	0.85	0.85	0.86	0.93	1.06	1.27	1.52	1.79	2.03	2.22	2.34	2.42	2.46	2.47
150	1.16	0.99	0.87	0.85	0.85	0.85	0.86	0.95	1.12	1.40	1.77	2.11	2.37	2.53	2.64	2.71	2.75	2.76	2.76
160	1.16	0.98	0.85	0.85	0.84	0.86	0.92	1.07	1.36	1.78	2.18	2.45	2.60	2.70	2.77	2.83	2.87	2.89	2.93
170	1.16	0.96	0.85	0.84	0.84	0.87	0.96	1.17	1.56	2.03	2.38	2.58	2.64	2.67	2.72	2.77	2.71	2.66	2.71
180	1.16	0.96	0.85	0.84	0.84	0.87	0.97	1.22	1.63	2.11	2.45	2.59	2.58	2.51	2.46	2.39	2.24	2.02	2.13

H_b Range:-90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-08-14

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoHody-330mm-RGBW RED-15D-Rev1	TYPE:RGBW-Red	WEIGHT:
SPEC.:15 DEG	DIM.:330mm	SERIAL No.:IES001498
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.91	1.92	1.87	1.74	1.56	1.32	1.02	0.71	0.45	0.29	0.28	0.33	0.44	0.54	0.54	0.51	0.48	0.39	
-170	2.23	2.13	2.05	1.86	1.58	1.28	0.97	0.67	0.43	0.30	0.28	0.33	0.44	0.53	0.53	0.52	0.48	0.39	
-160	2.04	1.92	1.76	1.56	1.31	1.04	0.77	0.53	0.36	0.29	0.29	0.35	0.46	0.52	0.53	0.52	0.47	0.39	
-150	1.39	1.31	1.18	1.02	0.84	0.66	0.50	0.38	0.30	0.28	0.30	0.40	0.49	0.52	0.53	0.51	0.46	0.39	
-140	0.73	0.67	0.60	0.51	0.43	0.35	0.30	0.29	0.28	0.29	0.37	0.46	0.51	0.53	0.52	0.50	0.46	0.39	
-130	0.32	0.31	0.29	0.29	0.28	0.29	0.30	0.31	0.35	0.41	0.46	0.50	0.52	0.53	0.52	0.50	0.45	0.39	
-120	0.30	0.32	0.34	0.36	0.38	0.42	0.45	0.47	0.50	0.51	0.52	0.52	0.53	0.52	0.51	0.49	0.44	0.39	
-110	0.52	0.52	0.53	0.54	0.55	0.55	0.55	0.54	0.54	0.53	0.53	0.53	0.52	0.51	0.50	0.46	0.42	0.39	
-100	0.56	0.56	0.55	0.55	0.53	0.52	0.52	0.52	0.52	0.52	0.52	0.51	0.50	0.48	0.46	0.43	0.41	0.39	
-90	0.44	0.44	0.43	0.42	0.41	0.41	0.41	0.41	0.41	0.41	0.42	0.42	0.41	0.41	0.41	0.40	0.40	0.39	
-80	0.82	0.81	0.78	0.75	0.72	0.68	0.64	0.59	0.55	0.50	0.46	0.41	0.40	0.40	0.39	0.39	0.39	0.39	
-70	2.48	2.39	2.28	2.14	1.98	1.81	1.66	1.49	1.31	1.14	0.96	0.80	0.66	0.54	0.45	0.41	0.39	0.39	
-60	5.39	5.17	4.88	4.52	4.12	3.73	3.33	2.92	2.52	2.13	1.76	1.41	1.09	0.82	0.60	0.45	0.39	0.39	
-50	10.8	10.2	9.45	8.54	7.57	6.65	5.77	4.93	4.13	3.41	2.75	2.14	1.62	1.17	0.80	0.54	0.41	0.39	
-40	22.1	20.4	18.1	15.7	13.4	11.2	9.30	7.62	6.16	4.92	3.86	2.95	2.18	1.54	1.02	0.63	0.42	0.39	
-30	51.2	44.4	36.5	29.3	23.3	18.3	14.2	11.0	8.54	6.57	5.01	3.75	2.72	1.88	1.22	0.73	0.44	0.39	
-20	158	121	86.3	59.5	40.7	28.4	20.4	14.9	11.0	8.18	6.04	4.43	3.17	2.17	1.38	0.80	0.46	0.39	
-10	678	390	207	114	65.8	40.4	26.5	18.3	13.0	9.37	6.78	4.89	3.47	2.35	1.48	0.85	0.46	0.39	
0	1755	765	315	150	79.1	46.1	29.1	19.7	13.8	9.82	7.03	5.06	3.57	2.42	1.53	0.87	0.47	0.39	
10	498	300	172	106	67.2	43.4	28.9	20.1	14.3	10.3	7.40	5.32	3.74	2.54	1.60	0.92	0.50	0.39	
20	135	110	84.8	63.2	46.2	33.7	24.5	17.9	13.2	9.77	7.17	5.21	3.69	2.52	1.61	0.93	0.51	0.39	
30	54.9	49.5	42.4	35.0	28.4	22.8	18.2	14.5	11.2	8.57	6.46	4.77	3.43	2.37	1.55	0.92	0.53	0.39	
40	26.3	24.7	22.5	20.0	17.4	14.9	12.6	10.5	8.70	7.02	5.42	4.09	3.02	2.13	1.42	0.88	0.53	0.39	
50	14.1	13.5	12.7	11.7	10.6	9.52	8.37	7.26	6.20	5.23	4.27	3.33	2.52	1.84	1.26	0.82	0.53	0.39	
60	7.76	7.54	7.23	6.81	6.33	5.80	5.24	4.67	4.13	3.63	3.17	2.59	2.02	1.52	1.10	0.76	0.53	0.39	
70	4.02	3.94	3.82	3.67	3.49	3.29	3.09	2.86	2.64	2.42	2.21	1.94	1.57	1.24	0.94	0.71	0.53	0.39	
80	1.99	1.97	1.94	1.90	1.85	1.79	1.74	1.69	1.63	1.58	1.52	1.45	1.25	1.04	0.85	0.68	0.53	0.39	
90	1.20	1.19	1.19	1.18	1.17	1.16	1.17	1.17	1.18	1.19	1.20	1.21	1.07	0.94	0.80	0.66	0.53	0.39	
100	0.89	0.88	0.88	0.87	0.86	0.86	0.86	0.86	0.90	0.92	0.95	0.97	1.00	0.93	0.85	0.76	0.65	0.52	0.39
110	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.87	0.88	0.87	0.83	0.78	0.72	0.64	0.52	0.39	
120	0.97	0.96	0.95	0.94	0.92	0.90	0.88	0.87	0.86	0.86	0.86	0.83	0.78	0.74	0.68	0.63	0.52	0.39	
130	1.65	1.61	1.53	1.43	1.31	1.18	1.07	0.97	0.90	0.86	0.84	0.80	0.75	0.71	0.66	0.61	0.52	0.39	
140	2.47	2.45	2.38	2.27	2.10	1.86	1.59	1.32	1.11	0.92	0.78	0.74	0.72	0.68	0.64	0.59	0.51	0.39	
150	2.76	2.76	2.74	2.67	2.58	2.43	2.19	1.86	1.34	0.96	0.74	0.66	0.66	0.64	0.61	0.57	0.51	0.39	
160	2.91	2.89	2.87	2.81	2.73	2.64	2.27	1.80	1.30	0.89	0.66	0.58	0.59	0.61	0.59	0.56	0.50	0.39	
170	2.67	2.73	2.82	2.64	2.37	2.06	1.72	1.35	0.97	0.66	0.50	0.46	0.51	0.57	0.56	0.54	0.49	0.39	
180	1.91	1.92	1.87	1.74	1.56	1.32	1.02	0.71	0.45	0.29	0.28	0.33	0.44	0.54	0.54	0.51	0.48	0.39	

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-08-14

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: