

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	3032.6 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	56.2V x 55.5H
	At 50% of Imax	26.1V x 26.1H
	At 90% of Imax	9.9V x 10.0H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	734.8 lumens per klm.
	To 50% of Imax	346.2 lumens per klm.
	To 90% of Imax	61.9 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoBody-330mm-RGBW 3000K-25D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:25 DEG	DIM.:330mm	SERIAL No.:IES001518
MFR.:	SUR.:	Shielding Angle:

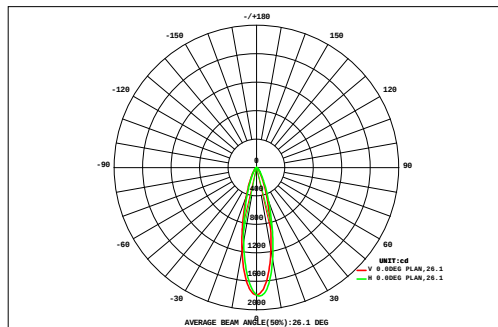

DATA OF LAMP		Eff:55.35lm/W	
MODEL		Imax(cd)	1813
NOMINAL POWER(W)	10.8	AVAILABILITY(%)	73.4
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	438.7
NOMINAL FLUX(lm)	597.8	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	597.8
TEST VOLTAGE(V)	221.4	q @50%(H,V)	26,26DEG

		AREA FLUX DIAGRAM															UNIT:lm				F t	F a
VERTICAL (DEG)	45	0.12	0.16	0.20	0.25	0.31	0.36	0.41	0.45	0.46	0.46	0.43	0.39	0.34	0.29	0.24	0.19	0.15	0.12	5.37	0.00	
	40	0.14	0.19	0.25	0.33	0.41	0.50	0.58	0.64	0.68	0.67	0.62	0.55	0.47	0.38	0.31	0.24	0.18	0.14	7.29	0.00	
	35	0.17	0.23	0.31	0.42	0.56	0.71	0.86	0.98	1.04	1.03	0.93	0.79	0.65	0.51	0.39	0.30	0.22	0.16	10.3	0.00	
	30	0.19	0.27	0.39	0.55	0.76	1.03	1.32	1.56	1.70	1.66	1.46	1.19	0.92	0.68	0.50	0.36	0.26	0.18	15.0	6.20	
	25	0.22	0.32	0.47	0.70	1.04	1.51	2.10	2.61	2.89	2.81	2.40	1.85	1.32	0.92	0.63	0.43	0.30	0.20	22.7	16.5	
	20	0.25	0.37	0.57	0.89	1.40	2.20	3.28	4.36	4.95	4.79	3.95	2.86	1.89	1.22	0.78	0.51	0.33	0.22	34.8	29.8	
	15	0.27	0.42	0.66	1.08	1.81	3.02	4.82	6.89	8.06	7.76	6.17	4.16	2.56	1.55	0.95	0.58	0.37	0.23	51.4	47.0	
	-15	0.29	0.45	0.73	1.24	2.16	3.79	6.36	9.45	11.5	11.0	8.45	5.49	3.30	1.91	1.10	0.64	0.39	0.24	68.4	64.4	
		0.29	0.46	0.76	1.30	2.33	4.17	7.14	10.7	13.2	12.7	10.0	6.68	3.90	2.16	1.19	0.67	0.39	0.24	78.4	74.5	
		0.29	0.45	0.74	1.27	2.27	4.05	6.89	10.2	12.4	12.3	9.92	6.62	3.86	2.13	1.17	0.65	0.38	0.23	75.8	72.0	
		0.27	0.42	0.68	1.15	2.01	3.50	5.72	8.08	9.58	9.38	7.62	5.24	3.18	1.82	1.04	0.60	0.36	0.22	60.9	56.7	
		0.24	0.37	0.59	0.96	1.60	2.63	3.97	5.35	6.29	6.16	5.02	3.62	2.34	1.41	0.85	0.52	0.32	0.21	42.4	38.0	
		0.21	0.31	0.48	0.75	1.17	1.78	2.53	3.26	3.75	3.67	3.07	2.30	1.59	1.04	0.66	0.43	0.28	0.18	27.4	22.2	
		0.18	0.26	0.38	0.56	0.82	1.17	1.56	1.93	2.16	2.12	1.83	1.42	1.05	0.74	0.50	0.34	0.23	0.16	17.4	10.5	
		0.15	0.21	0.30	0.42	0.57	0.76	0.97	1.15	1.25	1.23	1.09	0.89	0.69	0.52	0.38	0.27	0.19	0.14	11.2	0.94	
	-30	0.12	0.17	0.23	0.31	0.40	0.51	0.62	0.70	0.75	0.74	0.68	0.57	0.46	0.37	0.28	0.21	0.16	0.11	7.41	0.00	
-35	0.10	0.13	0.18	0.23	0.29	0.35	0.41	0.46	0.48	0.48	0.44	0.39	0.33	0.27	0.22	0.17	0.13	0.10	5.13	0.00		
-40	0.08	0.11	0.14	0.17	0.21	0.25	0.28	0.31	0.32	0.32	0.30	0.27	0.23	0.20	0.16	0.13	0.10	0.08	3.67	0.00		
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45		
F t	3.56	5.30	8.06	12.6	20.1	32.3	49.8	69.2	81.4	79.2	64.4	45.3	29.1	18.1	11.4	7.24	4.75	3.16	545	---		
F a	0.00	0.00	0.00	3.09	13.6	26.6	44.7	64.3	76.7	74.4	59.4	39.9	23.1	11.1	1.65	0.00	0.00	0.00	---	439		

one-half-peak spread: U:13.4,D:12.9 , L:13.2,R:13.1


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:DecoBody-330mm-RGBW 3000K-25D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:25 DEG	DIM.:330mm	SERIAL No.:IES001518
MFR.:	SUR.:	Shielding Angle:

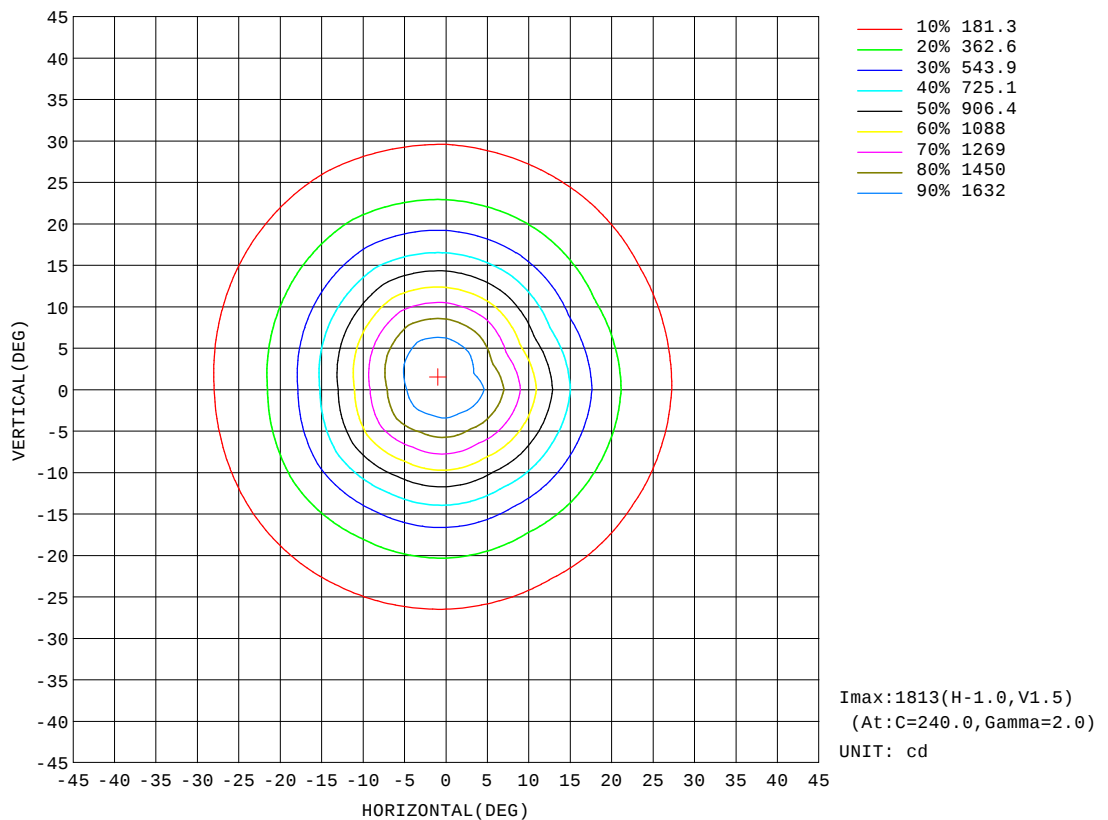


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoBody-330mm-RGBW 3000K-25D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:25 DEG	DIM.:330mm	SERIAL No.:IES001518
MFR.:	SUR.:	Shielding Angle:

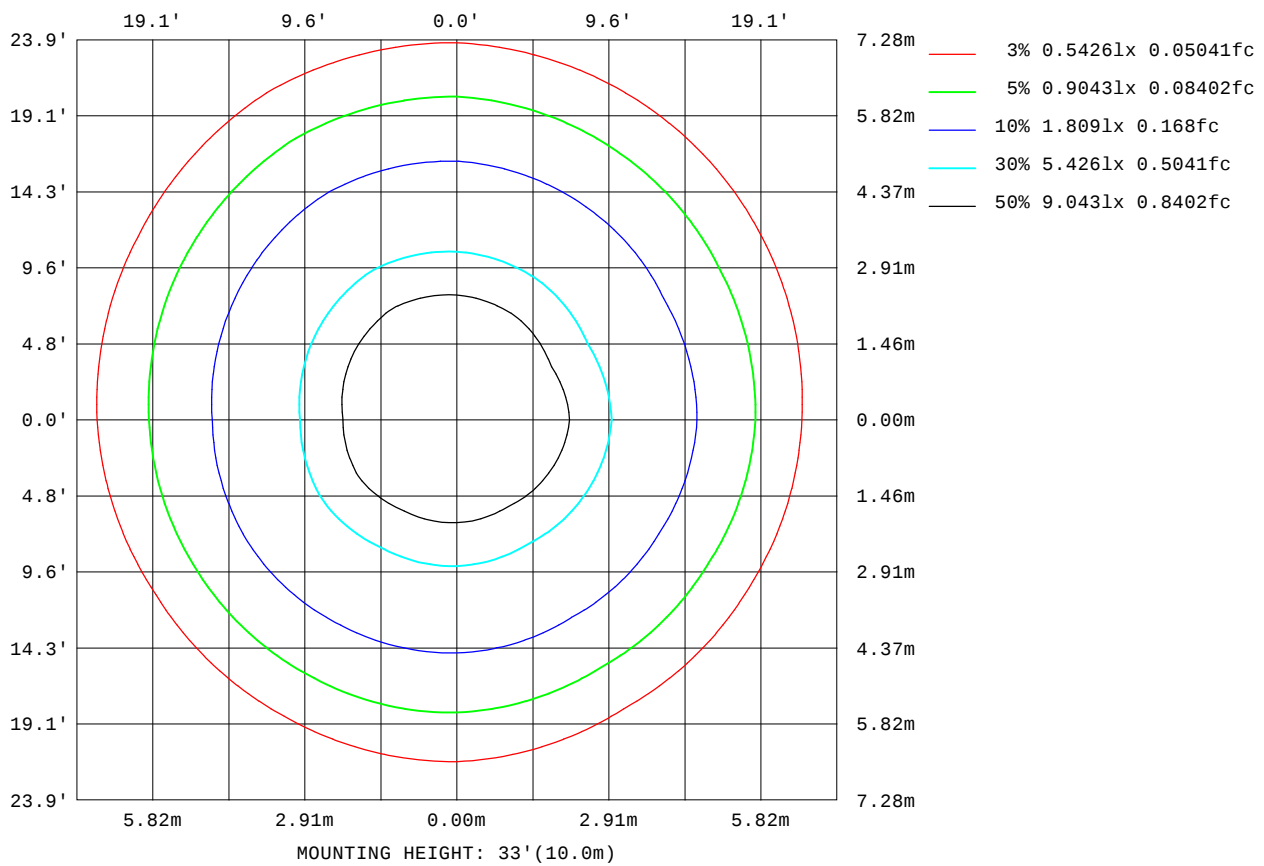

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

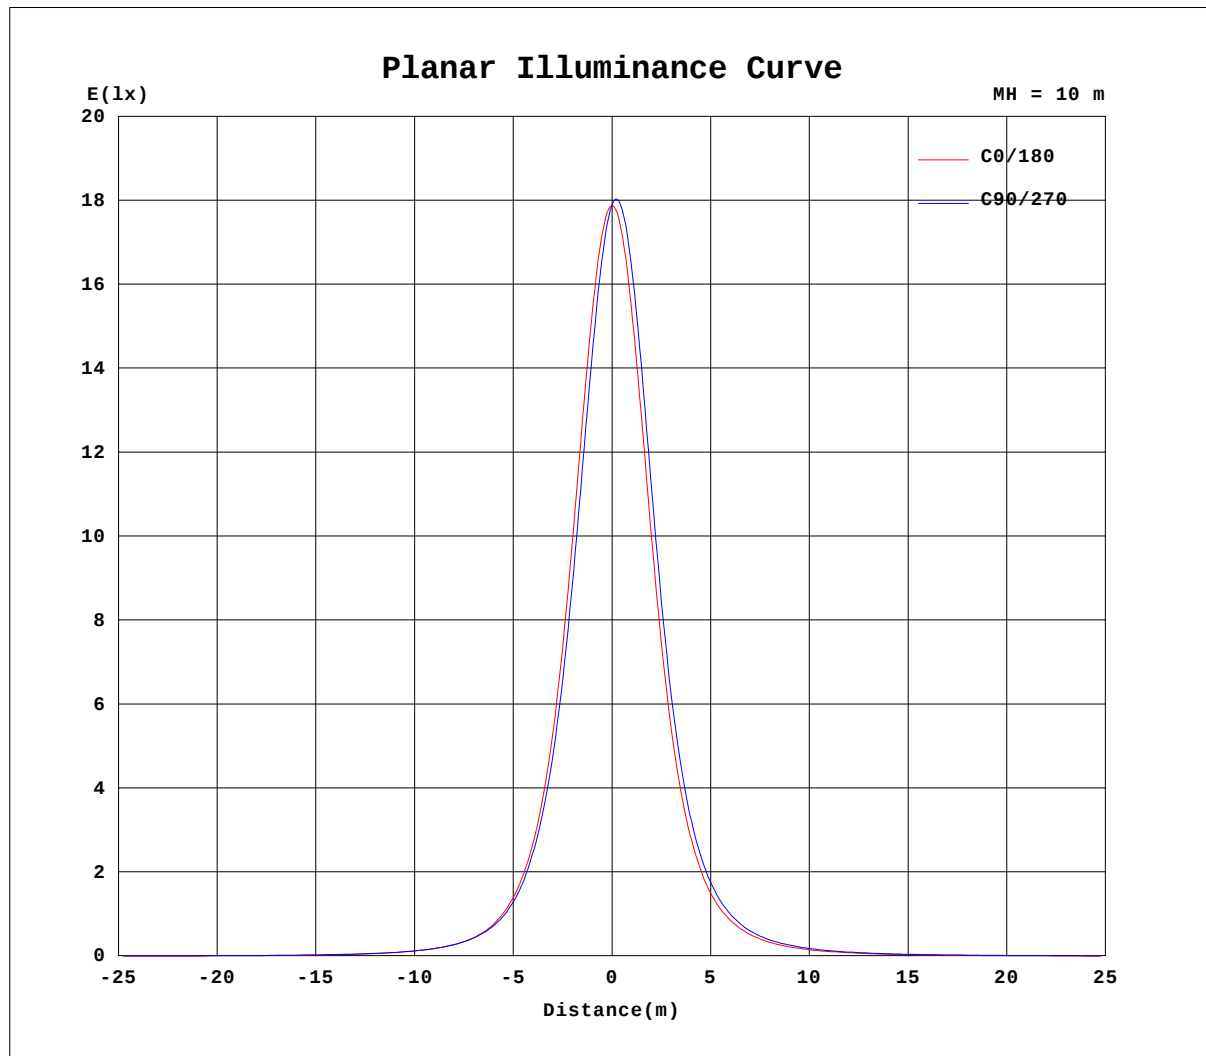


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoBody-330mm-RGBW 3000K-25D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:25 DEG	DIM.:330mm	SERIAL No.:IES001518
MFR.:	SUR.:	Shielding Angle:

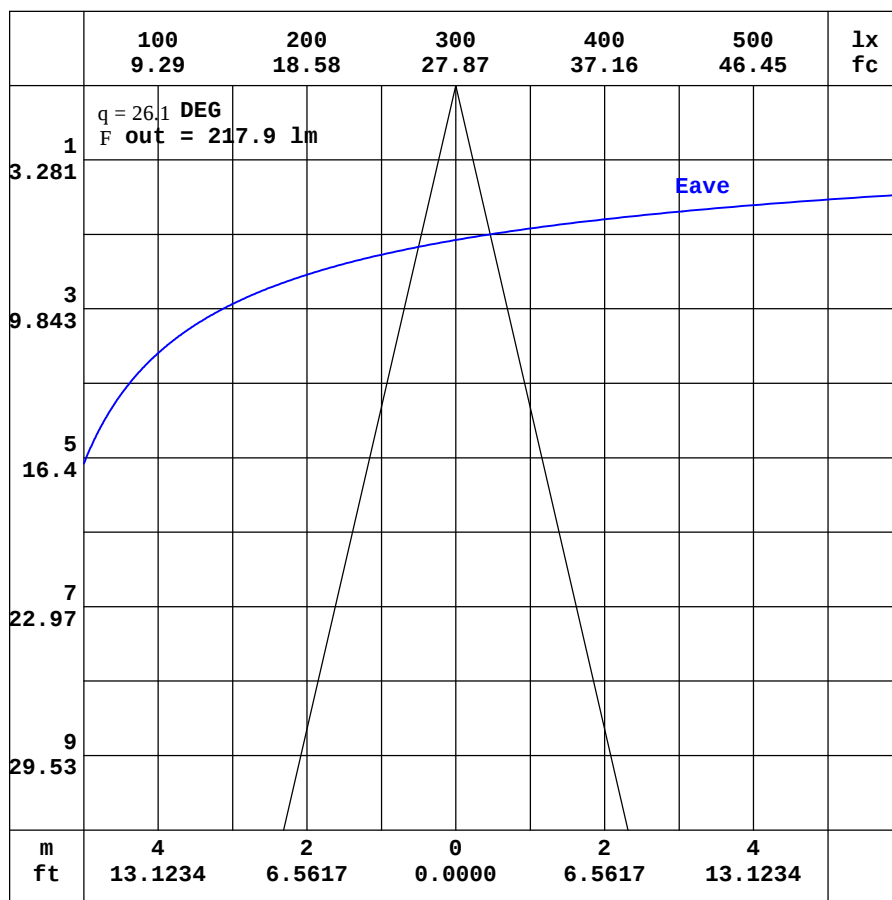

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-330mm-RGBW 3000K-25D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:25 DEG	DIM.:330mm	SERIAL No.:IES001518
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.26	2.03	1.86	1.79	1.80	1.91	2.15	2.56	3.12	3.72	4.24	4.60	4.77	4.77	4.74	4.63	4.42	4.16	4.38
-170	2.26	2.00	1.81	1.72	1.69	1.72	1.85	2.10	2.43	2.80	3.11	3.33	3.45	3.49	3.48	3.54	3.74	3.87	3.95
-160	2.26	1.97	1.76	1.64	1.58	1.54	1.55	1.63	1.74	1.85	1.93	1.97	2.01	2.44	2.84	3.16	3.42	3.58	3.66
-150	2.26	1.96	1.73	1.58	1.49	1.40	1.31	1.24	1.17	1.06	0.98	1.21	1.49	1.79	2.09	2.37	2.57	2.72	2.79
-140	2.26	1.94	1.71	1.53	1.41	1.29	1.15	0.99	0.82	0.75	0.78	0.87	0.99	1.15	1.31	1.47	1.60	1.69	1.74
-130	2.26	1.94	1.70	1.50	1.35	1.21	1.07	0.90	0.79	0.76	0.75	0.75	0.75	0.76	0.81	0.86	0.92	0.96	0.98
-120	2.26	1.94	1.69	1.49	1.32	1.16	1.02	0.91	0.89	0.87	0.84	0.82	0.80	0.78	0.77	0.76	0.76	0.76	0.76
-110	2.26	1.96	1.70	1.48	1.29	1.13	0.98	0.93	0.93	0.93	0.92	0.92	0.92	0.92	0.91	0.89	0.88	0.86	0.85
-100	2.26	1.98	1.72	1.48	1.26	1.06	0.88	0.88	0.89	0.90	0.91	0.91	0.91	0.92	0.92	0.93	0.93	0.93	0.93
-90	2.26	2.01	1.76	1.51	1.26	1.01	0.76	0.76	0.76	0.75	0.75	0.75	0.75	0.76	0.76	0.77	0.78	0.79	0.79
-80	2.26	2.04	1.81	1.57	1.32	1.06	0.82	0.90	1.01	1.11	1.21	1.32	1.41	1.51	1.60	1.69	1.76	1.81	1.85
-70	2.26	2.09	1.92	1.80	1.79	1.77	1.80	2.11	2.50	2.88	3.28	3.68	4.09	4.51	4.90	5.24	5.52	5.71	5.83
-60	2.26	2.15	2.13	2.32	2.64	3.03	3.38	3.78	4.63	5.59	6.61	7.67	8.70	9.71	10.6	11.4	12.0	12.4	12.6
-50	2.26	2.23	2.48	3.01	3.73	4.52	5.30	6.17	7.50	9.28	11.3	13.4	15.7	17.9	20.0	21.9	23.4	24.4	24.8
-40	2.26	2.31	2.82	3.73	4.93	6.20	7.64	9.32	11.3	14.1	17.8	22.0	26.9	32.2	37.6	42.9	47.3	50.3	51.4
-30	2.26	2.41	3.23	4.49	6.13	7.94	10.2	13.1	16.5	20.8	26.5	35.2	46.2	59.9	75.9	93.4	110	123	126
-20	2.26	2.51	3.57	5.19	7.24	9.64	12.8	16.9	22.3	29.6	39.9	55.2	78.6	115	166	231	299	357	377
-10	2.26	2.60	3.83	5.75	8.13	11.1	15.1	20.3	27.6	38.0	53.8	79.4	123	198	330	531	774	976	1061
0	2.26	2.67	4.01	6.12	8.73	12.0	16.6	22.5	31.0	43.1	62.1	93.5	148	246	429	741	1186	1613	1788
10	2.26	2.66	3.98	6.04	8.60	11.8	16.2	21.9	30.0	41.5	59.0	87.3	136	218	363	601	928	1240	1310
20	2.26	2.63	3.86	5.74	8.14	11.0	14.9	19.9	26.6	35.6	48.5	67.6	96.3	142	206	300	404	476	498
30	2.26	2.58	3.64	5.24	7.37	9.78	12.9	16.8	21.8	28.1	36.2	47.3	61.9	80.6	104	130	152	168	174
40	2.26	2.53	3.33	4.60	6.38	8.33	10.6	13.4	16.8	20.9	25.9	31.9	38.7	46.6	54.9	61.9	67.9	71.9	73.3
50	2.26	2.48	3.03	3.97	5.22	6.74	8.33	10.1	12.3	14.9	17.8	20.9	24.3	27.8	30.8	33.3	35.4	36.8	37.3
60	2.26	2.42	2.73	3.32	4.10	5.07	6.21	7.33	8.58	9.97	11.5	13.1	14.8	16.3	17.6	18.7	19.6	20.2	20.5
70	2.26	2.37	2.54	2.79	3.18	3.69	4.18	4.84	5.55	6.27	6.96	7.64	8.30	8.94	9.53	10.0	10.5	10.8	11.0
80	2.26	2.32	2.40	2.50	2.61	2.74	2.89	3.10	3.32	3.57	3.84	4.11	4.36	4.54	4.70	4.84	4.96	5.06	5.12
90	2.26	2.28	2.30	2.33	2.35	2.37	2.40	2.40	2.39	2.39	2.39	2.39	2.39	2.39	2.39	2.39	2.39	2.39	2.39
100	2.26	2.23	2.21	2.19	2.18	2.16	2.14	2.11	2.07	2.04	2.02	1.99	1.97	1.95	1.94	1.94	1.94	1.94	1.95
110	2.26	2.19	2.13	2.08	2.02	1.98	1.94	1.90	1.86	1.83	1.81	1.81	1.81	1.80	1.80	1.80	1.80	1.80	1.80
120	2.26	2.15	2.06	1.98	1.91	1.86	1.83	1.81	1.80	1.80	1.81	1.85	1.89	1.93	1.97	1.99	2.02	2.03	2.03
130	2.26	2.12	2.00	1.90	1.84	1.81	1.80	1.80	1.83	1.92	2.04	2.17	2.33	2.48	2.63	2.75	2.86	2.92	2.94
140	2.26	2.09	1.95	1.85	1.81	1.80	1.81	1.89	2.04	2.26	2.53	2.84	3.15	3.43	3.68	3.88	4.01	4.10	4.13
150	2.26	2.07	1.91	1.82	1.80	1.81	1.90	2.08	2.37	2.75	3.17	3.61	3.99	4.30	4.53	4.70	4.81	4.85	4.88
160	2.26	2.05	1.88	1.80	1.80	1.85	2.00	2.30	2.73	3.23	3.74	4.19	4.51	4.76	4.92	5.02	5.07	5.09	5.12
170	2.26	2.03	1.87	1.80	1.80	1.89	2.10	2.47	2.99	3.58	4.10	4.50	4.74	4.86	4.93	4.95	4.88	4.83	4.91
180	2.26	2.03	1.86	1.79	1.80	1.91	2.15	2.56	3.12	3.72	4.24	4.60	4.77	4.77	4.74	4.63	4.42	4.16	4.39

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-08-14

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-330mm-RGBW 3000K-25D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:25 DEG	DIM.:330mm	SERIAL No.:IES001518
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	3.75	3.69	3.54	3.28	2.91	2.46	2.00	1.54	1.15	0.87	0.75	0.77	0.83	0.92	0.92	0.91	0.84	0.72
-170	3.75	3.67	3.52	3.25	2.88	2.43	1.95	1.49	1.12	0.86	0.76	0.77	0.83	0.91	0.92	0.91	0.84	0.72
-160	3.57	3.42	3.19	2.89	2.51	2.10	1.68	1.30	1.00	0.81	0.76	0.77	0.84	0.91	0.92	0.91	0.83	0.72
-150	2.73	2.61	2.41	2.15	1.85	1.55	1.27	1.03	0.85	0.77	0.76	0.79	0.86	0.91	0.92	0.90	0.82	0.72
-140	1.71	1.62	1.50	1.35	1.19	1.03	0.90	0.80	0.76	0.75	0.76	0.83	0.89	0.92	0.92	0.89	0.81	0.72
-130	0.96	0.93	0.88	0.83	0.77	0.76	0.75	0.75	0.75	0.78	0.83	0.88	0.92	0.92	0.92	0.87	0.80	0.72
-120	0.76	0.75	0.75	0.76	0.77	0.78	0.80	0.82	0.85	0.87	0.91	0.92	0.92	0.92	0.90	0.86	0.78	0.72
-110	0.86	0.87	0.89	0.90	0.91	0.92	0.93	0.92	0.93	0.93	0.92	0.92	0.92	0.92	0.90	0.87	0.82	0.76
-100	0.93	0.93	0.93	0.93	0.93	0.92	0.92	0.92	0.92	0.92	0.92	0.90	0.88	0.85	0.82	0.78	0.75	0.72
-90	0.80	0.80	0.80	0.80	0.80	0.81	0.81	0.81	0.82	0.82	0.83	0.83	0.81	0.79	0.78	0.76	0.74	0.72
-80	1.80	1.73	1.64	1.54	1.43	1.32	1.25	1.16	1.07	0.99	0.91	0.82	0.80	0.78	0.78	0.77	0.74	0.72
-70	5.69	5.47	5.17	4.81	4.41	3.97	3.55	3.12	2.69	2.30	1.95	1.63	1.31	1.07	0.87	0.77	0.75	0.72
-60	12.3	11.8	11.1	10.3	9.39	8.42	7.42	6.39	5.37	4.41	3.55	2.82	2.22	1.67	1.20	0.88	0.76	0.72
-50	24.1	22.8	21.1	19.1	17.0	15.0	12.9	10.9	8.99	7.23	5.70	4.40	3.29	2.40	1.63	1.07	0.77	0.72
-40	49.3	45.4	40.4	34.9	30.0	25.3	21.0	17.1	13.7	10.7	8.27	6.23	4.51	3.15	2.12	1.26	0.78	0.72
-30	119	104	85.4	68.9	54.6	42.5	32.8	25.2	19.4	14.8	11.1	8.10	5.74	3.89	2.54	1.44	0.82	0.72
-20	343	276	208	148	102	70.4	49.6	35.6	25.9	18.9	13.7	9.79	6.83	4.52	2.87	1.62	0.86	0.72
-10	933	714	476	295	178	109	69.0	45.9	31.6	22.2	15.7	11.0	7.57	4.96	3.09	1.74	0.89	0.72
0	1606	1175	727	414	233	135	80.4	51.4	34.4	23.6	16.5	11.5	7.86	5.13	3.19	1.78	0.90	0.72
10	1139	810	508	312	192	118	76.1	50.9	35.1	24.5	17.3	12.1	8.28	5.42	3.37	1.88	0.95	0.72
20	448	359	260	180	123	86.4	61.4	44.0	31.8	23.0	16.5	11.8	8.14	5.38	3.39	1.89	0.97	0.72
30	162	141	117	93.6	73.6	57.3	44.6	34.7	26.5	19.9	14.7	10.7	7.51	5.05	3.27	1.83	0.98	0.72
40	70.4	65.2	58.5	51.1	43.7	36.8	30.6	25.1	20.3	16.0	12.2	9.08	6.54	4.52	2.99	1.74	0.98	0.72
50	36.3	34.6	32.3	29.6	26.7	23.4	20.2	17.2	14.4	11.9	9.53	7.28	5.38	3.88	2.55	1.60	1.00	0.72
60	20.1	19.4	18.5	17.3	16.0	14.4	12.8	11.2	9.66	8.23	6.88	5.52	4.26	3.08	2.16	1.45	1.01	0.72
70	10.7	10.4	9.99	9.47	8.85	8.17	7.44	6.70	5.98	5.32	4.67	3.92	3.09	2.39	1.80	1.34	1.01	0.72
80	5.02	4.89	4.73	4.54	4.35	4.14	3.91	3.67	3.43	3.18	2.97	2.76	2.36	1.98	1.64	1.31	1.00	0.72
90	2.39	2.38	2.38	2.37	2.37	2.37	2.37	2.37	2.37	2.37	2.37	2.37	2.10	1.82	1.55	1.27	1.00	0.72
100	1.94	1.93	1.92	1.92	1.92	1.93	1.95	1.98	2.00	2.03	2.07	2.09	1.90	1.70	1.48	1.25	0.99	0.72
110	1.80	1.80	1.80	1.80	1.80	1.79	1.79	1.79	1.80	1.83	1.87	1.86	1.73	1.59	1.43	1.23	0.98	0.72
120	2.03	2.02	2.01	1.98	1.94	1.90	1.85	1.81	1.79	1.78	1.78	1.71	1.60	1.50	1.36	1.20	0.98	0.72
130	2.93	2.89	2.80	2.68	2.54	2.38	2.22	2.07	1.94	1.84	1.73	1.60	1.49	1.40	1.30	1.16	0.96	0.72
140	4.12	4.05	3.93	3.76	3.53	3.25	2.94	2.62	2.33	2.00	1.69	1.50	1.40	1.31	1.22	1.12	0.95	0.72
150	4.87	4.82	4.74	4.59	4.38	4.09	3.72	3.30	2.61	2.02	1.62	1.39	1.28	1.22	1.15	1.07	0.92	0.72
160	5.10	5.08	5.05	4.95	4.81	4.59	3.92	3.16	2.44	1.84	1.45	1.23	1.14	1.12	1.08	1.03	0.90	0.72
170	4.81	4.89	4.98	4.70	4.25	3.71	3.12	2.50	1.92	1.45	1.15	1.02	1.00	1.02	1.00	0.97	0.87	0.72
180	3.75	3.69	3.54	3.28	2.91	2.46	2.00	1.54	1.15	0.87	0.75	0.77	0.83	0.92	0.92	0.91	0.84	0.72

H_(b) Range:-90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-08-14

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks: