

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2946.4 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	56.8V x 56.0H
	At 50% of Imax	26.3V x 26.2H
	At 90% of Imax	9.9V x 10.0H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	732.5 lumens per klm.
	To 50% of Imax	345.1 lumens per klm.
	To 90% of Imax	67.5 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoBody-330mm-RGBW GREEN-25D-Rev1	TYPE:RGBW-Green	WEIGHT:
SPEC.:25 DEG	DIM.:330mm	SERIAL No.:IES001509
MFR.:	SUR.:	Shielding Angle:

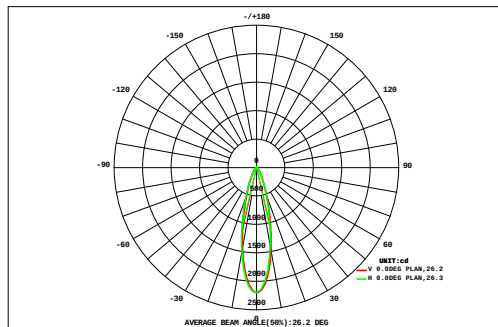

DATA OF LAMP		Eff:74.96lm/W	
MODEL		Imax(cd)	2193
NOMINAL POWER(W)	9.9	AVAILABILITY(%)	73.3
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	545.9
NOMINAL FLUX(lm)	744.4	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	744.4
TEST VOLTAGE(V)	221.4	q @50%(H,V)	26,26DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	45	40	35	30	25	20	15	10	5	0	5	10	15	20	25	30	35	40	45			
	0.15	0.19	0.24	0.30	0.36	0.41	0.46	0.50	0.52	0.52	0.49	0.45	0.40	0.34	0.29	0.23	0.19	0.15	6.18	0.00		
	0.18	0.23	0.30	0.38	0.47	0.56	0.64	0.71	0.74	0.74	0.69	0.62	0.54	0.45	0.36	0.29	0.23	0.17	8.30	0.00		
	0.21	0.28	0.37	0.49	0.62	0.78	0.93	1.05	1.12	1.11	1.02	0.89	0.74	0.59	0.46	0.36	0.27	0.20	11.5	0.00		
	0.24	0.33	0.46	0.63	0.84	1.11	1.39	1.64	1.78	1.75	1.58	1.32	1.04	0.79	0.59	0.43	0.32	0.23	16.5	4.13		
	0.28	0.39	0.56	0.80	1.15	1.61	2.18	2.68	2.96	2.92	2.57	2.03	1.50	1.07	0.75	0.52	0.36	0.25	24.6	16.7		
	0.31	0.46	0.67	1.02	1.55	2.34	3.38	4.43	5.03	4.95	4.21	3.15	2.16	1.43	0.94	0.62	0.41	0.28	37.3	31.0		
	0.34	0.51	0.79	1.25	2.02	3.25	5.05	7.10	8.35	8.20	6.72	4.68	2.98	1.85	1.16	0.72	0.46	0.29	55.7	50.1		
	0.36	0.56	0.89	1.46	2.48	4.21	6.92	10.2	12.5	12.2	9.67	6.43	3.95	2.34	1.37	0.81	0.49	0.31	77.2	72.2		
	0.38	0.59	0.95	1.60	2.78	4.89	8.30	12.5	15.5	15.2	12.2	8.20	4.84	2.71	1.51	0.86	0.50	0.31	93.8	89.0		
	0.37	0.58	0.95	1.61	2.85	5.06	8.63	12.9	15.8	15.6	12.8	8.56	5.01	2.77	1.53	0.86	0.50	0.31	96.7	92.0		
	0.35	0.55	0.89	1.50	2.64	4.62	7.65	10.9	13.1	12.9	10.5	7.22	4.36	2.49	1.40	0.80	0.48	0.30	82.6	77.7		
	0.32	0.49	0.78	1.28	2.18	3.61	5.55	7.61	9.06	8.95	7.31	5.22	3.34	2.01	1.18	0.71	0.44	0.28	60.3	55.1		
	0.29	0.43	0.65	1.02	1.63	2.52	3.64	4.80	5.60	5.52	4.61	3.43	2.35	1.50	0.94	0.60	0.38	0.25	40.2	34.1		
	0.25	0.35	0.52	0.78	1.16	1.68	2.29	2.89	3.28	3.24	2.79	2.16	1.57	1.08	0.72	0.48	0.33	0.22	25.8	18.4		
	0.21	0.29	0.41	0.58	0.82	1.11	1.43	1.72	1.90	1.88	1.66	1.35	1.04	0.76	0.55	0.39	0.27	0.19	16.6	5.39		
	0.17	0.24	0.32	0.44	0.57	0.73	0.90	1.05	1.14	1.12	1.02	0.86	0.69	0.54	0.41	0.31	0.22	0.16	10.9	0.00		
	0.14	0.19	0.25	0.33	0.41	0.50	0.59	0.67	0.71	0.71	0.65	0.57	0.48	0.39	0.31	0.24	0.18	0.14	7.46	0.00		
	0.12	0.15	0.20	0.25	0.30	0.35	0.40	0.44	0.47	0.47	0.44	0.39	0.34	0.29	0.24	0.19	0.15	0.11	5.29	0.00		
-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45			
F t	4.65	6.83	10.2	15.7	24.8	39.4	60.3	83.8	99.5	98.1	80.9	57.5	37.3	23.4	14.7	9.41	6.17	4.13	677	---		
F a	0.00	0.00	0.00	4.07	16.7	32.5	54.1	77.9	93.8	92.4	74.9	51.1	30.3	15.1	3.04	0.00	0.00	0.00	---	546		

one-half-peak spread: U:13.3,D:13.2 , L:13.1,R:13.3


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:DecoBody-330mm-RGBW GREEN-25D-Rev1	TYPE:RGBW-Green	WEIGHT:
SPEC.:25 DEG	DIM.:330mm	SERIAL No.:IES001509
MFR.:	SUR.:	Shielding Angle:

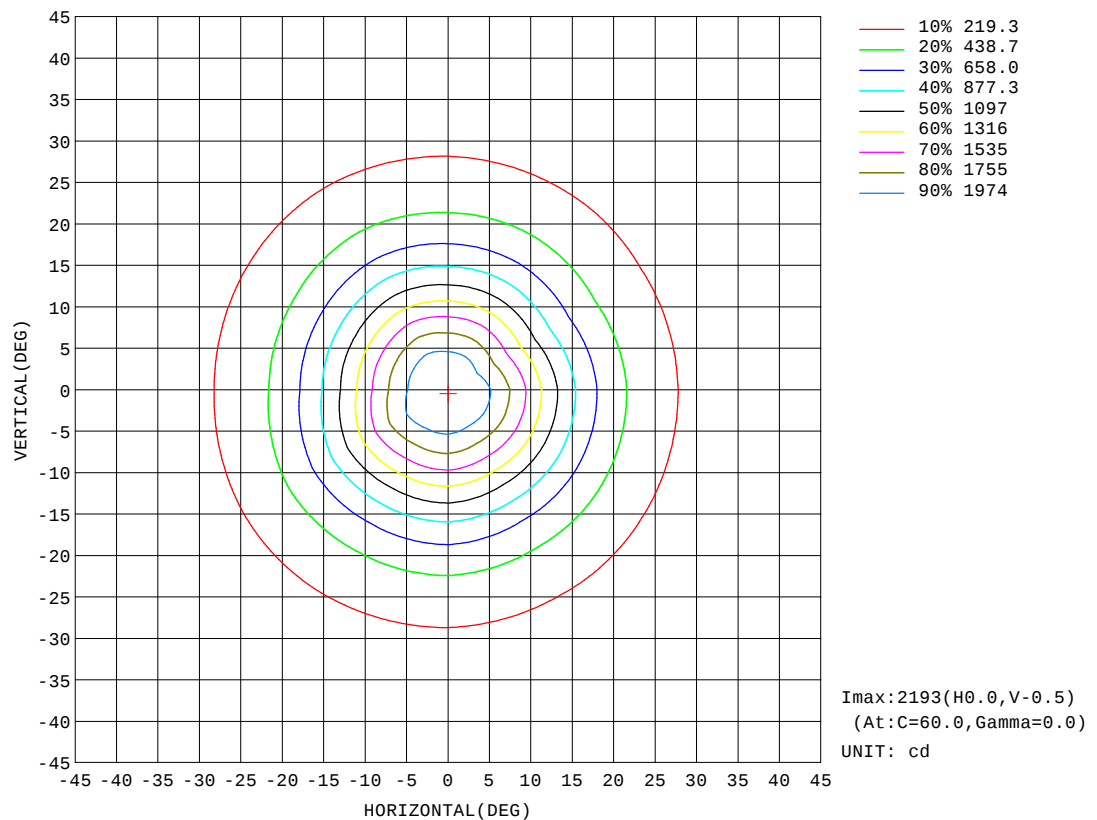


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoBody-330mm-RGBW GREEN-25D-Rev1	TYPE:RGBW-Green	WEIGHT:
SPEC.:25 DEG	DIM.:330mm	SERIAL No.:IES001509
MFR.:	SUR.:	Shielding Angle:

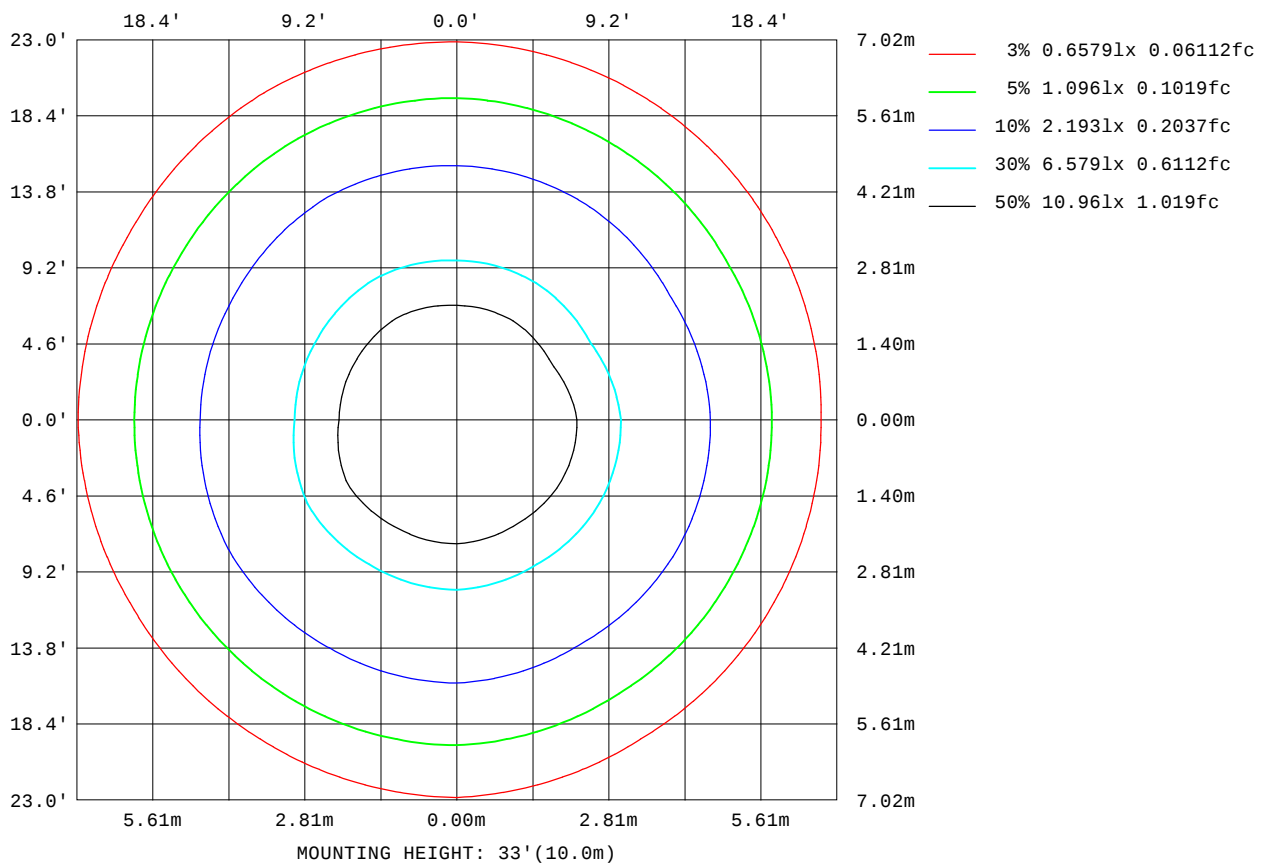

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

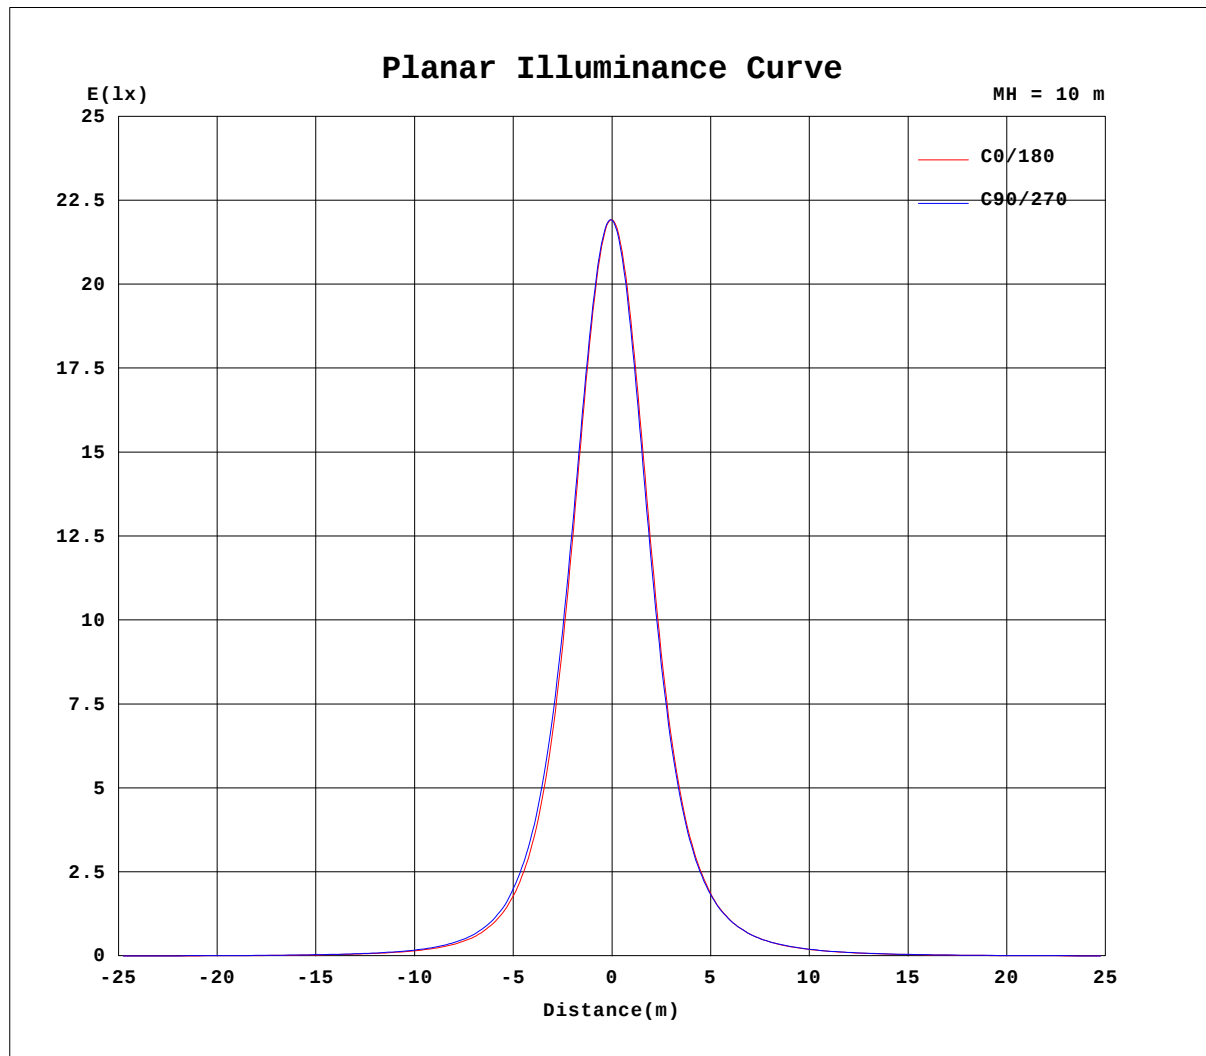


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoBody-330mm-RGBW GREEN-25D-Rev1	TYPE:RGBW-Green	WEIGHT:
SPEC.:25 DEG	DIM.:330mm	SERIAL No.:IES001509
MFR.:	SUR.:	Shielding Angle:

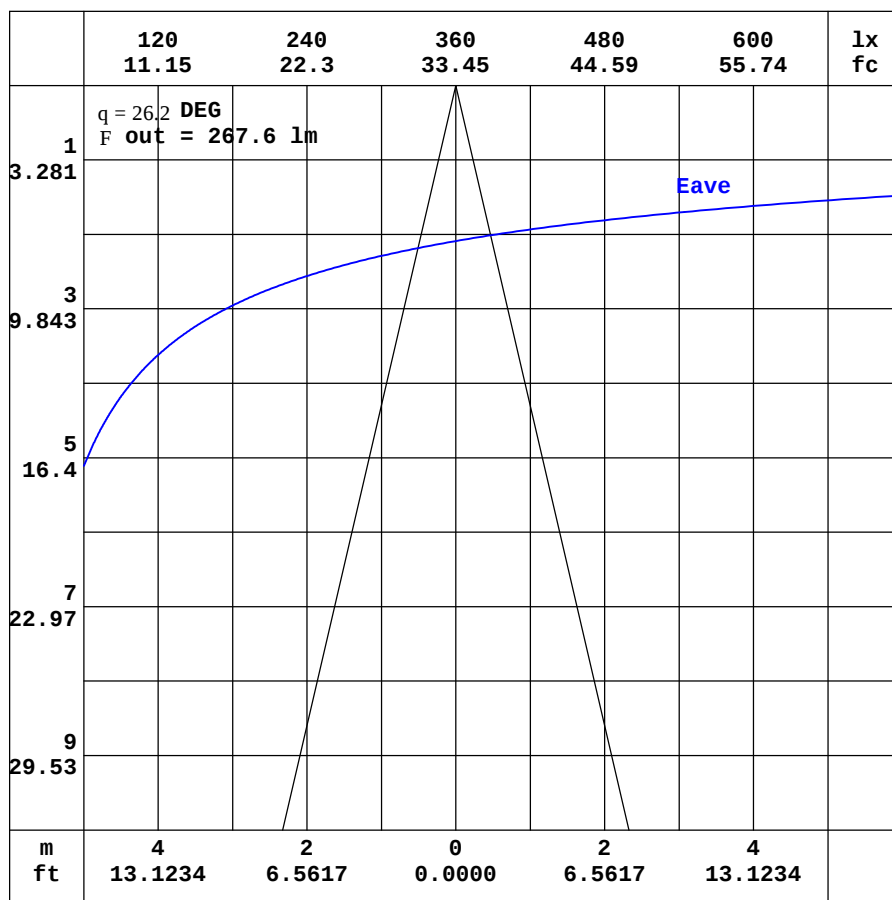

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-330mm-RGBW GREEN-25D-Rev1	TYPE:RGBW-Green	WEIGHT:
SPEC.:25 DEG	DIM.:330mm	SERIAL No.:IES001509
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.83	2.55	2.34	2.25	2.27	2.38	2.68	3.19	3.86	4.59	5.23	5.67	5.89	5.91	5.88	5.74	5.52	5.22	5.32
-170	2.83	2.51	2.28	2.15	2.12	2.16	2.32	2.62	3.02	3.45	3.82	4.07	4.20	4.25	4.24	4.31	4.59	4.76	4.90
-160	2.83	2.48	2.22	2.05	1.98	1.93	1.95	2.03	2.15	2.27	2.35	2.37	2.40	2.91	3.38	3.78	4.08	4.28	4.38
-150	2.83	2.45	2.17	1.97	1.85	1.75	1.65	1.56	1.46	1.31	1.19	1.44	1.76	2.10	2.44	2.76	3.01	3.17	3.24
-140	2.83	2.44	2.14	1.91	1.75	1.60	1.45	1.25	1.04	0.95	0.97	1.06	1.19	1.35	1.53	1.70	1.84	1.93	1.98
-130	2.83	2.43	2.12	1.88	1.67	1.50	1.33	1.13	1.00	0.96	0.95	0.94	0.94	0.94	0.98	1.04	1.09	1.12	1.15
-120	2.83	2.43	2.11	1.85	1.63	1.43	1.25	1.11	1.09	1.08	1.05	1.03	1.00	0.99	0.97	0.96	0.95	0.94	0.94
-110	2.83	2.45	2.12	1.83	1.58	1.38	1.19	1.12	1.12	1.13	1.12	1.13	1.13	1.13	1.12	1.10	1.09	1.08	1.07
-100	2.83	2.48	2.14	1.83	1.54	1.28	1.04	1.04	1.05	1.06	1.07	1.07	1.08	1.09	1.10	1.11	1.12	1.13	1.14
-90	2.83	2.50	2.18	1.85	1.53	1.20	0.87	0.88	0.88	0.88	0.88	0.89	0.89	0.89	0.89	0.89	0.90	0.90	0.90
-80	2.83	2.56	2.26	1.94	1.63	1.35	1.13	1.26	1.43	1.61	1.81	1.99	2.17	2.37	2.57	2.75	2.90	3.03	3.12
-70	2.83	2.61	2.39	2.31	2.32	2.45	2.61	3.00	3.59	4.24	4.96	5.67	6.36	6.97	7.51	7.97	8.33	8.59	8.73
-60	2.83	2.69	2.70	3.02	3.52	4.08	4.62	5.43	6.74	8.20	9.71	11.3	12.7	14.2	15.4	16.5	17.3	17.9	18.1
-50	2.83	2.79	3.12	3.91	4.94	6.03	7.31	8.81	10.9	13.5	16.3	19.3	22.4	25.5	28.5	31.2	33.4	34.9	35.6
-40	2.83	2.89	3.63	4.89	6.43	8.25	10.5	13.2	16.2	20.3	25.4	31.3	38.1	45.6	53.5	61.4	68.4	73.4	75.6
-30	2.83	3.02	4.08	5.87	7.91	10.6	14.0	18.1	23.1	29.4	37.6	49.4	64.9	84.7	109	138	164	185	192
-20	2.83	3.16	4.50	6.70	9.28	12.9	17.3	23.1	30.5	40.5	54.7	75.8	109	160	235	333	440	534	574
-10	2.83	3.28	4.83	7.34	10.4	14.6	20.1	27.2	36.9	50.7	71.5	105	162	265	443	724	1068	1369	1505
0	2.83	3.36	5.04	7.75	11.1	15.7	21.8	29.7	40.7	56.4	80.4	119	185	307	522	895	1433	1962	2193
10	2.83	3.34	4.97	7.62	10.8	15.3	21.1	28.6	38.8	53.1	74.1	107	161	252	403	645	979	1299	1390
20	2.83	3.29	4.78	7.24	10.1	14.1	19.2	25.6	33.9	44.9	60.0	81.3	112	159	224	314	413	485	507
30	2.83	3.21	4.48	6.61	9.05	12.3	16.4	21.5	27.6	35.1	44.6	56.9	72.3	91.5	114	139	162	178	184
40	2.83	3.14	4.15	5.80	7.82	10.2	13.3	16.9	21.1	26.0	31.8	38.4	45.6	53.6	61.8	69.4	75.5	79.6	81.0
50	2.83	3.08	3.73	4.86	6.45	8.13	10.1	12.5	15.2	18.3	21.6	25.1	28.7	32.4	35.5	38.2	40.4	41.8	42.2
60	2.83	3.02	3.37	4.07	4.99	6.17	7.38	8.70	10.3	12.0	13.8	15.7	17.5	19.1	20.5	21.7	22.5	23.1	23.3
70	2.83	2.96	3.12	3.40	3.84	4.34	4.99	5.77	6.50	7.28	8.08	8.91	9.72	10.4	11.0	11.5	11.9	12.1	12.2
80	2.83	2.90	2.97	3.05	3.15	3.27	3.41	3.60	3.82	4.05	4.28	4.52	4.75	4.93	5.09	5.23	5.34	5.41	5.45
90	2.83	2.84	2.85	2.86	2.88	2.89	2.90	2.89	2.89	2.88	2.87	2.87	2.86	2.86	2.87	2.87	2.87	2.87	2.88
100	2.83	2.80	2.75	2.71	2.67	2.64	2.61	2.56	2.52	2.49	2.45	2.43	2.40	2.39	2.38	2.38	2.38	2.38	2.38
110	2.83	2.74	2.65	2.57	2.50	2.44	2.39	2.34	2.30	2.28	2.26	2.26	2.26	2.26	2.27	2.27	2.27	2.27	2.27
120	2.83	2.69	2.57	2.46	2.38	2.31	2.28	2.26	2.26	2.27	2.30	2.36	2.42	2.49	2.55	2.61	2.65	2.68	2.69
130	2.83	2.66	2.49	2.37	2.29	2.26	2.25	2.26	2.33	2.46	2.63	2.83	3.05	3.27	3.47	3.65	3.78	3.87	3.91
140	2.83	2.62	2.44	2.31	2.26	2.25	2.28	2.41	2.62	2.92	3.29	3.69	4.09	4.46	4.75	5.00	5.17	5.27	5.31
150	2.83	2.59	2.39	2.27	2.25	2.27	2.40	2.65	3.03	3.53	4.07	4.61	5.08	5.45	5.71	5.91	6.02	6.08	6.10
160	2.83	2.57	2.37	2.26	2.26	2.32	2.53	2.91	3.45	4.09	4.73	5.26	5.65	5.92	6.10	6.20	6.25	6.27	6.31
170	2.83	2.55	2.35	2.25	2.26	2.37	2.64	3.11	3.75	4.47	5.11	5.59	5.88	6.01	6.06	6.05	5.94	5.85	5.88
180	2.83	2.55	2.34	2.25	2.27	2.38	2.68	3.19	3.86	4.59	5.23	5.67	5.89	5.91	5.88	5.74	5.52	5.22	5.36

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-330mm-RGBW GREEN-25D-Rev1	TYPE:RGBW-Green	WEIGHT:
SPEC.:25 DEG	DIM.:330mm	SERIAL No.:IES001509
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	4.71	4.59	4.40	4.07	3.62	3.09	2.52	1.95	1.47	1.13	0.95	0.95	1.01	1.11	1.12	1.09	1.00	0.85
-170	4.69	4.56	4.35	4.01	3.54	2.99	2.41	1.86	1.41	1.09	0.95	0.96	1.01	1.11	1.12	1.09	1.00	0.85
-160	4.29	4.11	3.83	3.47	3.02	2.53	2.03	1.58	1.24	1.02	0.94	0.95	1.03	1.11	1.12	1.08	1.00	0.85
-150	3.19	3.04	2.82	2.52	2.19	1.84	1.51	1.25	1.05	0.95	0.94	0.97	1.06	1.11	1.11	1.08	0.99	0.85
-140	1.95	1.87	1.74	1.57	1.39	1.23	1.08	0.98	0.94	0.94	0.95	1.02	1.09	1.11	1.11	1.07	0.97	0.85
-130	1.13	1.10	1.05	0.99	0.94	0.94	0.94	0.94	0.95	0.98	1.02	1.08	1.11	1.12	1.10	1.04	0.95	0.85
-120	0.94	0.94	0.95	0.96	0.97	0.99	1.01	1.03	1.06	1.08	1.10	1.12	1.12	1.11	1.08	1.02	0.94	0.85
-110	1.07	1.08	1.09	1.11	1.12	1.13	1.12	1.12	1.13	1.13	1.13	1.12	1.11	1.08	1.03	0.97	0.92	0.85
-100	1.13	1.13	1.12	1.11	1.10	1.09	1.09	1.09	1.09	1.08	1.07	1.06	1.03	1.00	0.97	0.93	0.89	0.85
-90	0.90	0.91	0.91	0.91	0.91	0.91	0.92	0.92	0.92	0.93	0.93	0.93	0.92	0.90	0.89	0.88	0.86	0.85
-80	3.03	2.90	2.74	2.57	2.37	2.16	1.99	1.80	1.61	1.41	1.25	1.10	0.96	0.89	0.87	0.86	0.85	0.85
-70	8.56	8.28	7.90	7.43	6.88	6.27	5.60	4.91	4.19	3.53	2.92	2.41	1.90	1.40	1.09	0.88	0.85	0.85
-60	17.8	17.1	16.2	15.1	13.8	12.4	11.0	9.52	8.07	6.67	5.38	4.19	3.18	2.37	1.57	1.07	0.85	0.85
-50	34.6	32.8	30.4	27.6	24.6	21.7	18.7	15.9	13.2	10.7	8.43	6.47	4.78	3.35	2.26	1.33	0.87	0.85
-40	72.4	66.6	59.1	51.0	43.4	36.3	30.0	24.4	19.6	15.5	12.0	8.99	6.50	4.43	2.87	1.60	0.92	0.85
-30	181	158	129	102	79.3	60.9	46.6	35.7	27.3	20.8	15.7	11.5	8.17	5.50	3.41	1.91	0.98	0.85
-20	520	418	312	218	148	100	69.4	49.1	35.5	26.0	19.0	13.6	9.53	6.34	3.84	2.16	1.02	0.85
-10	1332	1013	672	412	245	149	93.1	61.5	42.3	29.9	21.3	15.1	10.4	6.89	4.14	2.31	1.05	0.85
0	1988	1468	915	525	298	173	103	66.3	44.8	31.3	22.1	15.5	10.7	7.06	4.22	2.36	1.06	0.85
10	1248	913	591	373	234	148	95.2	64.2	44.7	31.8	22.7	16.1	11.1	7.32	4.40	2.46	1.11	0.85
20	470	388	292	207	147	104	75.2	54.6	40.0	29.5	21.5	15.4	10.8	7.16	4.35	2.44	1.15	0.85
30	175	156	132	108	86.5	68.6	54.2	42.8	33.2	25.3	19.0	13.9	9.84	6.61	4.12	2.31	1.16	0.85
40	78.7	73.8	67.3	59.6	51.7	44.1	37.1	30.9	25.4	20.3	15.6	11.7	8.43	5.76	3.74	2.10	1.16	0.85
50	41.5	39.9	37.5	34.7	31.5	28.1	24.6	21.2	18.0	14.9	12.0	9.22	6.79	4.78	3.22	1.92	1.15	0.85
60	23.0	22.4	21.4	20.2	18.8	17.2	15.4	13.6	11.8	10.2	8.56	6.81	5.17	3.84	2.58	1.71	1.16	0.85
70	12.1	11.9	11.5	11.0	10.4	9.64	8.84	7.98	7.14	6.32	5.59	4.80	3.74	2.87	2.14	1.58	1.18	0.85
80	5.40	5.31	5.19	5.03	4.85	4.65	4.42	4.17	3.94	3.73	3.51	3.30	2.81	2.35	1.93	1.55	1.18	0.85
90	2.87	2.86	2.85	2.85	2.84	2.83	2.84	2.84	2.85	2.85	2.85	2.86	2.52	2.19	1.85	1.52	1.18	0.85
100	2.38	2.37	2.37	2.37	2.37	2.37	2.40	2.42	2.45	2.49	2.52	2.54	2.31	2.07	1.80	1.51	1.19	0.85
110	2.27	2.27	2.27	2.27	2.27	2.26	2.26	2.26	2.27	2.28	2.32	2.30	2.13	1.94	1.73	1.48	1.19	0.85
120	2.69	2.67	2.63	2.58	2.52	2.45	2.38	2.31	2.27	2.25	2.25	2.14	1.98	1.83	1.66	1.45	1.19	0.85
130	3.89	3.82	3.70	3.54	3.34	3.12	2.90	2.70	2.52	2.37	2.20	2.02	1.87	1.72	1.58	1.40	1.16	0.85
140	5.29	5.20	5.06	4.84	4.55	4.20	3.80	3.40	3.02	2.60	2.17	1.90	1.75	1.62	1.50	1.35	1.15	0.85
150	6.09	6.04	5.95	5.77	5.52	5.18	4.74	4.22	3.36	2.61	2.09	1.77	1.60	1.51	1.41	1.29	1.12	0.85
160	6.28	6.25	6.22	6.14	5.98	5.74	4.93	4.01	3.11	2.38	1.87	1.57	1.43	1.39	1.32	1.23	1.09	0.85
170	5.79	5.92	6.06	5.79	5.26	4.63	3.91	3.17	2.45	1.86	1.47	1.29	1.23	1.25	1.22	1.16	1.04	0.85
180	4.71	4.59	4.40	4.07	3.62	3.09	2.52	1.95	1.47	1.13	0.95	0.95	1.01	1.11	1.12	1.09	1.00	0.85

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: