

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		3153.1 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	54.7V x 54.0H
	At 50% of Imax	25.5V x 25.4H
	At 90% of Imax	9.7V x 9.8H
Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	730.5 lumens per klm.
	To 50% of Imax	346.7 lumens per klm.
	To 90% of Imax	68.5 lumens per klm.
	Upward LOR	2.2 %
	Downward LOR	97.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoHody-330mm-RGBW RED-25D-Rev1	TYPE:RGBW-Red	WEIGHT:
SPEC.:25 DEG	DIM.:330mm	SERIAL No.:IES001508
MFR.:	SUR.:	Shielding Angle:

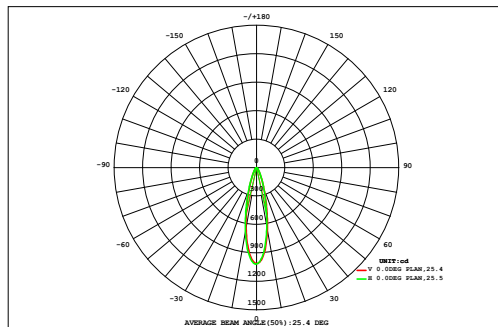

DATA OF LAMP		Eff:38.26lm/W	
MODEL		Imax (cd)	1018
NOMINAL POWER (W)	8.4	AVAILABILITY (%)	73.2
RATED VOLTAGE (V)	220	Avai. FLUX (lm)	236.2
NOMINAL FLUX (lm)	322.9	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	322.9
TEST VOLTAGE (V)	221.4	q @50% (H,V)	25,25DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	0.06	0.08	0.10	0.12	0.15	0.17	0.19	0.21	0.22	0.21	0.20	0.19	0.17	0.14	0.12	0.10	0.08	0.06	2.57	0.00		
	45	0.07	0.10	0.12	0.16	0.19	0.23	0.27	0.29	0.31	0.31	0.29	0.26	0.22	0.19	0.15	0.12	0.09	0.07	3.45	0.00	
	40	0.08	0.12	0.15	0.20	0.26	0.32	0.38	0.44	0.46	0.46	0.43	0.37	0.31	0.25	0.19	0.15	0.11	0.08	4.77	0.00	
	35	0.10	0.14	0.19	0.26	0.35	0.46	0.58	0.68	0.74	0.73	0.66	0.55	0.43	0.33	0.25	0.18	0.13	0.09	6.85	0.97	
	30	0.11	0.16	0.23	0.33	0.47	0.67	0.91	1.12	1.25	1.24	1.08	0.85	0.63	0.44	0.31	0.22	0.15	0.10	10.3	6.42	
	25	0.13	0.19	0.28	0.42	0.64	0.98	1.43	1.90	2.18	2.15	1.80	1.33	0.90	0.59	0.39	0.26	0.17	0.11	15.8	12.8	
	20	0.14	0.21	0.33	0.52	0.84	1.38	2.18	3.13	3.72	3.65	2.96	2.03	1.27	0.78	0.48	0.30	0.19	0.12	24.2	21.6	
	15	0.15	0.23	0.37	0.60	1.04	1.80	3.04	4.60	5.69	5.58	4.36	2.84	1.71	0.99	0.57	0.33	0.20	0.13	34.2	31.9	
	10	0.16	0.24	0.39	0.66	1.16	2.10	3.67	5.65	7.14	7.05	5.56	3.66	2.11	1.15	0.63	0.35	0.21	0.13	42.0	39.8	
	5	0.15	0.24	0.39	0.67	1.18	2.18	3.84	5.91	7.31	7.23	5.83	3.83	2.18	1.18	0.63	0.35	0.20	0.12	43.4	41.3	
	0	0.14	0.23	0.37	0.62	1.10	1.99	3.40	4.96	5.98	5.90	4.76	3.21	1.88	1.05	0.58	0.33	0.19	0.12	36.8	34.6	
	-5	0.13	0.20	0.32	0.53	0.91	1.53	2.42	3.38	4.07	4.02	3.26	2.28	1.42	0.84	0.49	0.29	0.18	0.11	26.4	23.9	
	-10	0.12	0.17	0.27	0.42	0.68	1.06	1.55	2.08	2.44	2.42	2.00	1.47	0.98	0.62	0.39	0.24	0.15	0.10	17.2	14.4	
	-15	0.10	0.14	0.21	0.32	0.48	0.69	0.96	1.22	1.38	1.37	1.17	0.90	0.65	0.44	0.30	0.20	0.13	0.09	10.8	7.25	
	-20	0.08	0.12	0.17	0.24	0.33	0.45	0.59	0.71	0.79	0.78	0.69	0.55	0.42	0.31	0.22	0.16	0.11	0.08	6.80	1.42	
	-25	0.07	0.10	0.13	0.18	0.23	0.30	0.37	0.43	0.47	0.46	0.42	0.35	0.28	0.22	0.17	0.12	0.09	0.07	4.44	0.00	
	-30	0.06	0.08	0.10	0.13	0.17	0.20	0.24	0.27	0.29	0.29	0.26	0.23	0.19	0.16	0.12	0.10	0.07	0.05	3.02	0.00	
	-35	0.05	0.06	0.08	0.10	0.12	0.14	0.16	0.18	0.19	0.19	0.18	0.16	0.14	0.12	0.09	0.08	0.06	0.05	2.14	0.00	
	-40	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45	
-45	F t	1.91	2.80	4.20	6.48	10.3	16.7	26.2	37.1	44.6	44.0	35.9	25.1	15.9	9.79	6.07	3.86	2.53	1.68	295	---	
	F a	0.00	0.00	0.00	1.01	6.48	13.4	23.3	34.4	42.0	41.4	33.1	22.1	12.6	5.80	0.69	0.00	0.00	0.00	---	236	

one-half-peak spread: U:12.9,D:12.8 , L:12.6,R:13.0


NEMA Beam Type: Type 4

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:DecoHody-330mm-RGBW RED-25D-Rev1	TYPE:RGBW-Red	WEIGHT:
SPEC.:25 DEG	DIM.:330mm	SERIAL No.:IES001508
MFR.:	SUR.:	Shielding Angle:

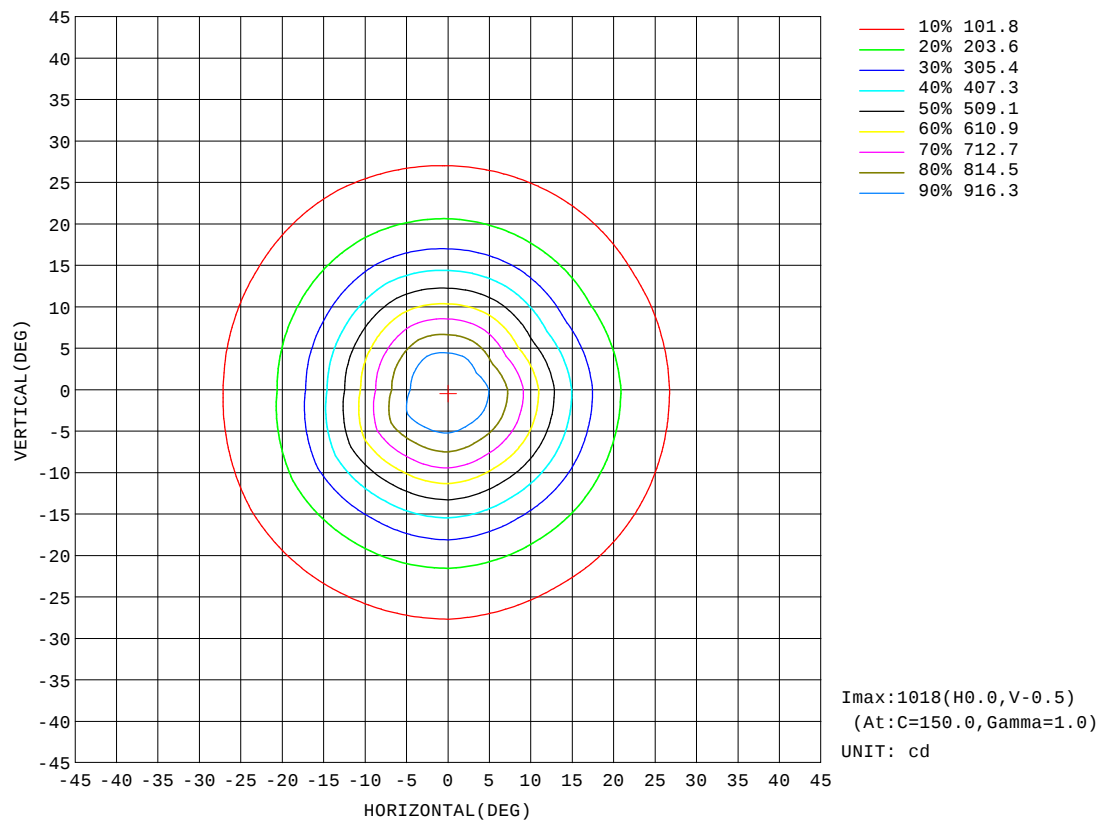


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoHody-330mm-RGBW RED-25D-Rev1	TYPE:RGBW-Red	WEIGHT:
SPEC.:25 DEG	DIM.:330mm	SERIAL No.:IES001508
MFR.:	SUR.:	Shielding Angle:

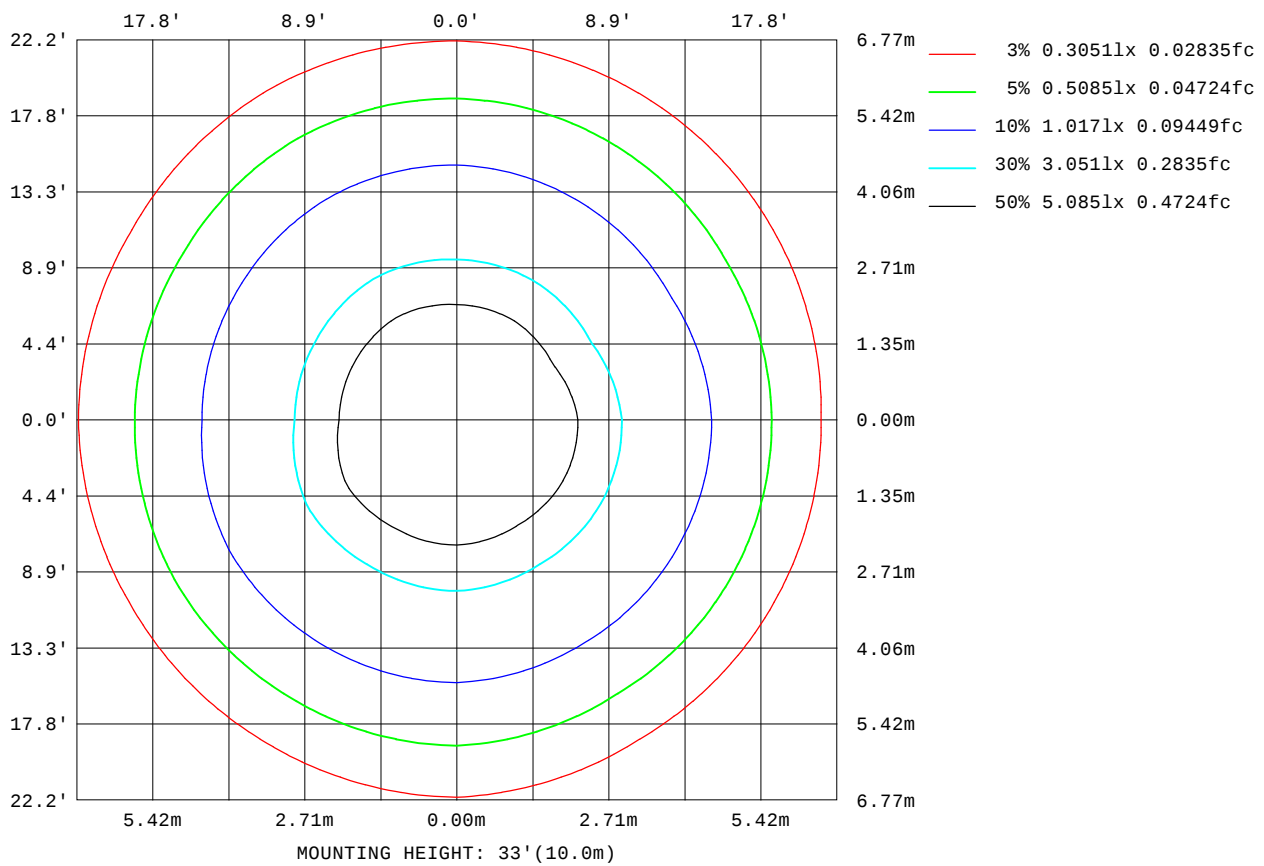

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

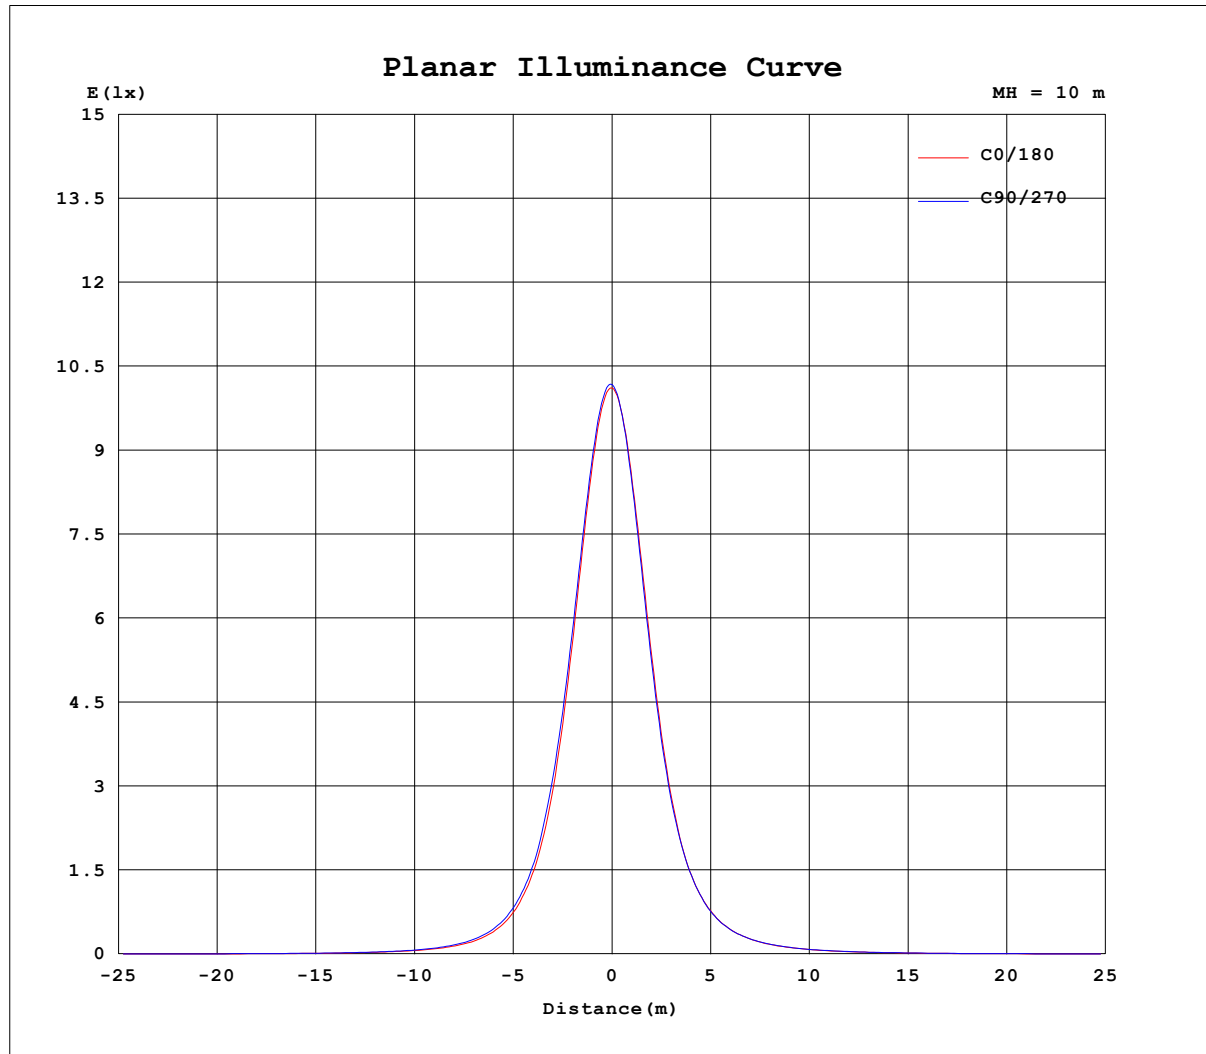


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoHody-330mm-RGBW RED-25D-Rev1	TYPE:RGBW-Red	WEIGHT:
SPEC.:25 DEG	DIM.:330mm	SERIAL No.:IES001508
MFR.:	SUR.:	Shielding Angle:

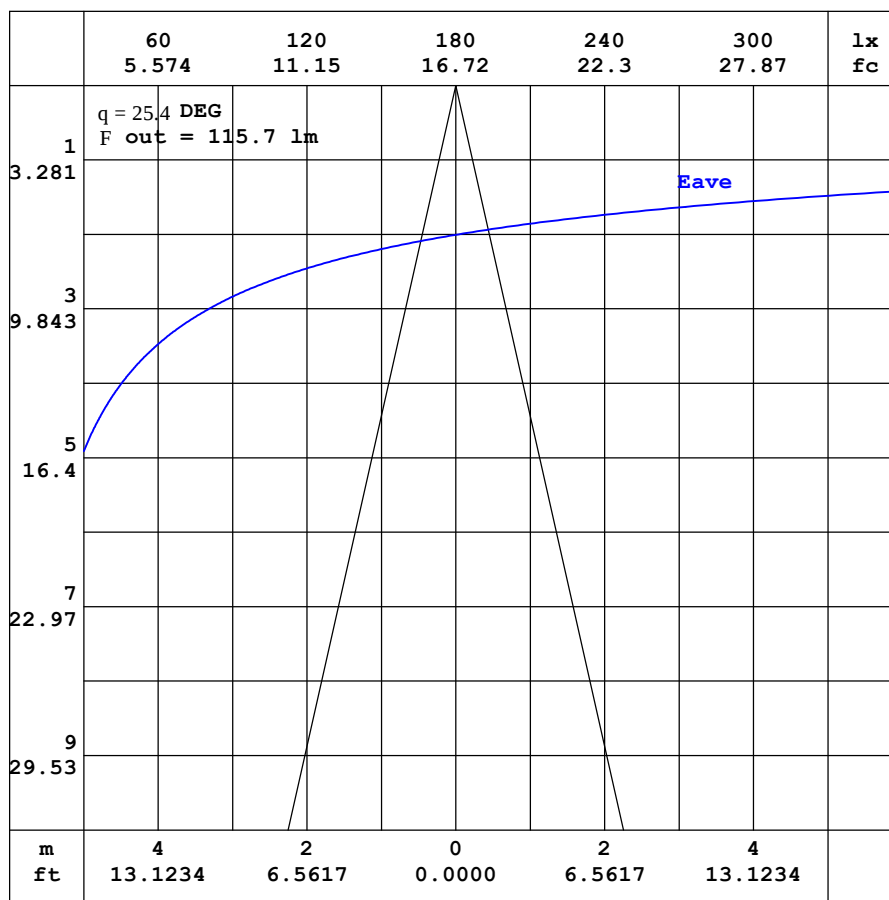

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoHody-330mm-RGBW RED-25D-Rev1	TYPE:RGBW-Red	WEIGHT:
SPEC.:25 DEG	DIM.:330mm	SERIAL No.:IES001508
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.18	1.05	0.95	0.92	0.93	0.99	1.12	1.34	1.65	1.99	2.28	2.47	2.54	2.54	2.52	2.47	2.36	2.23	2.30
-170	1.18	1.03	0.92	0.88	0.87	0.89	0.96	1.09	1.27	1.47	1.64	1.76	1.83	1.85	1.87	1.92	2.02	2.09	2.16
-160	1.18	1.02	0.90	0.85	0.82	0.79	0.80	0.84	0.89	0.95	0.99	1.00	1.03	1.25	1.47	1.65	1.79	1.89	1.94
-150	1.18	1.01	0.89	0.81	0.76	0.72	0.67	0.64	0.59	0.52	0.47	0.57	0.72	0.87	1.02	1.16	1.29	1.37	1.42
-140	1.18	1.00	0.88	0.78	0.73	0.66	0.59	0.50	0.41	0.37	0.38	0.40	0.45	0.51	0.59	0.68	0.75	0.80	0.83
-130	1.18	1.00	0.87	0.77	0.69	0.63	0.54	0.45	0.40	0.38	0.38	0.37	0.37	0.37	0.37	0.39	0.41	0.44	0.45
-120	1.18	1.01	0.88	0.77	0.68	0.60	0.52	0.46	0.45	0.45	0.44	0.43	0.42	0.40	0.39	0.38	0.37	0.37	0.37
-110	1.18	1.02	0.87	0.76	0.67	0.59	0.51	0.48	0.48	0.48	0.48	0.48	0.49	0.48	0.48	0.47	0.46	0.45	0.44
-100	1.18	1.03	0.89	0.76	0.65	0.55	0.45	0.45	0.45	0.46	0.46	0.45	0.45	0.46	0.47	0.48	0.48	0.49	0.49
-90	1.18	1.04	0.91	0.77	0.64	0.51	0.37	0.37	0.38	0.38	0.38	0.38	0.38	0.38	0.38	0.38	0.38	0.39	0.39
-80	1.18	1.07	0.94	0.81	0.67	0.53	0.43	0.49	0.56	0.64	0.73	0.81	0.89	0.96	1.03	1.09	1.15	1.19	1.22
-70	1.18	1.09	0.99	0.94	0.93	0.97	1.02	1.18	1.42	1.69	1.98	2.26	2.54	2.79	3.01	3.19	3.34	3.44	3.50
-60	1.18	1.12	1.10	1.23	1.41	1.63	1.84	2.16	2.71	3.30	3.91	4.53	5.14	5.71	6.21	6.66	7.00	7.24	7.36
-50	1.18	1.16	1.28	1.58	1.99	2.43	2.96	3.57	4.41	5.46	6.60	7.84	9.09	10.4	11.6	12.6	13.5	14.1	14.4
-40	1.18	1.20	1.49	1.99	2.60	3.36	4.29	5.36	6.58	8.22	10.3	12.7	15.5	18.5	21.7	24.9	27.8	29.8	30.7
-30	1.18	1.25	1.67	2.39	3.22	4.34	5.72	7.39	9.40	11.9	15.3	20.1	26.4	34.5	44.5	55.9	67.2	76.0	79.5
-20	1.18	1.30	1.84	2.72	3.80	5.25	7.10	9.41	12.5	16.6	22.3	30.9	44.5	66.0	97.3	140	187	227	244
-10	1.18	1.35	1.98	2.99	4.26	5.99	8.25	11.1	15.1	20.8	29.3	43.1	66.9	110	186	316	476	619	684
0	1.18	1.39	2.07	3.17	4.54	6.45	8.94	12.2	16.7	23.2	33.1	49.0	76.6	126	218	390	642	898	1012
10	1.18	1.38	2.04	3.11	4.44	6.27	8.66	11.7	15.9	21.8	30.5	44.0	66.2	104	170	278	431	583	628
20	1.18	1.36	1.96	2.96	4.15	5.78	7.86	10.5	13.9	18.5	24.7	33.5	46.1	65.3	92.9	130	173	206	218
30	1.18	1.34	1.85	2.72	3.71	5.05	6.73	8.81	11.3	14.4	18.3	23.4	29.8	37.8	47.3	57.8	67.3	74.0	76.2
40	1.18	1.31	1.72	2.39	3.20	4.19	5.43	6.90	8.64	10.7	13.0	15.8	18.8	22.1	25.6	28.7	31.3	33.1	33.8
50	1.18	1.29	1.56	2.01	2.66	3.33	4.15	5.10	6.20	7.49	8.89	10.3	11.8	13.3	14.7	15.8	16.8	17.3	17.6
60	1.18	1.26	1.40	1.70	2.07	2.56	3.03	3.57	4.22	4.93	5.67	6.43	7.20	7.90	8.47	8.97	9.35	9.60	9.70
70	1.18	1.24	1.31	1.43	1.61	1.82	2.09	2.40	2.68	2.99	3.32	3.66	3.99	4.28	4.54	4.75	4.91	5.01	5.06
80	1.18	1.21	1.25	1.29	1.33	1.39	1.45	1.52	1.60	1.69	1.78	1.87	1.96	2.03	2.11	2.17	2.22	2.26	2.29
90	1.18	1.19	1.20	1.21	1.22	1.23	1.24	1.23	1.22	1.22	1.21	1.20	1.20	1.20	1.21	1.21	1.22	1.23	1.23
100	1.18	1.16	1.15	1.13	1.12	1.11	1.10	1.08	1.05	1.03	1.01	0.99	0.98	0.98	0.98	0.98	0.99	1.00	1.01
110	1.18	1.14	1.10	1.07	1.04	1.02	1.00	0.98	0.96	0.95	0.94	0.93	0.93	0.94	0.94	0.94	0.94	0.94	0.94
120	1.18	1.12	1.06	1.01	0.98	0.96	0.94	0.94	0.93	0.94	0.95	0.97	1.00	1.03	1.06	1.08	1.09	1.10	1.10
130	1.18	1.09	1.03	0.98	0.95	0.93	0.93	0.93	0.94	1.01	1.08	1.18	1.28	1.39	1.48	1.55	1.61	1.64	1.65
140	1.18	1.08	1.00	0.95	0.93	0.93	0.94	0.98	1.07	1.20	1.37	1.56	1.75	1.93	2.08	2.18	2.25	2.29	2.30
150	1.18	1.07	0.98	0.94	0.93	0.94	0.98	1.09	1.26	1.48	1.73	1.98	2.20	2.37	2.50	2.59	2.64	2.66	2.66
160	1.18	1.06	0.96	0.93	0.93	0.95	1.04	1.21	1.45	1.74	2.04	2.28	2.45	2.58	2.66	2.70	2.72	2.73	2.75
170	1.18	1.05	0.96	0.93	0.93	0.97	1.10	1.30	1.59	1.92	2.22	2.43	2.56	2.60	2.64	2.64	2.59	2.53	2.59
180	1.18	1.05	0.95	0.92	0.93	0.99	1.12	1.34	1.65	1.99	2.28	2.47	2.54	2.54	2.52	2.47	2.36	2.23	2.34

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-08-14

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoHody-330mm-RGBW RED-25D-Rev1	TYPE:RGBW-Red	WEIGHT:
SPEC.:25 DEG	DIM.:330mm	SERIAL No.:IES001508
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	2.02	1.98	1.89	1.75	1.55	1.31	1.04	0.78	0.56	0.41	0.37	0.38	0.42	0.47	0.47	0.45	0.41	0.35	
-170	2.04	2.00	1.91	1.75	1.53	1.27	1.00	0.75	0.54	0.40	0.37	0.38	0.41	0.46	0.47	0.45	0.41	0.35	
-160	1.89	1.79	1.67	1.50	1.30	1.07	0.84	0.64	0.48	0.39	0.37	0.38	0.43	0.46	0.47	0.45	0.42	0.35	
-150	1.38	1.30	1.19	1.06	0.90	0.75	0.61	0.49	0.41	0.37	0.37	0.39	0.44	0.46	0.47	0.44	0.42	0.35	
-140	0.80	0.76	0.69	0.61	0.53	0.47	0.41	0.38	0.37	0.37	0.37	0.42	0.45	0.46	0.46	0.44	0.41	0.35	
-130	0.44	0.42	0.39	0.37	0.37	0.37	0.37	0.37	0.37	0.38	0.41	0.44	0.46	0.47	0.46	0.44	0.40	0.35	
-120	0.37	0.37	0.38	0.38	0.40	0.41	0.41	0.43	0.43	0.44	0.45	0.46	0.47	0.46	0.45	0.42	0.39	0.35	
-110	0.44	0.45	0.46	0.47	0.49	0.48	0.48	0.48	0.48	0.48	0.47	0.47	0.46	0.45	0.43	0.41	0.37	0.35	
-100	0.49	0.48	0.48	0.47	0.46	0.45	0.45	0.45	0.46	0.46	0.46	0.46	0.44	0.43	0.40	0.38	0.36	0.35	
-90	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.40	0.40	0.39	0.38	0.37	0.37	0.36	0.35	
-80	1.18	1.14	1.08	1.01	0.94	0.86	0.78	0.71	0.63	0.55	0.48	0.41	0.38	0.37	0.36	0.36	0.36	0.35	
-70	3.43	3.31	3.15	2.95	2.73	2.48	2.20	1.92	1.64	1.37	1.12	0.92	0.73	0.55	0.43	0.37	0.36	0.35	
-60	7.19	6.90	6.51	6.04	5.52	4.96	4.39	3.78	3.20	2.63	2.09	1.62	1.23	0.92	0.62	0.43	0.36	0.35	
-50	14.0	13.3	12.3	11.1	9.90	8.72	7.51	6.35	5.26	4.24	3.34	2.55	1.86	1.31	0.89	0.53	0.36	0.35	
-40	29.3	26.9	23.9	20.5	17.5	14.6	12.0	9.79	7.88	6.20	4.76	3.57	2.56	1.74	1.13	0.64	0.38	0.35	
-30	74.4	64.4	52.5	41.4	32.1	24.6	18.8	14.3	11.0	8.37	6.26	4.57	3.24	2.16	1.35	0.76	0.41	0.35	
-20	222	178	131	90.2	60.7	40.9	28.1	19.8	14.3	10.5	7.63	5.44	3.79	2.50	1.52	0.86	0.43	0.35	
-10	603	452	294	173	102	61.0	37.9	24.9	17.1	12.0	8.59	6.03	4.16	2.73	1.64	0.92	0.44	0.35	
0	913	664	404	226	125	70.8	42.3	27.0	18.1	12.6	8.92	6.21	4.27	2.80	1.68	0.95	0.44	0.35	
10	560	403	256	159	97.3	60.9	39.2	26.3	18.3	13.0	9.25	6.48	4.46	2.92	1.77	0.99	0.47	0.35	
20	199	163	121	86.5	61.0	43.5	31.3	22.6	16.5	12.1	8.83	6.27	4.36	2.88	1.76	0.99	0.49	0.35	
30	72.5	64.8	55.0	44.9	36.0	28.6	22.6	17.8	13.8	10.5	7.80	5.67	4.00	2.68	1.68	0.95	0.49	0.35	
40	32.8	30.8	28.0	24.8	21.5	18.3	15.5	12.9	10.6	8.44	6.43	4.79	3.45	2.36	1.54	0.87	0.49	0.35	
50	17.3	16.6	15.6	14.4	13.1	11.6	10.2	8.81	7.43	6.18	4.98	3.80	2.80	1.98	1.33	0.80	0.49	0.35	
60	9.57	9.30	8.90	8.39	7.82	7.12	6.39	5.64	4.91	4.21	3.56	2.83	2.17	1.61	1.08	0.73	0.49	0.35	
70	5.01	4.90	4.74	4.53	4.28	3.99	3.66	3.32	2.98	2.65	2.36	2.03	1.59	1.22	0.92	0.67	0.50	0.35	
80	2.26	2.22	2.17	2.10	2.02	1.94	1.85	1.76	1.67	1.59	1.50	1.42	1.21	1.00	0.82	0.66	0.50	0.35	
90	1.22	1.22	1.21	1.20	1.19	1.18	1.19	1.20	1.21	1.21	1.22	1.23	1.08	0.93	0.79	0.64	0.50	0.35	
100	1.00	0.99	0.98	0.98	0.97	0.98	0.99	1.00	1.02	1.04	1.07	1.08	0.99	0.88	0.76	0.63	0.49	0.35	
110	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.96	0.97	0.97	0.89	0.82	0.73	0.63	0.49	0.35	
120	1.10	1.10	1.09	1.07	1.05	1.02	0.99	0.96	0.94	0.94	0.94	0.90	0.83	0.77	0.69	0.61	0.49	0.35	
130	1.65	1.63	1.58	1.51	1.42	1.32	1.22	1.12	1.03	0.97	0.91	0.84	0.78	0.73	0.66	0.59	0.49	0.35	
140	2.30	2.27	2.21	2.12	1.98	1.81	1.62	1.43	1.26	1.07	0.88	0.79	0.73	0.68	0.63	0.56	0.48	0.35	
150	2.67	2.66	2.62	2.54	2.42	2.26	2.06	1.81	1.41	1.08	0.86	0.72	0.67	0.63	0.60	0.54	0.47	0.35	
160	2.74	2.73	2.72	2.70	2.63	2.51	2.14	1.71	1.31	0.98	0.76	0.64	0.59	0.58	0.55	0.51	0.45	0.35	
170	2.52	2.60	2.67	2.53	2.29	2.00	1.68	1.33	1.01	0.74	0.59	0.52	0.51	0.53	0.51	0.48	0.43	0.35	
180	2.02	1.98	1.89	1.75	1.55	1.31	1.04	0.78	0.56	0.41	0.37	0.38	0.42	0.47	0.47	0.45	0.41	0.35	

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-08-14

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: