

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1196.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	94.8V x 91.3H
	At 50% of Imax	46.5V x 45.9H
	At 90% of Imax	18.6V x 18.4H
Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	839.6 lumens per klm.
	To 50% of Imax	430.8 lumens per klm.
	To 90% of Imax	88.8 lumens per klm.
Upward LOR		2.2 %
Downward LOR		97.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoBody-330mm-RGBW RED-50D-Rev1	TYPE:RGBW-Red	WEIGHT:
SPEC.:50 DEG	DIM.:330mm	SERIAL No.:IES001520
MFR.:	SUR.:	Shielding Angle:

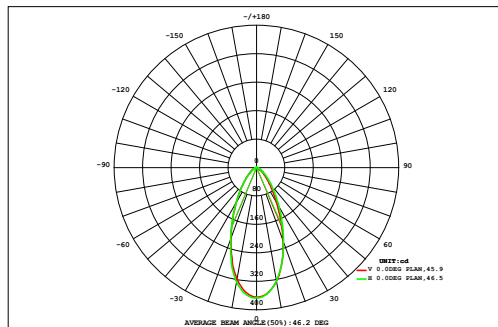

DATA OF LAMP		Eff:36.41lm/W	
MODEL		Imax(cd)	367.4
NOMINAL POWER(W)	8.38	AVAILABILITY(%)	83.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	257.7
NOMINAL FLUX(lm)	307	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	307.0
TEST VOLTAGE(V)	221.4	q @50%(H,V)	46,47DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.02	0.03	0.05	0.07	0.10	0.13	0.15	0.17	0.19	0.19	0.17	0.15	0.13	0.10	0.07	0.05	0.03	0.01	1.80	0.00
72	0.02	0.03	0.05	0.07	0.10	0.13	0.15	0.17	0.19	0.19	0.17	0.15	0.13	0.10	0.07	0.05	0.03	0.01	1.80	0.00
64	0.02	0.04	0.07	0.11	0.16	0.21	0.26	0.30	0.33	0.33	0.30	0.26	0.21	0.16	0.11	0.07	0.04	0.02	3.00	0.00
56	0.03	0.06	0.10	0.16	0.24	0.34	0.43	0.51	0.56	0.56	0.50	0.42	0.33	0.24	0.16	0.10	0.05	0.02	4.81	0.03
48	0.04	0.07	0.13	0.23	0.36	0.52	0.70	0.87	0.97	0.96	0.85	0.68	0.50	0.34	0.22	0.13	0.07	0.03	7.65	4.38
40	0.04	0.09	0.17	0.30	0.51	0.79	1.13	1.45	1.65	1.64	1.41	1.08	0.75	0.48	0.29	0.16	0.08	0.03	12.1	9.92
32	0.05	0.11	0.21	0.40	0.70	1.15	1.74	2.33	2.73	2.70	2.26	1.66	1.08	0.65	0.37	0.19	0.09	0.04	18.5	16.8
24	0.05	0.12	0.25	0.49	0.91	1.59	2.52	3.52	4.20	4.17	3.43	2.41	1.48	0.84	0.45	0.22	0.10	0.04	26.8	25.4
	0.06	0.13	0.28	0.57	1.11	2.01	3.33	4.77	5.76	5.76	4.73	3.23	1.90	1.02	0.51	0.25	0.11	0.04	35.6	34.3
	0.06	0.14	0.30	0.62	1.22	2.26	3.82	5.56	6.73	6.75	5.62	3.86	2.21	1.13	0.55	0.25	0.11	0.04	41.3	40.1
	0.06	0.14	0.30	0.62	1.21	2.26	3.84	5.65	6.80	6.76	5.66	3.89	2.23	1.14	0.55	0.25	0.11	0.04	41.5	40.3
	0.05	0.13	0.27	0.56	1.09	1.99	3.34	4.81	5.78	5.76	4.76	3.29	1.94	1.02	0.50	0.24	0.11	0.04	35.7	34.4
	0.05	0.11	0.24	0.47	0.88	1.55	2.45	3.43	4.08	4.07	3.41	2.42	1.50	0.83	0.43	0.21	0.10	0.04	26.3	24.9
-24	0.04	0.10	0.19	0.36	0.65	1.08	1.62	2.16	2.54	2.54	2.16	1.61	1.06	0.62	0.34	0.18	0.08	0.03	17.4	15.7
-32	0.04	0.08	0.15	0.27	0.46	0.71	1.02	1.30	1.49	1.49	1.30	1.01	0.70	0.44	0.25	0.14	0.07	0.03	10.9	8.75
-40	0.03	0.06	0.11	0.19	0.30	0.45	0.61	0.75	0.84	0.84	0.75	0.61	0.44	0.30	0.18	0.10	0.05	0.02	6.64	2.77
-48	0.02	0.04	0.08	0.13	0.20	0.27	0.35	0.42	0.47	0.47	0.42	0.35	0.27	0.19	0.13	0.07	0.04	0.02	3.95	0.00
-56	0.02	0.03	0.05	0.08	0.12	0.16	0.20	0.24	0.26	0.26	0.24	0.20	0.16	0.12	0.08	0.05	0.03	0.01	2.31	0.00
-64	0.01	0.02	0.03	0.05	0.07	0.09	0.11	0.13	0.14	0.14	0.13	0.11	0.09	0.07	0.05	0.03	0.02	0.01	1.27	0.00
-72	0.01	0.02	0.03	0.05	0.07	0.09	0.11	0.13	0.14	0.14	0.13	0.11	0.09	0.07	0.05	0.03	0.02	0.01	1.27	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
F t	0.68	1.50	2.99	5.68	10.3	17.6	27.6	38.4	45.5	45.4	38.1	27.3	17.0	9.68	5.22	2.69	1.29	0.53	297	---
F a	0.00	0.00	0.00	2.24	7.68	15.3	25.5	36.2	43.4	43.3	36.0	25.0	14.6	7.00	1.45	0.00	0.00	0.00	---	258

one-half-peak spread: U:22.4,D:24.4 , L:23.4,R:22.8


NEMA Beam Type: Type 5

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:DecoHody-330mm-RGBW RED-50D-Rev1	TYPE:RGBW-Red	WEIGHT:
SPEC.:50 DEG	DIM.:330mm	SERIAL No.:IES001520
MFR.:	SUR.:	Shielding Angle:

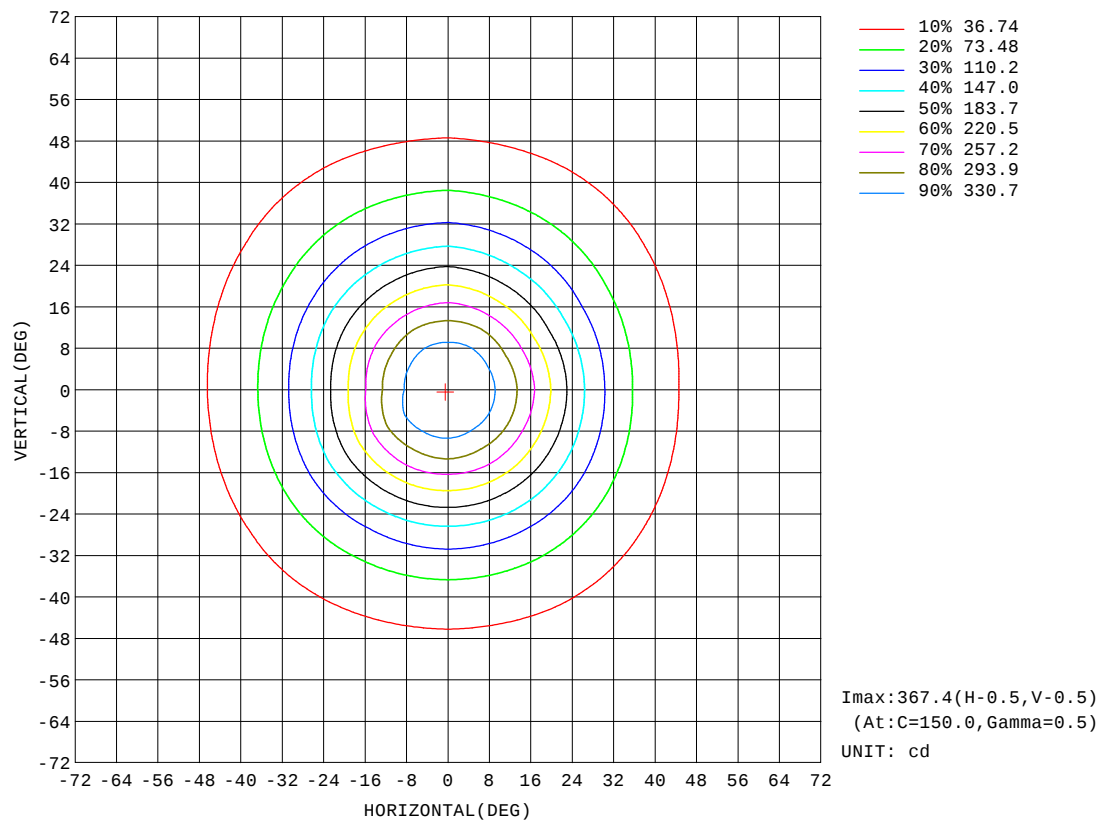


H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoHody-330mm-RGBW RED-50D-Rev1	TYPE:RGBW-Red	WEIGHT:
SPEC.:50 DEG	DIM.:330mm	SERIAL No.:IES001520
MFR.:	SUR.:	Shielding Angle:

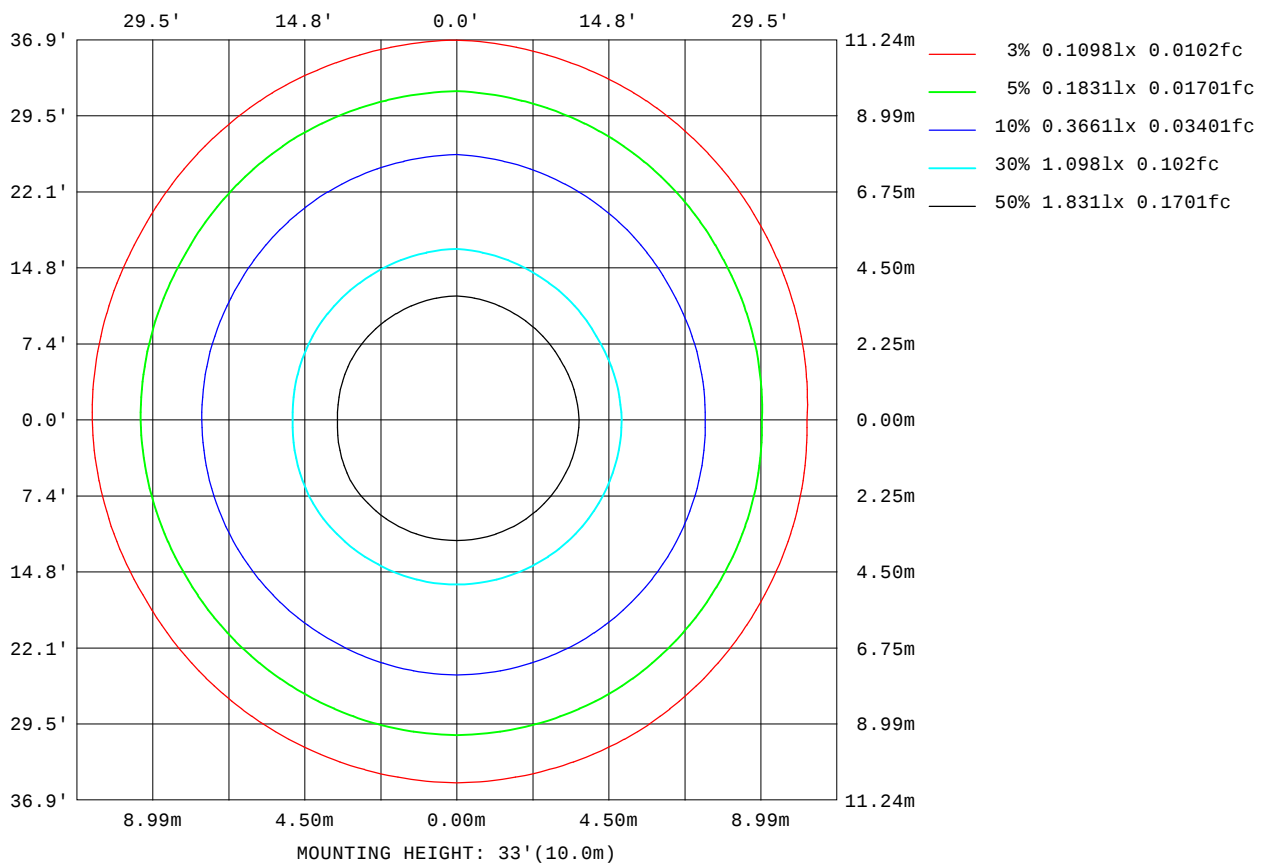

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

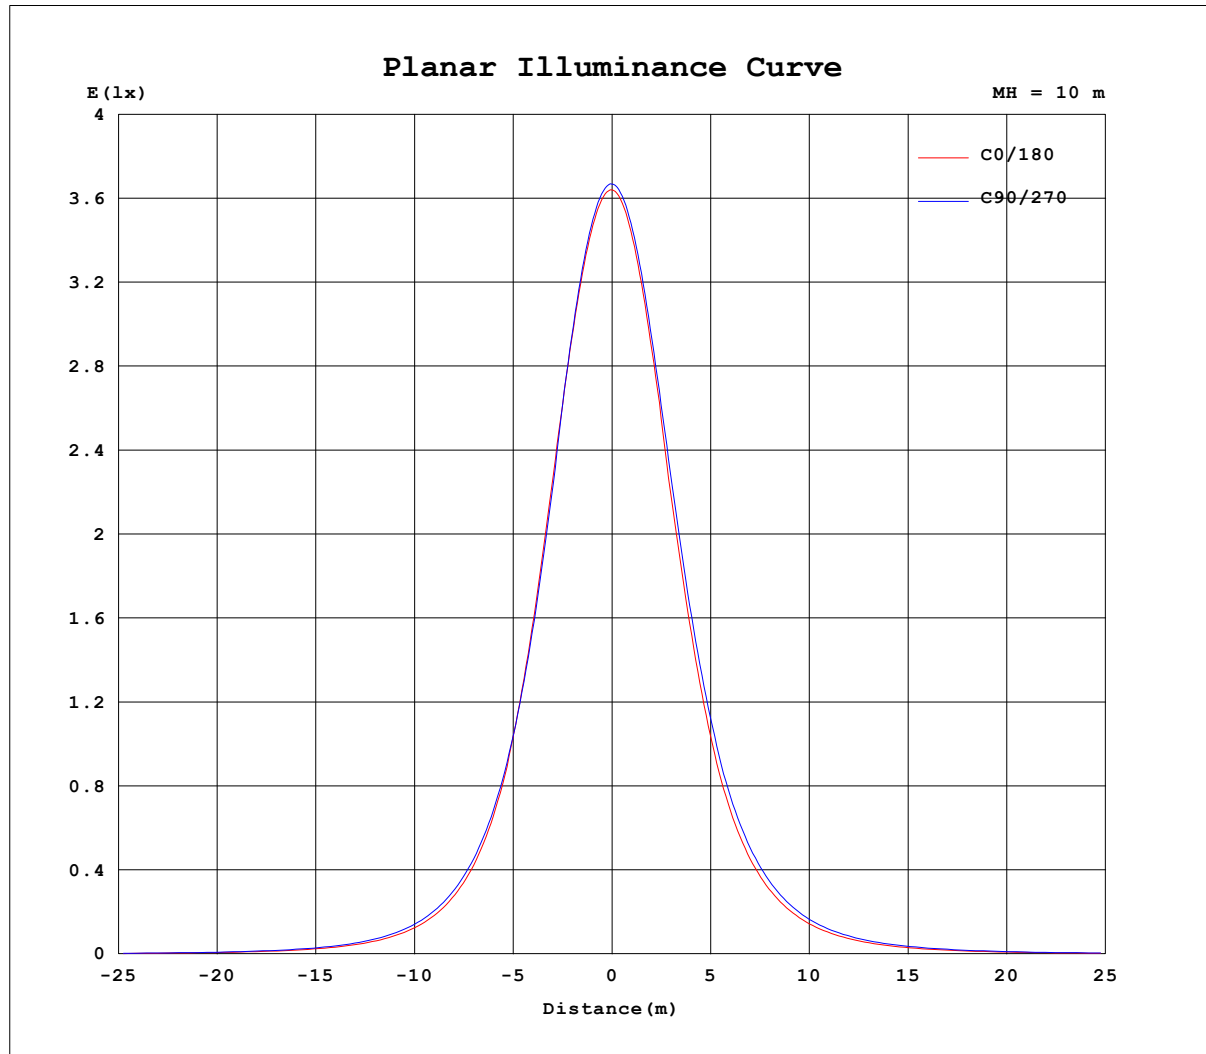


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoHody-330mm-RGBW RED-50D-Rev1	TYPE:RGBW-Red	WEIGHT:
SPEC.:50 DEG	DIM.:330mm	SERIAL No.:IES001520
MFR.:	SUR.:	Shielding Angle:

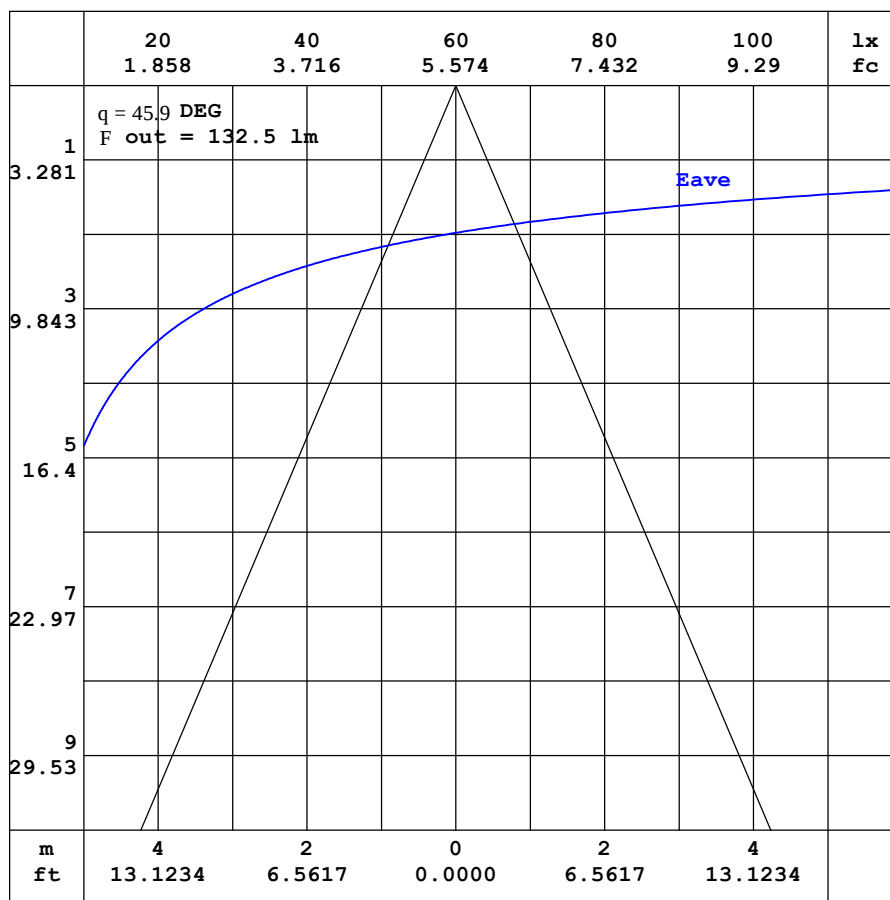

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoHody-330mm-RGBW RED-50D-Rev1	TYPE:RGBW-Red	WEIGHT:
SPEC.:50 DEG	DIM.:330mm	SERIAL No.:IES001520
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.26	1.14	1.10	1.10	1.11	1.18	1.29	1.44	1.62	1.79	1.95	2.08	2.19	2.22	2.22	2.18	2.14	2.08	2.15
-170	1.26	1.12	1.05	1.03	1.02	1.06	1.12	1.21	1.30	1.41	1.49	1.56	1.60	1.61	1.58	1.61	1.72	1.80	1.87
-160	1.26	1.10	1.01	0.97	0.94	0.93	0.94	0.96	0.99	1.01	1.01	1.01	1.01	1.15	1.27	1.38	1.46	1.53	1.56
-150	1.26	1.09	0.97	0.91	0.85	0.81	0.77	0.74	0.70	0.66	0.61	0.70	0.80	0.90	0.99	1.07	1.15	1.20	1.24
-140	1.26	1.08	0.94	0.85	0.78	0.71	0.64	0.56	0.48	0.46	0.50	0.55	0.60	0.66	0.71	0.77	0.83	0.86	0.88
-130	1.26	1.07	0.93	0.81	0.71	0.62	0.53	0.44	0.40	0.41	0.43	0.44	0.45	0.48	0.51	0.54	0.57	0.59	0.61
-120	1.26	1.07	0.91	0.78	0.66	0.55	0.45	0.37	0.38	0.37	0.38	0.38	0.38	0.38	0.40	0.43	0.44	0.45	0.46
-110	1.26	1.07	0.91	0.76	0.63	0.50	0.39	0.35	0.35	0.35	0.35	0.35	0.34	0.35	0.36	0.37	0.38	0.39	0.40
-100	1.26	1.08	0.92	0.76	0.61	0.47	0.33	0.33	0.33	0.32	0.32	0.32	0.32	0.32	0.33	0.34	0.35	0.35	0.36
-90	1.26	1.10	0.94	0.79	0.63	0.47	0.32	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.30	0.30	0.30	0.30
-80	1.26	1.12	0.97	0.83	0.70	0.59	0.50	0.62	0.76	0.89	1.02	1.15	1.28	1.40	1.51	1.61	1.70	1.77	1.82
-70	1.26	1.14	1.06	1.05	1.17	1.29	1.51	1.92	2.38	2.81	3.24	3.68	4.13	4.57	4.98	5.34	5.63	5.84	5.97
-60	1.26	1.18	1.22	1.50	1.92	2.50	3.09	3.71	4.58	5.60	6.70	7.83	8.96	10.1	11.0	11.9	12.6	13.1	13.3
-50	1.26	1.24	1.50	2.08	2.90	3.87	4.86	6.01	7.60	9.62	11.8	14.3	16.8	19.4	21.9	24.2	26.0	27.3	27.8
-40	1.26	1.30	1.77	2.67	3.94	5.32	6.96	9.05	11.7	15.1	19.5	24.5	30.2	36.5	42.7	48.6	53.5	56.8	58.1
-30	1.26	1.35	2.08	3.28	4.95	6.80	9.22	12.5	16.8	22.5	29.9	39.6	51.4	64.7	78.6	92.1	104	113	116
-20	1.26	1.42	2.35	3.82	5.79	8.11	11.4	15.9	22.2	30.8	42.7	58.7	79.5	105	133	164	190	209	215
-10	1.26	1.48	2.52	4.22	6.43	9.13	13.1	18.6	26.5	37.8	53.7	75.8	106	145	193	242	288	316	326
0	1.26	1.52	2.62	4.44	6.79	9.68	13.9	19.8	28.5	40.9	58.4	82.5	116	159	212	267	318	352	364
10	1.26	1.51	2.59	4.36	6.65	9.44	13.5	19.1	27.2	38.7	54.7	76.8	106	146	192	240	283	314	324
20	1.26	1.48	2.49	4.07	6.21	8.71	12.2	17.0	23.6	32.6	44.7	60.8	81.7	108	137	168	195	214	223
30	1.26	1.45	2.30	3.61	5.53	7.63	10.3	14.0	18.7	24.8	32.8	42.9	55.3	69.6	85.0	100	113	122	126
40	1.26	1.43	2.03	3.07	4.62	6.30	8.26	10.8	13.8	17.7	22.4	28.0	34.4	41.4	48.6	55.1	60.5	64.4	66.2
50	1.26	1.39	1.79	2.56	3.57	4.91	6.26	7.80	9.66	12.0	14.5	17.4	20.4	23.5	26.4	29.0	31.1	32.6	33.3
60	1.26	1.34	1.56	2.01	2.64	3.41	4.41	5.36	6.41	7.58	8.87	10.3	11.7	13.0	14.2	15.3	16.1	16.7	17.0
70	1.26	1.32	1.43	1.60	1.89	2.28	2.67	3.18	3.77	4.36	4.94	5.52	6.08	6.64	7.14	7.58	7.93	8.20	8.38
80	1.26	1.29	1.34	1.40	1.47	1.56	1.66	1.79	1.94	2.11	2.31	2.51	2.70	2.85	2.98	3.11	3.21	3.29	3.34
90	1.26	1.28	1.29	1.31	1.33	1.35	1.37	1.36	1.36	1.35	1.35	1.34	1.33	1.34	1.34	1.35	1.35	1.35	1.36
100	1.26	1.25	1.24	1.25	1.24	1.24	1.23	1.22	1.20	1.18	1.16	1.15	1.14	1.13	1.14	1.15	1.15	1.15	1.16
110	1.26	1.23	1.21	1.19	1.17	1.16	1.15	1.14	1.13	1.12	1.12	1.12	1.12	1.12	1.13	1.13	1.13	1.13	1.13
120	1.26	1.22	1.17	1.15	1.13	1.12	1.12	1.11	1.11	1.12	1.13	1.16	1.20	1.22	1.25	1.25	1.26	1.27	1.27
130	1.26	1.19	1.15	1.12	1.11	1.11	1.11	1.11	1.13	1.20	1.26	1.33	1.40	1.46	1.51	1.54	1.56	1.58	1.58
140	1.26	1.18	1.13	1.11	1.10	1.11	1.12	1.17	1.25	1.34	1.44	1.54	1.65	1.74	1.83	1.88	1.91	1.93	1.92
150	1.26	1.16	1.11	1.10	1.10	1.12	1.17	1.26	1.37	1.49	1.62	1.76	1.88	1.99	2.08	2.15	2.17	2.18	2.18
160	1.26	1.15	1.10	1.10	1.11	1.15	1.23	1.35	1.49	1.64	1.79	1.93	2.04	2.14	2.20	2.23	2.24	2.25	2.28
170	1.26	1.15	1.10	1.10	1.11	1.17	1.28	1.41	1.57	1.74	1.90	2.04	2.14	2.20	2.22	2.22	2.22	2.21	2.27
180	1.26	1.14	1.10	1.10	1.11	1.18	1.29	1.44	1.62	1.79	1.95	2.08	2.19	2.22	2.22	2.18	2.14	2.08	2.18

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-08-14

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoHody-330mm-RGBW RED-50D-Rev1	TYPE:RGBW-Red	WEIGHT:
SPEC.:50 DEG	DIM.:330mm	SERIAL No.:IES001520
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.88	1.77	1.64	1.48	1.31	1.13	0.95	0.79	0.65	0.53	0.45	0.39	0.36	0.34	0.33	0.30	0.27	0.27	
-170	1.75	1.67	1.58	1.44	1.28	1.11	0.94	0.78	0.65	0.53	0.44	0.40	0.36	0.35	0.33	0.30	0.27	0.27	
-160	1.52	1.43	1.36	1.25	1.13	1.00	0.86	0.72	0.60	0.51	0.44	0.40	0.37	0.35	0.33	0.30	0.27	0.27	
-150	1.20	1.14	1.07	0.99	0.90	0.80	0.70	0.62	0.54	0.47	0.43	0.39	0.37	0.36	0.33	0.30	0.28	0.27	
-140	0.86	0.83	0.77	0.71	0.65	0.60	0.55	0.51	0.47	0.44	0.41	0.38	0.37	0.35	0.33	0.29	0.28	0.27	
-130	0.59	0.57	0.54	0.51	0.48	0.46	0.44	0.43	0.41	0.41	0.39	0.38	0.37	0.34	0.32	0.29	0.28	0.27	
-120	0.45	0.43	0.42	0.41	0.38	0.38	0.38	0.37	0.38	0.38	0.38	0.37	0.36	0.34	0.31	0.29	0.28	0.27	
-110	0.39	0.38	0.37	0.36	0.35	0.35	0.36	0.36	0.36	0.37	0.37	0.36	0.34	0.32	0.30	0.29	0.28	0.27	
-100	0.36	0.36	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.34	0.34	0.34	0.33	0.31	0.30	0.29	0.28	0.27	
-90	0.31	0.31	0.32	0.33	0.34	0.35	0.34	0.34	0.34	0.33	0.33	0.32	0.31	0.30	0.30	0.29	0.28	0.27	
-80	1.76	1.68	1.57	1.46	1.33	1.21	1.09	0.96	0.85	0.73	0.60	0.49	0.42	0.36	0.35	0.32	0.28	0.27	
-70	5.83	5.62	5.32	4.96	4.55	4.09	3.61	3.12	2.65	2.23	1.83	1.41	1.03	0.77	0.52	0.36	0.32	0.27	
-60	13.1	12.6	11.9	11.0	10.0	8.90	7.73	6.58	5.46	4.41	3.46	2.69	2.05	1.39	0.89	0.52	0.35	0.27	
-50	27.2	26.0	24.2	21.9	19.3	16.6	14.0	11.6	9.37	7.37	5.70	4.28	3.11	2.20	1.31	0.73	0.37	0.27	
-40	56.8	53.5	48.6	42.6	36.0	29.5	23.7	18.7	14.5	11.1	8.37	6.13	4.31	2.93	1.83	0.93	0.40	0.27	
-30	113	104	92.3	78.1	63.6	49.9	38.0	28.4	21.0	15.4	11.3	8.01	5.51	3.62	2.28	1.10	0.45	0.27	
-20	208	189	162	131	102	76.6	55.6	39.7	28.0	19.8	13.9	9.67	6.56	4.20	2.60	1.25	0.49	0.27	
-10	313	285	239	190	143	102	71.4	49.2	33.6	23.0	15.8	10.8	7.24	4.58	2.80	1.36	0.52	0.27	
0	354	324	277	219	161	113	77.4	52.5	35.5	24.0	16.4	11.2	7.44	4.71	2.87	1.40	0.53	0.27	
10	314	283	237	187	140	101	71.1	49.5	34.2	23.6	16.4	11.2	7.55	4.79	2.94	1.43	0.56	0.27	
20	212	191	162	131	101	75.8	56.1	40.7	29.3	21.0	15.0	10.5	7.15	4.59	2.86	1.38	0.56	0.27	
30	121	110	96.6	81.2	65.8	51.8	40.0	30.4	23.0	17.2	12.7	9.13	6.33	4.18	2.64	1.30	0.55	0.27	
40	63.7	59.2	53.3	46.6	39.5	32.7	26.6	21.4	17.0	13.2	10.1	7.42	5.23	3.61	2.25	1.19	0.52	0.27	
50	32.4	30.7	28.4	25.8	22.8	19.8	16.8	14.1	11.6	9.43	7.46	5.60	4.14	2.93	1.76	1.02	0.52	0.27	
60	16.6	16.0	15.1	14.0	12.8	11.5	10.1	8.70	7.41	6.16	5.07	4.03	3.06	2.09	1.41	0.85	0.51	0.27	
70	8.20	7.93	7.56	7.12	6.62	6.05	5.45	4.83	4.25	3.71	3.14	2.54	1.98	1.49	1.07	0.74	0.49	0.27	
80	3.27	3.17	3.05	2.92	2.77	2.62	2.44	2.27	2.08	1.91	1.76	1.63	1.38	1.14	0.91	0.69	0.46	0.27	
90	1.36	1.36	1.36	1.36	1.36	1.36	1.36	1.37	1.38	1.39	1.39	1.40	1.21	1.02	0.83	0.64	0.46	0.27	
100	1.15	1.15	1.14	1.14	1.13	1.14	1.15	1.17	1.19	1.21	1.24	1.25	1.09	0.94	0.78	0.62	0.45	0.27	
110	1.13	1.13	1.13	1.13	1.13	1.13	1.12	1.12	1.12	1.13	1.15	1.12	1.00	0.87	0.73	0.59	0.43	0.27	
120	1.27	1.27	1.26	1.25	1.23	1.20	1.17	1.14	1.12	1.12	1.12	1.03	0.92	0.80	0.68	0.56	0.42	0.27	
130	1.58	1.57	1.55	1.52	1.47	1.41	1.34	1.28	1.21	1.15	1.07	0.96	0.85	0.74	0.63	0.52	0.40	0.27	
140	1.93	1.92	1.89	1.84	1.76	1.67	1.56	1.45	1.36	1.22	1.02	0.87	0.77	0.68	0.58	0.48	0.38	0.27	
150	2.19	2.18	2.16	2.10	2.01	1.90	1.78	1.65	1.40	1.15	0.96	0.79	0.68	0.61	0.52	0.44	0.35	0.27	
160	2.26	2.25	2.24	2.23	2.16	2.07	1.80	1.51	1.25	1.02	0.83	0.69	0.59	0.52	0.46	0.39	0.33	0.27	
170	2.19	2.23	2.25	2.12	1.91	1.68	1.44	1.21	0.99	0.81	0.66	0.56	0.48	0.44	0.40	0.35	0.30	0.27	
180	1.88	1.77	1.64	1.48	1.31	1.13	0.95	0.79	0.65	0.53	0.45	0.39	0.36	0.34	0.33	0.30	0.27	0.27	

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-08-14

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: