

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		3310.9 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	41.0V x 67.8H
	At 50% of Imax	15.3V x 39.1H
	At 90% of Imax	5.8V x 17.5H
Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	722.2 lumens per klm.
	To 50% of Imax	351.7 lumens per klm.
	To 90% of Imax	75.6 lumens per klm.
	Upward LOR	2.3 %
	Downward LOR	97.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoBody-600mm-RGBW 3000K-1540D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230-W
MFR.:	SUR.:	Shielding Angle:

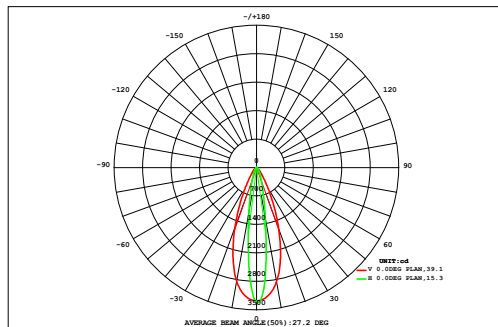

DATA OF LAMP		Eff:54.23lm/W	
MODEL		Imax(cd)	3321
NOMINAL POWER(W)	18.5	AVAILABILITY(%)	72.3
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	724.8
NOMINAL FLUX(lm)	1003	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1003
TEST VOLTAGE(V)	221.4	q @50%(H,V)	39,15DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	45	40	35	30	25	20	15	10	5	0	5	10	15	20	25	30	35	40	45			
45	0.21	0.27	0.32	0.38	0.42	0.47	0.51	0.53	0.53	0.53	0.52	0.49	0.45	0.41	0.36	0.31	0.25	0.20	7.16	0.00		
40	0.26	0.33	0.41	0.49	0.56	0.63	0.69	0.73	0.73	0.73	0.72	0.67	0.61	0.54	0.47	0.39	0.32	0.25	9.54	0.00		
35	0.31	0.41	0.53	0.65	0.77	0.86	0.96	1.03	1.04	1.04	1.02	0.94	0.83	0.75	0.63	0.51	0.39	0.30	13.0	0.00		
30	0.38	0.51	0.68	0.88	1.08	1.24	1.37	1.50	1.53	1.52	1.49	1.35	1.21	1.06	0.86	0.66	0.49	0.35	18.1	0.00		
25	0.45	0.63	0.88	1.20	1.56	1.89	2.09	2.31	2.35	2.35	2.30	2.07	1.88	1.55	1.18	0.86	0.60	0.41	26.6	4.46		
20	0.53	0.79	1.16	1.65	2.29	3.02	3.51	3.75	3.91	3.92	3.76	3.57	3.09	2.32	1.65	1.13	0.75	0.48	41.3	30.4		
15	0.62	0.96	1.54	2.40	3.51	4.91	6.39	6.89	7.20	7.27	7.06	6.69	5.14	3.61	2.42	1.51	0.91	0.56	69.6	61.9		
10	0.70	1.14	1.97	3.41	5.54	8.20	11.3	13.8	14.5	14.7	14.4	12.0	8.60	5.73	3.48	1.96	1.09	0.62	123	117		
5	0.76	1.30	2.38	4.44	7.75	12.1	16.8	21.1	23.4	23.5	21.5	17.3	12.5	7.99	4.55	2.38	1.24	0.68	182	176		
0	0.75	1.28	2.35	4.37	7.61	11.7	15.8	19.1	21.3	21.7	19.7	16.2	12.0	7.82	4.48	2.34	1.22	0.66	170	165		
-5	0.66	1.09	1.87	3.23	5.17	7.28	9.30	11.1	12.1	12.2	11.6	9.73	7.49	5.29	3.28	1.85	1.03	0.59	105	98.7		
-10	0.56	0.87	1.39	2.15	3.05	4.09	5.21	5.65	6.11	6.14	5.74	5.35	4.17	3.08	2.15	1.36	0.83	0.50	58.4	50.1		
-15	0.46	0.68	0.98	1.37	1.91	2.50	2.88	3.11	3.33	3.34	3.11	2.90	2.51	1.90	1.35	0.95	0.64	0.42	34.3	20.6		
-20	0.37	0.51	0.70	0.96	1.25	1.52	1.66	1.86	1.93	1.93	1.85	1.65	1.51	1.23	0.93	0.68	0.48	0.34	21.4	0.00		
-25	0.29	0.39	0.52	0.68	0.83	0.95	1.05	1.16	1.18	1.18	1.15	1.03	0.93	0.81	0.66	0.50	0.37	0.27	14.0	0.00		
-30	0.23	0.30	0.39	0.48	0.57	0.63	0.70	0.76	0.77	0.77	0.75	0.69	0.61	0.55	0.47	0.37	0.29	0.21	9.56	0.00		
-35	0.18	0.24	0.29	0.35	0.40	0.44	0.49	0.52	0.53	0.52	0.51	0.48	0.43	0.39	0.34	0.28	0.22	0.17	6.79	0.00		
-40	0.15	0.18	0.22	0.26	0.29	0.32	0.35	0.36	0.37	0.36	0.36	0.34	0.31	0.28	0.25	0.21	0.17	0.14	4.91	0.00		
-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45			
F t	7.87	11.9	18.6	29.3	44.6	62.8	81.1	95.2	103	104	97.6	83.5	64.3	45.3	29.5	18.2	11.3	7.15	915	---		
F a	0.00	0.00	4.76	18.0	33.6	52.6	71.3	85.1	92.7	93.7	87.3	73.7	54.2	34.8	18.3	4.52	0.00	0.00	---	725		


one-half-peak spread: U:7.7,D:7.7 , L:19.5,R:19.5 Beam Type: Type 4 x 3 (H x V)

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:DecoHody-600mm-RGBW 3000K-1540D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230-W
MFR.:	SUR.:	Shielding Angle:

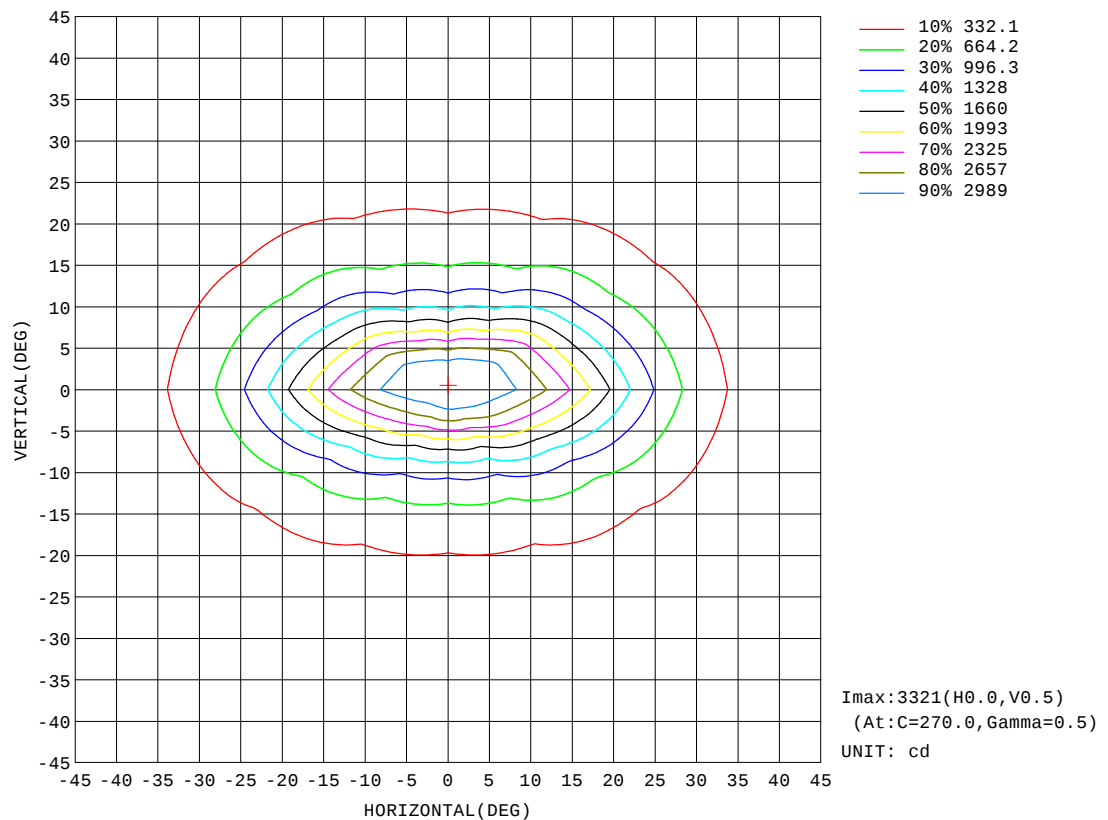


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoHody-600mm-RGBW 3000K-1540D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230-W
MFR.:	SUR.:	Shielding Angle:

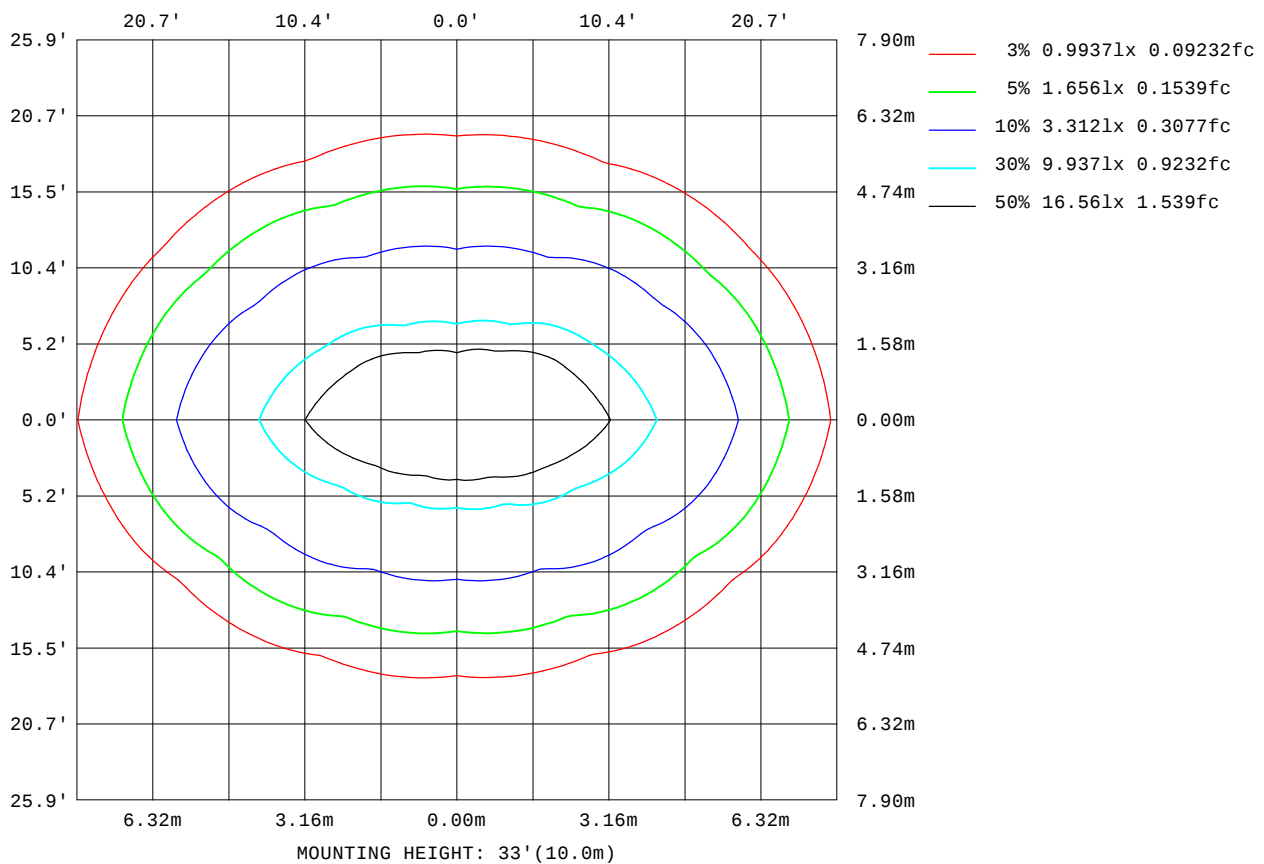

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

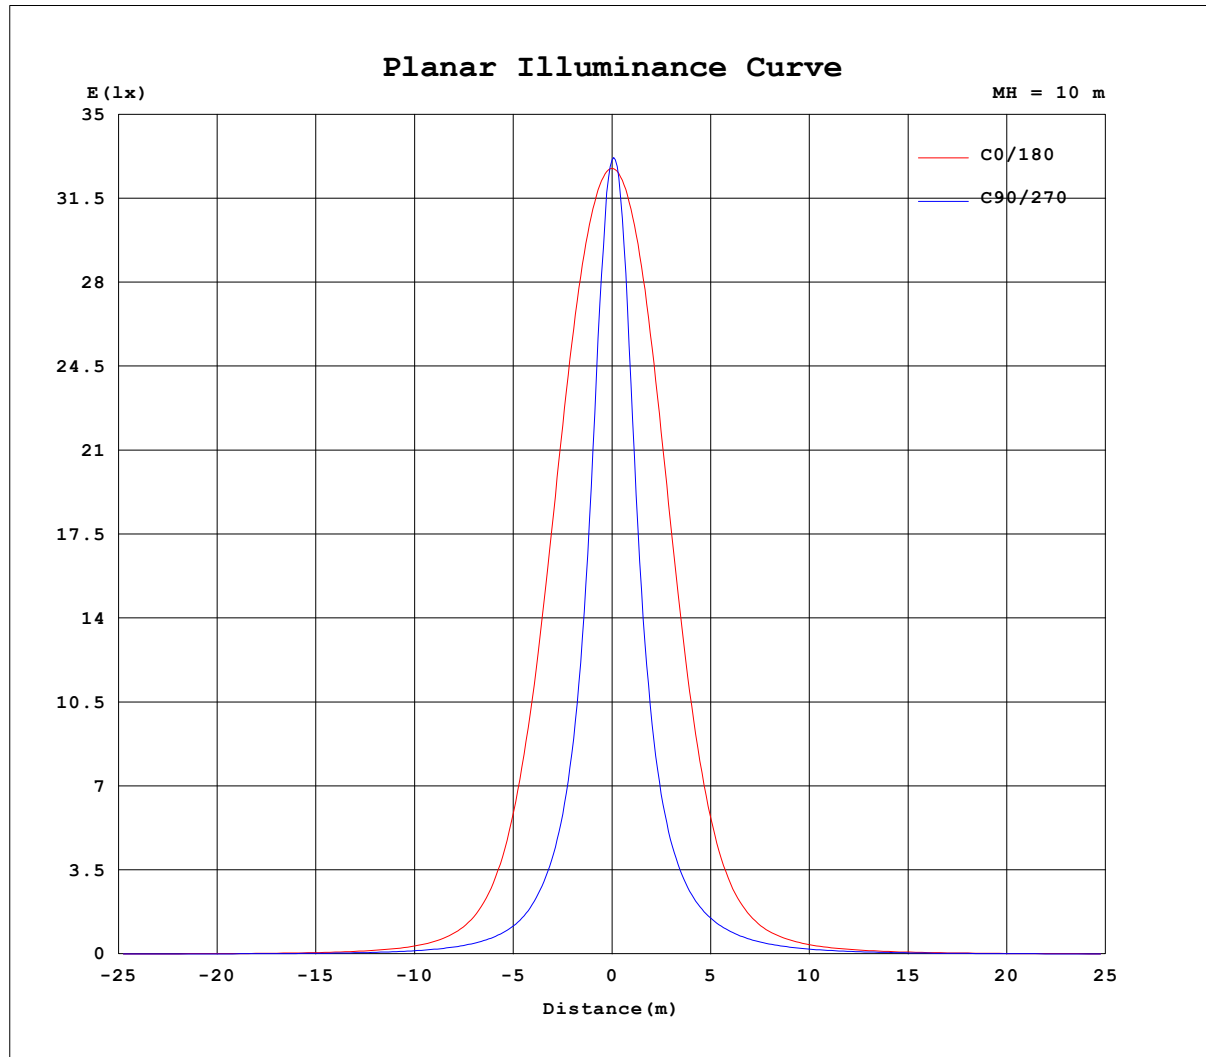


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoHody-600mm-RGBW 3000K-1540D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230-W
MFR.:	SUR.:	Shielding Angle:

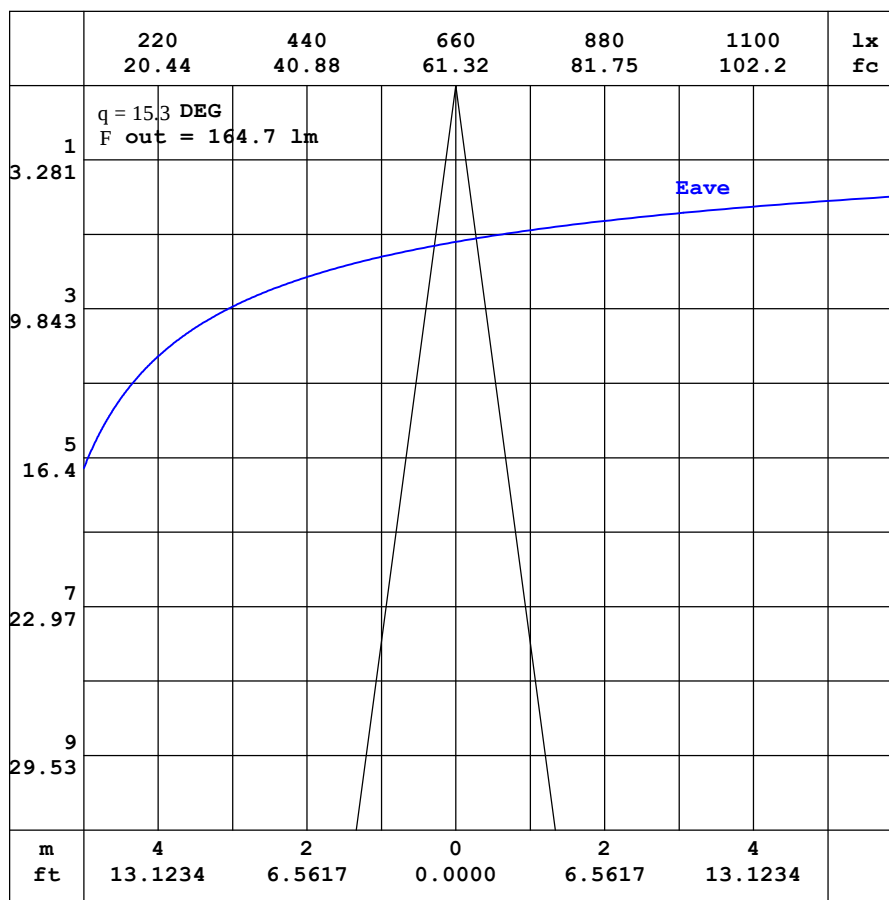

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-600mm-RGBW 3000K-1540D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230-W
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	4.00	3.63	3.38	3.33	3.40	3.67	4.13	4.76	5.47	6.17	6.77	7.21	7.43	7.41	7.21	6.89	6.57	6.32	6.49
-170	4.00	3.57	3.28	3.17	3.16	3.31	3.59	3.96	4.38	4.79	5.17	5.46	5.67	5.77	5.79	5.86	6.23	6.70	7.11
-160	4.00	3.52	3.19	3.02	2.93	2.93	3.01	3.13	3.25	3.36	3.44	3.51	3.65	4.30	4.95	5.54	6.06	6.37	6.54
-150	4.00	3.49	3.12	2.88	2.72	2.60	2.51	2.42	2.28	2.10	1.96	2.29	2.70	3.16	3.63	4.08	4.45	4.70	4.81
-140	4.00	3.46	3.06	2.76	2.55	2.34	2.13	1.91	1.62	1.48	1.50	1.59	1.75	1.95	2.17	2.43	2.63	2.77	2.82
-130	4.00	3.44	3.02	2.69	2.41	2.16	1.90	1.61	1.45	1.41	1.33	1.27	1.22	1.17	1.21	1.28	1.32	1.35	1.35
-120	4.00	3.45	3.00	2.64	2.32	2.03	1.76	1.55	1.52	1.48	1.43	1.36	1.28	1.20	1.13	1.07	1.03	1.00	0.97
-110	4.00	3.46	3.01	2.61	2.26	1.95	1.66	1.57	1.58	1.60	1.60	1.59	1.57	1.55	1.53	1.52	1.50	1.49	1.48
-100	4.00	3.49	3.04	2.61	2.22	1.85	1.50	1.51	1.54	1.56	1.59	1.60	1.63	1.64	1.65	1.66	1.67	1.68	1.69
-90	4.00	3.55	3.10	2.66	2.21	1.76	1.32	1.33	1.34	1.35	1.36	1.38	1.39	1.41	1.43	1.45	1.47	1.49	1.51
-80	4.00	3.61	3.21	2.81	2.47	2.14	1.80	1.94	2.10	2.24	2.36	2.46	2.52	2.61	2.69	2.75	2.79	2.80	2.79
-70	4.00	3.70	3.50	3.52	3.59	3.69	3.76	4.14	4.66	5.16	5.61	6.05	6.38	6.73	7.04	7.26	7.38	7.39	7.31
-60	4.00	3.81	4.08	4.62	5.34	6.07	6.62	7.29	8.57	9.83	11.0	12.0	12.9	13.6	14.4	15.0	15.3	15.4	15.1
-50	4.00	4.00	4.78	6.01	7.55	9.02	10.5	12.0	14.1	16.7	19.3	21.6	23.6	25.0	26.7	28.1	28.9	29.0	28.4
-40	4.00	4.25	5.56	7.61	9.96	12.6	15.5	18.7	22.1	26.4	31.6	37.0	42.1	46.4	49.2	53.5	56.5	57.6	56.5
-30	4.00	4.49	6.35	9.21	12.5	16.6	21.4	27.2	33.9	41.5	50.4	63.0	77.2	91.1	101	107	119	125	121
-20	4.00	4.71	7.04	10.7	15.0	20.6	27.7	36.8	48.6	64.0	84.4	111	144	192	245	282	295	328	322
-10	4.00	4.90	7.60	11.8	17.1	24.1	33.5	46.2	64.1	90.3	131	199	313	479	652	816	1011	1042	1095
0	4.00	5.03	7.97	12.6	18.5	26.6	37.7	53.2	76.1	112	173	293	527	950	1559	2252	2838	3172	3275
10	4.00	5.00	7.85	12.3	17.9	25.4	35.4	49.1	68.4	96.8	141	215	338	522	742	1002	1253	1275	1261
20	4.00	4.91	7.51	11.6	16.5	23.0	31.2	42.0	56.2	75.0	100	135	179	236	297	348	365	393	377
30	4.00	4.77	7.02	10.5	14.6	19.7	26.0	33.7	43.2	54.4	67.8	83.9	102	121	136	146	160	165	162
40	4.00	4.61	6.39	9.09	12.4	16.2	20.7	25.8	31.6	38.1	45.3	52.7	60.0	66.5	71.3	77.0	80.8	82.0	80.4
50	4.00	4.41	5.71	7.63	10.1	12.7	15.6	18.9	22.3	25.9	29.6	33.2	36.4	39.1	41.5	43.5	44.7	44.8	44.0
60	4.00	4.27	5.08	6.28	7.80	9.53	11.3	13.1	15.0	16.9	18.8	20.5	22.0	23.3	24.5	25.3	25.7	25.8	25.5
70	4.00	4.17	4.52	5.15	5.91	6.82	7.77	8.71	9.58	10.4	11.2	12.0	12.6	13.1	13.6	13.9	14.0	14.1	13.9
80	4.00	4.08	4.19	4.36	4.61	4.91	5.22	5.50	5.79	6.07	6.35	6.59	6.79	6.94	7.06	7.14	7.17	7.17	7.13
90	4.00	4.01	4.03	4.04	4.06	4.07	4.09	4.07	4.05	4.04	4.02	4.00	3.99	3.98	3.97	3.96	3.95	3.94	3.94
100	4.00	3.93	3.88	3.83	3.78	3.73	3.69	3.62	3.55	3.47	3.40	3.33	3.28	3.24	3.22	3.20	3.18	3.17	3.16
110	4.00	3.86	3.75	3.65	3.56	3.47	3.40	3.31	3.22	3.15	3.09	3.04	3.01	2.99	2.99	2.98	2.97	2.96	2.96
120	4.00	3.81	3.65	3.51	3.39	3.30	3.24	3.19	3.16	3.13	3.13	3.14	3.13	3.13	3.15	3.15	3.14	3.12	3.07
130	4.00	3.75	3.56	3.40	3.30	3.25	3.23	3.24	3.33	3.44	3.58	3.72	3.88	4.04	4.23	4.40	4.54	4.62	4.62
140	4.00	3.71	3.49	3.34	3.28	3.27	3.34	3.52	3.78	4.10	4.45	4.85	5.29	5.75	6.18	6.62	6.96	7.21	7.35
150	4.00	3.68	3.44	3.31	3.29	3.36	3.57	3.91	4.36	4.89	5.47	6.06	6.67	7.22	7.68	8.03	8.24	8.36	8.42
160	4.00	3.65	3.41	3.31	3.33	3.49	3.82	4.30	4.90	5.57	6.24	6.90	7.50	7.97	8.30	8.54	8.72	8.80	8.90
170	4.00	3.63	3.39	3.32	3.37	3.60	4.02	4.61	5.29	6.00	6.68	7.25	7.69	7.97	8.14	8.18	8.12	8.25	8.60
180	4.00	3.63	3.38	3.33	3.40	3.67	4.13	4.76	5.47	6.17	6.77	7.21	7.43	7.41	7.21	6.89	6.57	6.32	6.52

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-07-03

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoHody-600mm-RGBW 3000K-1540D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230-W
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	5.69	5.37	5.11	4.83	4.44	3.94	3.41	2.87	2.40	2.02	1.76	1.62	1.58	1.57	1.57	1.51	1.39	1.24	
-170	6.89	6.36	5.99	5.48	4.84	4.14	3.47	2.86	2.35	1.96	1.72	1.60	1.57	1.57	1.57	1.51	1.39	1.24	
-160	6.40	6.12	5.63	5.05	4.43	3.80	3.15	2.58	2.13	1.83	1.65	1.57	1.56	1.57	1.57	1.50	1.39	1.24	
-150	4.75	4.55	4.24	3.80	3.34	2.87	2.46	2.12	1.84	1.67	1.58	1.55	1.55	1.57	1.57	1.50	1.38	1.24	
-140	2.82	2.73	2.57	2.35	2.12	1.91	1.74	1.63	1.58	1.55	1.54	1.54	1.56	1.58	1.55	1.49	1.37	1.24	
-130	1.39	1.39	1.38	1.34	1.32	1.33	1.38	1.42	1.47	1.51	1.53	1.56	1.57	1.57	1.53	1.47	1.35	1.24	
-120	1.02	1.07	1.13	1.19	1.26	1.35	1.41	1.48	1.52	1.56	1.57	1.58	1.57	1.55	1.51	1.43	1.33	1.24	
-110	1.50	1.52	1.54	1.57	1.60	1.63	1.64	1.64	1.64	1.62	1.60	1.58	1.56	1.53	1.46	1.39	1.31	1.24	
-100	1.70	1.70	1.70	1.70	1.70	1.69	1.67	1.64	1.62	1.60	1.57	1.53	1.49	1.44	1.39	1.34	1.28	1.24	
-90	1.50	1.48	1.47	1.46	1.44	1.43	1.42	1.41	1.41	1.40	1.39	1.38	1.36	1.34	1.31	1.29	1.27	1.24	
-80	2.78	2.74	2.68	2.60	2.49	2.38	2.31	2.23	2.12	2.00	1.86	1.70	1.58	1.45	1.35	1.28	1.26	1.24	
-70	7.30	7.19	7.00	6.71	6.34	5.95	5.61	5.20	4.75	4.26	3.73	3.21	2.73	2.27	1.82	1.48	1.26	1.24	
-60	15.2	14.9	14.4	13.7	12.8	12.0	11.2	10.2	9.13	7.91	6.67	5.54	4.46	3.45	2.59	1.83	1.34	1.24	
-50	28.7	28.3	27.2	25.5	23.6	22.2	20.2	18.0	15.6	13.2	10.8	8.65	6.68	4.95	3.45	2.28	1.46	1.24	
-40	57.1	55.6	52.3	47.5	44.5	40.1	35.0	29.7	24.7	20.2	16.1	12.5	9.30	6.61	4.43	2.76	1.58	1.24	
-30	124	118	106	99.0	88.4	74.3	60.2	47.7	37.9	29.6	22.6	16.8	12.1	8.32	5.39	3.18	1.70	1.24	
-20	328	294	281	244	189	141	107	77.7	56.4	41.0	29.8	21.2	14.8	9.88	6.21	3.53	1.79	1.24	
-10	1062	1050	846	664	486	313	192	121	78.1	52.7	36.4	25.0	16.9	11.1	6.81	3.79	1.86	1.24	
0	3172	2850	2289	1600	979	536	283	158	94.9	61.0	40.7	27.4	18.1	11.7	7.11	3.91	1.88	1.24	
10	1304	1322	1069	773	535	339	208	130	84.5	57.0	39.2	26.9	18.2	11.9	7.26	4.03	1.95	1.24	
20	393	362	350	298	234	176	130	93.5	67.2	48.6	34.9	24.7	17.1	11.3	7.07	3.99	1.98	1.24	
30	164	157	142	132	117	98.4	80.6	64.8	50.7	38.8	29.2	21.4	15.2	10.3	6.58	3.83	1.96	1.24	
40	81.2	79.1	74.8	68.5	63.8	57.4	50.4	43.2	36.3	29.7	23.1	17.5	12.7	8.91	5.86	3.54	1.92	1.24	
50	44.4	43.8	42.2	39.9	37.3	34.6	31.6	28.2	24.7	21.2	17.5	13.5	10.2	7.36	5.01	3.16	1.85	1.24	
60	25.5	25.2	24.5	23.5	22.2	20.9	19.5	17.8	16.0	14.1	12.3	10.0	7.78	5.84	4.16	2.78	1.77	1.24	
70	13.9	13.8	13.5	13.1	12.6	12.0	11.4	10.6	9.81	8.97	8.12	7.09	5.72	4.47	3.37	2.46	1.71	1.24	
80	7.10	7.04	6.94	6.80	6.62	6.42	6.23	6.01	5.77	5.50	5.24	4.95	4.20	3.50	2.83	2.22	1.72	1.24	
90	3.93	3.93	3.93	3.92	3.92	3.92	3.94	3.96	3.98	4.00	4.02	4.04	3.57	3.11	2.64	2.18	1.71	1.24	
100	3.17	3.17	3.17	3.18	3.20	3.22	3.28	3.35	3.41	3.48	3.55	3.61	3.28	2.92	2.54	2.14	1.70	1.24	
110	2.96	2.97	2.98	2.99	2.99	3.00	3.03	3.07	3.12	3.18	3.25	3.25	3.01	2.75	2.44	2.09	1.69	1.24	
120	3.13	3.17	3.19	3.20	3.19	3.18	3.17	3.16	3.14	3.14	3.17	3.01	2.79	2.57	2.33	2.04	1.67	1.24	
130	4.66	4.61	4.50	4.35	4.18	4.00	3.82	3.66	3.51	3.37	3.14	2.85	2.62	2.42	2.22	1.97	1.64	1.24	
140	7.26	7.07	6.78	6.38	5.94	5.47	5.01	4.60	4.22	3.73	3.16	2.74	2.46	2.28	2.09	1.89	1.61	1.24	
150	8.40	8.32	8.16	7.84	7.39	6.85	6.23	5.63	4.65	3.76	3.08	2.61	2.30	2.12	1.98	1.81	1.56	1.24	
160	8.89	8.85	8.67	8.43	8.10	7.63	6.52	5.37	4.34	3.49	2.83	2.38	2.10	1.95	1.85	1.71	1.51	1.24	
170	8.59	8.49	8.51	7.94	7.07	6.18	5.26	4.37	3.55	2.88	2.37	2.04	1.86	1.77	1.71	1.61	1.45	1.24	
180	5.69	5.37	5.11	4.83	4.44	3.94	3.41	2.87	2.40	2.02	1.76	1.62	1.58	1.57	1.57	1.51	1.39	1.24	

H_b Range:-90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-07-03

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: