

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	3273.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	41.3V x 68.0H
	At 50% of Imax	15.4V x 39.2H
	At 90% of Imax	5.9V x 17.5H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	721.8 lumens per klm.
	To 50% of Imax	351.1 lumens per klm.
	To 90% of Imax	77.0 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoBody-600mm-RGBW ALL-1540D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230
MFR.:	SUR.:	Shielding Angle:

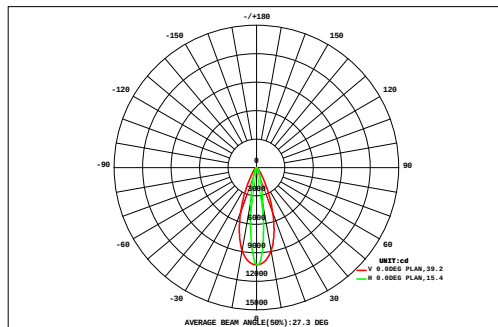

DATA OF LAMP		Eff:53.26lm/W	
MODEL		Imax(cd)	10305
NOMINAL POWER(W)	59.7	AVAILABILITY(%)	72.3
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	2275
NOMINAL FLUX(lm)	3148	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	3148
TEST VOLTAGE(V)	221.4	q @50%(H,V)	39,15DEG

		AREA FLUX DIAGRAM															UNIT:lm				F t	F a
		0.67	0.84	1.02	1.19	1.33	1.48	1.60	1.67	1.68	1.67	1.64	1.56	1.42	1.27	1.13	0.96	0.79	0.63	22.6	0.00	
VERTICAL (DEG)	45	0.82	1.06	1.30	1.56	1.78	1.99	2.20	2.32	2.33	2.32	2.28	2.13	1.91	1.70	1.48	1.23	0.99	0.77	30.2	0.00	
	40	1.00	1.31	1.68	2.08	2.46	2.75	3.06	3.27	3.30	3.28	3.22	2.97	2.64	2.35	1.97	1.59	1.23	0.93	41.1	0.00	
	35	1.20	1.63	2.17	2.80	3.45	3.95	4.37	4.77	4.81	4.79	4.70	4.27	3.83	3.32	2.68	2.06	1.54	1.11	57.5	0.00	
	30	1.44	2.04	2.82	3.82	4.97	6.03	6.62	7.29	7.42	7.40	7.22	6.51	5.92	4.85	3.68	2.68	1.90	1.30	83.9	15.9	
	25	1.71	2.53	3.70	5.26	7.31	9.58	11.1	11.9	12.4	12.4	11.9	11.2	9.60	7.23	5.13	3.54	2.34	1.52	130	97.4	
	20	1.99	3.09	4.89	7.64	11.1	15.5	20.2	21.8	22.7	22.8	22.2	20.8	15.9	11.2	7.56	4.72	2.86	1.75	219	195	
	15	2.25	3.68	6.27	10.8	17.5	25.8	35.6	43.2	45.3	45.8	44.7	37.3	26.7	17.8	10.8	6.12	3.41	1.96	385	367	
	10	2.45	4.18	7.57	14.1	24.4	38.1	52.8	66.0	72.8	72.8	66.9	54.0	39.0	25.0	14.2	7.43	3.87	2.12	568	551	
	5	2.41	4.11	7.46	13.9	24.0	36.8	49.4	59.2	65.7	67.5	61.4	50.7	37.6	24.5	14.0	7.33	3.81	2.09	532	515	
	0	2.13	3.49	5.95	10.2	16.3	22.8	28.9	34.4	37.5	38.3	36.4	30.6	23.6	16.6	10.3	5.82	3.24	1.86	328	309	
	-5	1.80	2.80	4.42	6.81	9.59	12.8	16.3	17.6	19.2	19.4	18.1	16.9	13.2	9.71	6.78	4.28	2.60	1.58	184	158	
	-10	1.47	2.16	3.13	4.36	6.01	7.85	9.04	9.76	10.5	10.5	9.79	9.14	7.93	6.01	4.30	3.02	2.01	1.30	108	66.3	
	-15	1.17	1.62	2.23	3.04	3.97	4.78	5.22	5.86	6.10	6.10	5.85	5.19	4.76	3.92	2.97	2.15	1.52	1.05	67.5	0.00	
	-20	0.92	1.22	1.65	2.15	2.64	2.99	3.30	3.66	3.75	3.74	3.64	3.26	2.94	2.58	2.09	1.58	1.16	0.84	44.1	0.00	
	-25	0.72	0.95	1.23	1.53	1.80	1.99	2.23	2.41	2.45	2.44	2.38	2.19	1.94	1.75	1.48	1.17	0.90	0.67	30.2	0.00	
	-30	0.57	0.74	0.92	1.11	1.27	1.40	1.55	1.64	1.65	1.64	1.62	1.52	1.36	1.22	1.06	0.87	0.70	0.54	21.4	0.00	
-35	0.46	0.58	0.70	0.81	0.91	1.01	1.10	1.15	1.15	1.14	1.13	1.07	0.97	0.87	0.77	0.66	0.54	0.43	15.4	0.00		
-40																						
-45																						
		-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45				
F t	25.2	38.0	59.1	93.1	141	198	255	298	321	324	305	261	201	142	92.4	57.2	35.4	22.4	2868	---		
F a	0.00	0.00	15.9	57.8	107	166	224	266	289	293	273	231	171	109	57.5	14.9	0.00	0.00	---	2275		


one-half-peak spread: U:7.8,D:7.8 , L:19.6,R:19.6 Beam Type: Type 4 x 3 (H x V)

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-16

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:DecoBody-600mm-RGBW ALL-1540D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230
MFR.:	SUR.:	Shielding Angle:

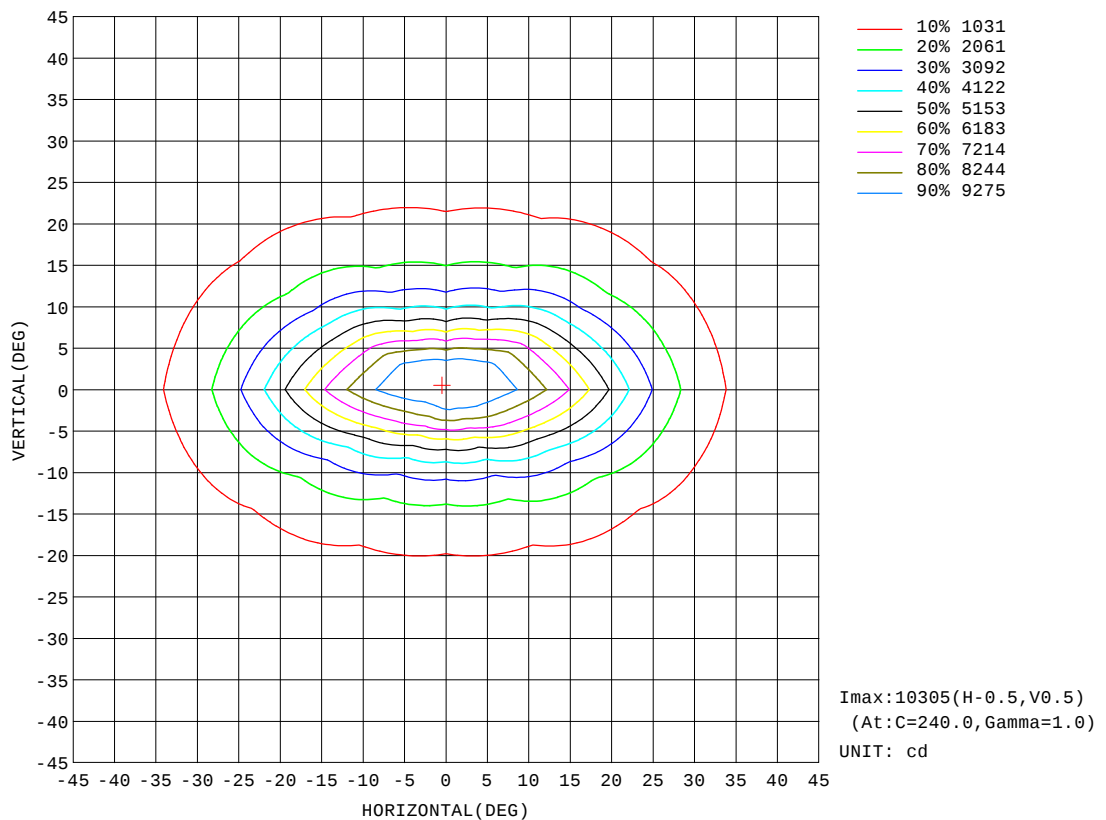


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoBody-600mm-RGBW ALL-1540D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230
MFR.:	SUR.:	Shielding Angle:

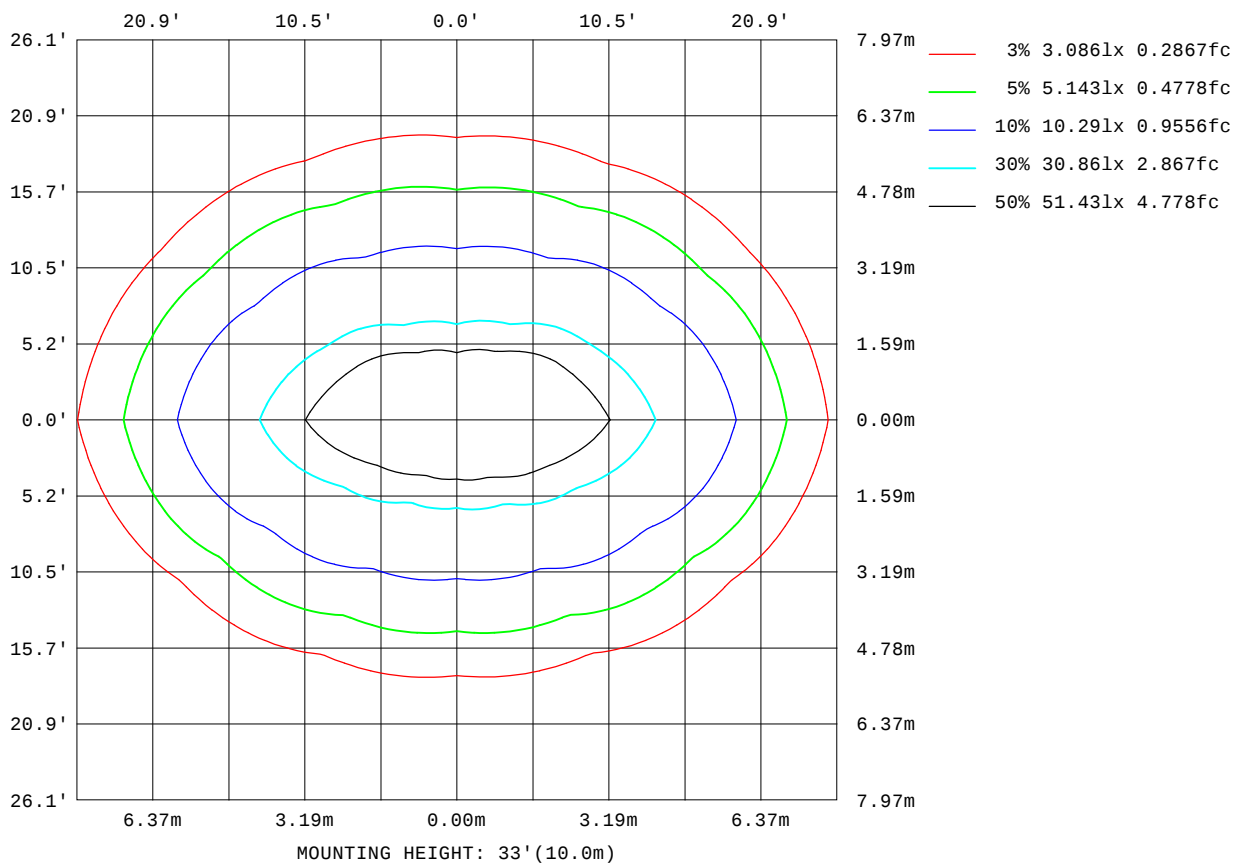

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-16

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

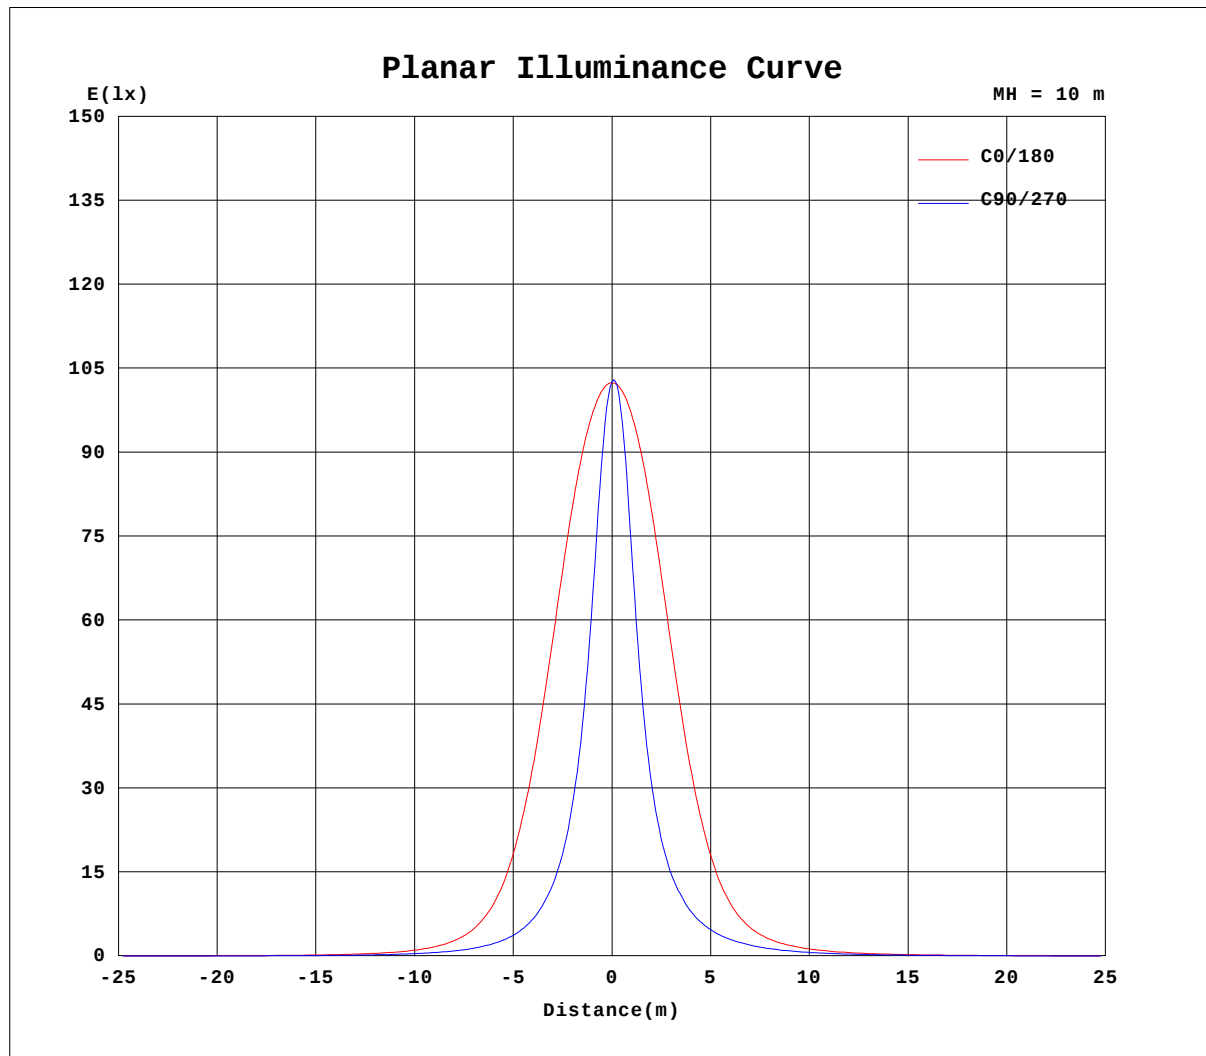


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-16

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoBody-600mm-RGBW ALL-1540D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230
MFR.:	SUR.:	Shielding Angle:

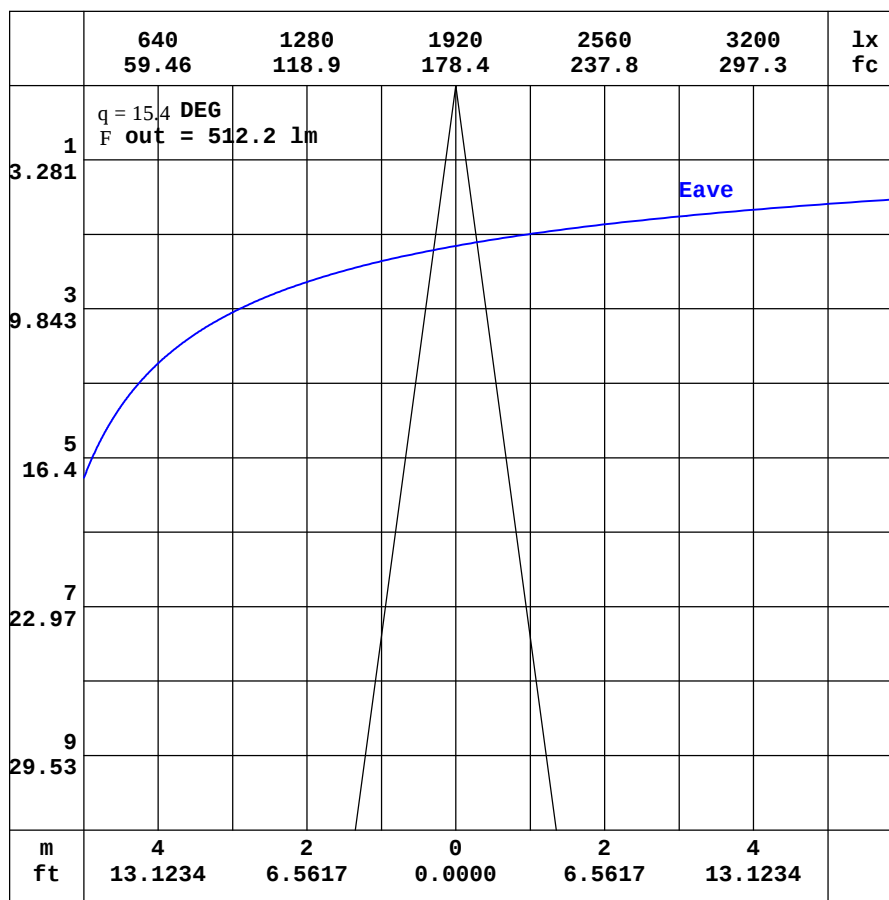

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

$H(b)$ Range:-90 - 90DEG
 $H(b)$ Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-06-16

$V(B)$ Range:-180 - 180DEG
 $V(B)$ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-600mm-RGBW ALL-1540D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.30	1.18	1.10	1.07	1.09	1.17	1.32	1.51	1.73	1.95	2.14	2.28	2.36	2.36	2.30	2.21	2.10	2.03	2.05
-170	1.30	1.16	1.07	1.02	1.01	1.06	1.14	1.26	1.39	1.52	1.63	1.72	1.78	1.82	1.82	1.83	1.96	2.09	2.23
-160	1.30	1.14	1.04	0.97	0.94	0.94	0.96	0.99	1.03	1.06	1.09	1.11	1.14	1.35	1.55	1.74	1.91	2.00	2.05
-150	1.30	1.13	1.01	0.93	0.87	0.83	0.80	0.77	0.72	0.66	0.62	0.72	0.85	1.00	1.15	1.29	1.41	1.49	1.52
-140	1.30	1.12	0.99	0.89	0.82	0.75	0.68	0.61	0.51	0.47	0.48	0.51	0.56	0.63	0.70	0.78	0.84	0.88	0.89
-130	1.30	1.12	0.98	0.87	0.77	0.69	0.61	0.51	0.46	0.44	0.42	0.41	0.39	0.39	0.40	0.42	0.43	0.44	0.43
-120	1.30	1.12	0.97	0.85	0.75	0.65	0.56	0.49	0.49	0.47	0.45	0.43	0.41	0.38	0.36	0.35	0.34	0.33	0.32
-110	1.30	1.12	0.97	0.84	0.72	0.62	0.52	0.50	0.50	0.50	0.50	0.50	0.49	0.49	0.48	0.48	0.48	0.48	0.48
-100	1.30	1.13	0.98	0.84	0.71	0.59	0.47	0.47	0.48	0.49	0.50	0.51	0.51	0.52	0.52	0.53	0.53	0.54	0.54
-90	1.30	1.15	1.00	0.85	0.71	0.56	0.41	0.42	0.42	0.43	0.43	0.44	0.45	0.45	0.46	0.46	0.47	0.47	0.48
-80	1.30	1.17	1.04	0.91	0.80	0.69	0.58	0.62	0.67	0.71	0.75	0.78	0.80	0.83	0.86	0.88	0.89	0.90	0.89
-70	1.30	1.20	1.13	1.13	1.15	1.18	1.19	1.31	1.48	1.64	1.78	1.91	2.01	2.12	2.22	2.29	2.32	2.33	2.31
-60	1.30	1.24	1.31	1.48	1.70	1.93	2.10	2.31	2.71	3.11	3.47	3.79	4.06	4.29	4.54	4.72	4.81	4.82	4.75
-50	1.30	1.29	1.53	1.92	2.40	2.88	3.35	3.80	4.45	5.26	6.05	6.78	7.41	7.86	8.39	8.83	9.08	9.11	8.92
-40	1.30	1.37	1.79	2.42	3.18	4.01	4.94	5.94	6.96	8.30	9.94	11.6	13.2	14.6	15.6	16.9	17.8	18.1	17.7
-30	1.30	1.45	2.04	2.94	4.00	5.27	6.82	8.62	10.7	13.1	15.8	19.8	24.5	28.9	32.2	34.1	37.7	39.4	38.5
-20	1.30	1.52	2.26	3.41	4.78	6.56	8.82	11.7	15.4	20.3	26.8	35.6	45.9	60.9	76.9	88.5	92.7	103	101
-10	1.30	1.57	2.43	3.78	5.45	7.71	10.7	14.7	20.4	29.0	42.1	63.7	99.5	151	205	255	315	326	343
0	1.30	1.61	2.55	4.03	5.92	8.51	12.0	17.0	24.2	36.1	55.7	92.7	167	301	490	705	887	992	1025
10	1.30	1.60	2.51	3.93	5.71	8.11	11.3	15.7	21.8	31.2	45.3	68.7	108	166	234	316	396	402	394
20	1.30	1.58	2.41	3.69	5.27	7.33	9.96	13.4	17.9	24.1	32.3	43.3	57.0	75.1	95.0	110	115	124	120
30	1.30	1.54	2.25	3.34	4.65	6.29	8.31	10.7	13.7	17.4	21.7	26.8	32.6	38.4	43.2	46.4	50.6	52.2	50.7
40	1.30	1.48	2.05	2.90	3.94	5.15	6.58	8.22	10.0	12.1	14.4	16.8	19.0	21.0	22.4	24.3	25.6	26.1	25.5
50	1.30	1.42	1.83	2.44	3.21	4.04	4.97	6.00	7.09	8.23	9.37	10.5	11.5	12.3	13.1	13.6	14.0	14.1	13.9
60	1.30	1.38	1.63	2.01	2.48	3.03	3.59	4.16	4.76	5.37	5.94	6.48	6.94	7.33	7.68	7.93	8.06	8.08	7.98
70	1.30	1.35	1.46	1.65	1.89	2.17	2.46	2.76	3.04	3.31	3.55	3.78	3.97	4.14	4.27	4.36	4.41	4.41	4.37
80	1.30	1.32	1.36	1.41	1.48	1.57	1.67	1.76	1.85	1.93	2.01	2.08	2.15	2.19	2.23	2.25	2.26	2.26	2.25
90	1.30	1.30	1.30	1.30	1.31	1.31	1.31	1.31	1.30	1.30	1.30	1.29	1.29	1.28	1.28	1.27	1.27	1.26	1.26
100	1.30	1.28	1.26	1.24	1.22	1.20	1.19	1.16	1.14	1.12	1.10	1.08	1.06	1.05	1.03	1.03	1.02	1.01	1.01
110	1.30	1.26	1.22	1.18	1.15	1.12	1.09	1.06	1.03	1.01	0.99	0.98	0.96	0.95	0.95	0.95	0.94	0.94	0.94
120	1.30	1.24	1.18	1.14	1.10	1.06	1.04	1.02	1.01	1.00	1.00	1.00	1.00	0.99	1.00	1.00	1.00	1.00	0.99
130	1.30	1.22	1.15	1.10	1.06	1.04	1.03	1.04	1.07	1.10	1.14	1.18	1.23	1.28	1.34	1.39	1.44	1.46	1.46
140	1.30	1.21	1.13	1.08	1.05	1.05	1.07	1.13	1.21	1.31	1.42	1.54	1.68	1.82	1.95	2.08	2.19	2.26	2.31
150	1.30	1.19	1.12	1.07	1.05	1.08	1.14	1.25	1.39	1.56	1.74	1.92	2.11	2.28	2.42	2.52	2.59	2.63	2.65
160	1.30	1.19	1.11	1.06	1.07	1.12	1.22	1.37	1.56	1.77	1.98	2.18	2.37	2.52	2.62	2.69	2.74	2.77	2.79
170	1.30	1.18	1.10	1.07	1.08	1.15	1.28	1.46	1.68	1.90	2.11	2.29	2.43	2.52	2.57	2.57	2.56	2.60	2.69
180	1.30	1.18	1.10	1.07	1.09	1.17	1.32	1.51	1.73	1.95	2.14	2.28	2.36	2.36	2.30	2.21	2.10	2.03	2.05

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-06-16

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-600mm-RGBW ALL-1540D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: ×10cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	1.82	1.72	1.64	1.55	1.42	1.27	1.10	0.93	0.78	0.66	0.57	0.53	0.51	0.51	0.50	0.49	0.45	0.40
-170	2.17	2.02	1.89	1.74	1.54	1.32	1.11	0.92	0.76	0.64	0.56	0.52	0.51	0.50	0.50	0.49	0.45	0.40
-160	2.02	1.94	1.78	1.60	1.41	1.21	1.00	0.83	0.69	0.59	0.53	0.51	0.50	0.50	0.50	0.49	0.45	0.40
-150	1.50	1.44	1.35	1.21	1.07	0.92	0.79	0.68	0.59	0.53	0.51	0.50	0.50	0.51	0.50	0.49	0.45	0.40
-140	0.90	0.87	0.83	0.76	0.69	0.62	0.56	0.53	0.51	0.50	0.49	0.49	0.50	0.51	0.50	0.48	0.44	0.40
-130	0.45	0.45	0.45	0.44	0.43	0.43	0.44	0.45	0.47	0.48	0.49	0.50	0.51	0.51	0.50	0.47	0.44	0.40
-120	0.33	0.35	0.37	0.38	0.40	0.43	0.45	0.47	0.49	0.50	0.51	0.51	0.51	0.50	0.49	0.46	0.43	0.40
-110	0.48	0.48	0.49	0.50	0.50	0.51	0.52	0.52	0.52	0.52	0.52	0.51	0.50	0.49	0.47	0.45	0.42	0.40
-100	0.54	0.54	0.54	0.54	0.54	0.54	0.53	0.52	0.52	0.51	0.50	0.49	0.47	0.46	0.45	0.43	0.42	0.40
-90	0.47	0.47	0.47	0.46	0.46	0.46	0.46	0.45	0.45	0.44	0.44	0.44	0.43	0.42	0.42	0.41	0.41	0.40
-80	0.89	0.88	0.86	0.83	0.80	0.77	0.74	0.71	0.68	0.64	0.60	0.55	0.51	0.47	0.44	0.41	0.40	0.40
-70	2.30	2.27	2.20	2.11	2.00	1.88	1.78	1.66	1.51	1.36	1.19	1.02	0.87	0.73	0.59	0.48	0.40	0.40
-60	4.75	4.68	4.53	4.30	4.01	3.77	3.53	3.22	2.88	2.51	2.13	1.76	1.42	1.10	0.83	0.59	0.43	0.40
-50	9.01	8.87	8.52	8.00	7.41	6.95	6.33	5.64	4.89	4.13	3.41	2.74	2.12	1.57	1.10	0.73	0.47	0.40
-40	17.9	17.5	16.5	15.0	13.9	12.5	10.9	9.29	7.72	6.32	5.07	3.93	2.94	2.10	1.40	0.88	0.51	0.40
-30	39.2	37.3	33.4	31.4	28.0	23.5	18.9	14.9	11.8	9.23	7.08	5.28	3.82	2.64	1.70	1.01	0.55	0.40
-20	103	92.6	88.8	76.7	60.1	44.8	33.8	24.4	17.7	12.9	9.28	6.66	4.65	3.12	1.96	1.12	0.58	0.40
-10	333	331	267	210	152	98.2	60.5	37.8	24.6	16.6	11.3	7.83	5.32	3.50	2.15	1.20	0.60	0.40
0	993	892	716	501	305	167	88.8	49.6	29.9	19.2	12.6	8.55	5.69	3.70	2.25	1.24	0.60	0.40
10	408	412	331	240	166	106	65.0	40.8	26.6	17.9	12.2	8.41	5.70	3.74	2.29	1.28	0.63	0.40
20	124	114	109	93.7	73.2	54.9	40.7	29.4	21.1	15.2	10.9	7.73	5.35	3.57	2.23	1.26	0.63	0.40
30	51.7	49.6	44.9	41.6	36.8	30.9	25.3	20.3	15.9	12.0	9.07	6.68	4.76	3.25	2.07	1.21	0.63	0.40
40	25.7	25.0	23.5	21.5	20.0	18.0	15.8	13.5	11.3	9.21	7.21	5.46	4.00	2.80	1.84	1.13	0.61	0.40
50	14.0	13.7	13.2	12.5	11.6	10.8	9.83	8.77	7.68	6.59	5.44	4.24	3.19	2.31	1.58	1.00	0.59	0.40
60	7.98	7.88	7.66	7.34	6.93	6.53	6.08	5.56	4.99	4.41	3.84	3.13	2.43	1.83	1.32	0.88	0.57	0.40
70	4.37	4.32	4.23	4.11	3.94	3.75	3.55	3.32	3.07	2.81	2.53	2.21	1.80	1.41	1.07	0.78	0.54	0.40
80	2.24	2.22	2.18	2.14	2.08	2.02	1.96	1.89	1.81	1.74	1.66	1.56	1.33	1.11	0.90	0.70	0.55	0.40
90	1.26	1.26	1.26	1.26	1.26	1.26	1.26	1.26	1.27	1.27	1.27	1.28	1.13	0.99	0.84	0.69	0.55	0.40
100	1.01	1.01	1.01	1.02	1.03	1.04	1.05	1.07	1.09	1.11	1.13	1.14	1.04	0.93	0.81	0.69	0.55	0.40
110	0.94	0.94	0.95	0.95	0.95	0.95	0.96	0.98	0.99	1.01	1.03	1.03	0.96	0.87	0.78	0.67	0.55	0.40
120	1.00	1.01	1.01	1.01	1.01	1.01	1.01	1.00	1.00	0.99	1.00	0.95	0.89	0.82	0.75	0.65	0.54	0.40
130	1.47	1.46	1.42	1.38	1.32	1.26	1.21	1.16	1.12	1.07	1.00	0.90	0.83	0.77	0.71	0.63	0.53	0.40
140	2.28	2.21	2.12	2.00	1.87	1.72	1.58	1.45	1.34	1.19	1.00	0.87	0.78	0.72	0.67	0.61	0.52	0.40
150	2.64	2.60	2.55	2.45	2.31	2.15	1.96	1.77	1.47	1.19	0.98	0.83	0.74	0.68	0.63	0.58	0.51	0.40
160	2.78	2.76	2.71	2.64	2.54	2.39	2.05	1.69	1.38	1.11	0.91	0.76	0.68	0.62	0.59	0.55	0.49	0.40
170	2.69	2.65	2.65	2.48	2.22	1.95	1.66	1.39	1.13	0.92	0.76	0.66	0.60	0.57	0.55	0.52	0.47	0.40
180	1.82	1.72	1.64	1.55	1.42	1.27	1.10	0.93	0.78	0.66	0.57	0.53	0.51	0.51	0.50	0.49	0.45	0.40

H_b Range: -90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-06-16

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: