

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		3032.9 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	44.0V x 69.9H
	At 50% of Imax	16.6V x 39.9H
	At 90% of Imax	6.2V x 17.7H
Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	729.3 lumens per klm.
	To 50% of Imax	352.6 lumens per klm.
	To 90% of Imax	72.6 lumens per klm.
	Upward LOR	2.0 %
	Downward LOR	98.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoBody-600mm-RGBW BLUE-1540D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230-B
MFR.:	SUR.:	Shielding Angle:

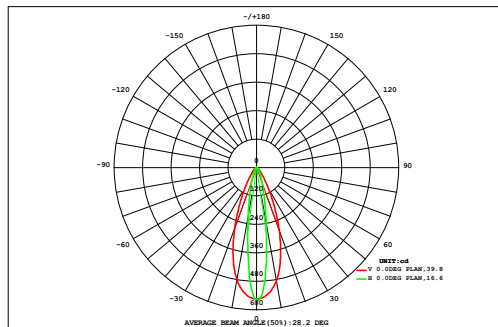

DATA OF LAMP		Eff:10.09lm/W	
MODEL		Imax (cd)	560.2
NOMINAL POWER(W)	18.3	AVAILABILITY(%)	72.9
RATED VOLTAGE (V)	220	Avai. FLUX(lm)	134.6
NOMINAL FLUX(lm)	184.7	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	184.7
TEST VOLTAGE (V)	221.4	q @50% (H,V)	40,17DEG

45 40 35 30 25 20 15 10 5 0 -5 -10 -15 -20 -25 -30 -35 -40 -45	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	0.04	0.05	0.06	0.07	0.08	0.09	0.10	0.10	0.10	0.10	0.10	0.10	0.09	0.08	0.07	0.06	0.05	0.04	1.41	0.00		
	0.05	0.07	0.08	0.10	0.11	0.12	0.14	0.14	0.14	0.14	0.14	0.13	0.12	0.11	0.09	0.08	0.06	0.05	1.88	0.00		
	0.06	0.08	0.10	0.13	0.15	0.17	0.19	0.20	0.20	0.20	0.20	0.19	0.17	0.15	0.12	0.10	0.08	0.06	2.55	0.00		
	0.07	0.10	0.13	0.17	0.21	0.24	0.27	0.29	0.30	0.30	0.29	0.27	0.24	0.21	0.17	0.13	0.10	0.07	3.57	0.00		
	0.09	0.13	0.17	0.24	0.31	0.37	0.41	0.45	0.46	0.46	0.45	0.41	0.37	0.30	0.23	0.17	0.12	0.08	5.22	1.84		
	0.11	0.16	0.23	0.32	0.45	0.58	0.68	0.73	0.76	0.77	0.74	0.69	0.60	0.45	0.32	0.22	0.15	0.10	8.05	6.40		
	0.12	0.19	0.30	0.46	0.67	0.93	1.20	1.30	1.37	1.39	1.34	1.26	0.98	0.69	0.47	0.29	0.18	0.11	13.3	12.0		
	0.14	0.22	0.38	0.63	1.01	1.49	2.04	2.45	2.60	2.64	2.56	2.16	1.57	1.06	0.65	0.38	0.21	0.12	22.3	21.3		
	0.15	0.25	0.45	0.81	1.37	2.12	2.90	3.59	3.96	3.98	3.67	2.99	2.19	1.43	0.84	0.45	0.24	0.13	31.5	30.7		
	0.15	0.25	0.44	0.80	1.34	2.05	2.74	3.29	3.65	3.72	3.38	2.81	2.11	1.40	0.82	0.44	0.24	0.13	29.8	28.9		
	0.13	0.21	0.36	0.60	0.95	1.33	1.70	2.03	2.21	2.24	2.11	1.77	1.37	0.97	0.61	0.36	0.20	0.12	19.3	18.3		
	0.11	0.17	0.27	0.42	0.59	0.79	0.99	1.08	1.17	1.18	1.10	1.01	0.80	0.59	0.42	0.27	0.16	0.10	11.2	9.94		
	0.09	0.14	0.20	0.28	0.38	0.49	0.56	0.61	0.65	0.65	0.61	0.56	0.49	0.37	0.27	0.19	0.13	0.08	6.76	4.84		
	0.07	0.10	0.14	0.19	0.25	0.30	0.33	0.37	0.38	0.38	0.37	0.33	0.30	0.25	0.19	0.14	0.10	0.07	4.27	0.35		
	0.06	0.08	0.11	0.14	0.17	0.19	0.21	0.23	0.24	0.24	0.23	0.21	0.19	0.16	0.13	0.10	0.08	0.05	2.81	0.00		
	0.05	0.06	0.08	0.10	0.12	0.13	0.14	0.15	0.16	0.16	0.15	0.14	0.12	0.11	0.09	0.08	0.06	0.04	1.93	0.00		
	0.04	0.05	0.06	0.07	0.08	0.09	0.10	0.11	0.11	0.11	0.10	0.10	0.09	0.08	0.07	0.06	0.05	0.03	1.38	0.00		
	0.03	0.04	0.05	0.05	0.06	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.06	0.06	0.05	0.04	0.03	0.03	1.00	0.00		
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45		
F t	1.56	2.35	3.62	5.59	8.29	11.6	14.8	17.2	18.5	18.7	17.6	15.2	11.8	8.47	5.62	3.55	2.23	1.42	168	---		
F a	0.00	0.00	1.28	3.63	6.45	9.86	13.0	15.5	16.8	17.0	15.9	13.5	10.2	6.66	3.70	1.25	0.00	0.00	---	135		


one-half-peak spread: U:8.4,D:8.3 , L:20.3,R:20.3 Beam Type: Type 4 x 3 (H x V)

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:DecoHody-600mm-RGBW BLUE-1540D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230-B
MFR.:	SUR.:	Shielding Angle:

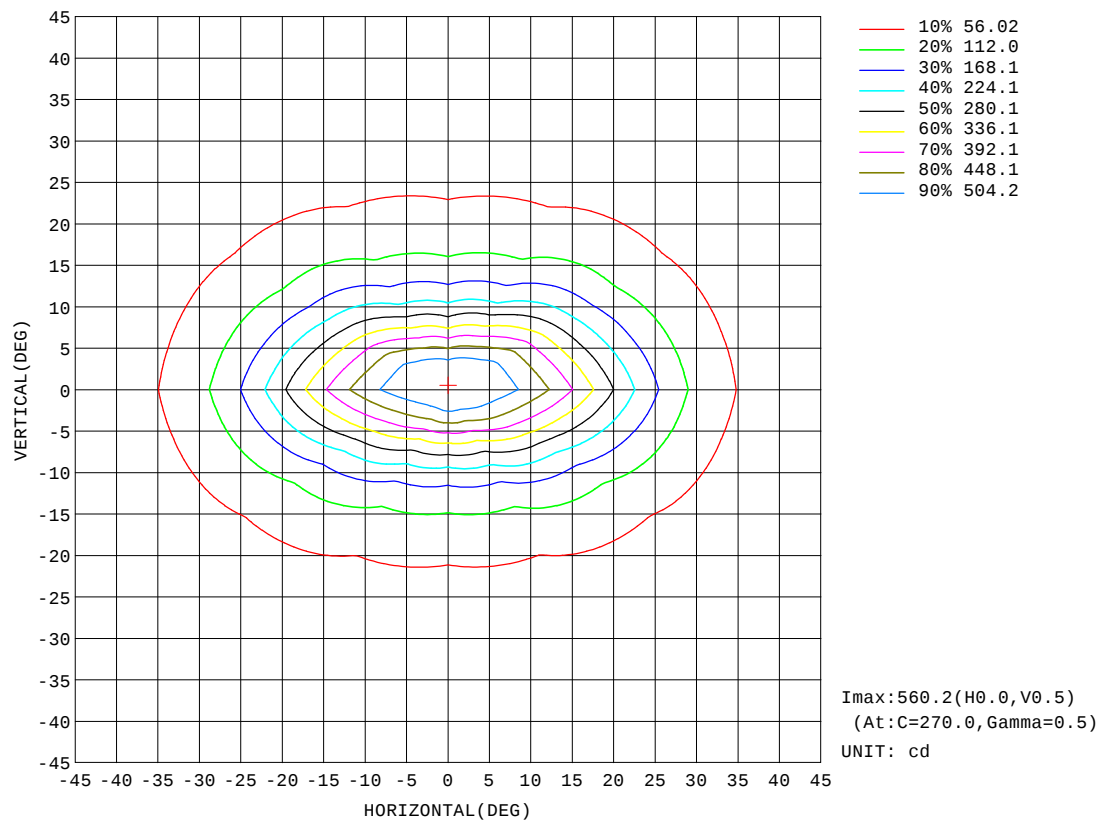


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoHody-600mm-RGBW BLUE-1540D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230-B
MFR.:	SUR.:	Shielding Angle:

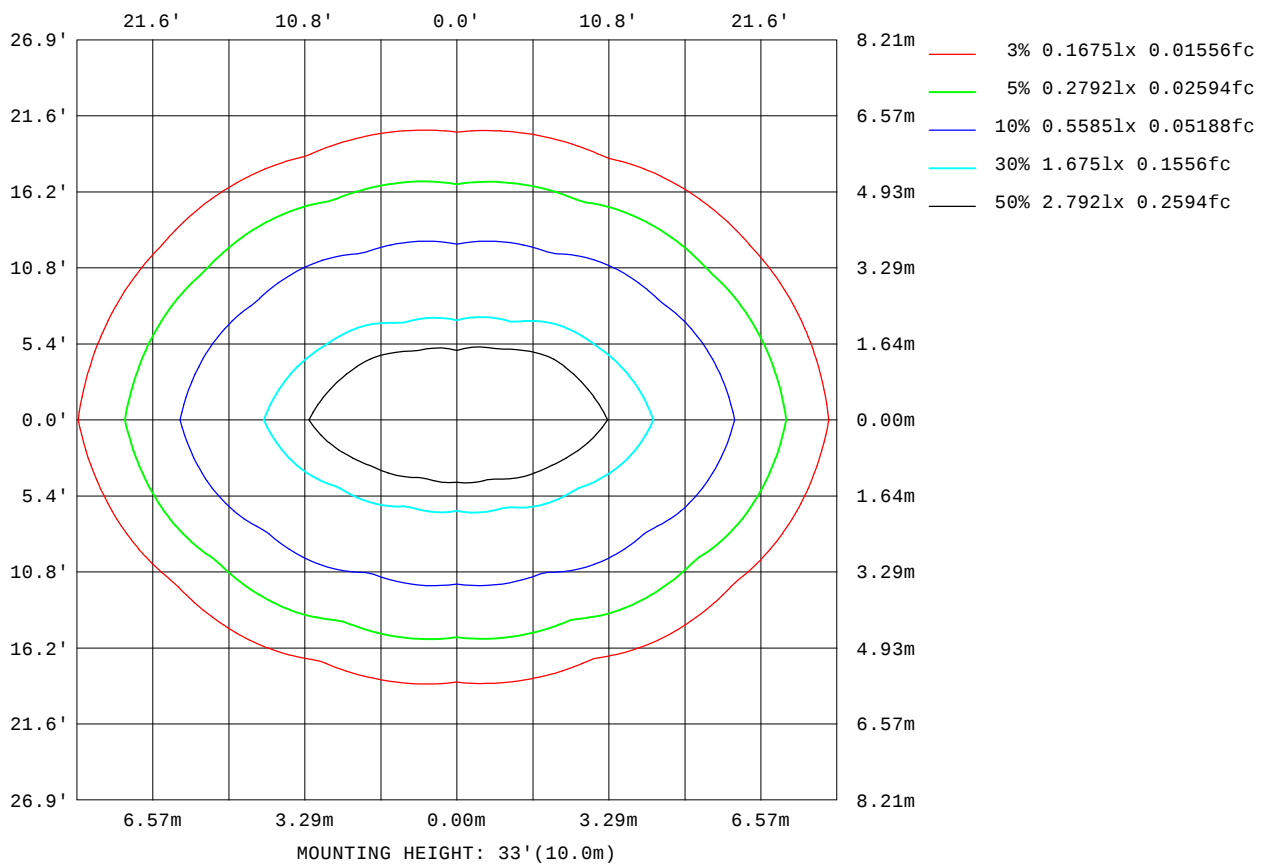

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

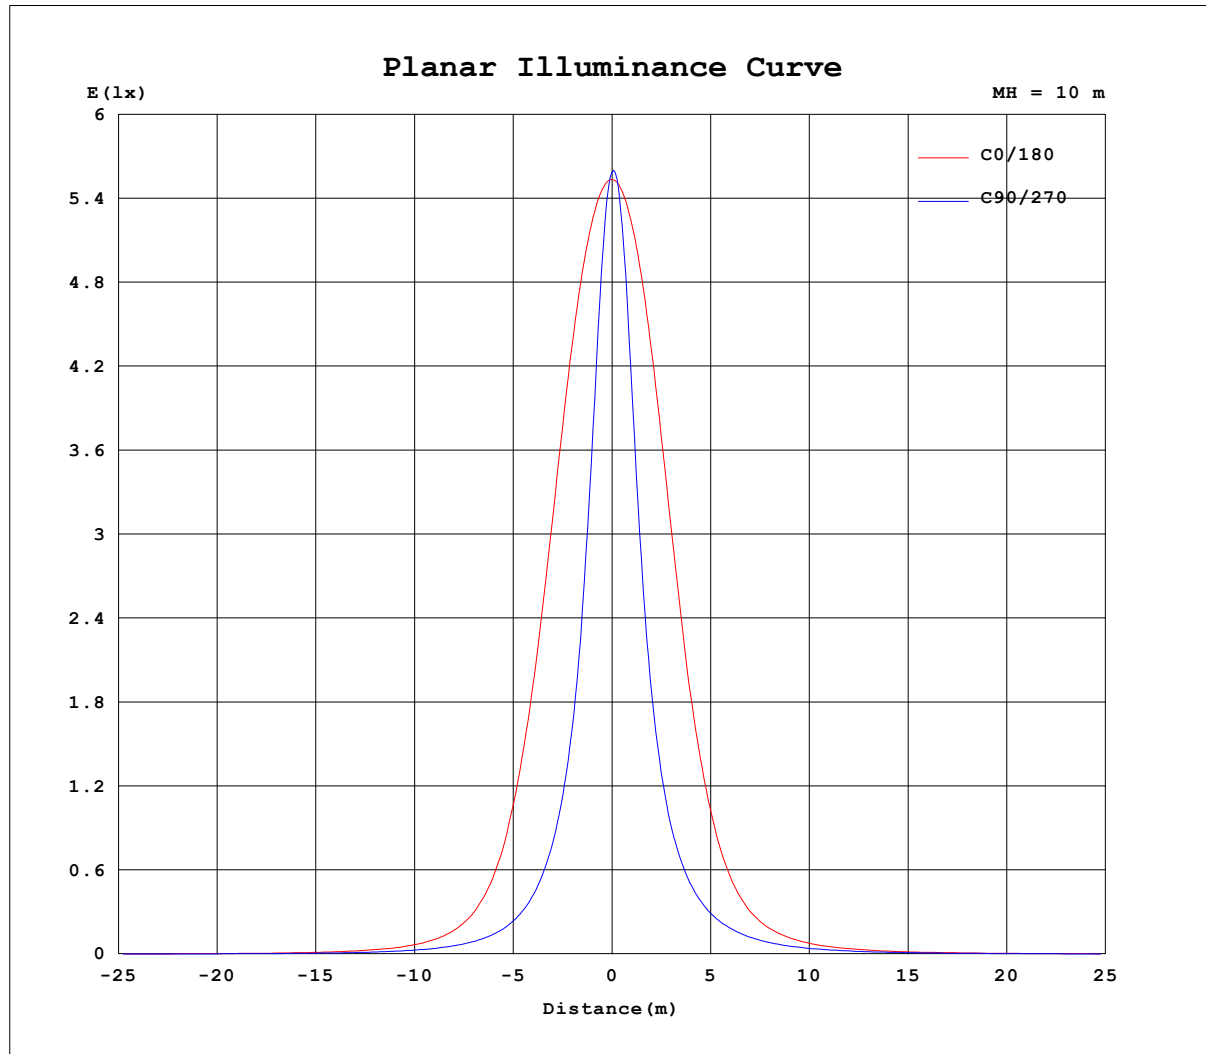


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoHody-600mm-RGBW BLUE-1540D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230-B
MFR.:	SUR.:	Shielding Angle:

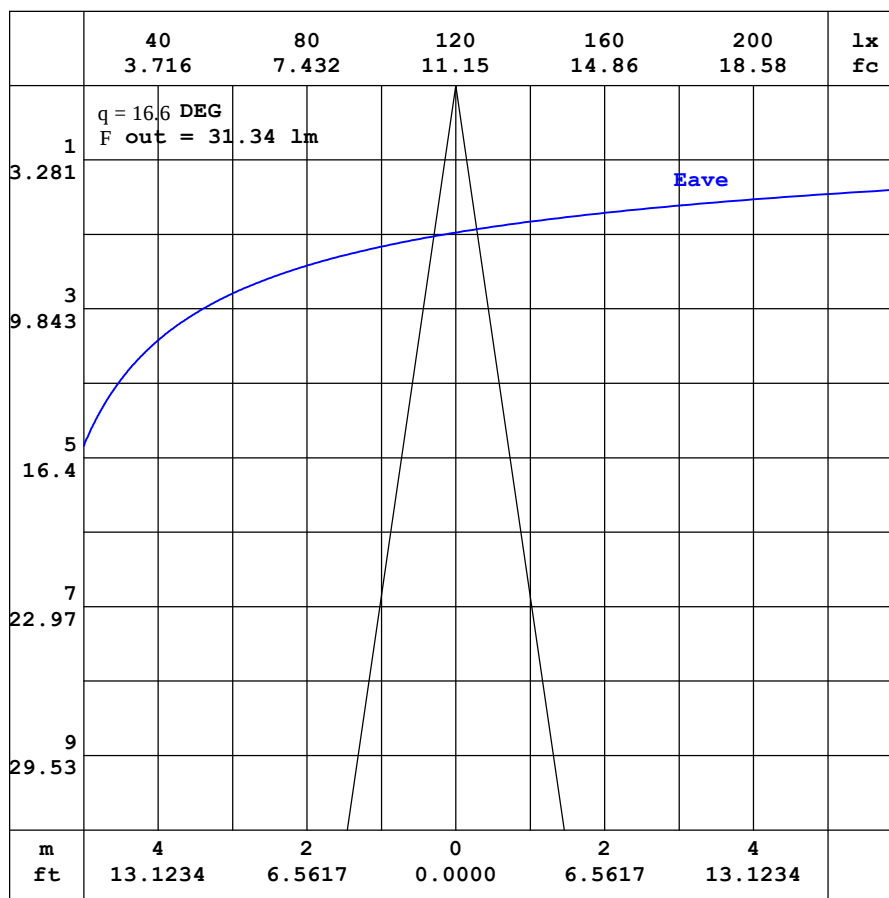

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoHody-600mm-RGBW BLUE-1540D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230-B
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.72	0.65	0.60	0.60	0.60	0.64	0.72	0.82	0.95	1.07	1.17	1.24	1.25	1.24	1.22	1.16	1.11	1.07	1.12
-170	0.72	0.64	0.58	0.56	0.55	0.57	0.61	0.67	0.74	0.81	0.88	0.93	0.95	0.97	0.98	1.00	1.05	1.11	1.18
-160	0.72	0.63	0.55	0.53	0.50	0.49	0.50	0.52	0.54	0.56	0.57	0.59	0.61	0.71	0.82	0.91	1.00	1.07	1.12
-150	0.72	0.62	0.54	0.49	0.46	0.43	0.40	0.38	0.35	0.32	0.30	0.35	0.42	0.50	0.57	0.65	0.72	0.78	0.82
-140	0.72	0.61	0.53	0.46	0.42	0.37	0.32	0.27	0.22	0.20	0.21	0.21	0.24	0.27	0.30	0.36	0.40	0.44	0.46
-130	0.72	0.61	0.51	0.44	0.38	0.32	0.27	0.21	0.18	0.17	0.17	0.16	0.15	0.14	0.14	0.15	0.17	0.18	0.19
-120	0.72	0.61	0.51	0.43	0.36	0.29	0.23	0.18	0.17	0.17	0.16	0.15	0.15	0.14	0.13	0.13	0.12	0.12	0.11
-110	0.72	0.61	0.51	0.42	0.34	0.27	0.20	0.18	0.17	0.16	0.16	0.15	0.15	0.14	0.14	0.14	0.14	0.13	0.13
-100	0.72	0.62	0.52	0.43	0.33	0.25	0.17	0.17	0.17	0.16	0.16	0.15	0.14	0.15	0.15	0.15	0.15	0.16	0.16
-90	0.72	0.62	0.53	0.43	0.33	0.24	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.15	0.15	0.15	0.15	0.16	0.16
-80	0.72	0.64	0.55	0.45	0.36	0.29	0.22	0.25	0.29	0.33	0.37	0.39	0.41	0.42	0.45	0.46	0.46	0.46	0.45
-70	0.72	0.65	0.59	0.59	0.60	0.62	0.64	0.72	0.85	0.97	1.07	1.16	1.24	1.32	1.38	1.42	1.44	1.45	1.43
-60	0.72	0.67	0.71	0.82	0.96	1.11	1.24	1.40	1.68	1.95	2.20	2.42	2.60	2.76	2.92	3.05	3.11	3.11	3.06
-50	0.72	0.70	0.85	1.10	1.41	1.73	2.05	2.38	2.83	3.38	3.92	4.40	4.81	5.10	5.44	5.73	5.90	5.93	5.82
-40	0.72	0.75	1.02	1.42	1.90	2.44	3.05	3.75	4.48	5.41	6.49	7.57	8.61	9.50	10.0	10.9	11.5	11.7	11.4
-30	0.72	0.80	1.18	1.74	2.41	3.23	4.23	5.43	6.83	8.47	10.3	12.9	15.8	18.6	20.6	21.8	24.0	25.1	24.5
-20	0.72	0.85	1.31	2.03	2.90	4.01	5.45	7.29	9.71	12.9	17.1	22.6	29.4	38.8	48.6	55.7	58.3	64.5	63.4
-10	0.72	0.89	1.43	2.26	3.30	4.70	6.57	9.08	12.7	17.9	26.0	39.2	60.4	90.3	122	155	189	198	206
0	0.72	0.91	1.50	2.41	3.58	5.17	7.35	10.4	14.9	22.0	33.8	55.7	97.5	169	270	385	479	536	553
10	0.72	0.91	1.48	2.35	3.46	4.94	6.92	9.60	13.5	19.1	27.7	41.8	64.5	97.7	138	187	231	237	236
20	0.72	0.89	1.41	2.21	3.19	4.46	6.10	8.22	11.1	14.8	19.9	26.6	35.1	46.1	58.0	67.4	71.1	76.9	74.0
30	0.72	0.87	1.32	2.00	2.81	3.83	5.08	6.61	8.49	10.8	13.4	16.6	20.2	23.7	26.6	28.6	31.2	32.3	31.4
40	0.72	0.84	1.20	1.73	2.37	3.13	4.02	5.05	6.20	7.50	8.96	10.4	11.8	13.1	14.0	15.1	15.9	16.1	15.8
50	0.72	0.80	1.06	1.44	1.92	2.44	3.03	3.68	4.36	5.08	5.81	6.52	7.16	7.69	8.16	8.55	8.77	8.80	8.64
60	0.72	0.78	0.94	1.18	1.48	1.82	2.17	2.53	2.91	3.29	3.66	4.00	4.29	4.55	4.78	4.94	5.03	5.05	4.99
70	0.72	0.76	0.83	0.96	1.11	1.29	1.47	1.66	1.83	1.99	2.15	2.29	2.41	2.52	2.62	2.68	2.72	2.73	2.71
80	0.72	0.75	0.77	0.81	0.86	0.93	0.99	1.04	1.09	1.13	1.18	1.21	1.25	1.29	1.32	1.34	1.35	1.36	1.36
90	0.72	0.73	0.75	0.76	0.77	0.78	0.80	0.79	0.78	0.77	0.76	0.75	0.74	0.75	0.76	0.76	0.77	0.77	0.78
100	0.72	0.72	0.72	0.72	0.72	0.73	0.73	0.70	0.68	0.65	0.63	0.60	0.57	0.57	0.57	0.56	0.56	0.56	0.56
110	0.72	0.71	0.69	0.69	0.68	0.66	0.65	0.63	0.59	0.56	0.54	0.53	0.51	0.51	0.51	0.51	0.50	0.50	0.50
120	0.72	0.70	0.67	0.65	0.63	0.61	0.59	0.58	0.56	0.55	0.54	0.54	0.53	0.53	0.54	0.53	0.52	0.51	0.49
130	0.72	0.68	0.65	0.62	0.61	0.59	0.58	0.57	0.56	0.56	0.59	0.62	0.66	0.70	0.72	0.75	0.76	0.76	0.76
140	0.72	0.67	0.64	0.61	0.59	0.59	0.58	0.59	0.61	0.67	0.74	0.82	0.89	0.98	1.06	1.13	1.18	1.21	1.22
150	0.72	0.66	0.63	0.60	0.59	0.60	0.61	0.65	0.72	0.80	0.90	1.01	1.12	1.23	1.31	1.38	1.41	1.42	1.42
160	0.72	0.66	0.61	0.60	0.59	0.61	0.65	0.72	0.82	0.93	1.05	1.16	1.25	1.34	1.41	1.44	1.47	1.48	1.50
170	0.72	0.65	0.60	0.60	0.60	0.63	0.69	0.78	0.90	1.02	1.14	1.23	1.29	1.33	1.36	1.39	1.38	1.38	1.48
180	0.72	0.65	0.60	0.60	0.60	0.64	0.72	0.82	0.95	1.07	1.17	1.24	1.25	1.24	1.22	1.16	1.11	1.07	1.15

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-06-16

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoHody-600mm-RGBW BLUE-1540D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230-B
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.96	0.89	0.84	0.78	0.71	0.63	0.52	0.42	0.34	0.27	0.21	0.18	0.16	0.14	0.15	0.13	0.13	0.13	
-170	1.14	1.07	1.02	0.92	0.80	0.68	0.55	0.44	0.34	0.27	0.21	0.19	0.17	0.15	0.15	0.13	0.13	0.13	
-160	1.08	1.01	0.93	0.84	0.74	0.63	0.51	0.40	0.31	0.24	0.21	0.17	0.17	0.15	0.15	0.13	0.13	0.13	
-150	0.79	0.74	0.67	0.60	0.53	0.45	0.38	0.32	0.27	0.23	0.20	0.18	0.17	0.16	0.15	0.14	0.13	0.13	
-140	0.45	0.42	0.38	0.33	0.30	0.27	0.25	0.22	0.21	0.21	0.19	0.17	0.17	0.16	0.15	0.14	0.13	0.13	
-130	0.19	0.18	0.17	0.15	0.15	0.17	0.18	0.18	0.18	0.18	0.18	0.18	0.17	0.16	0.15	0.14	0.13	0.13	
-120	0.12	0.13	0.13	0.14	0.15	0.16	0.17	0.17	0.17	0.18	0.18	0.18	0.17	0.16	0.15	0.14	0.13	0.13	
-110	0.13	0.14	0.15	0.15	0.16	0.16	0.16	0.17	0.17	0.18	0.18	0.18	0.17	0.16	0.15	0.14	0.13	0.13	
-100	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.17	0.17	0.17	0.17	0.16	0.15	0.14	0.14	0.13	0.13	
-90	0.16	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.14	0.14	0.14	0.14	0.13	0.13	0.13	
-80	0.45	0.45	0.44	0.43	0.41	0.38	0.36	0.34	0.30	0.27	0.23	0.19	0.17	0.16	0.15	0.14	0.13	0.13	
-70	1.43	1.41	1.36	1.31	1.23	1.15	1.08	0.98	0.88	0.76	0.64	0.52	0.42	0.33	0.24	0.18	0.14	0.13	
-60	3.07	3.02	2.91	2.76	2.56	2.40	2.24	2.03	1.79	1.54	1.27	1.02	0.79	0.58	0.40	0.25	0.15	0.13	
-50	5.85	5.74	5.50	5.15	4.77	4.48	4.08	3.62	3.13	2.62	2.13	1.68	1.26	0.89	0.59	0.34	0.18	0.13	
-40	11.5	11.2	10.5	9.57	8.99	8.09	7.08	6.02	5.00	4.06	3.22	2.47	1.80	1.24	0.78	0.44	0.20	0.13	
-30	24.9	23.6	21.2	19.9	17.8	15.0	12.2	9.66	7.67	5.96	4.52	3.34	2.37	1.59	0.98	0.53	0.23	0.13	
-20	64.4	57.8	55.2	47.8	37.8	28.4	21.4	15.7	11.4	8.24	5.95	4.22	2.91	1.91	1.15	0.61	0.25	0.13	
-10	201	195	159	125	91.7	60.1	37.7	23.9	15.6	10.5	7.26	4.96	3.34	2.15	1.28	0.66	0.26	0.13	
0	537	484	393	280	176	99.4	54.5	31.1	18.9	12.1	8.10	5.40	3.57	2.28	1.34	0.69	0.27	0.13	
10	244	242	199	146	101	64.9	40.5	25.7	16.8	11.3	7.79	5.32	3.57	2.30	1.37	0.71	0.29	0.13	
20	77.1	71.2	68.2	58.6	46.1	34.7	25.7	18.6	13.3	9.63	6.90	4.87	3.34	2.19	1.33	0.71	0.29	0.13	
30	32.1	30.9	28.1	26.1	23.1	19.6	16.0	12.8	10.0	7.64	5.73	4.19	2.96	1.98	1.23	0.67	0.29	0.13	
40	16.0	15.6	14.8	13.6	12.6	11.4	9.97	8.54	7.13	5.82	4.53	3.40	2.47	1.70	1.08	0.62	0.28	0.13	
50	8.73	8.63	8.34	7.90	7.37	6.84	6.21	5.53	4.82	4.13	3.39	2.62	1.95	1.39	0.92	0.55	0.27	0.13	
60	5.00	4.94	4.81	4.60	4.34	4.09	3.79	3.46	3.10	2.73	2.36	1.91	1.47	1.09	0.76	0.47	0.25	0.13	
70	2.71	2.67	2.61	2.53	2.42	2.29	2.17	2.02	1.87	1.71	1.54	1.35	1.09	0.83	0.60	0.41	0.24	0.13	
80	1.35	1.33	1.30	1.27	1.23	1.19	1.16	1.13	1.09	1.04	1.00	0.96	0.80	0.65	0.49	0.36	0.24	0.13	
90	0.77	0.76	0.76	0.75	0.74	0.73	0.74	0.75	0.76	0.77	0.78	0.79	0.68	0.57	0.46	0.35	0.24	0.13	
100	0.56	0.56	0.56	0.56	0.56	0.56	0.58	0.61	0.63	0.66	0.68	0.70	0.61	0.53	0.43	0.33	0.23	0.13	
110	0.51	0.51	0.51	0.51	0.51	0.51	0.52	0.54	0.55	0.57	0.60	0.61	0.54	0.47	0.40	0.32	0.23	0.13	
120	0.51	0.53	0.54	0.54	0.55	0.54	0.54	0.54	0.55	0.55	0.57	0.54	0.48	0.42	0.36	0.30	0.22	0.13	
130	0.77	0.77	0.76	0.75	0.72	0.68	0.64	0.61	0.57	0.56	0.54	0.48	0.43	0.38	0.32	0.27	0.20	0.13	
140	1.21	1.19	1.16	1.10	1.02	0.92	0.84	0.76	0.70	0.60	0.49	0.43	0.38	0.34	0.29	0.24	0.19	0.13	
150	1.43	1.43	1.40	1.34	1.26	1.15	1.04	0.93	0.76	0.60	0.47	0.38	0.33	0.29	0.26	0.21	0.18	0.13	
160	1.50	1.50	1.48	1.43	1.37	1.28	1.08	0.88	0.69	0.53	0.43	0.32	0.28	0.24	0.22	0.19	0.16	0.13	
170	1.44	1.45	1.44	1.33	1.18	1.01	0.85	0.69	0.54	0.43	0.33	0.27	0.22	0.19	0.19	0.16	0.14	0.13	
180	0.96	0.89	0.84	0.78	0.71	0.63	0.52	0.42	0.34	0.27	0.21	0.18	0.16	0.14	0.15	0.13	0.13	0.13	

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-06-16

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: