

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		3230.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	41.9V x 68.3H
	At 50% of Imax	15.7V x 39.3H
	At 90% of Imax	5.9V x 17.6H
Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	724.4 lumens per klm.
	To 50% of Imax	350.4 lumens per klm.
	To 90% of Imax	72.8 lumens per klm.
Upward LOR		2.3 %
Downward LOR		97.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-16

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoBody-600mm-RGBW GREEN-1540D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230-G
MFR.:	SUR.:	Shielding Angle:

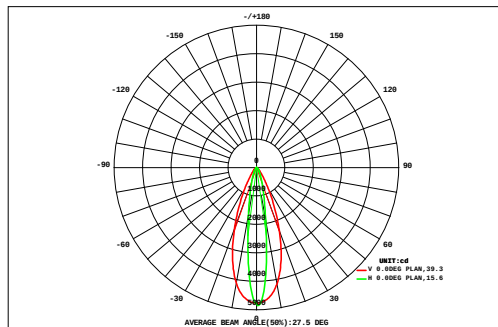

DATA OF LAMP		Eff:82.87lm/W	
MODEL		Imax(cd)	4846
NOMINAL POWER(W)	18.1	AVAILABILITY(%)	72.3
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1084
NOMINAL FLUX(lm)	1500	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1500
TEST VOLTAGE(V)	221.4	q @50%(H,V)	39,16DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.32	0.40	0.49	0.57	0.64	0.71	0.77	0.80	0.80	0.80	0.79	0.75	0.69	0.62	0.55	0.47	0.38	0.31	10.9	0.00
45	0.32	0.40	0.49	0.57	0.64	0.71	0.77	0.80	0.80	0.80	0.79	0.75	0.69	0.62	0.55	0.47	0.38	0.31	10.9	0.00
40	0.39	0.50	0.62	0.75	0.86	0.95	1.05	1.11	1.12	1.11	1.09	1.02	0.92	0.83	0.72	0.60	0.48	0.37	14.5	0.00
35	0.48	0.63	0.80	1.00	1.17	1.31	1.46	1.57	1.59	1.58	1.55	1.43	1.27	1.13	0.96	0.77	0.60	0.45	19.7	0.00
30	0.57	0.78	1.04	1.34	1.65	1.89	2.11	2.30	2.33	2.32	2.28	2.07	1.85	1.61	1.30	1.00	0.74	0.53	27.7	0.00
25	0.69	0.97	1.35	1.83	2.39	2.90	3.20	3.53	3.59	3.59	3.51	3.18	2.89	2.36	1.79	1.31	0.92	0.62	40.6	8.60
20	0.81	1.21	1.78	2.53	3.51	4.61	5.36	5.74	5.99	6.00	5.77	5.44	4.69	3.53	2.50	1.72	1.13	0.73	63.0	47.7
15	0.94	1.47	2.33	3.64	5.33	7.44	9.63	10.5	10.9	11.0	10.7	10.1	7.75	5.45	3.65	2.27	1.38	0.84	105	94.6
10	1.06	1.75	2.98	5.12	8.28	12.2	16.8	20.4	21.5	21.9	21.4	17.8	12.8	8.51	5.18	2.92	1.63	0.94	183	174
5	1.15	1.98	3.58	6.62	11.5	17.8	24.6	30.8	34.1	34.4	31.5	25.4	18.3	11.8	6.73	3.53	1.84	1.01	267	259
0	1.13	1.95	3.54	6.53	11.2	17.2	23.2	27.9	31.0	31.6	28.7	23.7	17.6	11.5	6.62	3.48	1.81	0.99	250	242
-5	1.01	1.66	2.84	4.87	7.74	10.9	14.0	16.6	18.0	18.3	17.3	14.5	11.2	7.86	4.89	2.77	1.54	0.88	157	148
-10	0.86	1.34	2.12	3.29	4.66	6.25	7.95	8.63	9.34	9.39	8.76	8.13	6.33	4.65	3.24	2.03	1.23	0.75	89.0	77.0
-15	0.71	1.04	1.51	2.14	2.95	3.84	4.42	4.78	5.12	5.12	4.77	4.41	3.82	2.89	2.07	1.43	0.96	0.62	52.6	33.3
-20	0.57	0.79	1.08	1.48	1.95	2.34	2.55	2.86	2.98	2.98	2.84	2.51	2.30	1.89	1.42	1.02	0.73	0.50	32.8	0.00
-25	0.45	0.60	0.80	1.04	1.29	1.46	1.61	1.78	1.82	1.81	1.76	1.58	1.42	1.24	0.99	0.76	0.56	0.40	21.4	0.00
-30	0.35	0.47	0.60	0.74	0.87	0.96	1.08	1.17	1.18	1.17	1.15	1.06	0.93	0.83	0.70	0.56	0.43	0.32	14.6	0.00
-35	0.28	0.36	0.45	0.54	0.61	0.68	0.75	0.80	0.80	0.80	0.78	0.73	0.65	0.58	0.51	0.42	0.34	0.26	10.3	0.00
-40	0.22	0.28	0.34	0.40	0.44	0.49	0.53	0.56	0.56	0.56	0.55	0.52	0.47	0.42	0.37	0.32	0.26	0.20	7.48	0.00
-45	0.22	0.28	0.34	0.40	0.44	0.49	0.53	0.56	0.56	0.56	0.55	0.52	0.47	0.42	0.37	0.32	0.26	0.20	7.48	0.00
-45 -40 -35 -30 -25 -20 -15 -10 HORIZONTAL (DEG) 10 15 20 25 30 35 40 45																				
F t	12.0	18.2	28.3	44.4	67.0	94.0	121	142	153	154	145	124	95.9	67.6	44.2	27.4	16.9	10.7	1366	---
F a	0.00	0.00	7.67	27.7	51.2	79.4	106	127	138	139	130	110	81.6	52.1	27.8	7.35	0.00	0.00	---	1084


one-half-peak spread: U:8.0,D:7.8 , L:19.6,R:19.6 Beam Type: Type 4 x 3 (H x V)

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:DecoBody-600mm-RGBW GREEN-1540D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230-G
MFR.:	SUR.:	Shielding Angle:

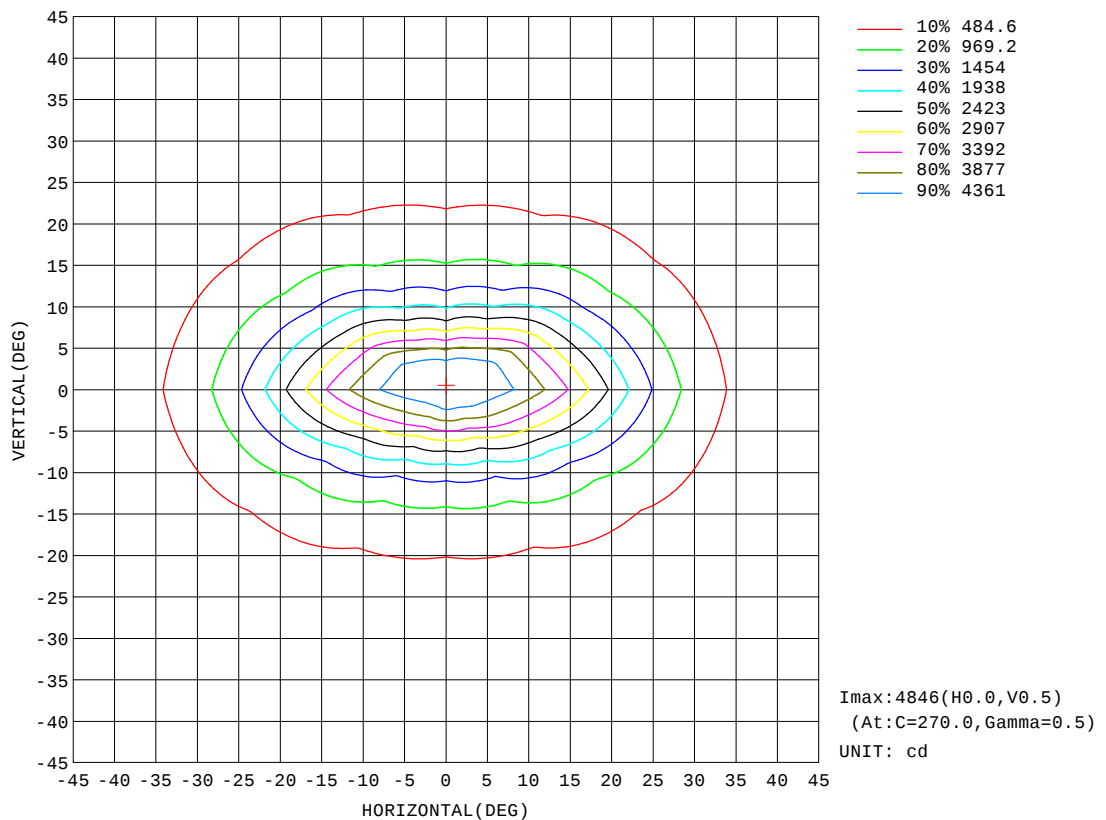


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoBody-600mm-RGBW GREEN-1540D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230-G
MFR.:	SUR.:	Shielding Angle:

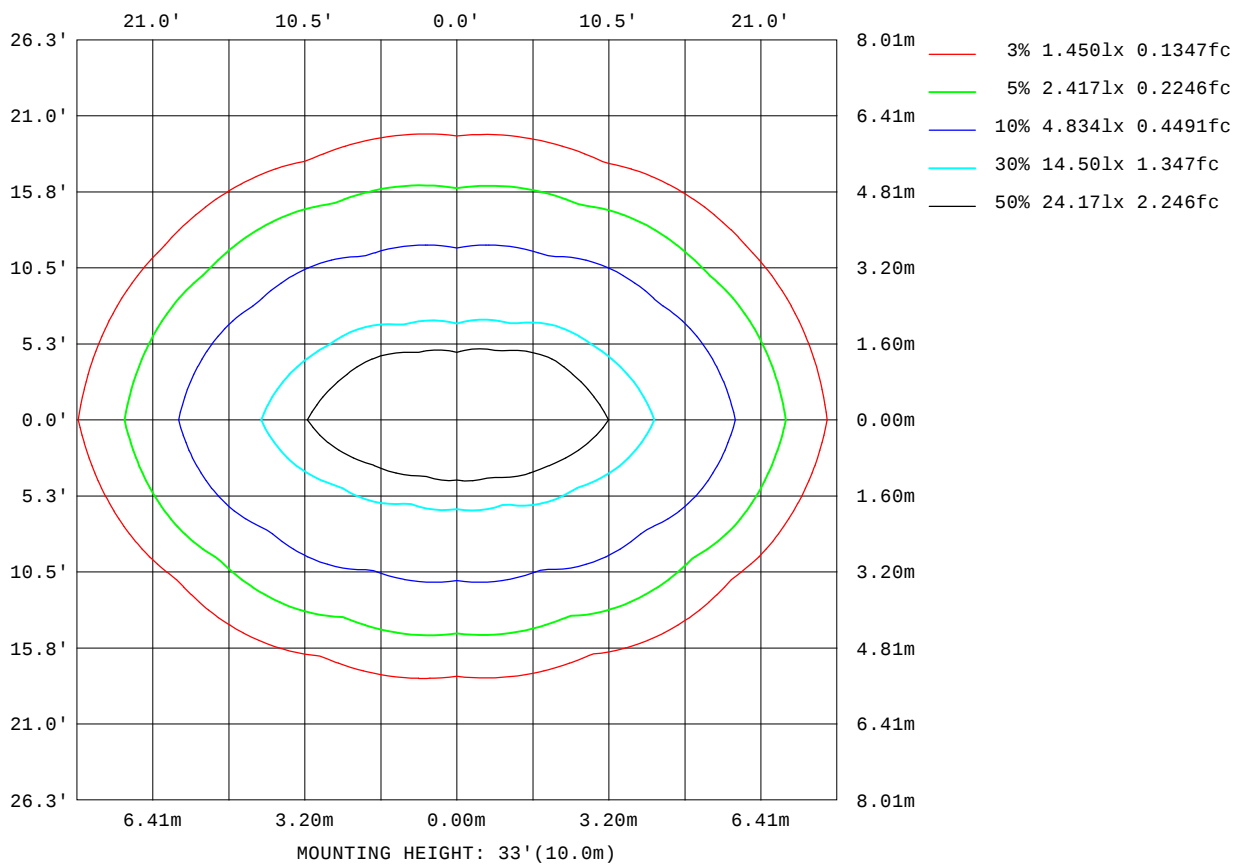

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-16

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

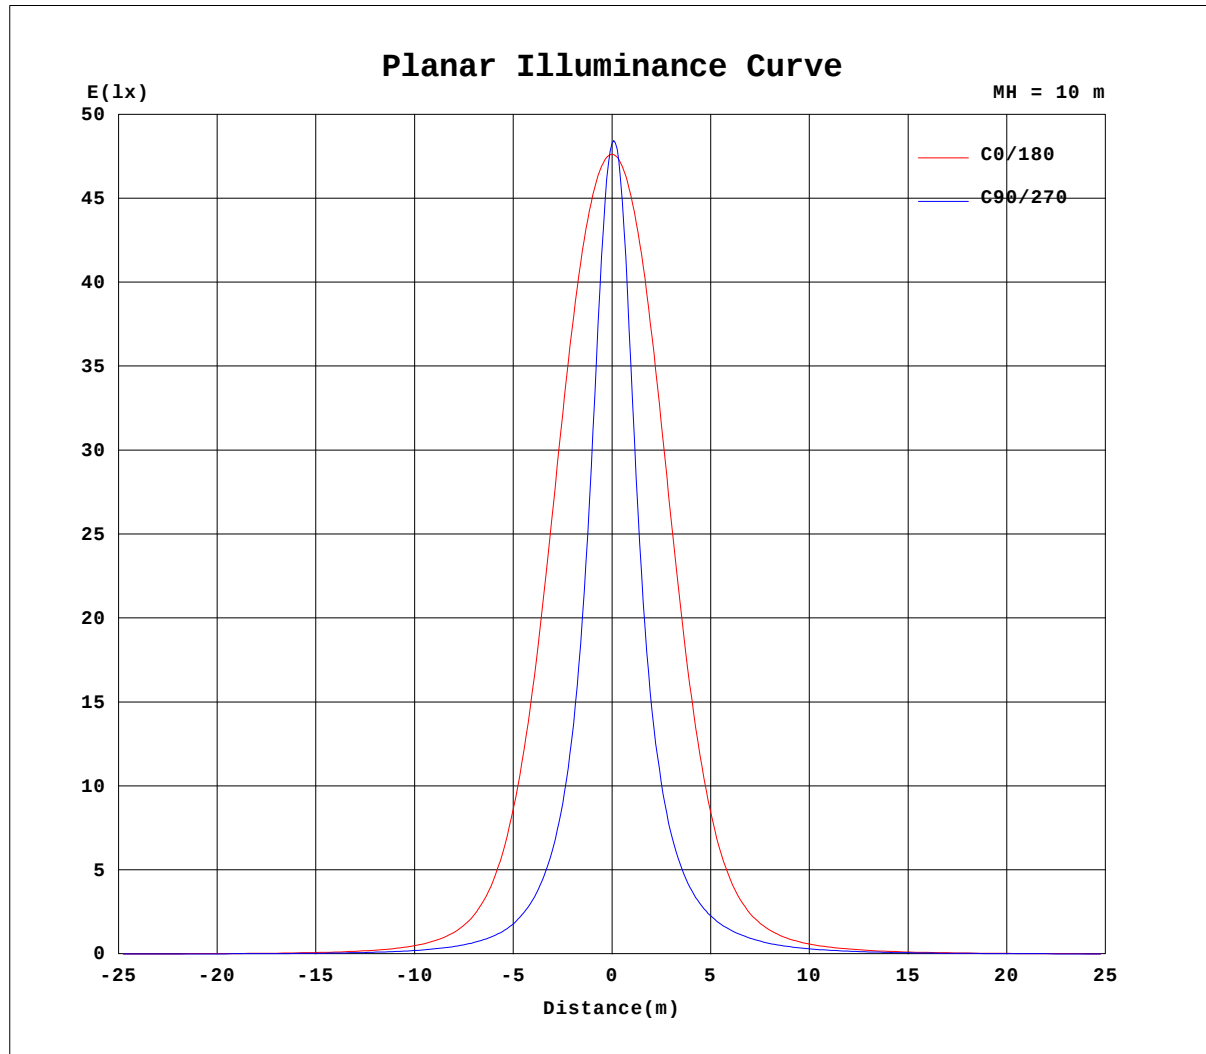


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-16

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoBody-600mm-RGBW GREEN-1540D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230-G
MFR.:	SUR.:	Shielding Angle:

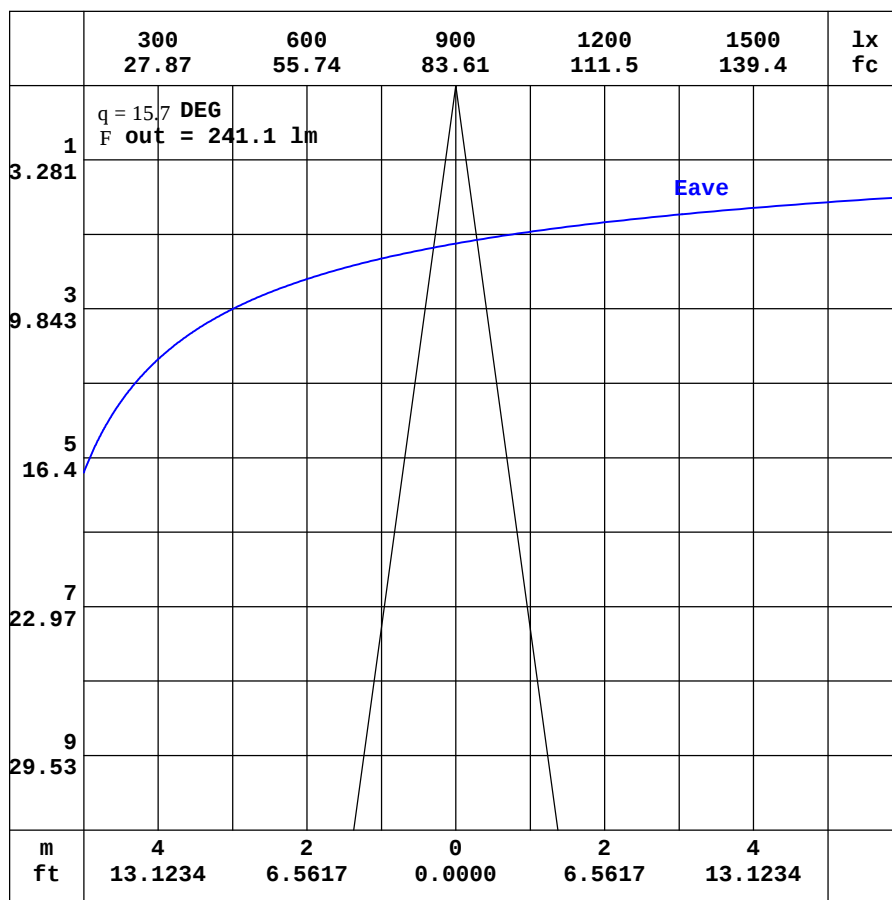

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

$H(b)$ Range:-90 - 90DEG
 $H(b)$ Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-06-16

$V(B)$ Range:-180 - 180DEG
 $V(B)$ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-600mm-RGBW GREEN-1540D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230-G
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	6.04	5.49	5.11	5.00	5.11	5.50	6.18	7.10	8.14	9.18	10.1	10.7	11.1	11.1	10.8	10.4	9.88	9.52	9.76
-170	6.04	5.40	4.96	4.76	4.75	4.95	5.36	5.91	6.52	7.14	7.69	8.12	8.43	8.59	8.60	8.71	9.28	9.95	10.5
-160	6.04	5.32	4.83	4.53	4.39	4.38	4.50	4.67	4.85	5.01	5.14	5.23	5.42	6.39	7.35	8.24	9.02	9.46	9.70
-150	6.04	5.26	4.71	4.32	4.07	3.89	3.75	3.60	3.40	3.14	2.94	3.43	4.04	4.74	5.44	6.11	6.65	7.01	7.17
-140	6.04	5.22	4.62	4.15	3.81	3.49	3.17	2.84	2.40	2.21	2.26	2.42	2.66	2.97	3.31	3.68	3.98	4.17	4.23
-130	6.04	5.20	4.55	4.04	3.60	3.22	2.82	2.39	2.15	2.08	1.99	1.91	1.84	1.81	1.88	1.97	2.04	2.07	2.06
-120	6.04	5.21	4.52	3.95	3.47	3.02	2.61	2.28	2.24	2.18	2.10	2.01	1.90	1.79	1.70	1.63	1.57	1.53	1.49
-110	6.04	5.23	4.52	3.90	3.36	2.88	2.43	2.30	2.31	2.33	2.33	2.32	2.29	2.26	2.24	2.22	2.20	2.18	2.18
-100	6.04	5.28	4.57	3.90	3.29	2.71	2.17	2.18	2.23	2.27	2.30	2.33	2.36	2.38	2.40	2.41	2.43	2.44	2.46
-90	6.04	5.35	4.66	3.97	3.28	2.59	1.90	1.92	1.94	1.96	1.98	2.00	2.02	2.05	2.08	2.10	2.13	2.16	2.19
-80	6.04	5.45	4.82	4.21	3.68	3.19	2.69	2.91	3.13	3.35	3.52	3.66	3.75	3.91	4.06	4.17	4.24	4.26	4.25
-70	6.04	5.58	5.25	5.26	5.38	5.55	5.68	6.28	7.10	7.89	8.61	9.23	9.70	10.2	10.7	11.0	11.2	11.3	11.2
-60	6.04	5.75	6.10	6.97	8.05	9.19	10.1	11.2	13.2	15.1	16.9	18.4	19.7	20.8	22.0	22.9	23.4	23.4	23.0
-50	6.04	6.02	7.16	9.07	11.4	13.8	16.2	18.5	21.7	25.7	29.5	33.1	36.1	38.3	40.8	43.0	44.2	44.3	43.4
-40	6.04	6.39	8.40	11.5	15.2	19.2	23.8	28.8	34.0	40.6	48.6	56.8	64.6	71.1	75.4	82.0	86.5	88.0	86.2
-30	6.04	6.75	9.58	13.9	19.1	25.3	32.8	41.7	52.0	63.7	77.4	96.9	119	140	156	166	183	191	185
-20	6.04	7.07	10.6	16.2	22.8	31.4	42.4	56.3	74.2	97.8	129	171	222	299	377	433	453	503	494
-10	6.04	7.34	11.5	17.9	26.0	36.9	51.2	70.5	97.6	137	199	304	477	724	987	1244	1533	1578	1672
0	6.04	7.52	12.0	19.1	28.1	40.7	57.5	81.0	116	169	263	439	788	1404	2285	3279	4123	4611	4763
10	6.04	7.49	11.8	18.6	27.2	38.8	54.1	74.8	104	147	214	328	512	786	1118	1505	1880	1924	1887
20	6.04	7.37	11.3	17.5	25.1	35.0	47.7	64.1	85.5	114	154	207	274	360	456	530	557	602	576
30	6.04	7.18	10.6	15.8	22.1	30.1	39.8	51.6	65.8	82.9	103	128	156	184	206	221	242	252	245
40	6.04	6.93	9.65	13.7	18.8	24.6	31.6	39.5	48.3	58.3	69.0	80.2	91.1	101	108	117	122	124	122
50	6.04	6.65	8.58	11.5	15.2	19.3	23.8	28.9	34.1	39.6	45.1	50.4	55.2	59.2	62.8	65.8	67.6	67.8	66.6
60	6.04	6.44	7.62	9.47	11.7	14.4	17.1	19.9	22.9	25.8	28.6	31.2	33.4	35.3	37.0	38.2	38.9	38.9	38.4
70	6.04	6.29	6.81	7.74	8.90	10.2	11.7	13.2	14.5	15.8	17.0	18.1	19.1	19.9	20.5	21.0	21.2	21.2	21.0
80	6.04	6.17	6.32	6.57	6.94	7.39	7.88	8.30	8.73	9.15	9.54	9.90	10.2	10.4	10.6	10.8	10.8	10.8	10.8
90	6.04	6.06	6.08	6.10	6.11	6.13	6.15	6.13	6.11	6.09	6.07	6.05	6.03	6.02	6.00	5.98	5.97	5.95	5.93
100	6.04	5.95	5.86	5.79	5.71	5.63	5.56	5.46	5.35	5.25	5.15	5.06	4.97	4.91	4.87	4.83	4.80	4.78	4.77
110	6.04	5.85	5.67	5.52	5.37	5.24	5.13	4.99	4.87	4.76	4.67	4.60	4.54	4.52	4.50	4.49	4.48	4.46	4.45
120	6.04	5.76	5.51	5.30	5.13	4.98	4.89	4.81	4.75	4.72	4.73	4.72	4.72	4.72	4.75	4.76	4.76	4.73	4.67
130	6.04	5.68	5.38	5.15	4.98	4.90	4.86	4.90	5.02	5.19	5.38	5.59	5.82	6.06	6.35	6.61	6.83	6.96	6.97
140	6.04	5.61	5.28	5.04	4.94	4.92	5.03	5.30	5.69	6.16	6.67	7.26	7.90	8.56	9.20	9.86	10.4	10.7	10.9
150	6.04	5.56	5.20	4.99	4.95	5.05	5.36	5.87	6.53	7.32	8.16	9.05	9.94	10.7	11.4	11.9	12.3	12.5	12.6
160	6.04	5.52	5.16	4.98	5.00	5.23	5.72	6.44	7.32	8.30	9.31	10.3	11.2	11.9	12.4	12.7	13.0	13.1	13.2
170	6.04	5.50	5.13	4.99	5.06	5.40	6.02	6.88	7.89	8.94	9.94	10.8	11.5	11.9	12.1	12.2	12.1	12.3	12.8
180	6.04	5.49	5.11	5.00	5.11	5.50	6.18	7.10	8.14	9.18	10.1	10.7	11.1	11.1	10.8	10.4	9.88	9.52	9.79

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-600mm-RGBW GREEN-1540D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230-G
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	8.56	8.08	7.68	7.27	6.68	5.95	5.14	4.34	3.63	3.05	2.65	2.42	2.33	2.30	2.29	2.21	2.04	1.81
-170	10.3	9.50	8.91	8.17	7.23	6.22	5.22	4.31	3.54	2.97	2.59	2.38	2.32	2.30	2.29	2.21	2.04	1.81
-160	9.52	9.12	8.40	7.55	6.64	5.70	4.72	3.88	3.22	2.75	2.47	2.34	2.30	2.30	2.29	2.21	2.04	1.81
-150	7.09	6.81	6.36	5.72	5.03	4.33	3.70	3.20	2.77	2.49	2.35	2.30	2.29	2.30	2.28	2.20	2.03	1.81
-140	4.25	4.13	3.90	3.59	3.24	2.91	2.64	2.46	2.36	2.31	2.28	2.28	2.29	2.31	2.27	2.18	2.01	1.81
-130	2.13	2.14	2.12	2.06	2.02	2.02	2.06	2.11	2.17	2.23	2.26	2.29	2.31	2.30	2.25	2.15	1.98	1.81
-120	1.55	1.62	1.70	1.79	1.88	1.98	2.08	2.17	2.24	2.29	2.32	2.33	2.31	2.28	2.21	2.10	1.95	1.81
-110	2.20	2.22	2.25	2.29	2.32	2.37	2.39	2.40	2.39	2.37	2.35	2.33	2.30	2.23	2.14	2.03	1.92	1.81
-100	2.46	2.46	2.46	2.46	2.45	2.45	2.42	2.39	2.36	2.32	2.28	2.23	2.17	2.10	2.03	1.95	1.88	1.81
-90	2.17	2.15	2.14	2.12	2.10	2.09	2.07	2.06	2.05	2.03	2.02	2.01	1.97	1.94	1.91	1.88	1.84	1.81
-80	4.22	4.16	4.06	3.93	3.76	3.59	3.48	3.35	3.19	3.00	2.78	2.55	2.36	2.15	1.98	1.85	1.83	1.81
-70	11.1	10.9	10.6	10.2	9.58	9.02	8.56	7.95	7.26	6.48	5.65	4.86	4.14	3.42	2.70	2.18	1.84	1.81
-60	23.0	22.7	21.9	20.7	19.3	18.2	17.0	15.5	13.8	12.1	10.2	8.47	6.75	5.21	3.90	2.71	1.96	1.81
-50	43.7	42.9	41.2	38.6	35.7	33.5	30.5	27.1	23.5	19.8	16.4	13.2	10.2	7.48	5.22	3.42	2.14	1.81
-40	86.9	84.3	79.0	71.8	67.1	60.4	52.6	44.7	37.2	30.4	24.3	18.9	14.1	10.1	6.67	4.15	2.32	1.81
-30	189	180	161	151	133	112	90.6	71.7	56.8	44.3	33.9	25.3	18.3	12.7	8.11	4.80	2.51	1.81
-20	501	449	429	370	290	212	160	117	84.3	61.2	44.4	31.9	22.3	15.0	9.41	5.34	2.65	1.81
-10	1603	1588	1281	999	727	469	287	180	117	78.5	54.1	37.5	25.5	16.8	10.3	5.72	2.74	1.81
0	4619	4154	3344	2341	1432	793	421	236	143	90.6	60.4	40.8	27.3	17.7	10.8	5.89	2.78	1.81
10	1971	1981	1596	1160	801	508	311	196	127	85.0	58.5	40.4	27.4	17.9	11.0	6.08	2.89	1.81
20	602	555	532	456	356	267	198	142	101	72.7	52.3	37.2	25.8	17.2	10.7	6.03	2.93	1.81
30	250	238	216	200	178	150	122	97.9	76.3	58.3	43.9	32.3	23.0	15.6	9.90	5.77	2.91	1.81
40	123	120	114	104	96.8	87.1	76.2	65.3	54.8	44.8	34.9	26.4	19.3	13.5	8.80	5.34	2.83	1.81
50	67.2	66.4	64.0	60.6	56.5	52.5	47.8	42.6	37.3	32.0	26.4	20.5	15.4	11.1	7.55	4.75	2.73	1.81
60	38.5	38.1	37.1	35.6	33.6	31.7	29.5	27.0	24.2	21.4	18.6	15.1	11.7	8.77	6.27	4.14	2.61	1.81
70	21.0	20.8	20.4	19.8	19.0	18.1	17.2	16.1	14.9	13.5	12.2	10.6	8.63	6.74	5.05	3.65	2.52	1.81
80	10.7	10.6	10.5	10.2	9.97	9.65	9.36	9.03	8.68	8.30	7.91	7.45	6.31	5.24	4.21	3.29	2.53	1.81
90	5.93	5.93	5.92	5.92	5.92	5.92	5.94	5.96	5.99	6.01	6.04	6.06	5.35	4.65	3.94	3.23	2.52	1.81
100	4.77	4.78	4.79	4.81	4.84	4.88	4.96	5.05	5.14	5.25	5.36	5.42	4.91	4.37	3.80	3.18	2.52	1.81
110	4.46	4.48	4.50	4.51	4.52	4.54	4.58	4.63	4.70	4.79	4.91	4.89	4.52	4.11	3.65	3.11	2.50	1.81
120	4.76	4.81	4.84	4.84	4.81	4.81	4.80	4.77	4.74	4.73	4.77	4.52	4.18	3.85	3.48	3.03	2.47	1.81
130	7.02	6.95	6.78	6.56	6.29	6.04	5.78	5.54	5.32	5.11	4.76	4.28	3.93	3.61	3.30	2.92	2.43	1.81
140	10.8	10.5	10.1	9.53	8.88	8.21	7.54	6.92	6.38	5.66	4.77	4.12	3.68	3.39	3.11	2.80	2.37	1.81
150	12.5	12.4	12.1	11.7	11.0	10.2	9.35	8.46	7.01	5.68	4.65	3.93	3.45	3.15	2.92	2.67	2.30	1.81
160	13.2	13.2	12.9	12.6	12.1	11.4	9.77	8.07	6.54	5.26	4.27	3.58	3.14	2.89	2.72	2.53	2.23	1.81
170	12.8	12.6	12.6	11.8	10.6	9.24	7.89	6.56	5.36	4.35	3.58	3.06	2.77	2.60	2.51	2.37	2.14	1.81
180	8.56	8.08	7.68	7.27	6.68	5.95	5.14	4.34	3.63	3.05	2.65	2.42	2.33	2.30	2.29	2.21	2.04	1.81

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-06-16

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: