

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	3471.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	39.4V x 66.6H
	At 50% of Imax	14.8V x 38.8H
	At 90% of Imax	5.8V x 17.4H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	718.2 lumens per klm.
	To 50% of Imax	354.2 lumens per klm.
	To 90% of Imax	75.8 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoBody-600mm-RGBW RED-1540D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230-R
MFR.:	SUR.:	Shielding Angle:

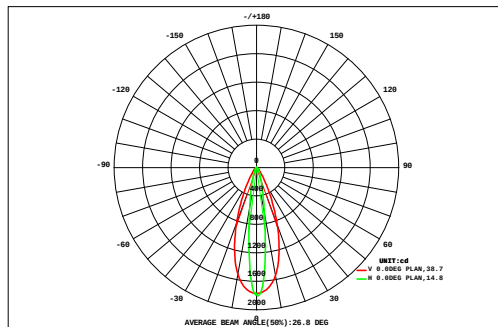

DATA OF LAMP		Eff:35.38lm/W	
MODEL		Imax(cd)	1806
NOMINAL POWER(W)	14.6	AVAILABILITY(%)	72.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	374.5
NOMINAL FLUX(lm)	520.1	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	520.1
TEST VOLTAGE(V)	221.4	q @50%(H,V)	39,15DEG

45 40 35 30 25 20 15 10 5 0 -5 -10 -15 -20 -25 -30 -35 -40 -45 -45	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	0.11	0.13	0.16	0.19	0.21	0.23	0.25	0.27	0.27	0.27	0.26	0.25	0.23	0.20	0.18	0.15	0.13	0.10	3.59	0.00		
	0.13	0.17	0.20	0.25	0.28	0.31	0.35	0.37	0.37	0.37	0.36	0.34	0.31	0.27	0.24	0.20	0.16	0.12	4.79	0.00		
	0.16	0.21	0.26	0.33	0.39	0.43	0.48	0.52	0.52	0.52	0.51	0.47	0.42	0.37	0.32	0.25	0.20	0.15	6.51	0.00		
	0.19	0.25	0.34	0.44	0.54	0.62	0.69	0.75	0.76	0.76	0.75	0.68	0.61	0.53	0.43	0.33	0.24	0.18	9.08	0.00		
	0.22	0.32	0.44	0.60	0.78	0.95	1.04	1.15	1.18	1.17	1.14	1.04	0.95	0.78	0.59	0.43	0.30	0.21	13.3	0.90		
	0.27	0.39	0.58	0.83	1.15	1.52	1.76	1.89	1.98	1.98	1.90	1.80	1.56	1.17	0.82	0.56	0.37	0.24	20.8	14.6		
	0.31	0.48	0.76	1.21	1.78	2.50	3.28	3.53	3.68	3.73	3.65	3.47	2.63	1.84	1.23	0.75	0.45	0.27	35.6	31.2		
	0.35	0.57	0.98	1.74	2.86	4.26	5.93	7.26	7.61	7.78	7.69	6.40	4.51	2.97	1.78	0.98	0.54	0.31	64.5	61.2		
	0.38	0.65	1.19	2.29	4.05	6.40	8.98	11.3	12.6	12.8	11.7	9.32	6.65	4.21	2.35	1.20	0.61	0.33	97.0	94.1		
	0.38	0.64	1.17	2.25	3.97	6.20	8.42	10.2	11.5	11.7	10.6	8.67	6.40	4.12	2.31	1.18	0.60	0.33	90.7	87.8		
	0.33	0.54	0.93	1.65	2.66	3.78	4.84	5.82	6.35	6.46	6.11	5.10	3.92	2.74	1.67	0.93	0.51	0.29	54.6	51.2		
	0.28	0.44	0.69	1.08	1.53	2.07	2.66	2.89	3.14	3.16	2.95	2.76	2.13	1.55	1.08	0.68	0.41	0.25	29.7	25.1		
	0.23	0.34	0.49	0.69	0.95	1.25	1.45	1.57	1.68	1.68	1.57	1.47	1.26	0.94	0.68	0.47	0.31	0.20	17.2	8.34		
	0.18	0.25	0.35	0.48	0.63	0.76	0.83	0.93	0.97	0.97	0.93	0.82	0.75	0.62	0.46	0.33	0.24	0.16	10.7	0.00		
	0.14	0.19	0.26	0.34	0.42	0.47	0.52	0.58	0.59	0.59	0.57	0.51	0.46	0.41	0.33	0.25	0.18	0.13	6.95	0.00		
	0.11	0.15	0.19	0.24	0.28	0.31	0.35	0.38	0.39	0.39	0.38	0.35	0.31	0.28	0.23	0.18	0.14	0.10	4.77	0.00		
	0.09	0.12	0.15	0.18	0.20	0.22	0.25	0.26	0.26	0.26	0.26	0.24	0.21	0.19	0.17	0.14	0.11	0.08	3.39	0.00		
	0.07	0.09	0.11	0.13	0.14	0.16	0.17	0.18	0.18	0.18	0.18	0.17	0.15	0.14	0.12	0.10	0.08	0.07	2.45	0.00		
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45		
F t	3.93	5.93	9.27	14.9	22.8	32.5	42.3	49.9	54.1	54.8	51.5	43.8	33.5	23.3	15.0	9.13	5.58	3.52	476	---		
F a	0.00	0.00	1.68	8.77	17.0	27.0	36.9	44.3	48.6	49.3	45.9	38.5	28.1	17.6	8.97	1.75	0.00	0.00	---	374		


one-half-peak spread: U:7.5,D:7.4 , L:19.3,R:19.3 IESNA Beam Type: Type 4 x 3 (H x V)

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-16

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:DecoBody-600mm-RGBW RED-1540D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230-R
MFR.:	SUR.:	Shielding Angle:

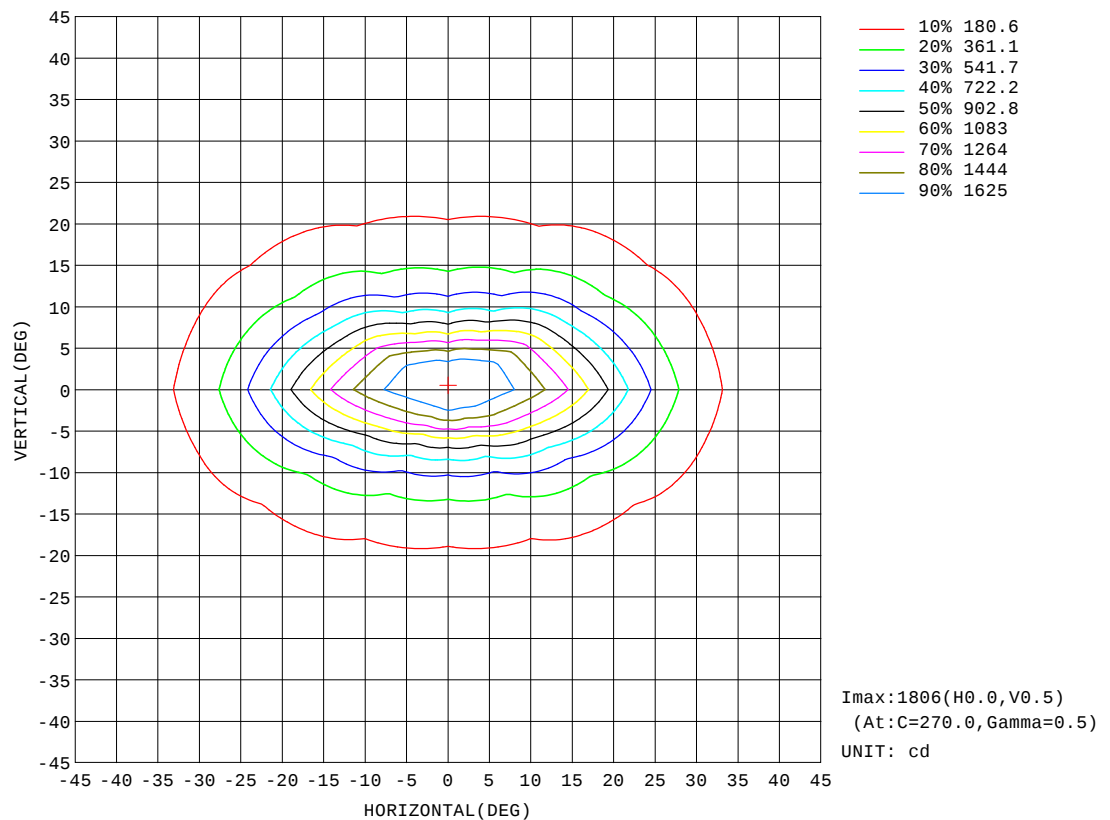


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoBody-600mm-RGBW RED-1540D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230-R
MFR.:	SUR.:	Shielding Angle:

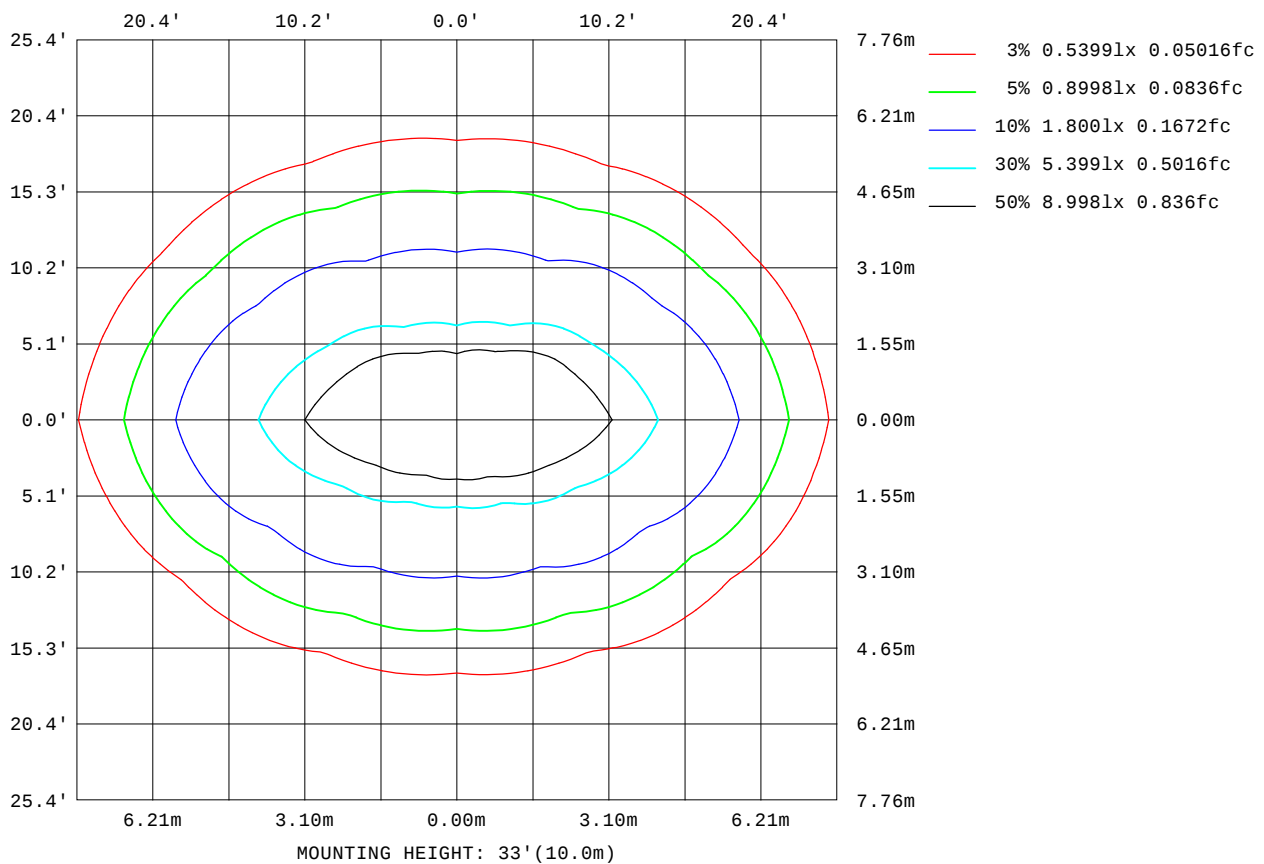

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-16

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

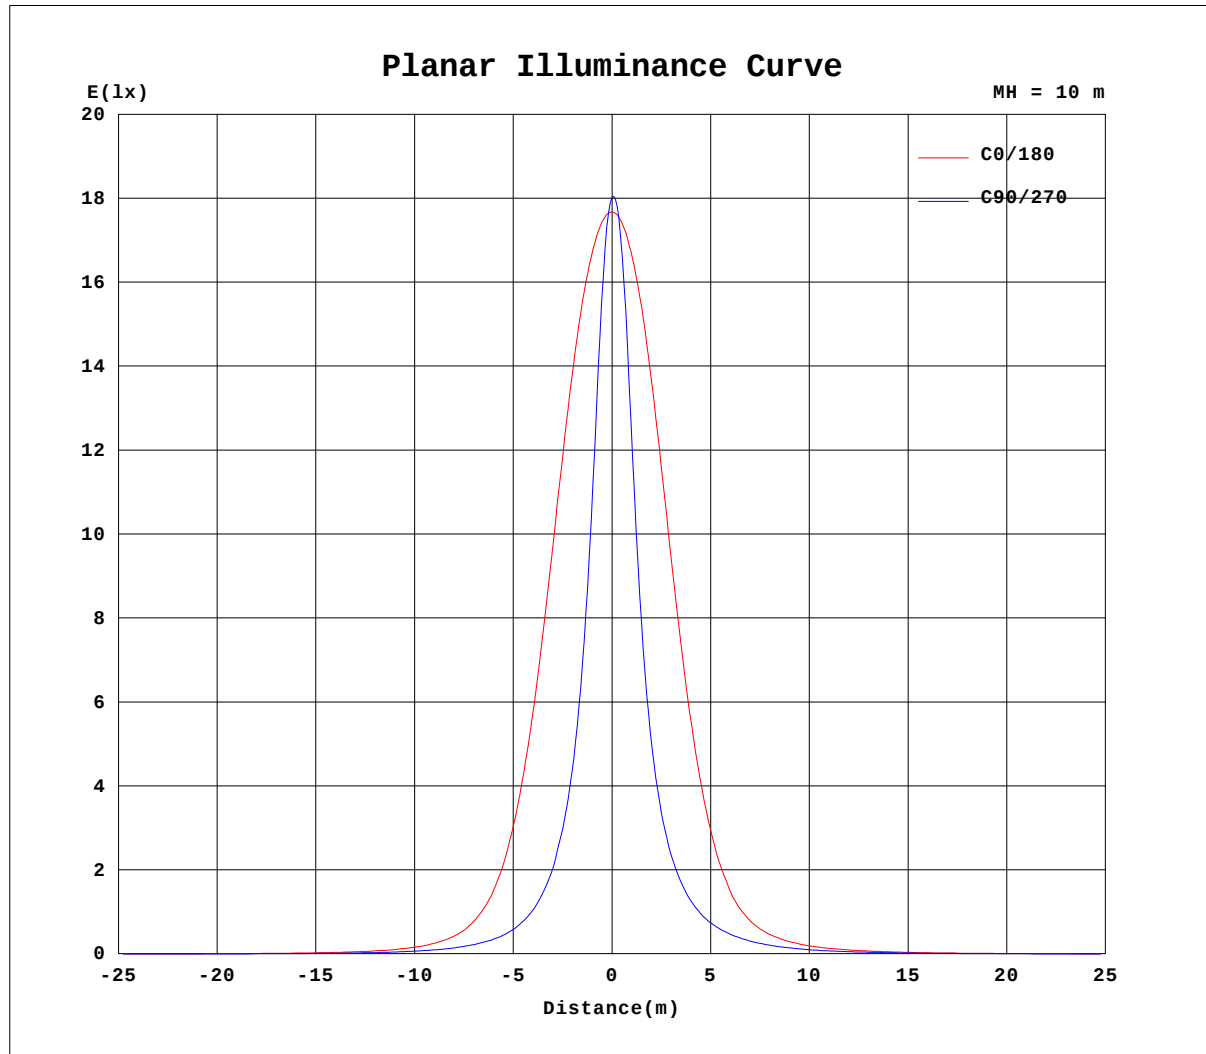


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-16

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoBody-600mm-RGBW RED-1540D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230-R
MFR.:	SUR.:	Shielding Angle:

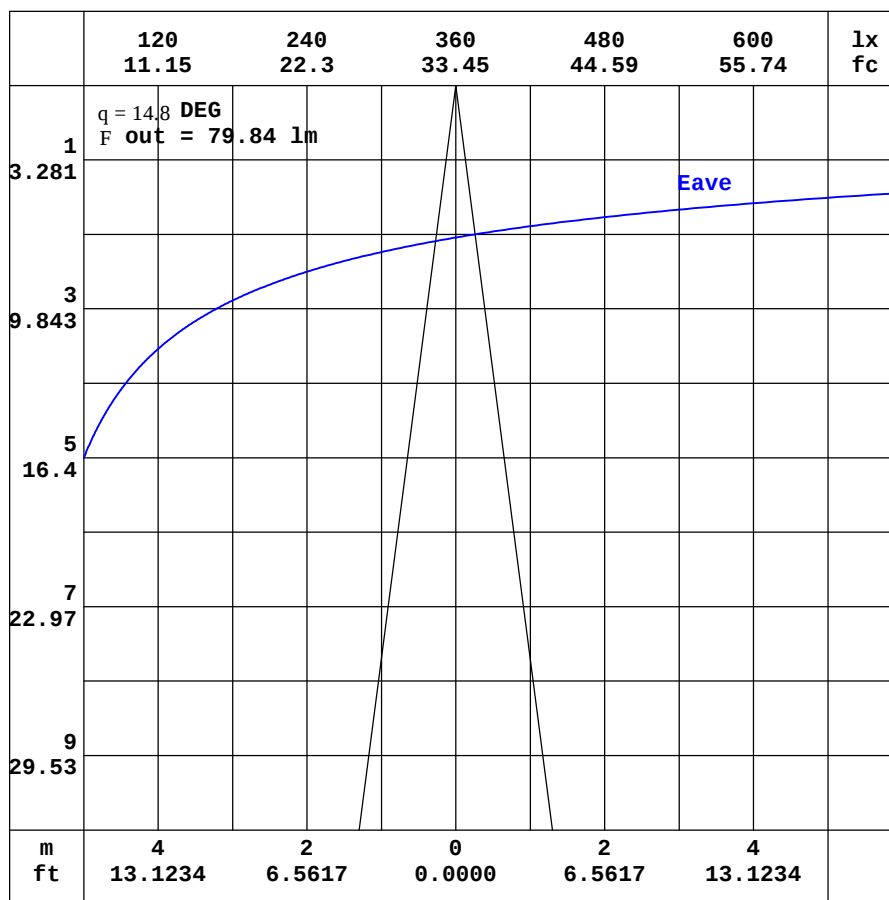

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-600mm-RGBW RED-1540D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230-R
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°)\V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.01	1.82	1.69	1.67	1.71	1.85	2.10	2.43	2.80	3.18	3.50	3.73	3.80	3.79	3.68	3.51	3.33	3.21	3.33
-170	2.01	1.80	1.64	1.59	1.59	1.67	1.82	2.02	2.24	2.46	2.66	2.82	2.94	3.01	3.05	3.08	3.28	3.54	3.73
-160	2.01	1.77	1.60	1.52	1.47	1.47	1.52	1.58	1.65	1.71	1.76	1.81	1.89	2.25	2.60	2.93	3.21	3.37	3.47
-150	2.01	1.75	1.56	1.45	1.37	1.30	1.26	1.21	1.14	1.05	0.98	1.15	1.37	1.62	1.87	2.11	2.32	2.46	2.52
-140	2.01	1.74	1.53	1.38	1.28	1.17	1.06	0.95	0.80	0.73	0.73	0.77	0.85	0.95	1.07	1.21	1.32	1.40	1.43
-130	2.01	1.74	1.52	1.35	1.21	1.08	0.95	0.79	0.72	0.69	0.65	0.62	0.58	0.54	0.55	0.59	0.62	0.64	0.64
-120	2.01	1.74	1.52	1.33	1.16	1.02	0.88	0.77	0.76	0.74	0.71	0.68	0.63	0.59	0.55	0.52	0.49	0.47	0.45
-110	2.01	1.75	1.52	1.32	1.15	0.98	0.83	0.79	0.80	0.80	0.81	0.81	0.81	0.80	0.78	0.77	0.75	0.73	0.73
-100	2.01	1.77	1.53	1.33	1.13	0.95	0.78	0.78	0.79	0.79	0.80	0.81	0.82	0.83	0.83	0.84	0.84	0.85	0.85
-90	2.01	1.79	1.57	1.34	1.12	0.90	0.67	0.68	0.68	0.69	0.69	0.70	0.70	0.72	0.73	0.74	0.75	0.77	0.78
-80	2.01	1.83	1.62	1.41	1.23	1.06	0.88	0.96	1.03	1.11	1.18	1.22	1.26	1.30	1.33	1.35	1.36	1.36	1.35
-70	2.01	1.87	1.76	1.76	1.79	1.83	1.85	2.05	2.31	2.56	2.79	2.98	3.14	3.30	3.45	3.56	3.62	3.63	3.59
-60	2.01	1.93	2.05	2.33	2.66	3.02	3.30	3.63	4.27	4.89	5.46	5.97	6.36	6.73	7.14	7.44	7.60	7.61	7.49
-50	2.01	2.02	2.40	3.01	3.78	4.53	5.28	6.03	7.04	8.29	9.57	10.7	11.7	12.5	13.3	14.0	14.4	14.5	14.2
-40	2.01	2.15	2.82	3.81	5.01	6.31	7.81	9.37	11.0	13.1	15.7	18.4	21.0	23.1	24.6	26.8	28.3	28.9	28.4
-30	2.01	2.27	3.20	4.63	6.30	8.34	10.8	13.6	16.9	20.6	25.0	31.3	38.4	45.4	50.7	53.8	59.6	62.4	61.0
-20	2.01	2.38	3.54	5.37	7.52	10.4	13.9	18.5	24.3	31.9	42.1	55.5	71.9	95.9	121	140	148	164	160
-10	2.01	2.47	3.83	5.95	8.58	12.2	16.9	23.2	32.2	45.2	65.5	99.3	157	243	333	418	522	538	568
0	2.01	2.53	4.02	6.35	9.31	13.5	19.0	26.8	38.3	56.0	86.6	145	270	494	823	1201	1523	1709	1768
10	2.01	2.52	3.95	6.19	8.98	12.8	17.8	24.7	34.4	48.5	70.5	107	169	266	381	517	652	658	647
20	2.01	2.48	3.79	5.82	8.29	11.6	15.7	21.1	28.2	37.5	50.2	67.3	88.9	118	150	174	181	196	190
30	2.01	2.41	3.55	5.27	7.33	9.93	13.1	16.9	21.6	27.2	33.8	41.9	50.9	60.2	67.8	73.0	79.8	82.7	80.5
40	2.01	2.33	3.25	4.56	6.21	8.12	10.4	13.0	15.8	19.1	22.6	26.3	30.0	33.2	35.7	38.6	40.5	41.2	40.5
50	2.01	2.24	2.89	3.84	5.05	6.36	7.85	9.49	11.2	13.0	14.8	16.6	18.2	19.5	20.7	21.8	22.4	22.5	22.1
60	2.01	2.16	2.57	3.19	3.92	4.78	5.65	6.54	7.53	8.48	9.42	10.2	11.0	11.6	12.2	12.6	12.9	12.9	12.8
70	2.01	2.11	2.30	2.62	3.00	3.44	3.90	4.37	4.80	5.22	5.62	5.98	6.30	6.56	6.77	6.92	7.00	7.00	6.92
80	2.01	2.07	2.13	2.23	2.36	2.51	2.67	2.80	2.94	3.07	3.20	3.31	3.41	3.48	3.55	3.59	3.62	3.62	3.61
90	2.01	2.03	2.04	2.06	2.07	2.09	2.10	2.09	2.08	2.07	2.06	2.05	2.04	2.04	2.04	2.04	2.04	2.04	2.04
100	2.01	1.99	1.97	1.95	1.93	1.91	1.89	1.84	1.80	1.76	1.71	1.68	1.64	1.63	1.62	1.61	1.61	1.61	1.61
110	2.01	1.95	1.90	1.85	1.80	1.76	1.72	1.67	1.62	1.58	1.55	1.53	1.52	1.51	1.51	1.51	1.51	1.50	1.50
120	2.01	1.93	1.84	1.77	1.71	1.67	1.63	1.61	1.59	1.58	1.57	1.58	1.58	1.58	1.59	1.58	1.57	1.56	1.53
130	2.01	1.89	1.79	1.71	1.66	1.64	1.63	1.62	1.66	1.73	1.80	1.88	1.97	2.06	2.16	2.25	2.32	2.36	2.36
140	2.01	1.87	1.75	1.68	1.65	1.65	1.68	1.76	1.91	2.07	2.26	2.48	2.72	2.98	3.21	3.45	3.63	3.75	3.83
150	2.01	1.85	1.72	1.67	1.66	1.69	1.79	1.97	2.21	2.49	2.80	3.12	3.46	3.75	4.00	4.19	4.30	4.36	4.39
160	2.01	1.84	1.71	1.67	1.68	1.75	1.93	2.19	2.50	2.86	3.22	3.57	3.88	4.13	4.32	4.45	4.54	4.58	4.64
170	2.01	1.83	1.70	1.67	1.69	1.81	2.04	2.35	2.71	3.09	3.45	3.75	3.97	4.11	4.22	4.26	4.22	4.28	4.53
180	2.01	1.82	1.69	1.67	1.71	1.85	2.10	2.43	2.80	3.18	3.50	3.73	3.80	3.79	3.68	3.51	3.33	3.21	3.37

H_(b) Range:-90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-06-16

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-600mm-RGBW RED-1540D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:15x40 DEG	DIM.:600mm	SERIAL No.:IES001230-R
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	2.90	2.74	2.61	2.47	2.26	2.00	1.71	1.42	1.17	0.97	0.84	0.78	0.78	0.78	0.78	0.74	0.69	0.62
-170	3.61	3.32	3.12	2.84	2.50	2.12	1.75	1.42	1.15	0.95	0.83	0.78	0.77	0.77	0.78	0.74	0.69	0.62
-160	3.37	3.20	2.93	2.62	2.29	1.94	1.59	1.28	1.05	0.89	0.80	0.77	0.77	0.77	0.78	0.74	0.68	0.62
-150	2.48	2.35	2.18	1.93	1.69	1.44	1.22	1.05	0.90	0.81	0.77	0.76	0.77	0.77	0.77	0.74	0.68	0.62
-140	1.42	1.36	1.27	1.15	1.03	0.93	0.84	0.79	0.77	0.76	0.76	0.76	0.77	0.78	0.77	0.74	0.67	0.62
-130	0.66	0.65	0.64	0.62	0.60	0.64	0.67	0.69	0.72	0.75	0.75	0.76	0.78	0.78	0.75	0.72	0.66	0.62
-120	0.48	0.51	0.54	0.58	0.62	0.67	0.70	0.74	0.76	0.77	0.78	0.78	0.78	0.77	0.75	0.72	0.65	0.62
-110	0.74	0.75	0.77	0.80	0.82	0.83	0.84	0.82	0.81	0.80	0.79	0.78	0.77	0.76	0.74	0.69	0.64	0.62
-100	0.85	0.85	0.85	0.85	0.85	0.84	0.83	0.82	0.81	0.80	0.79	0.79	0.75	0.72	0.69	0.66	0.63	0.62
-90	0.77	0.75	0.74	0.73	0.72	0.70	0.70	0.70	0.70	0.69	0.69	0.69	0.68	0.67	0.65	0.64	0.63	0.62
-80	1.35	1.34	1.31	1.27	1.23	1.18	1.15	1.10	1.04	0.97	0.90	0.82	0.77	0.71	0.67	0.64	0.63	0.62
-70	3.58	3.53	3.42	3.27	3.09	2.92	2.75	2.56	2.33	2.08	1.81	1.55	1.33	1.10	0.89	0.73	0.63	0.62
-60	7.50	7.38	7.12	6.73	6.26	5.89	5.50	5.02	4.47	3.88	3.29	2.71	2.17	1.67	1.26	0.90	0.67	0.62
-50	14.3	14.0	13.5	12.7	11.7	10.9	9.94	8.81	7.60	6.43	5.30	4.25	3.28	2.41	1.68	1.11	0.72	0.62
-40	28.6	27.8	26.1	23.7	22.1	19.8	17.2	14.6	12.1	9.84	7.90	6.14	4.57	3.25	2.16	1.35	0.78	0.62
-30	62.0	58.8	52.8	49.4	43.9	36.8	29.6	23.4	18.5	14.4	11.0	8.25	5.97	4.10	2.63	1.56	0.84	0.62
-20	164	148	140	121	94.3	69.9	52.5	38.2	27.6	20.0	14.5	10.4	7.27	4.86	3.04	1.73	0.89	0.62
-10	547	545	437	343	247	157	95.2	58.9	38.2	25.7	17.7	12.2	8.34	5.46	3.34	1.86	0.92	0.62
0	1713	1539	1230	852	512	274	142	77.5	46.5	29.7	19.8	13.4	8.93	5.78	3.49	1.91	0.93	0.62
10	677	697	554	399	273	171	103	64.0	41.6	28.0	19.2	13.2	8.99	5.86	3.58	1.98	0.97	0.62
20	197	181	175	151	117	87.5	64.7	46.5	33.3	24.0	17.2	12.2	8.49	5.62	3.49	1.97	0.99	0.62
30	82.1	78.8	71.4	66.3	58.6	49.4	40.4	32.4	25.3	19.3	14.5	10.6	7.58	5.12	3.25	1.90	0.98	0.62
40	40.9	39.9	37.7	34.6	32.1	28.9	25.3	21.6	18.2	14.8	11.6	8.75	6.37	4.44	2.90	1.77	0.96	0.62
50	22.3	22.0	21.2	20.1	18.8	17.4	15.8	14.1	12.4	10.6	8.79	6.81	5.11	3.67	2.50	1.58	0.93	0.62
60	12.8	12.6	12.3	11.8	11.1	10.5	9.79	8.97	8.07	7.12	6.20	5.04	3.91	2.93	2.10	1.40	0.89	0.62
70	6.94	6.89	6.76	6.57	6.31	6.03	5.72	5.35	4.95	4.53	4.09	3.59	2.91	2.27	1.72	1.25	0.87	0.62
80	3.59	3.56	3.51	3.44	3.35	3.24	3.15	3.05	2.93	2.81	2.69	2.55	2.17	1.80	1.45	1.13	0.87	0.62
90	2.03	2.03	2.02	2.01	2.01	2.00	2.02	2.03	2.05	2.06	2.08	2.10	1.85	1.60	1.36	1.11	0.86	0.62
100	1.61	1.61	1.61	1.61	1.63	1.63	1.67	1.71	1.75	1.79	1.84	1.87	1.69	1.50	1.30	1.08	0.85	0.62
110	1.51	1.51	1.52	1.52	1.52	1.52	1.54	1.57	1.59	1.62	1.67	1.68	1.55	1.41	1.25	1.06	0.84	0.62
120	1.57	1.59	1.61	1.62	1.62	1.61	1.60	1.59	1.59	1.60	1.62	1.54	1.43	1.32	1.19	1.03	0.83	0.62
130	2.38	2.36	2.30	2.23	2.14	2.04	1.95	1.86	1.78	1.70	1.58	1.45	1.33	1.23	1.12	0.99	0.82	0.62
140	3.78	3.69	3.54	3.34	3.09	2.83	2.58	2.35	2.15	1.89	1.58	1.37	1.24	1.15	1.06	0.95	0.80	0.62
150	4.39	4.35	4.27	4.11	3.87	3.57	3.24	2.91	2.38	1.91	1.55	1.30	1.15	1.07	1.00	0.91	0.77	0.62
160	4.65	4.64	4.55	4.43	4.24	3.99	3.39	2.77	2.22	1.76	1.41	1.19	1.05	0.97	0.93	0.85	0.75	0.62
170	4.50	4.46	4.49	4.16	3.69	3.20	2.71	2.23	1.79	1.43	1.17	1.00	0.92	0.88	0.85	0.80	0.72	0.62
180	2.90	2.74	2.61	2.47	2.26	2.00	1.71	1.42	1.17	0.97	0.84	0.78	0.78	0.78	0.78	0.74	0.69	0.62

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: