

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	6982.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	34.9V x 34.4H
	At 50% of Imax	15.3V x 15.4H
	At 90% of Imax	5.7V x 5.9H

Beam Flux	Total	1000.7 lumens per klm.
	To 10% of Imax	631.0 lumens per klm.
	To 50% of Imax	280.3 lumens per klm.
	To 90% of Imax	59.7 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoBody-600mm-RGBW 3000K-15D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228-W
MFR.:	SUR.:	Shielding Angle:

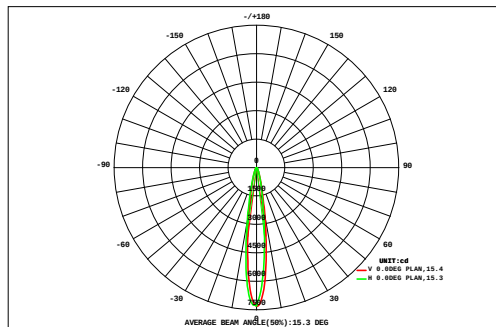

DATA OF LAMP		Eff:56.31lm/W	
MODEL		Imax(cd)	7311
NOMINAL POWER(W)	18.6	AVAILABILITY(%)	63.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	660.1
NOMINAL FLUX(lm)	1047	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1047
TEST VOLTAGE(V)	221.4	q @50%(H,V)	15,15DEG

		AREA FLUX DIAGRAM															UNIT:lm				F t	F a
		0.29	0.35	0.42	0.49	0.56	0.63	0.69	0.74	0.76	0.76	0.73	0.68	0.61	0.54	0.47	0.41	0.34	0.29	9.75	0.00	
VERTICAL (DEG)	27	0.34	0.41	0.50	0.60	0.71	0.82	0.91	0.98	1.02	1.01	0.96	0.89	0.79	0.68	0.58	0.49	0.40	0.33	12.4	0.00	
	24	0.39	0.49	0.60	0.74	0.90	1.07	1.23	1.35	1.41	1.40	1.32	1.19	1.03	0.86	0.71	0.58	0.47	0.38	16.1	0.00	
	21	0.45	0.56	0.72	0.91	1.15	1.43	1.72	1.94	2.06	2.03	1.88	1.64	1.36	1.10	0.87	0.69	0.55	0.44	21.5	4.35	
	18	0.50	0.65	0.85	1.12	1.48	1.95	2.49	2.95	3.18	3.13	2.83	2.35	1.84	1.40	1.06	0.81	0.63	0.49	29.7	18.1	
	15	0.56	0.74	0.99	1.36	1.91	2.69	3.69	4.68	5.18	5.09	4.44	3.45	2.50	1.78	1.28	0.95	0.71	0.53	42.5	32.9	
	12	0.61	0.83	1.14	1.63	2.42	3.63	5.43	7.63	8.78	8.53	7.08	4.99	3.34	2.25	1.57	1.11	0.80	0.58	62.3	54.1	
	9	0.65	0.90	1.27	1.89	2.94	4.69	7.56	11.3	13.8	13.3	10.4	6.93	4.48	2.90	1.88	1.26	0.87	0.62	87.7	80.2	
	-9	0.68	0.94	1.35	2.05	3.29	5.55	9.42	14.4	18.1	17.5	14.0	9.60	5.84	3.49	2.14	1.38	0.92	0.64	111	104	
		0.68	0.95	1.39	2.13	3.49	6.05	10.5	16.0	19.3	19.0	15.6	10.5	6.26	3.65	2.21	1.41	0.93	0.64	121	113	
		0.65	0.92	1.36	2.10	3.43	5.90	9.88	14.1	16.6	16.1	12.9	8.97	5.49	3.32	2.06	1.33	0.89	0.61	107	99.6	
		0.61	0.86	1.25	1.90	3.00	4.73	7.14	9.74	11.6	11.3	8.97	6.43	4.25	2.75	1.79	1.20	0.82	0.57	78.9	71.3	
		-12	0.54	0.76	1.09	1.59	2.33	3.37	4.67	6.07	7.10	6.94	5.68	4.27	3.08	2.13	1.48	1.03	0.73	0.52	53.4	45.0
-15		0.47	0.65	0.90	1.25	1.73	2.34	3.05	3.74	4.19	4.12	3.56	2.84	2.16	1.61	1.18	0.86	0.62	0.46	35.7	25.6	
-18	0.40	0.53	0.73	0.97	1.27	1.63	2.01	2.36	2.58	2.55	2.28	1.91	1.53	1.20	0.92	0.69	0.52	0.39	24.5	11.3		
-21	0.34	0.44	0.57	0.74	0.94	1.15	1.37	1.56	1.67	1.66	1.52	1.32	1.10	0.89	0.71	0.56	0.43	0.34	17.3	0.00		
-24	0.29	0.36	0.46	0.57	0.69	0.83	0.96	1.07	1.13	1.13	1.05	0.93	0.80	0.67	0.55	0.45	0.36	0.29	12.6	0.00		
-27	0.24	0.30	0.36	0.44	0.52	0.60	0.69	0.75	0.79	0.79	0.74	0.67	0.59	0.51	0.43	0.36	0.30	0.24	9.33	0.00		
		-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)			6	9	12	15	18	21	24	27		
F t		8.70	11.7	16.0	22.5	32.8	49.1	73.4	101	119	116	95.9	69.6	47.0	31.7	21.9	15.6	11.3	8.35	852	---	
F a		0.00	0.00	0.00	6.81	21.7	39.5	65.2	93.4	112	109	88.0	61.1	37.5	20.3	6.00	0.00	0.00	0.00	---	660	

one-half-peak spread: U:8.7,D:6.7 , L:7.5,R:8.0


NEMA Beam Type: Type 3

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-06-16

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:DecoBody-600mm-RGBW 3000K-15D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228-W
MFR.:	SUR.:	Shielding Angle:

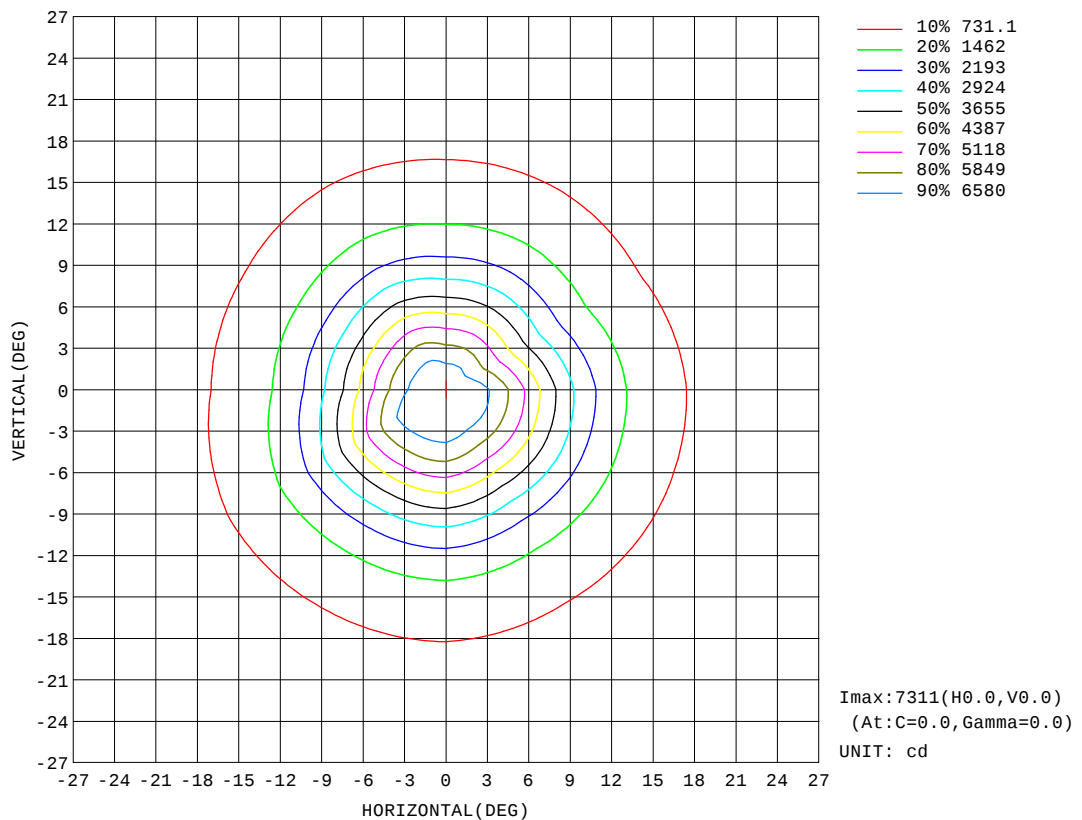


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoBody-600mm-RGBW 3000K-15D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228-W
MFR.:	SUR.:	Shielding Angle:

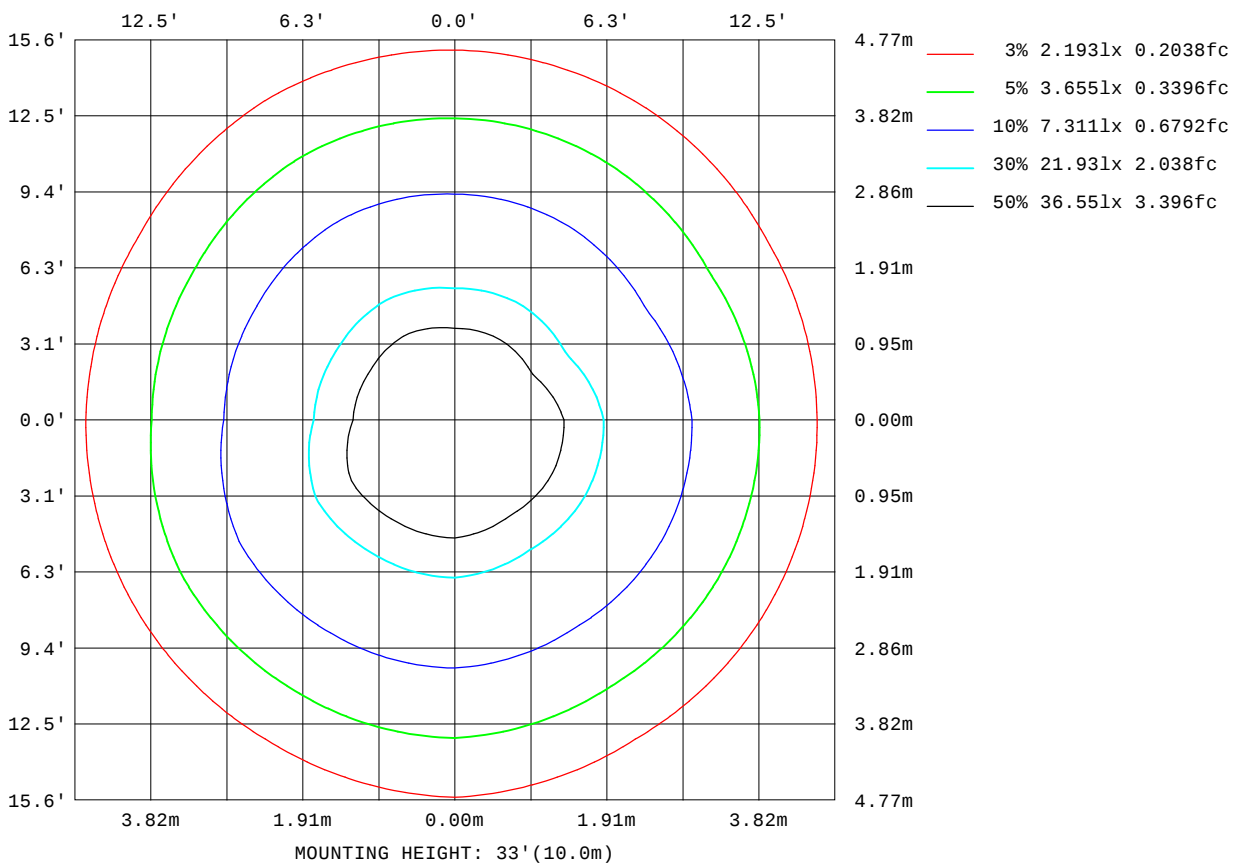

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-16

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

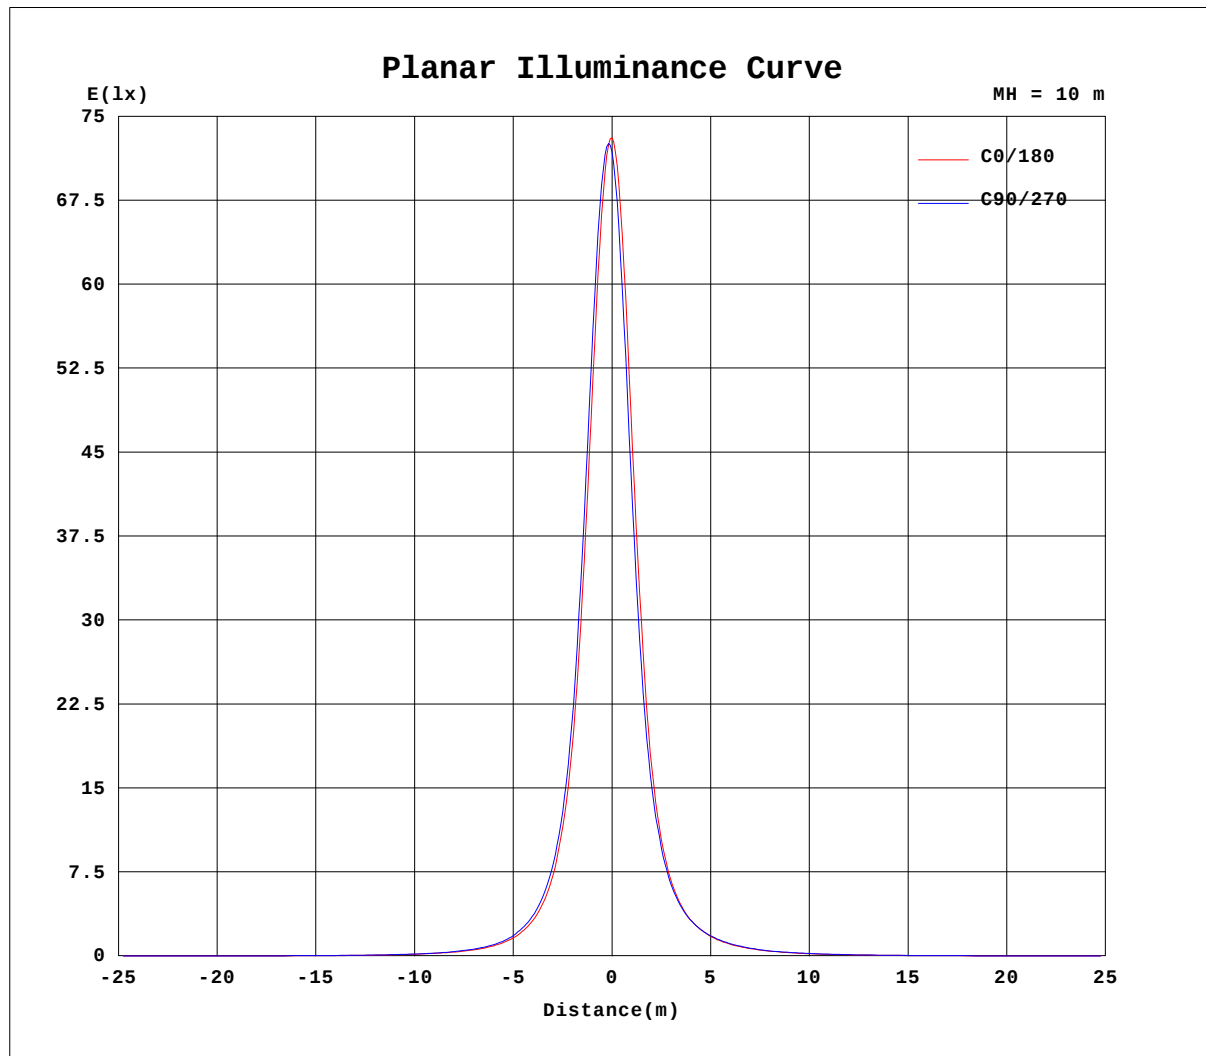


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-16

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoBody-600mm-RGBW 3000K-15D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228-W
MFR.:	SUR.:	Shielding Angle:

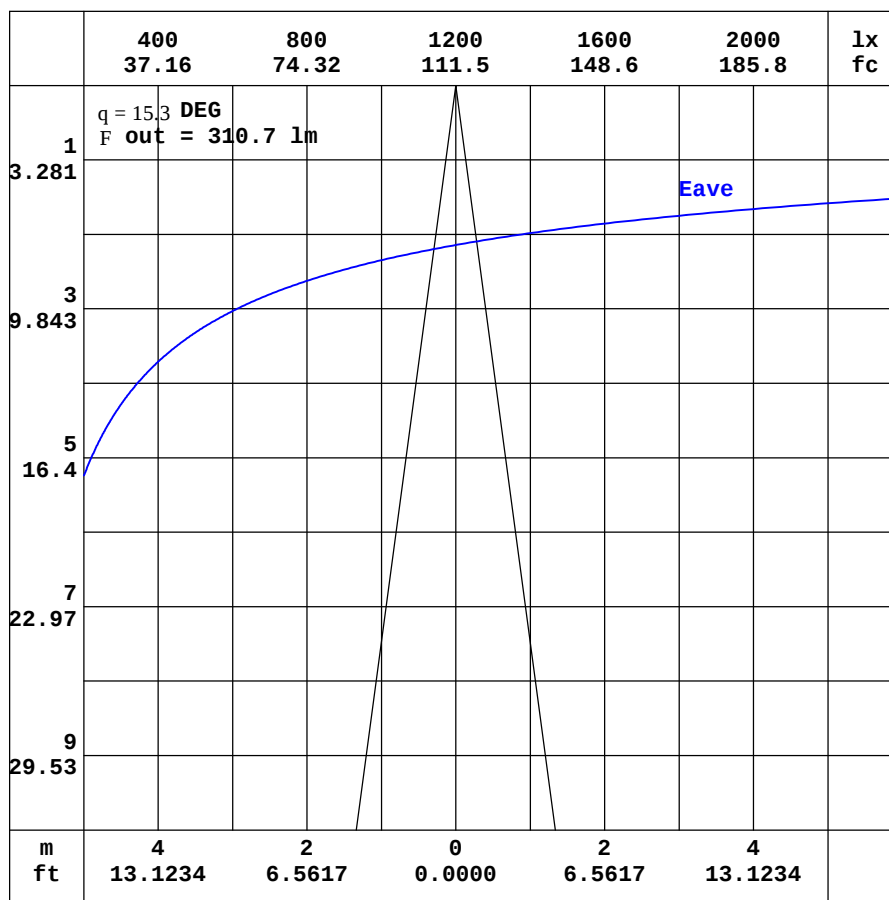

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-600mm-RGBW 3000K-15D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228-W
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	3.85	3.44	3.10	2.94	2.96	3.11	3.48	4.25	5.47	6.81	7.88	8.42	8.45	8.20	7.80	7.39	6.90	6.42	6.71
-170	3.85	3.39	3.04	2.85	2.82	2.85	3.01	3.45	4.18	5.02	5.68	6.07	6.22	6.28	6.34	6.58	7.01	7.51	7.77
-160	3.85	3.36	3.00	2.77	2.69	2.61	2.57	2.64	2.86	3.15	3.36	3.45	3.58	4.42	5.22	5.93	6.50	6.83	6.97
-150	3.85	3.34	2.97	2.71	2.58	2.44	2.25	2.05	1.87	1.67	1.52	1.94	2.49	3.09	3.67	4.21	4.61	4.88	4.99
-140	3.85	3.33	2.95	2.67	2.49	2.33	2.10	1.80	1.41	1.19	1.18	1.29	1.50	1.78	2.09	2.38	2.62	2.78	2.84
-130	3.85	3.34	2.94	2.66	2.44	2.26	2.07	1.80	1.57	1.41	1.27	1.18	1.14	1.13	1.16	1.24	1.30	1.35	1.37
-120	3.85	3.35	2.96	2.65	2.42	2.21	2.03	1.89	1.85	1.77	1.68	1.58	1.48	1.39	1.31	1.24	1.19	1.16	1.14
-110	3.85	3.37	2.98	2.65	2.39	2.17	1.99	1.92	1.93	1.93	1.93	1.93	1.92	1.90	1.87	1.84	1.82	1.80	1.79
-100	3.85	3.41	3.01	2.65	2.33	2.04	1.79	1.80	1.84	1.86	1.87	1.88	1.89	1.91	1.92	1.93	1.94	1.95	1.96
-90	3.85	3.46	3.06	2.67	2.27	1.87	1.48	1.49	1.50	1.51	1.52	1.53	1.54	1.55	1.57	1.59	1.61	1.63	1.65
-80	3.85	3.52	3.16	2.78	2.39	2.03	1.66	1.80	1.98	2.16	2.34	2.52	2.69	2.87	3.05	3.22	3.36	3.48	3.57
-70	3.85	3.61	3.36	3.23	3.17	3.12	3.10	3.50	4.07	4.68	5.35	6.02	6.67	7.30	7.87	8.37	8.78	9.09	9.29
-60	3.85	3.71	3.75	4.01	4.41	4.87	5.28	5.90	7.17	8.57	10.0	11.5	13.0	14.4	15.7	16.9	17.9	18.6	19.0
-50	3.85	3.84	4.26	5.00	5.96	6.98	8.10	9.29	11.2	13.7	16.4	19.3	22.4	25.6	28.7	31.6	34.1	36.0	37.1
-40	3.85	4.02	4.81	6.09	7.64	9.43	11.5	13.9	16.4	20.1	25.1	30.9	37.5	44.7	52.2	60.1	67.3	72.9	75.9
-30	3.85	4.21	5.39	7.16	9.38	12.1	15.3	19.2	23.8	29.4	36.6	47.6	61.3	78.3	98.7	122	148	168	177
-20	3.85	4.38	5.89	8.16	11.0	14.6	19.1	24.8	32.0	41.4	54.2	71.5	96.4	139	204	300	414	524	575
-10	3.85	4.51	6.29	8.96	12.3	16.8	22.5	29.8	39.6	53.2	72.7	102	149	233	406	755	1392	2304	2897
0	3.85	4.62	6.57	9.50	13.2	18.3	24.8	33.3	44.7	61.1	85.1	122	182	289	495	985	2311	5265	7311
10	3.85	4.60	6.50	9.34	13.0	17.8	24.0	32.0	42.8	57.6	78.9	111	160	239	374	627	1111	1791	2038
20	3.85	4.55	6.29	8.89	12.2	16.4	21.9	28.8	37.6	49.2	64.7	85.9	115	159	217	296	387	459	485
30	3.85	4.46	5.97	8.19	11.0	14.5	18.9	24.3	30.9	38.9	48.9	61.7	77.7	97.2	120	145	167	184	190
40	3.85	4.34	5.54	7.33	9.57	12.2	15.5	19.4	23.8	29.1	35.4	42.5	50.5	59.1	68.0	76.4	83.3	88.2	90.2
50	3.85	4.22	5.09	6.37	8.04	9.93	12.1	14.6	17.5	20.8	24.4	28.3	32.2	36.2	39.9	43.2	45.9	47.7	48.6
60	3.85	4.12	4.65	5.46	6.50	7.75	9.07	10.5	12.2	14.0	15.9	17.9	19.9	21.8	23.5	24.9	26.1	26.9	27.3
70	3.85	4.04	4.28	4.69	5.22	5.82	6.49	7.27	8.10	8.90	9.73	10.6	11.4	12.2	12.8	13.4	13.9	14.2	14.4
80	3.85	3.96	4.06	4.18	4.33	4.52	4.72	4.94	5.17	5.42	5.67	5.92	6.15	6.34	6.51	6.66	6.78	6.86	6.89
90	3.85	3.88	3.90	3.93	3.95	3.97	4.00	4.00	4.00	4.01	4.01	4.02	4.02	4.02	4.02	4.02	4.02	4.02	4.02
100	3.85	3.80	3.75	3.70	3.66	3.61	3.56	3.49	3.42	3.35	3.29	3.24	3.19	3.17	3.16	3.14	3.14	3.13	3.14
110	3.85	3.73	3.61	3.49	3.38	3.29	3.20	3.12	3.06	3.02	3.00	2.99	2.99	2.99	2.99	3.00	3.00	3.00	3.00
120	3.85	3.66	3.47	3.31	3.17	3.07	3.01	2.98	2.98	2.98	2.99	3.03	3.07	3.12	3.18	3.22	3.27	3.30	3.30
130	3.85	3.60	3.36	3.16	3.03	2.98	2.97	2.98	3.02	3.14	3.31	3.54	3.81	4.11	4.44	4.76	5.03	5.21	5.29
140	3.85	3.54	3.27	3.07	2.97	2.96	2.99	3.10	3.33	3.72	4.27	4.96	5.71	6.41	7.00	7.47	7.77	7.95	8.02
150	3.85	3.50	3.20	3.00	2.95	2.98	3.10	3.39	3.93	4.76	5.78	6.78	7.61	8.19	8.56	8.81	8.95	9.03	9.05
160	3.85	3.47	3.15	2.96	2.95	3.02	3.26	3.77	4.66	5.85	7.03	7.93	8.49	8.83	9.05	9.23	9.38	9.46	9.56
170	3.85	3.45	3.12	2.95	2.96	3.08	3.40	4.10	5.24	6.56	7.69	8.38	8.67	8.76	8.81	8.76	8.65	8.66	8.83
180	3.85	3.44	3.10	2.94	2.96	3.11	3.48	4.25	5.47	6.81	7.88	8.42	8.45	8.20	7.80	7.39	6.90	6.42	6.72

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-06-16

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-600mm-RGBW 3000K-15D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228-W
MFR.:	SUR.:	Shielding Angle:

Table--2
UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	5.81	5.79	5.72	5.46	5.02	4.39	3.58	2.72	1.94	1.41	1.24	1.33	1.57	1.82	1.93	1.89	1.72	1.42
-170	7.45	6.94	6.55	5.98	5.23	4.38	3.48	2.59	1.85	1.38	1.24	1.33	1.58	1.82	1.93	1.89	1.72	1.42
-160	6.82	6.52	5.98	5.32	4.55	3.73	2.90	2.15	1.59	1.27	1.23	1.37	1.63	1.85	1.93	1.89	1.71	1.42
-150	4.91	4.68	4.31	3.79	3.22	2.61	2.05	1.60	1.31	1.21	1.27	1.48	1.71	1.89	1.92	1.87	1.70	1.42
-140	2.80	2.67	2.46	2.18	1.87	1.58	1.35	1.21	1.19	1.25	1.43	1.64	1.82	1.92	1.91	1.85	1.67	1.42
-130	1.36	1.32	1.27	1.19	1.14	1.15	1.17	1.23	1.35	1.51	1.67	1.81	1.90	1.92	1.90	1.81	1.64	1.42
-120	1.15	1.19	1.22	1.28	1.34	1.43	1.53	1.63	1.73	1.81	1.87	1.92	1.92	1.91	1.87	1.76	1.60	1.42
-110	1.80	1.81	1.83	1.85	1.88	1.92	1.93	1.93	1.94	1.93	1.93	1.93	1.91	1.86	1.78	1.67	1.55	1.42
-100	1.95	1.95	1.95	1.94	1.94	1.93	1.92	1.92	1.90	1.89	1.87	1.84	1.78	1.72	1.65	1.58	1.50	1.42
-90	1.64	1.63	1.62	1.61	1.61	1.60	1.59	1.59	1.58	1.58	1.57	1.57	1.54	1.52	1.49	1.47	1.44	1.42
-80	3.49	3.38	3.24	3.08	2.90	2.72	2.55	2.38	2.21	2.03	1.85	1.69	1.57	1.48	1.43	1.41	1.40	1.42
-70	9.09	8.79	8.38	7.89	7.34	6.73	6.12	5.46	4.79	4.14	3.53	2.96	2.48	2.03	1.67	1.46	1.40	1.42
-60	18.6	17.8	16.9	15.6	14.3	13.0	11.6	10.2	8.79	7.39	6.11	4.91	3.84	2.93	2.19	1.64	1.40	1.42
-50	36.0	34.1	31.5	28.6	25.4	22.4	19.5	16.7	14.1	11.6	9.34	7.32	5.57	4.03	2.82	1.92	1.45	1.42
-40	73.0	67.5	60.3	52.3	44.8	37.5	31.1	25.5	20.7	16.6	13.1	10.0	7.41	5.24	3.48	2.23	1.49	1.42
-30	167	147	122	98.8	78.7	61.6	47.8	36.9	28.6	22.1	17.0	12.7	9.21	6.38	4.11	2.52	1.54	1.42
-20	510	396	288	199	138	96.5	69.5	50.7	37.3	27.6	20.5	15.0	10.7	7.32	4.63	2.74	1.58	1.42
-10	2130	1274	693	385	223	139	91.4	63.2	44.7	32.0	23.1	16.7	11.7	7.94	4.98	2.88	1.61	1.42
0	5550	2559	1077	508	272	160	101	68.7	47.8	33.8	24.2	17.3	12.1	8.16	5.09	2.92	1.62	1.42
10	1684	1024	586	359	228	149	99.4	69.1	48.9	35.0	25.3	18.1	12.7	8.54	5.34	3.08	1.70	1.42
20	449	372	285	211	156	114	83.2	60.9	44.8	33.1	24.4	17.7	12.5	8.46	5.34	3.13	1.75	1.42
30	182	164	140	117	95.0	76.5	61.2	48.8	37.8	29.0	21.9	16.2	11.6	7.94	5.11	3.08	1.78	1.42
40	87.5	82.0	74.7	66.1	57.9	49.6	42.1	35.3	29.4	23.7	18.4	13.8	10.1	7.08	4.68	2.91	1.80	1.42
50	47.5	45.4	42.5	39.2	35.5	31.8	28.1	24.4	21.0	17.7	14.4	11.2	8.37	6.03	4.15	2.70	1.81	1.42
60	26.8	25.9	24.7	23.2	21.4	19.6	17.8	15.9	14.0	12.2	10.5	8.53	6.61	4.95	3.56	2.50	1.80	1.42
70	14.2	13.8	13.4	12.8	12.1	11.3	10.5	9.66	8.82	8.00	7.17	6.25	5.06	3.97	3.07	2.36	1.81	1.42
80	6.84	6.74	6.60	6.43	6.24	6.03	5.81	5.57	5.32	5.08	4.86	4.62	3.96	3.35	2.80	2.29	1.82	1.42
90	4.01	4.01	4.00	3.99	3.99	3.98	3.98	3.98	3.98	3.98	3.98	3.98	3.56	3.13	2.70	2.27	1.85	1.42
100	3.13	3.12	3.12	3.12	3.14	3.15	3.19	3.23	3.29	3.36	3.42	3.47	3.23	2.95	2.64	2.28	1.88	1.42
110	2.99	2.99	2.98	2.97	2.96	2.96	2.95	2.95	2.97	3.00	3.06	3.07	2.94	2.77	2.55	2.26	1.89	1.42
120	3.30	3.28	3.24	3.19	3.14	3.07	3.02	2.97	2.95	2.94	2.94	2.85	2.73	2.61	2.46	2.23	1.89	1.42
130	5.25	5.10	4.86	4.55	4.22	3.90	3.61	3.36	3.16	3.02	2.87	2.71	2.60	2.49	2.37	2.19	1.88	1.42
140	7.97	7.83	7.56	7.16	6.59	5.91	5.15	4.43	3.83	3.27	2.79	2.54	2.46	2.38	2.28	2.14	1.86	1.42
150	9.03	8.96	8.83	8.61	8.27	7.75	6.98	6.00	4.53	3.35	2.68	2.36	2.27	2.27	2.20	2.08	1.84	1.42
160	9.49	9.43	9.26	9.07	8.86	8.56	7.36	5.87	4.37	3.14	2.40	2.09	2.06	2.12	2.11	2.03	1.81	1.42
170	8.76	8.79	8.91	8.50	7.68	6.78	5.75	4.59	3.44	2.47	1.91	1.74	1.81	1.96	2.02	1.96	1.77	1.42
180	5.81	5.79	5.72	5.46	5.02	4.39	3.58	2.72	1.94	1.41	1.24	1.33	1.57	1.82	1.93	1.89	1.72	1.42

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: