

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	6998.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	35.0V x 34.4H
	At 50% of Imax	15.3V x 15.3H
	At 90% of Imax	5.5V x 5.9H

Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	628.3 lumens per klm.
	To 50% of Imax	280.4 lumens per klm.
	To 90% of Imax	51.6 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoBody-600mm-RGBW ALL-15D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228
MFR.:	SUR.:	Shielding Angle:

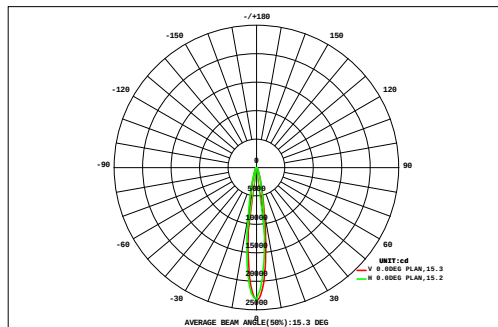

DATA OF LAMP		Eff:55.75lm/W	
MODEL		Imax(cd)	23215
NOMINAL POWER(W)	59.5	AVAILABILITY(%)	62.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	2086
NOMINAL FLUX(lm)	3317	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	3317
TEST VOLTAGE(V)	221.4	q @50%(H,V)	15,15DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.94	1.11	1.32	1.54	1.77	2.00	2.21	2.37	2.46	2.45	2.34	2.17	1.96	1.73	1.50	1.28	1.07	0.89	31.1	0.00
27	0.94	1.11	1.32	1.54	1.77	2.00	2.21	2.37	2.46	2.45	2.34	2.17	1.96	1.73	1.50	1.28	1.07	0.89	31.1	0.00
24	1.09	1.31	1.58	1.89	2.22	2.56	2.89	3.15	3.30	3.28	3.10	2.82	2.49	2.15	1.82	1.52	1.26	1.03	39.5	0.00
21	1.26	1.55	1.90	2.32	2.82	3.36	3.89	4.33	4.60	4.57	4.25	3.77	3.24	2.70	2.22	1.81	1.46	1.17	51.2	0.00
18	1.44	1.81	2.28	2.88	3.62	4.49	5.42	6.24	6.75	6.69	6.07	5.19	4.26	3.42	2.72	2.16	1.70	1.33	68.5	15.6
15	1.62	2.09	2.73	3.57	4.69	6.15	7.85	9.46	10.5	10.3	9.10	7.40	5.72	4.37	3.38	2.58	1.96	1.50	95.0	57.7
12	1.81	2.38	3.21	4.38	6.10	8.51	11.6	14.9	17.1	16.8	14.1	10.7	7.80	5.73	4.19	3.08	2.25	1.66	136	106
9	1.97	2.66	3.68	5.26	7.78	11.6	17.3	23.9	28.5	27.7	22.1	15.7	11.0	7.50	5.13	3.58	2.53	1.81	200	174
6	2.09	2.88	4.08	6.06	9.42	15.1	24.3	35.8	44.1	42.5	32.8	23.2	15.0	9.46	6.07	4.04	2.78	1.93	282	258
3	2.16	3.00	4.32	6.58	10.5	17.7	29.9	45.8	57.3	55.5	45.7	31.1	18.7	11.1	6.78	4.35	2.93	2.00	355	333
0	2.16	3.02	4.39	6.75	10.9	18.7	32.0	48.9	60.5	60.0	49.2	33.0	19.6	11.4	6.94	4.41	2.95	2.00	377	354
-3	2.10	2.93	4.26	6.51	10.4	17.5	29.3	43.7	51.6	50.4	40.9	27.9	17.2	10.4	6.47	4.19	2.82	1.93	330	309
-6	1.96	2.72	3.90	5.82	9.04	14.3	22.4	30.8	35.8	35.0	28.7	20.4	13.4	8.64	5.62	3.77	2.59	1.81	247	222
-9	1.78	2.43	3.40	4.90	7.26	10.7	14.9	19.2	21.8	21.4	18.2	13.8	9.77	6.75	4.64	3.25	2.29	1.64	168	141
-12	1.56	2.09	2.85	3.95	5.50	7.52	9.71	11.7	12.9	12.8	11.3	9.12	6.93	5.09	3.71	2.69	1.96	1.44	113	80.1
-15	1.35	1.75	2.31	3.08	4.06	5.20	6.40	7.43	8.00	7.91	7.20	6.09	4.90	3.81	2.90	2.19	1.65	1.25	77.5	36.1
-18	1.14	1.44	1.84	2.36	2.99	3.67	4.33	4.88	5.18	5.14	4.77	4.19	3.51	2.85	2.25	1.76	1.37	1.07	54.7	0.00
-21	0.95	1.17	1.45	1.81	2.21	2.63	3.03	3.34	3.52	3.50	3.29	2.96	2.55	2.13	1.75	1.41	1.13	0.91	39.7	0.00
-24	0.79	0.95	1.16	1.40	1.66	1.92	2.16	2.35	2.45	2.44	2.32	2.12	1.88	1.62	1.37	1.14	0.94	0.77	29.4	0.00
-27	0.79	0.95	1.16	1.40	1.66	1.92	2.16	2.35	2.45	2.44	2.32	2.12	1.88	1.62	1.37	1.14	0.94	0.77	29.4	0.00
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)	6	9	12	15	18	21	24	27			
F t	28.2	37.3	50.7	71.1	103	154	230	318	376	368	305	222	150	101	69.5	49.2	35.6	26.2	2695	---
F a	0.00	0.00	0.00	20.1	67.8	124	204	294	353	345	280	195	119	64.8	19.6	0.00	0.00	0.00	---	2086

one-half-peak spread: U:8.4,D:7.0 , L:7.4,R:8.0


NEMA Beam Type: Type 3

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-06-16

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:DecoBody-600mm-RGBW ALL-15D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228
MFR.:	SUR.:	Shielding Angle:

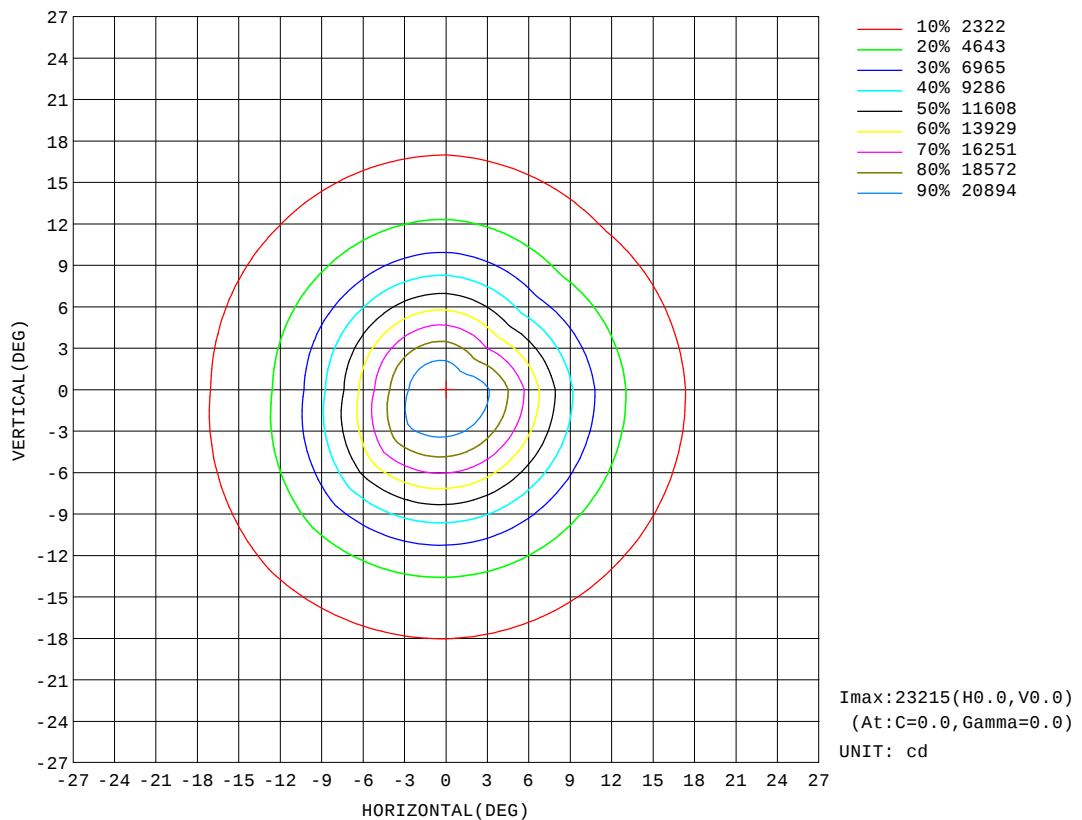


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoBody-600mm-RGBW ALL-15D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228
MFR.:	SUR.:	Shielding Angle:

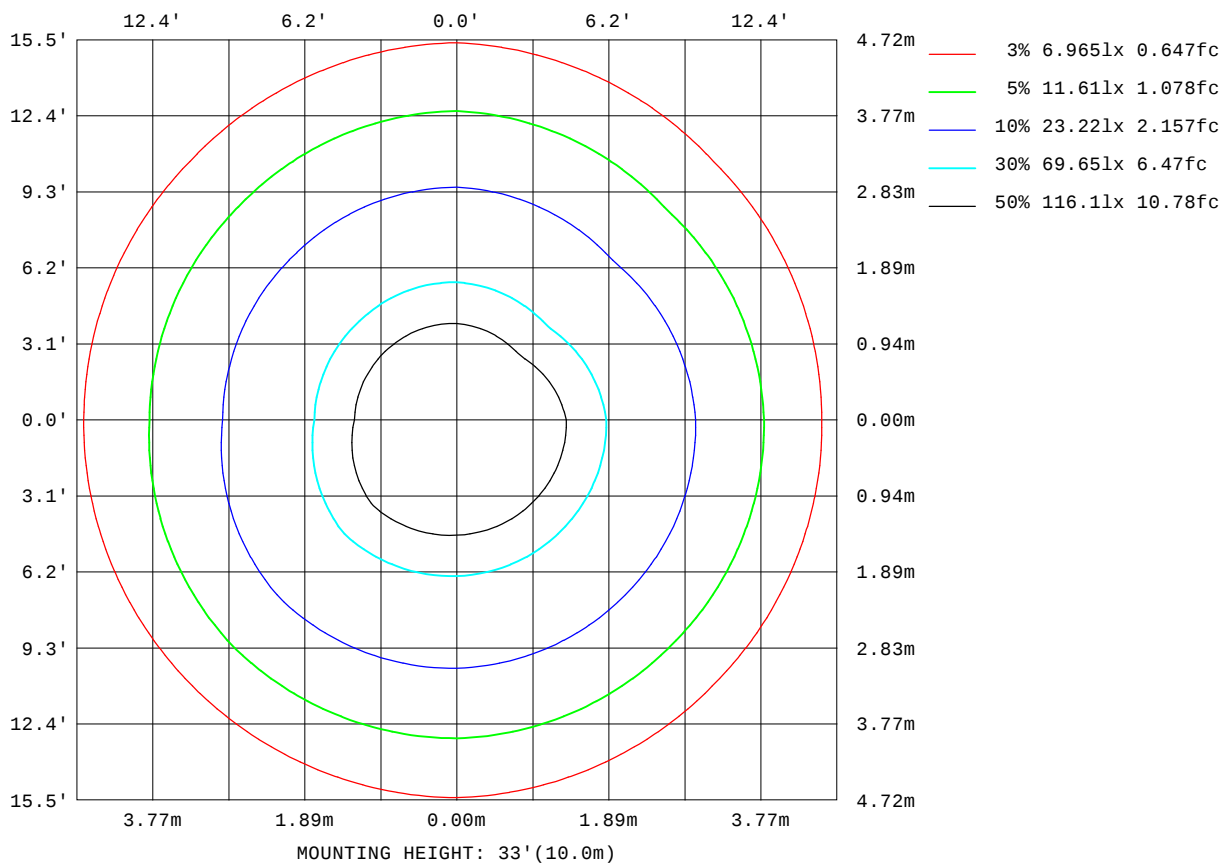

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-16

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

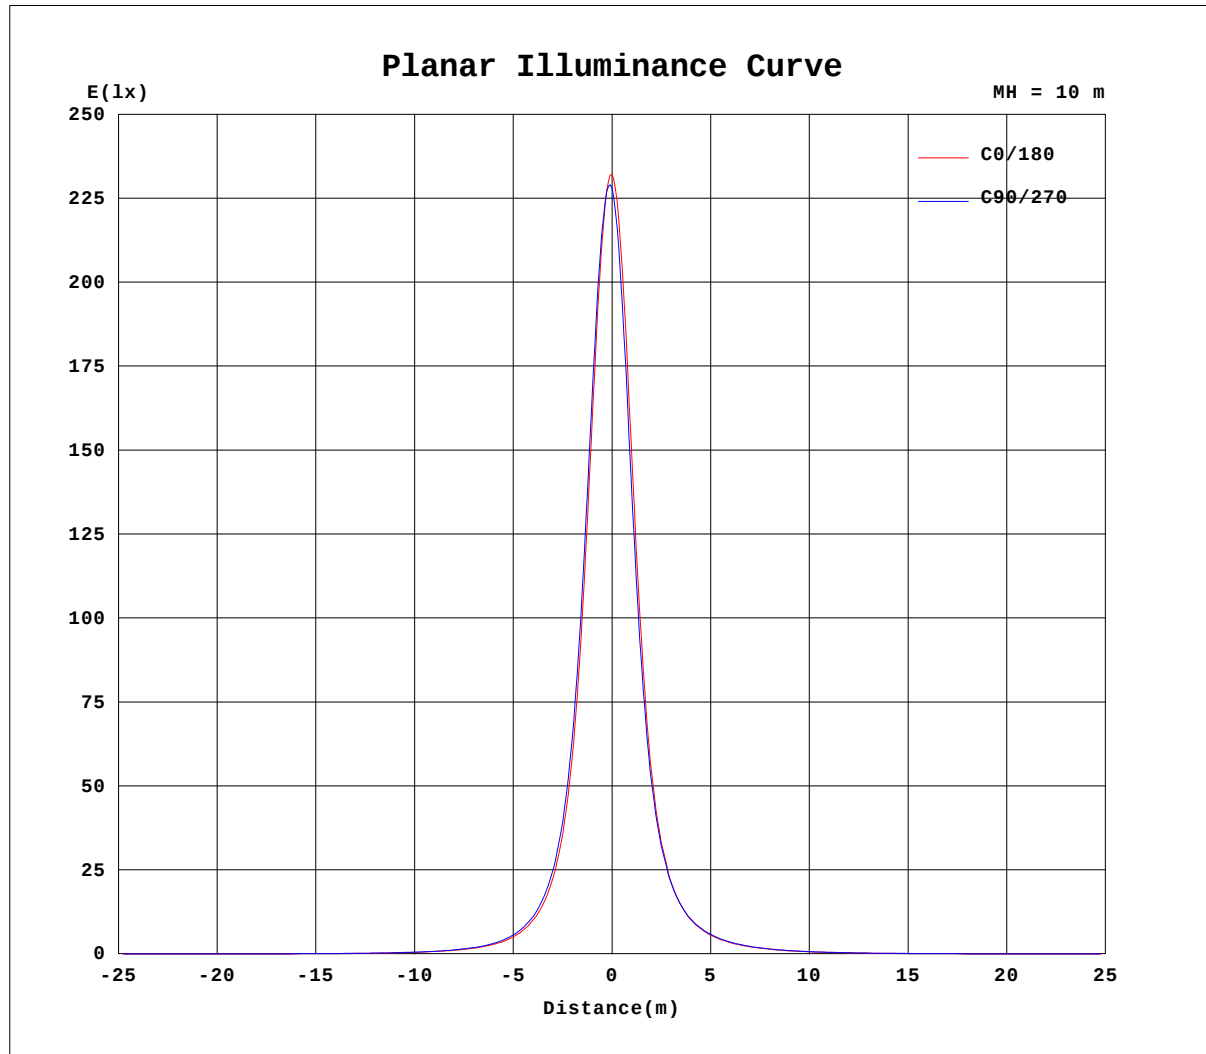


$H(b)$ Range: -90 - 90DEG
 $H(b)$ Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-16

$V(B)$ Range: -180 - 180DEG
 $V(B)$ Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoBody-600mm-RGBW ALL-15D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228
MFR.:	SUR.:	Shielding Angle:

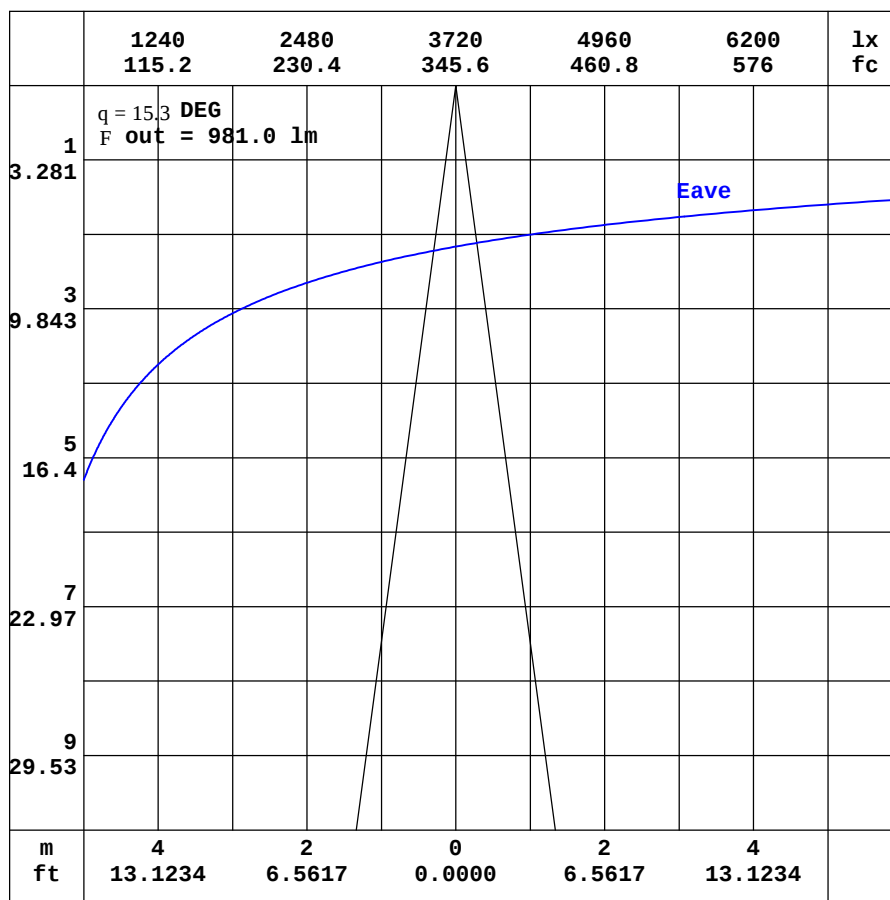

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-16

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-600mm-RGBW ALL-15D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.27	1.14	1.02	0.96	0.96	1.00	1.11	1.37	1.75	2.18	2.51	2.69	2.71	2.63	2.51	2.38	2.22	2.07	2.14
-170	1.27	1.13	1.01	0.94	0.93	0.94	1.01	1.18	1.46	1.77	2.03	2.18	2.24	2.25	2.25	2.26	2.27	2.33	2.47
-160	1.27	1.12	1.00	0.93	0.90	0.89	0.90	0.97	1.12	1.30	1.47	1.59	1.65	1.68	1.71	1.88	2.05	2.16	2.22
-150	1.27	1.12	1.00	0.92	0.87	0.84	0.82	0.81	0.83	0.88	0.93	0.96	0.95	0.99	1.17	1.34	1.47	1.57	1.61
-140	1.27	1.12	1.00	0.92	0.86	0.82	0.77	0.72	0.66	0.61	0.56	0.49	0.49	0.58	0.68	0.77	0.85	0.90	0.93
-130	1.27	1.13	1.01	0.92	0.86	0.80	0.76	0.71	0.64	0.55	0.45	0.38	0.37	0.38	0.39	0.41	0.43	0.45	0.45
-120	1.27	1.14	1.03	0.94	0.86	0.81	0.76	0.71	0.66	0.60	0.54	0.50	0.47	0.44	0.42	0.40	0.39	0.38	0.38
-110	1.27	1.15	1.05	0.96	0.88	0.82	0.76	0.71	0.67	0.63	0.61	0.61	0.61	0.60	0.59	0.59	0.58	0.58	0.58
-100	1.27	1.17	1.07	0.98	0.90	0.83	0.76	0.70	0.65	0.59	0.60	0.60	0.61	0.61	0.62	0.62	0.62	0.62	0.63
-90	1.27	1.19	1.10	1.01	0.92	0.83	0.75	0.66	0.57	0.48	0.49	0.49	0.50	0.50	0.51	0.51	0.52	0.52	0.53
-80	1.27	1.21	1.14	1.06	1.00	0.94	0.88	0.82	0.76	0.70	0.76	0.82	0.88	0.94	0.98	1.03	1.06	1.09	1.11
-70	1.27	1.24	1.20	1.22	1.26	1.32	1.38	1.44	1.49	1.54	1.69	1.90	2.10	2.30	2.47	2.62	2.75	2.84	2.89
-60	1.27	1.27	1.32	1.46	1.66	1.88	2.13	2.38	2.63	2.89	3.15	3.62	4.09	4.53	4.94	5.30	5.59	5.81	5.92
-50	1.27	1.31	1.48	1.77	2.14	2.59	3.06	3.60	4.17	4.76	5.35	6.11	7.08	8.08	9.05	9.94	10.7	11.2	11.5
-40	1.27	1.35	1.64	2.09	2.68	3.35	4.16	5.08	6.12	7.28	8.55	9.94	11.8	14.1	16.6	19.1	21.3	22.9	23.8
-30	1.27	1.40	1.81	2.42	3.20	4.15	5.33	6.73	8.42	10.5	13.0	16.1	19.8	24.6	31.7	39.4	46.9	52.9	55.6
-20	1.27	1.45	1.95	2.71	3.66	4.89	6.44	8.39	10.9	14.1	18.5	24.6	33.3	46.0	65.6	95.4	132	164	177
-10	1.27	1.48	2.05	2.93	4.02	5.48	7.36	9.77	13.0	17.5	23.9	34.0	49.6	76.4	127	231	445	732	873
0	1.27	1.51	2.12	3.06	4.24	5.84	7.90	10.6	14.3	19.5	27.4	39.5	58.7	91.7	158	318	733	1662	2322
10	1.27	1.50	2.10	3.01	4.16	5.69	7.68	10.3	13.7	18.5	25.3	35.9	51.9	77.2	121	201	349	566	687
20	1.27	1.49	2.03	2.87	3.91	5.28	7.04	9.25	12.1	15.9	20.9	28.0	37.7	51.0	69.0	93.0	122	147	159
30	1.27	1.46	1.93	2.64	3.55	4.67	6.10	7.84	9.95	12.5	15.8	19.9	24.8	30.8	38.1	45.9	53.3	58.8	61.4
40	1.27	1.42	1.79	2.36	3.09	3.95	5.00	6.27	7.73	9.39	11.3	13.5	16.0	18.7	21.5	24.2	26.7	28.5	29.4
50	1.27	1.39	1.66	2.06	2.59	3.21	3.91	4.73	5.65	6.67	7.75	8.92	10.2	11.4	12.6	13.7	14.6	15.3	15.6
60	1.27	1.35	1.52	1.77	2.10	2.49	2.94	3.41	3.91	4.45	5.02	5.66	6.30	6.89	7.44	7.93	8.33	8.61	8.77
70	1.27	1.33	1.40	1.53	1.70	1.90	2.11	2.34	2.59	2.83	3.09	3.36	3.63	3.87	4.10	4.29	4.45	4.57	4.64
80	1.27	1.30	1.33	1.37	1.41	1.47	1.53	1.60	1.68	1.75	1.83	1.90	1.97	2.04	2.10	2.15	2.19	2.22	2.24
90	1.27	1.28	1.28	1.29	1.29	1.30	1.30	1.31	1.31	1.31	1.31	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32
100	1.27	1.25	1.23	1.21	1.19	1.17	1.15	1.13	1.11	1.10	1.08	1.06	1.05	1.04	1.03	1.02	1.02	1.01	1.01
110	1.27	1.23	1.18	1.14	1.10	1.06	1.03	1.01	0.99	0.98	0.97	0.97	0.96	0.96	0.96	0.96	0.96	0.96	0.96
120	1.27	1.21	1.14	1.08	1.03	0.99	0.97	0.96	0.96	0.96	0.96	0.97	0.99	1.00	1.02	1.04	1.05	1.06	1.06
130	1.27	1.19	1.10	1.03	0.99	0.96	0.96	0.96	0.98	1.01	1.07	1.14	1.23	1.33	1.43	1.53	1.60	1.65	1.66
140	1.27	1.17	1.07	1.00	0.96	0.96	0.97	1.00	1.08	1.20	1.37	1.59	1.83	2.05	2.24	2.38	2.46	2.51	2.53
150	1.27	1.15	1.05	0.98	0.96	0.96	1.00	1.09	1.26	1.52	1.85	2.17	2.42	2.61	2.72	2.79	2.84	2.87	2.88
160	1.27	1.14	1.04	0.97	0.96	0.98	1.05	1.21	1.49	1.87	2.25	2.53	2.71	2.81	2.88	2.93	2.96	3.00	3.04
170	1.27	1.14	1.03	0.96	0.96	0.99	1.09	1.32	1.68	2.10	2.45	2.67	2.76	2.78	2.77	2.77	2.77	2.74	2.80
180	1.27	1.14	1.02	0.96	0.96	1.00	1.11	1.37	1.75	2.18	2.51	2.69	2.71	2.63	2.51	2.38	2.22	2.07	2.14

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-600mm-RGBW ALL-15D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:15DEG	DIM.:600mm	SERIAL No.:IES001228
MFR.:	SUR.:	Shielding Angle:

Table--2
UNIT: ×10cd

H(°) V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.87	1.87	1.85	1.76	1.62	1.42	1.16	0.88	0.64	0.47	0.40	0.43	0.50	0.58	0.62	0.61	0.56	0.47	
-170	2.34	2.27	2.10	1.90	1.66	1.40	1.12	0.84	0.61	0.45	0.40	0.43	0.51	0.58	0.62	0.61	0.56	0.47	
-160	2.17	2.07	1.92	1.71	1.46	1.19	0.93	0.70	0.52	0.41	0.40	0.44	0.52	0.59	0.62	0.61	0.56	0.47	
-150	1.58	1.50	1.37	1.22	1.04	0.84	0.66	0.52	0.42	0.39	0.41	0.48	0.55	0.61	0.62	0.61	0.55	0.47	
-140	0.91	0.87	0.80	0.70	0.61	0.52	0.44	0.39	0.39	0.41	0.47	0.53	0.59	0.62	0.62	0.60	0.54	0.47	
-130	0.45	0.44	0.42	0.40	0.38	0.38	0.38	0.40	0.44	0.49	0.54	0.59	0.61	0.62	0.61	0.58	0.53	0.47	
-120	0.38	0.39	0.40	0.41	0.43	0.46	0.49	0.52	0.55	0.58	0.61	0.62	0.62	0.62	0.60	0.57	0.52	0.47	
-110	0.58	0.58	0.58	0.59	0.60	0.60	0.61	0.62	0.62	0.62	0.62	0.62	0.61	0.59	0.57	0.54	0.51	0.47	
-100	0.63	0.63	0.62	0.62	0.62	0.62	0.62	0.61	0.61	0.60	0.59	0.58	0.57	0.55	0.53	0.51	0.49	0.47	
-90	0.52	0.52	0.52	0.52	0.52	0.52	0.51	0.51	0.51	0.51	0.50	0.50	0.49	0.49	0.48	0.48	0.47	0.47	
-80	1.09	1.06	1.03	0.98	0.94	0.88	0.82	0.77	0.71	0.66	0.60	0.55	0.51	0.48	0.46	0.45	0.46	0.47	
-70	2.85	2.76	2.65	2.50	2.33	2.15	1.94	1.73	1.53	1.33	1.13	0.96	0.80	0.65	0.54	0.47	0.45	0.47	
-60	5.81	5.61	5.33	4.98	4.58	4.14	3.69	3.23	2.80	2.37	1.96	1.58	1.24	0.94	0.70	0.53	0.45	0.47	
-50	11.2	10.7	9.93	9.04	8.08	7.09	6.14	5.26	4.46	3.70	3.00	2.36	1.79	1.30	0.91	0.62	0.46	0.47	
-40	22.9	21.3	19.1	16.6	14.1	11.7	9.72	8.02	6.55	5.28	4.17	3.21	2.38	1.68	1.12	0.72	0.48	0.47	
-30	52.6	46.5	39.0	31.4	24.5	19.3	15.1	11.7	9.08	7.02	5.38	4.05	2.95	2.05	1.33	0.81	0.49	0.47	
-20	160	127	91.2	62.9	43.5	30.8	22.1	16.1	11.8	8.75	6.50	4.78	3.42	2.34	1.49	0.88	0.51	0.47	
-10	687	403	218	122	70.5	43.8	29.0	20.0	14.2	10.1	7.32	5.29	3.74	2.53	1.60	0.93	0.52	0.47	
0	1760	803	334	159	85.3	50.1	32.0	21.7	15.1	10.6	7.63	5.48	3.85	2.60	1.64	0.94	0.52	0.47	
10	531	317	192	116	71.3	45.7	30.7	21.3	15.1	10.7	7.77	5.60	3.94	2.66	1.68	0.97	0.54	0.47	
20	144	117	89.0	65.8	47.8	34.4	25.0	18.3	13.4	9.89	7.32	5.34	3.79	2.58	1.64	0.96	0.54	0.47	
30	58.4	52.5	44.9	37.0	29.9	23.7	18.5	14.3	11.0	8.46	6.43	4.78	3.44	2.37	1.53	0.93	0.55	0.47	
40	28.4	26.4	23.9	21.1	18.3	15.6	12.9	10.6	8.54	6.79	5.29	4.00	2.94	2.07	1.37	0.86	0.54	0.47	
50	15.2	14.5	13.6	12.5	11.3	10.0	8.80	7.52	6.25	5.09	4.07	3.15	2.37	1.72	1.18	0.78	0.54	0.47	
60	8.59	8.30	7.90	7.41	6.85	6.26	5.62	4.99	4.27	3.57	2.93	2.33	1.81	1.37	1.00	0.71	0.54	0.47	
70	4.57	4.45	4.28	4.08	3.85	3.60	3.33	3.05	2.73	2.35	1.98	1.64	1.34	1.07	0.84	0.66	0.54	0.47	
80	2.21	2.18	2.13	2.07	2.01	1.94	1.86	1.78	1.70	1.51	1.34	1.17	1.02	0.88	0.75	0.64	0.55	0.47	
90	1.31	1.31	1.31	1.31	1.30	1.30	1.30	1.30	1.29	1.20	1.11	1.02	0.93	0.84	0.74	0.65	0.56	0.47	
100	1.01	1.01	1.01	1.02	1.02	1.03	1.04	1.05	1.06	1.02	0.98	0.93	0.88	0.82	0.74	0.66	0.57	0.47	
110	0.96	0.96	0.95	0.95	0.95	0.95	0.95	0.95	0.94	0.92	0.89	0.86	0.83	0.79	0.74	0.67	0.58	0.47	
120	1.06	1.06	1.04	1.03	1.01	0.99	0.97	0.95	0.91	0.87	0.84	0.82	0.79	0.76	0.73	0.67	0.58	0.47	
130	1.66	1.62	1.55	1.46	1.36	1.26	1.16	1.04	0.92	0.85	0.80	0.78	0.76	0.74	0.71	0.67	0.59	0.47	
140	2.52	2.47	2.39	2.27	2.10	1.88	1.57	1.23	0.99	0.84	0.76	0.73	0.72	0.72	0.70	0.66	0.59	0.47	
150	2.86	2.84	2.79	2.72	2.62	2.30	1.88	1.45	1.09	0.84	0.71	0.67	0.67	0.68	0.68	0.65	0.58	0.47	
160	3.00	2.97	2.93	2.82	2.53	2.21	1.86	1.47	1.09	0.80	0.64	0.60	0.61	0.65	0.66	0.64	0.58	0.47	
170	2.75	2.80	2.62	2.40	2.16	1.90	1.59	1.26	0.94	0.68	0.54	0.51	0.56	0.61	0.64	0.63	0.57	0.47	
180	1.87	1.87	1.85	1.76	1.62	1.42	1.16	0.88	0.64	0.47	0.40	0.43	0.50	0.58	0.62	0.61	0.56	0.47	

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: