

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	6227.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	37.6V x 36.7H
	At 50% of Imax	16.2V x 16.1H
	At 90% of Imax	6.0V x 6.1H

Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	638.6 lumens per klm.
	To 50% of Imax	278.5 lumens per klm.
	To 90% of Imax	55.7 lumens per klm.

Upward LOR	2.0 %
Downward LOR	98.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoBody-600mm-RGBW BLUE-15D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228-B
MFR.:	SUR.:	Shielding Angle:

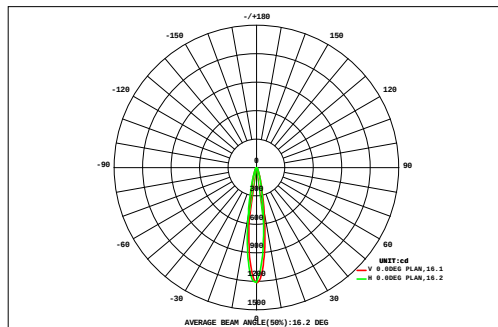

DATA OF LAMP		Eff:10.63lm/W	
MODEL		Imax(cd)	1211
NOMINAL POWER(W)	18.3	AVAILABILITY(%)	63.8
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	124.1
NOMINAL FLUX(lm)	194.5	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	194.5
TEST VOLTAGE(V)	221.4	q @50%(H,V)	16,16DEG

		AREA FLUX DIAGRAM															UNIT:lm				F t	F a
		0.06	0.07	0.08	0.10	0.11	0.12	0.14	0.14	0.15	0.15	0.14	0.13	0.12	0.11	0.09	0.08	0.07	0.06	1.92	0.00	
VERTICAL (DEG)	27	0.07	0.08	0.10	0.12	0.14	0.16	0.18	0.19	0.20	0.20	0.19	0.17	0.16	0.13	0.11	0.10	0.08	0.07	2.44	0.00	
	24	0.08	0.10	0.12	0.14	0.18	0.21	0.24	0.27	0.28	0.28	0.26	0.23	0.20	0.17	0.14	0.11	0.09	0.07	3.17	0.00	
	21	0.09	0.11	0.14	0.18	0.23	0.28	0.34	0.38	0.41	0.40	0.37	0.32	0.27	0.22	0.17	0.14	0.11	0.08	4.23	1.86	
	18	0.10	0.13	0.17	0.22	0.29	0.38	0.48	0.57	0.62	0.61	0.55	0.46	0.36	0.28	0.21	0.16	0.12	0.09	5.81	4.02	
	15	0.11	0.14	0.19	0.27	0.37	0.52	0.71	0.89	0.99	0.97	0.85	0.67	0.49	0.35	0.25	0.19	0.14	0.10	8.22	6.72	
	12	0.12	0.16	0.22	0.32	0.47	0.69	1.02	1.39	1.59	1.55	1.30	0.94	0.64	0.44	0.31	0.22	0.16	0.11	11.7	10.4	
	9	0.13	0.18	0.25	0.37	0.56	0.88	1.37	1.98	2.38	2.31	1.83	1.27	0.85	0.56	0.37	0.25	0.17	0.12	15.8	14.6	
		0.13	0.18	0.26	0.40	0.63	1.03	1.66	2.45	3.02	2.93	2.39	1.69	1.07	0.66	0.42	0.27	0.18	0.13	19.5	18.4	
		0.13	0.19	0.27	0.41	0.66	1.11	1.82	2.69	3.21	3.15	2.62	1.83	1.14	0.69	0.43	0.28	0.18	0.13	20.9	19.8	
		0.13	0.18	0.27	0.41	0.66	1.09	1.74	2.40	2.78	2.70	2.21	1.57	1.01	0.63	0.40	0.26	0.18	0.12	18.7	17.6	
		0.12	0.17	0.25	0.37	0.58	0.90	1.31	1.73	2.02	1.96	1.59	1.17	0.80	0.52	0.35	0.23	0.16	0.11	14.3	13.2	
		0.11	0.15	0.22	0.32	0.46	0.65	0.89	1.13	1.30	1.27	1.05	0.81	0.58	0.41	0.29	0.20	0.14	0.10	10.1	8.78	
		0.10	0.13	0.18	0.25	0.34	0.46	0.60	0.72	0.81	0.79	0.68	0.55	0.42	0.31	0.23	0.17	0.12	0.09	6.96	5.39	
		0.08	0.11	0.15	0.19	0.25	0.33	0.40	0.47	0.50	0.50	0.45	0.38	0.30	0.24	0.18	0.14	0.10	0.08	4.84	2.89	
		0.07	0.09	0.12	0.15	0.19	0.23	0.27	0.31	0.33	0.33	0.30	0.26	0.22	0.18	0.14	0.11	0.09	0.07	3.45	0.44	
	0.06	0.07	0.09	0.12	0.14	0.17	0.19	0.21	0.22	0.22	0.21	0.19	0.16	0.13	0.11	0.09	0.07	0.06	2.52	0.00		
	0.05	0.06	0.07	0.09	0.11	0.12	0.14	0.15	0.16	0.16	0.15	0.13	0.12	0.10	0.09	0.07	0.06	0.05	1.88	0.00		
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)			6	9	12	15	18	21	24	27			
F t	1.73	2.31	3.15	4.41	6.36	9.34	13.5	18.1	21.0	20.5	17.2	12.8	8.89	6.11	4.28	3.05	2.23	1.65	156	---		
F a	0.00	0.00	0.00	2.23	4.64	7.88	12.2	16.9	19.8	19.3	15.9	11.4	7.36	4.34	2.05	0.11	0.00	0.00	---	124		

one-half-peak spread: U:9.1,D:7.3 , L:7.8,R:8.4


NEMA Beam Type: Type 3

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-16

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:DecoBody-600mm-RGBW BLUE-15D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228-B
MFR.:	SUR.:	Shielding Angle:

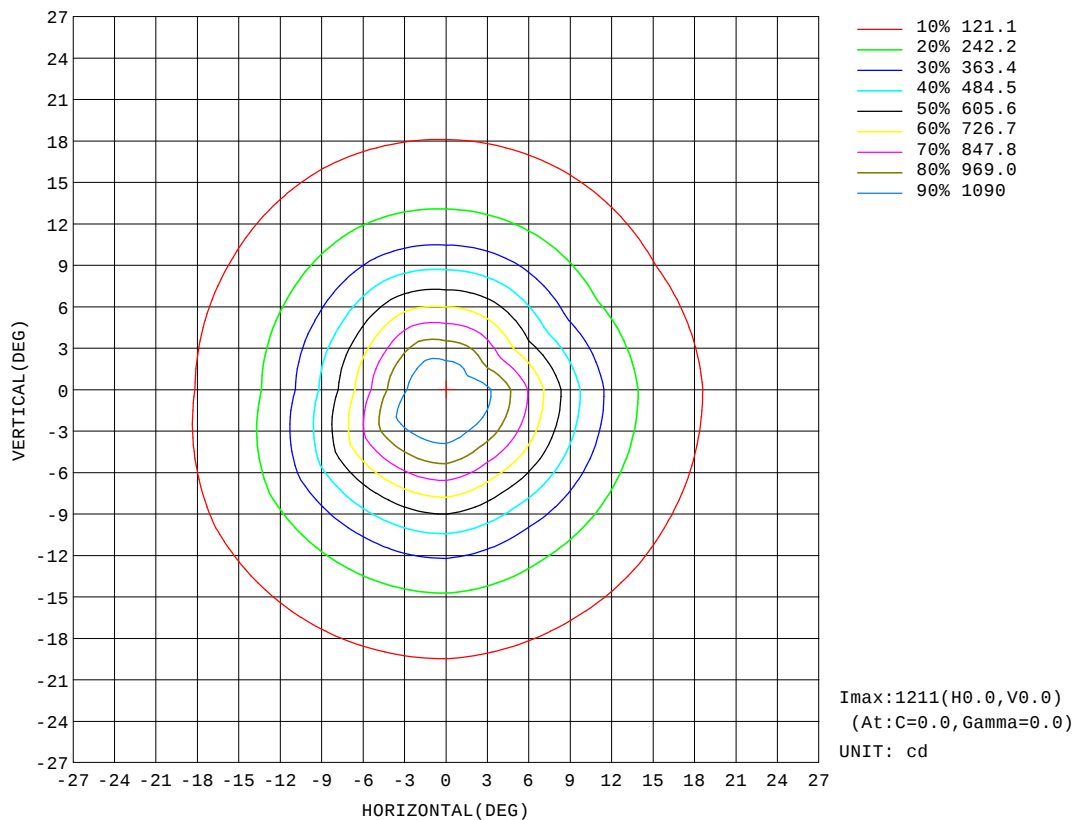


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoBody-600mm-RGBW BLUE-15D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228-B
MFR.:	SUR.:	Shielding Angle:

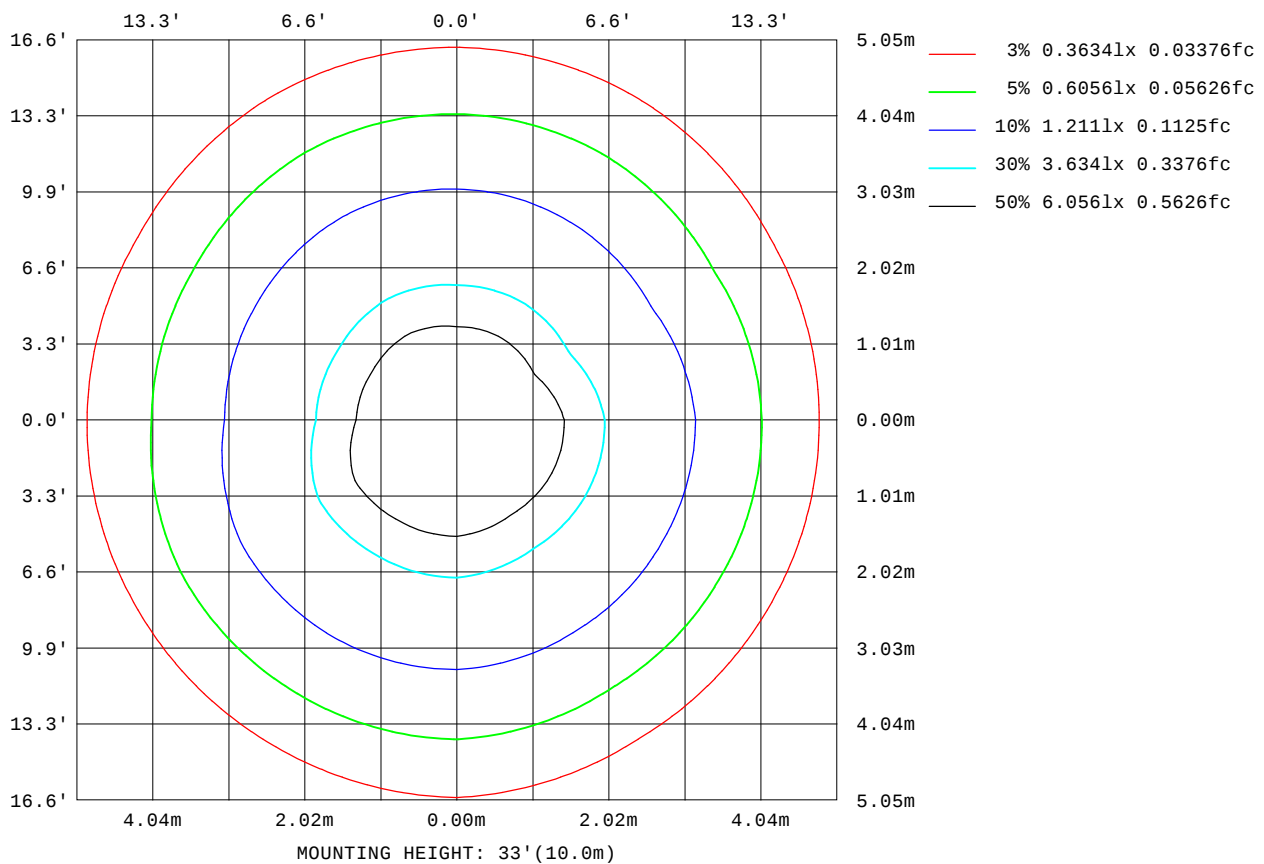

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

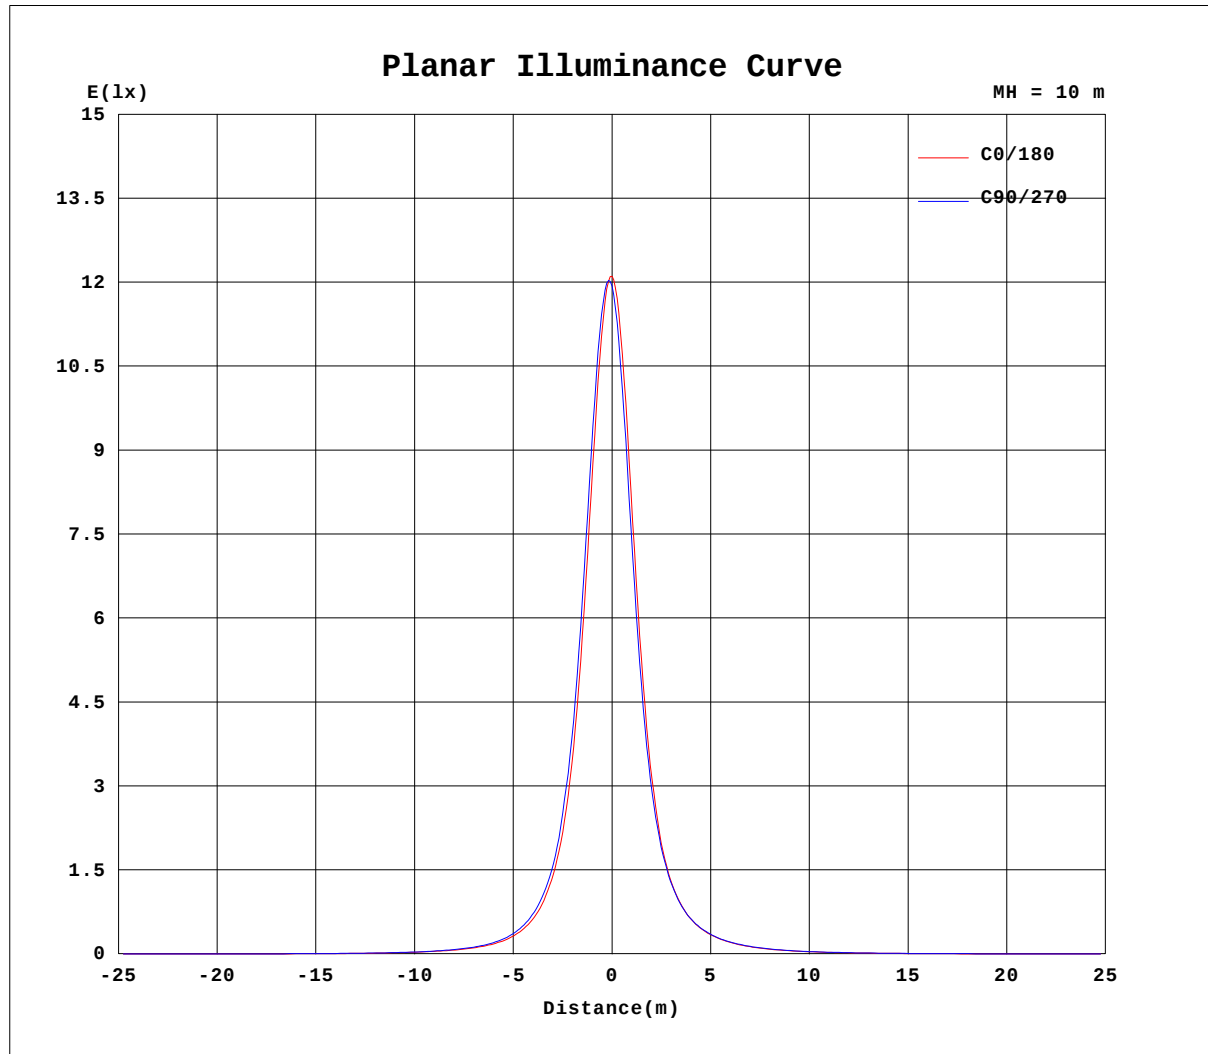


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-16

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoBody-600mm-RGBW BLUE-15D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228-B
MFR.:	SUR.:	Shielding Angle:

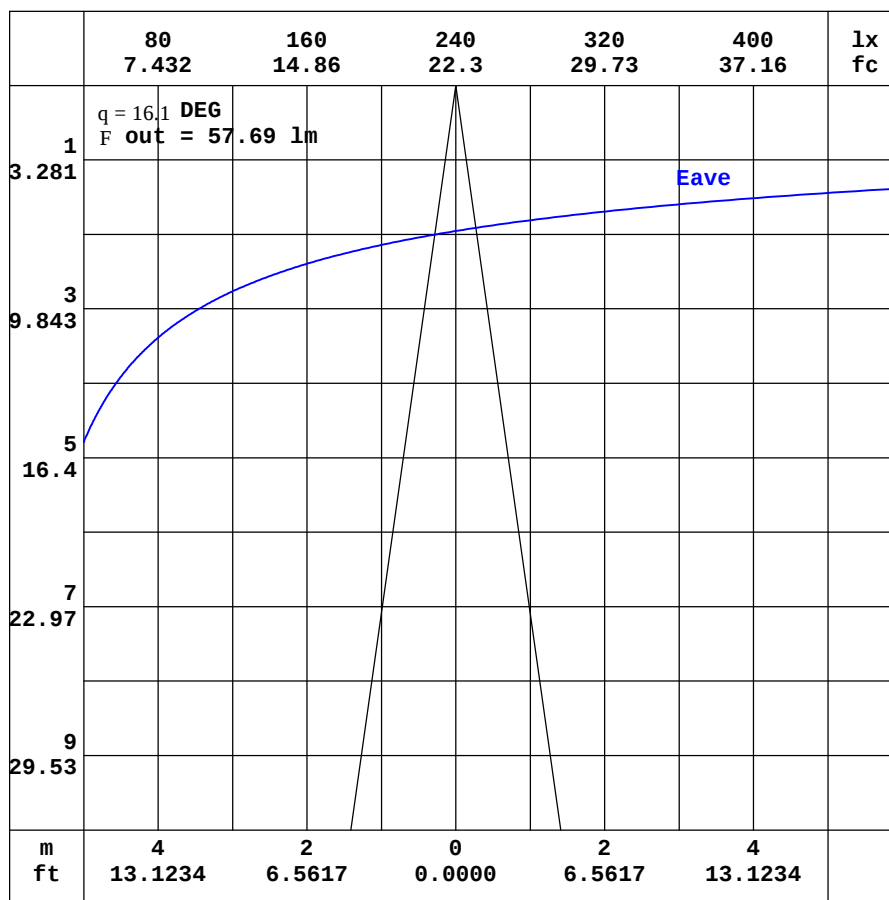

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-600mm-RGBW BLUE-15D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228-B
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.77	0.67	0.57	0.51	0.51	0.53	0.60	0.74	0.95	1.19	1.37	1.44	1.44	1.40	1.35	1.27	1.18	1.10	1.16
-170	0.77	0.66	0.55	0.49	0.47	0.47	0.51	0.59	0.72	0.86	0.98	1.04	1.06	1.08	1.09	1.12	1.18	1.27	1.31
-160	0.77	0.66	0.53	0.46	0.44	0.41	0.41	0.43	0.48	0.52	0.56	0.58	0.60	0.74	0.87	0.99	1.08	1.16	1.21
-150	0.77	0.66	0.53	0.43	0.41	0.37	0.33	0.31	0.28	0.25	0.22	0.30	0.39	0.49	0.58	0.67	0.76	0.82	0.86
-140	0.77	0.65	0.53	0.43	0.38	0.34	0.28	0.22	0.17	0.15	0.15	0.17	0.20	0.24	0.29	0.35	0.41	0.45	0.47
-130	0.77	0.64	0.53	0.43	0.35	0.31	0.26	0.19	0.15	0.15	0.15	0.15	0.14	0.14	0.14	0.15	0.17	0.18	0.19
-120	0.77	0.65	0.54	0.44	0.35	0.29	0.23	0.20	0.20	0.19	0.19	0.18	0.18	0.17	0.16	0.15	0.14	0.14	0.14
-110	0.77	0.66	0.55	0.45	0.36	0.29	0.22	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.19	0.19	0.18
-100	0.77	0.66	0.56	0.46	0.37	0.29	0.21	0.20	0.20	0.20	0.19	0.19	0.19	0.19	0.19	0.19	0.20	0.20	0.20
-90	0.77	0.67	0.57	0.47	0.37	0.27	0.17	0.17	0.17	0.17	0.17	0.17	0.18	0.18	0.18	0.18	0.18	0.18	0.18
-80	0.77	0.68	0.59	0.49	0.39	0.29	0.20	0.23	0.28	0.33	0.38	0.43	0.47	0.50	0.53	0.56	0.58	0.60	0.61
-70	0.77	0.70	0.63	0.57	0.54	0.53	0.53	0.62	0.76	0.90	1.04	1.19	1.33	1.46	1.57	1.66	1.74	1.80	1.83
-60	0.77	0.72	0.70	0.73	0.81	0.90	1.00	1.15	1.42	1.72	2.03	2.36	2.67	2.96	3.23	3.46	3.63	3.77	3.84
-50	0.77	0.75	0.80	0.93	1.13	1.34	1.59	1.86	2.27	2.80	3.39	4.00	4.64	5.28	5.91	6.49	6.98	7.34	7.53
-40	0.77	0.78	0.91	1.15	1.47	1.84	2.29	2.80	3.37	4.16	5.20	6.40	7.77	9.27	10.8	12.4	13.7	14.8	15.3
-30	0.77	0.81	1.02	1.37	1.81	2.37	3.06	3.88	4.85	6.05	7.56	9.79	12.6	16.2	20.4	25.3	30.2	34.1	35.9
-20	0.77	0.85	1.12	1.57	2.13	2.87	3.80	4.97	6.47	8.41	11.0	14.6	19.9	28.6	41.9	60.5	83.2	104	113
-10	0.77	0.88	1.21	1.72	2.39	3.29	4.45	5.93	7.94	10.6	14.6	20.5	30.0	47.3	81.0	148	271	430	522
0	0.77	0.91	1.27	1.83	2.57	3.57	4.87	6.57	8.88	12.1	16.8	24.0	35.8	56.2	96.6	188	424	893	1211
10	0.77	0.90	1.25	1.80	2.51	3.48	4.72	6.33	8.50	11.4	15.7	21.9	31.5	46.9	73.4	123	212	341	389
20	0.77	0.89	1.22	1.72	2.36	3.22	4.30	5.69	7.47	9.81	12.9	17.1	23.0	31.2	42.6	57.8	75.9	90.5	96.0
30	0.77	0.88	1.16	1.58	2.13	2.83	3.72	4.80	6.11	7.73	9.79	12.3	15.4	19.2	23.6	28.3	32.6	35.7	36.9
40	0.77	0.86	1.08	1.41	1.86	2.38	3.04	3.82	4.71	5.78	7.03	8.45	10.0	11.7	13.4	15.0	16.4	17.3	17.7
50	0.77	0.84	1.00	1.24	1.56	1.93	2.36	2.87	3.45	4.11	4.83	5.59	6.37	7.16	7.88	8.51	9.04	9.40	9.56
60	0.77	0.82	0.92	1.07	1.27	1.50	1.76	2.05	2.38	2.74	3.12	3.51	3.90	4.28	4.60	4.89	5.11	5.26	5.33
70	0.77	0.82	0.86	0.94	1.04	1.15	1.28	1.42	1.57	1.72	1.88	2.04	2.20	2.35	2.49	2.61	2.70	2.76	2.80
80	0.77	0.80	0.83	0.86	0.89	0.93	0.97	1.00	1.03	1.07	1.10	1.14	1.17	1.21	1.25	1.28	1.31	1.33	1.34
90	0.77	0.78	0.80	0.81	0.83	0.84	0.86	0.85	0.85	0.84	0.84	0.83	0.82	0.83	0.84	0.85	0.85	0.86	0.87
100	0.77	0.77	0.77	0.77	0.76	0.76	0.75	0.73	0.69	0.66	0.64	0.60	0.58	0.57	0.57	0.58	0.58	0.58	0.59
110	0.77	0.76	0.73	0.71	0.68	0.66	0.63	0.59	0.56	0.54	0.52	0.51	0.51	0.51	0.51	0.51	0.51	0.51	0.51
120	0.77	0.74	0.70	0.65	0.60	0.57	0.55	0.53	0.52	0.51	0.51	0.52	0.53	0.53	0.54	0.54	0.54	0.53	0.53
130	0.77	0.72	0.66	0.59	0.55	0.53	0.52	0.51	0.51	0.52	0.55	0.59	0.65	0.71	0.77	0.82	0.85	0.87	0.87
140	0.77	0.71	0.63	0.56	0.53	0.52	0.51	0.52	0.55	0.61	0.71	0.84	0.97	1.11	1.21	1.29	1.33	1.35	1.35
150	0.77	0.70	0.60	0.53	0.52	0.51	0.52	0.56	0.65	0.79	0.96	1.14	1.30	1.41	1.48	1.54	1.55	1.55	1.55
160	0.77	0.69	0.58	0.52	0.52	0.52	0.55	0.63	0.79	0.99	1.18	1.35	1.43	1.50	1.56	1.58	1.60	1.62	1.64
170	0.77	0.68	0.57	0.52	0.51	0.53	0.58	0.70	0.90	1.13	1.32	1.43	1.47	1.50	1.50	1.53	1.49	1.47	1.54
180	0.77	0.67	0.57	0.51	0.51	0.53	0.60	0.74	0.95	1.19	1.37	1.44	1.44	1.40	1.35	1.27	1.18	1.10	1.19

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-600mm-RGBW BLUE-15D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228-B
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	1.00	1.00	0.96	0.91	0.83	0.70	0.55	0.40	0.26	0.16	0.15	0.17	0.19	0.20	0.20	0.19	0.16	0.15
-170	1.25	1.16	1.10	1.03	0.89	0.72	0.55	0.39	0.26	0.17	0.15	0.17	0.19	0.20	0.20	0.19	0.16	0.15
-160	1.16	1.09	1.00	0.90	0.77	0.63	0.47	0.33	0.22	0.16	0.15	0.17	0.18	0.20	0.19	0.19	0.16	0.15
-150	0.83	0.77	0.70	0.61	0.51	0.41	0.31	0.24	0.18	0.15	0.15	0.17	0.18	0.20	0.19	0.19	0.16	0.15
-140	0.45	0.42	0.36	0.30	0.26	0.21	0.17	0.16	0.14	0.15	0.15	0.17	0.19	0.20	0.19	0.19	0.16	0.15
-130	0.19	0.17	0.16	0.14	0.14	0.14	0.14	0.15	0.15	0.15	0.16	0.19	0.20	0.19	0.19	0.18	0.16	0.15
-120	0.14	0.14	0.14	0.15	0.16	0.17	0.18	0.18	0.18	0.19	0.19	0.19	0.19	0.19	0.19	0.17	0.16	0.15
-110	0.19	0.19	0.19	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.19	0.19	0.19	0.19	0.19	0.18	0.17	0.16
-100	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.19	0.19	0.18	0.18	0.17	0.16
-90	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.17	0.17	0.16	0.16	0.15
-80	0.60	0.59	0.56	0.54	0.51	0.47	0.43	0.38	0.33	0.29	0.24	0.19	0.18	0.17	0.16	0.16	0.16	0.15
-70	1.80	1.74	1.66	1.57	1.46	1.34	1.20	1.05	0.91	0.76	0.61	0.49	0.38	0.29	0.21	0.17	0.16	0.15
-60	3.75	3.61	3.42	3.18	2.91	2.64	2.35	2.05	1.75	1.45	1.17	0.91	0.69	0.49	0.34	0.21	0.16	0.15
-50	7.31	6.92	6.39	5.80	5.17	4.58	3.98	3.41	2.86	2.33	1.86	1.43	1.07	0.74	0.48	0.28	0.17	0.15
-40	14.7	13.6	12.1	10.6	9.08	7.66	6.35	5.21	4.22	3.38	2.65	2.01	1.46	1.00	0.63	0.35	0.18	0.15
-30	33.6	29.4	24.4	19.9	15.9	12.5	9.75	7.58	5.87	4.52	3.45	2.57	1.84	1.25	0.77	0.42	0.19	0.15
-20	101	78.2	56.9	39.8	27.7	19.6	14.1	10.3	7.63	5.65	4.18	3.05	2.16	1.44	0.88	0.47	0.21	0.15
-10	395	240	133	75.3	44.4	27.7	18.4	12.8	9.08	6.51	4.71	3.39	2.37	1.58	0.96	0.51	0.22	0.15
0	939	462	204	99.2	53.7	31.7	20.3	13.8	9.66	6.84	4.92	3.51	2.44	1.63	0.98	0.52	0.23	0.15
10	323	199	115	70.4	44.7	29.2	19.7	13.8	9.82	7.04	5.10	3.65	2.55	1.70	1.03	0.55	0.24	0.15
20	88.8	73.4	56.0	41.4	30.4	22.4	16.4	12.1	8.94	6.61	4.88	3.54	2.49	1.66	1.03	0.56	0.25	0.15
30	35.5	32.2	27.9	23.2	18.8	15.1	12.1	9.66	7.49	5.76	4.35	3.21	2.28	1.56	0.98	0.55	0.26	0.15
40	17.3	16.3	14.9	13.2	11.5	9.88	8.37	7.00	5.81	4.69	3.63	2.73	1.98	1.38	0.89	0.52	0.26	0.15
50	9.37	8.99	8.44	7.80	7.08	6.32	5.57	4.83	4.13	3.48	2.83	2.18	1.63	1.16	0.78	0.48	0.27	0.15
60	5.25	5.08	4.85	4.56	4.23	3.87	3.50	3.12	2.74	2.39	2.06	1.66	1.28	0.96	0.67	0.44	0.26	0.15
70	2.76	2.69	2.60	2.48	2.34	2.19	2.03	1.87	1.71	1.55	1.41	1.24	1.00	0.78	0.58	0.41	0.27	0.15
80	1.33	1.31	1.28	1.24	1.20	1.16	1.13	1.09	1.06	1.03	1.00	0.95	0.81	0.66	0.52	0.39	0.27	0.15
90	0.86	0.85	0.84	0.84	0.83	0.82	0.83	0.83	0.84	0.84	0.85	0.86	0.74	0.62	0.50	0.39	0.27	0.15
100	0.58	0.58	0.57	0.57	0.57	0.57	0.59	0.61	0.65	0.67	0.70	0.73	0.65	0.56	0.47	0.37	0.27	0.15
110	0.51	0.51	0.51	0.51	0.51	0.51	0.51	0.51	0.52	0.54	0.57	0.59	0.55	0.50	0.43	0.35	0.26	0.15
120	0.54	0.54	0.55	0.55	0.54	0.53	0.52	0.51	0.51	0.51	0.52	0.49	0.46	0.43	0.39	0.32	0.25	0.15
130	0.88	0.86	0.83	0.79	0.74	0.67	0.61	0.56	0.52	0.51	0.49	0.45	0.41	0.38	0.36	0.31	0.23	0.15
140	1.36	1.34	1.30	1.24	1.14	1.01	0.87	0.75	0.63	0.53	0.45	0.41	0.37	0.34	0.32	0.29	0.22	0.15
150	1.55	1.55	1.54	1.49	1.42	1.32	1.18	1.00	0.74	0.54	0.42	0.36	0.33	0.31	0.28	0.26	0.21	0.15
160	1.62	1.61	1.59	1.56	1.52	1.45	1.23	0.97	0.70	0.50	0.37	0.31	0.29	0.27	0.25	0.24	0.19	0.15
170	1.49	1.51	1.55	1.45	1.30	1.13	0.94	0.74	0.53	0.36	0.28	0.24	0.25	0.24	0.23	0.22	0.17	0.15
180	1.00	1.00	0.96	0.91	0.83	0.70	0.55	0.40	0.26	0.16	0.15	0.17	0.19	0.20	0.20	0.19	0.16	0.15

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-06-16

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: