

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	6827.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	35.7V x 34.8H
	At 50% of Imax	15.5V x 15.3H
	At 90% of Imax	5.7V x 5.9H

Beam Flux	Total	1000.5 lumens per klm.
	To 10% of Imax	631.9 lumens per klm.
	To 50% of Imax	280.1 lumens per klm.
	To 90% of Imax	50.1 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoBody-600mm-RGBW GREEN-15D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228-G
MFR.:	SUR.:	Shielding Angle:

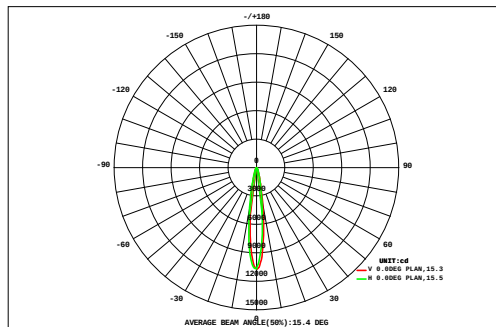

DATA OF LAMP		Eff:86.06lm/W	
MODEL		Imax(cd)	10692
NOMINAL POWER(W)	18.2	AVAILABILITY(%)	63.2
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	989.0
NOMINAL FLUX(lm)	1566	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1566
TEST VOLTAGE(V)	221.4	q @50%(H,V)	15,15DEG

		AREA FLUX DIAGRAM																UNIT:lm				F t	F a
		0.45	0.53	0.63	0.75	0.86	0.97	1.06	1.13	1.16	1.16	1.11	1.04	0.94	0.83	0.72	0.61	0.52	0.44	14.9	0.00		
VERTICAL (DEG)	27	0.52	0.63	0.76	0.91	1.08	1.24	1.39	1.50	1.56	1.55	1.47	1.35	1.20	1.04	0.88	0.74	0.61	0.50	19.0	0.00		
	24	0.60	0.74	0.92	1.13	1.37	1.64	1.88	2.07	2.17	2.15	2.02	1.81	1.57	1.31	1.08	0.88	0.71	0.58	24.6	0.00		
	21	0.68	0.86	1.09	1.39	1.76	2.20	2.64	2.99	3.17	3.13	2.90	2.51	2.08	1.66	1.32	1.04	0.83	0.65	32.9	8.70		
	18	0.77	0.99	1.29	1.71	2.27	3.00	3.82	4.51	4.87	4.80	4.32	3.58	2.79	2.12	1.60	1.22	0.94	0.73	45.3	29.1		
	15	0.85	1.13	1.52	2.08	2.93	4.09	5.63	7.20	7.95	7.77	6.74	5.18	3.76	2.68	1.93	1.43	1.06	0.80	64.7	51.1		
	12	0.93	1.26	1.75	2.50	3.67	5.49	8.27	11.5	13.2	12.8	10.6	7.44	4.92	3.36	2.34	1.66	1.19	0.86	93.7	81.5		
	9	0.99	1.37	1.94	2.88	4.42	7.07	11.3	16.8	20.5	19.8	15.3	10.1	6.55	4.25	2.80	1.88	1.30	0.92	130	119		
	-9	1.03	1.43	2.06	3.11	4.94	8.32	13.9	21.1	26.6	25.7	20.4	13.9	8.46	5.07	3.17	2.05	1.37	0.94	164	153		
		1.03	1.44	2.11	3.23	5.23	9.01	15.3	23.2	28.1	27.7	22.7	15.3	9.07	5.32	3.27	2.09	1.39	0.94	176	166		
		1.00	1.41	2.07	3.18	5.15	8.78	14.4	20.4	24.1	23.3	18.8	13.0	8.04	4.86	3.05	1.98	1.33	0.91	156	145		
		0.93	1.31	1.91	2.89	4.52	7.11	10.6	14.4	17.1	16.5	13.2	9.49	6.28	4.06	2.66	1.79	1.22	0.85	117	106		
		0.84	1.17	1.67	2.43	3.54	5.10	7.10	9.19	10.7	10.4	8.51	6.38	4.57	3.18	2.20	1.53	1.08	0.77	80.3	68.4		
		0.73	1.00	1.39	1.92	2.66	3.59	4.66	5.71	6.42	6.29	5.38	4.25	3.26	2.41	1.76	1.28	0.93	0.68	54.3	40.6		
	-12	0.62	0.83	1.12	1.49	1.96	2.52	3.12	3.65	3.98	3.92	3.49	2.90	2.31	1.81	1.38	1.04	0.78	0.59	37.5	18.7		
	-15	0.52	0.69	0.89	1.14	1.45	1.78	2.13	2.41	2.59	2.56	2.33	2.01	1.66	1.35	1.07	0.84	0.65	0.50	26.6	0.99		
	-18	0.44	0.56	0.71	0.88	1.07	1.28	1.48	1.65	1.74	1.73	1.60	1.42	1.21	1.01	0.83	0.67	0.54	0.43	19.3	0.00		
-21	0.38	0.46	0.56	0.68	0.80	0.94	1.06	1.16	1.22	1.21	1.14	1.03	0.90	0.77	0.65	0.54	0.45	0.37	14.3	0.00			
-24	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27			
-27	F t	13.3	17.8	24.4	34.3	49.7	74.1	110	151	177	172	142	103	69.6	47.1	32.7	23.3	16.9	12.5	1271	---		
	F a	0.00	0.00	0.00	11.3	34.3	61.0	97.9	140	166	162	131	90.4	55.7	30.5	9.81	0.00	0.00	0.00	---	989		

one-half-peak spread: U:8.7,D:6.9 , L:7.5,R:8.0


NEMA Beam Type: Type 3

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-06-16

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:DecoBody-600mm-RGBW GREEN-15D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228-G
MFR.:	SUR.:	Shielding Angle:

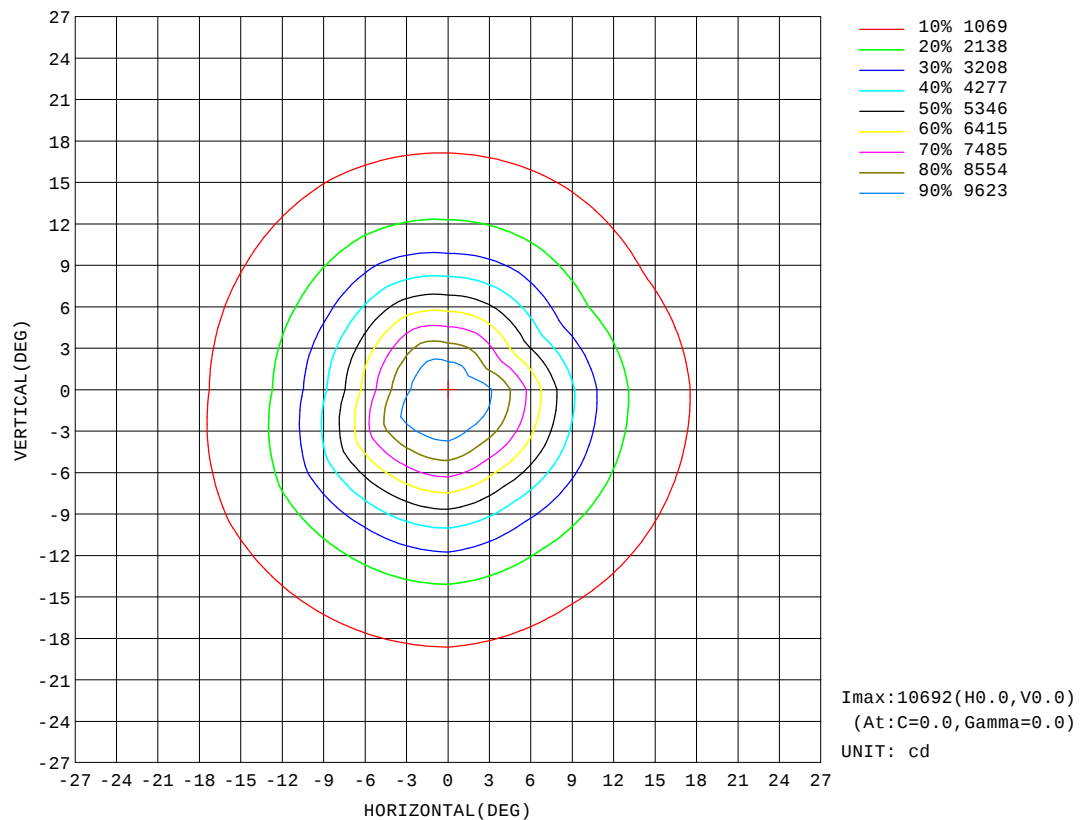


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoBody-600mm-RGBW GREEN-15D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228-G
MFR.:	SUR.:	Shielding Angle:

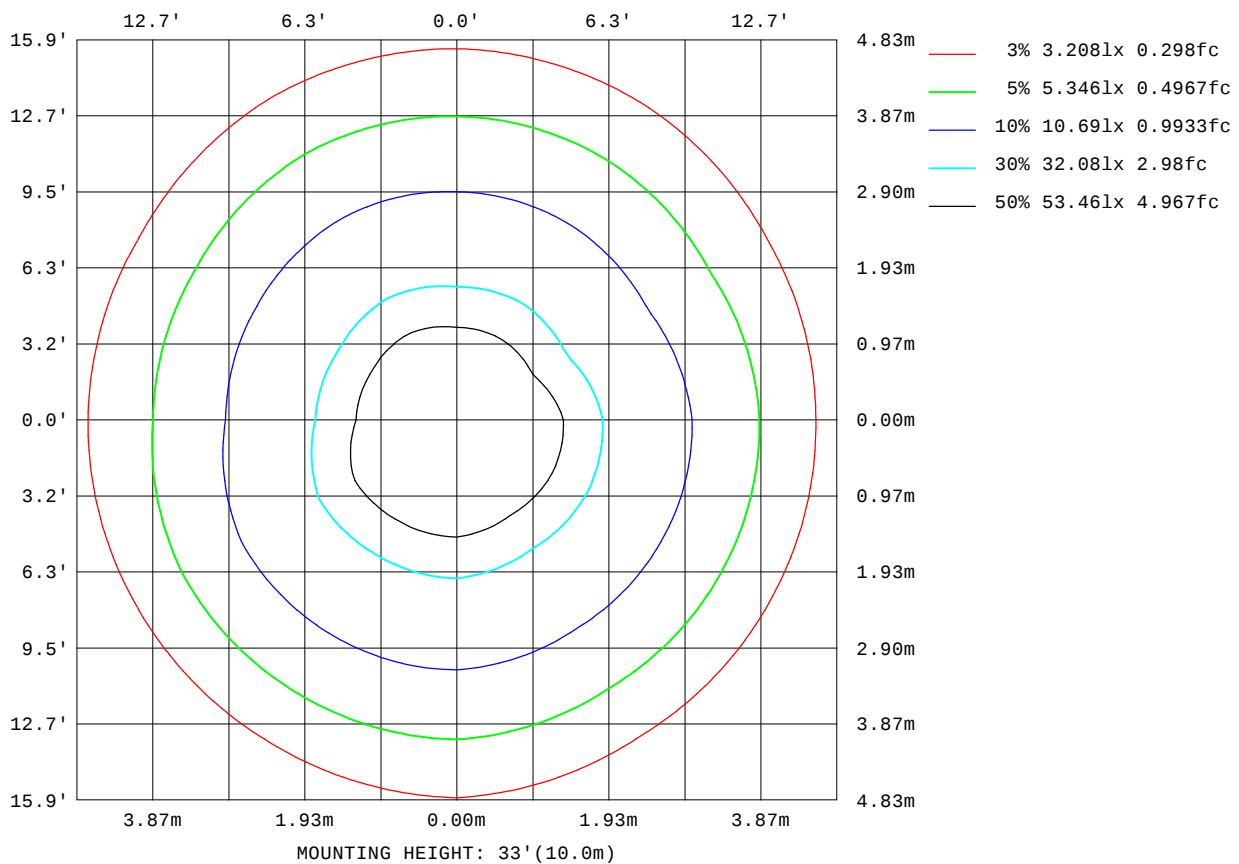

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-16

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

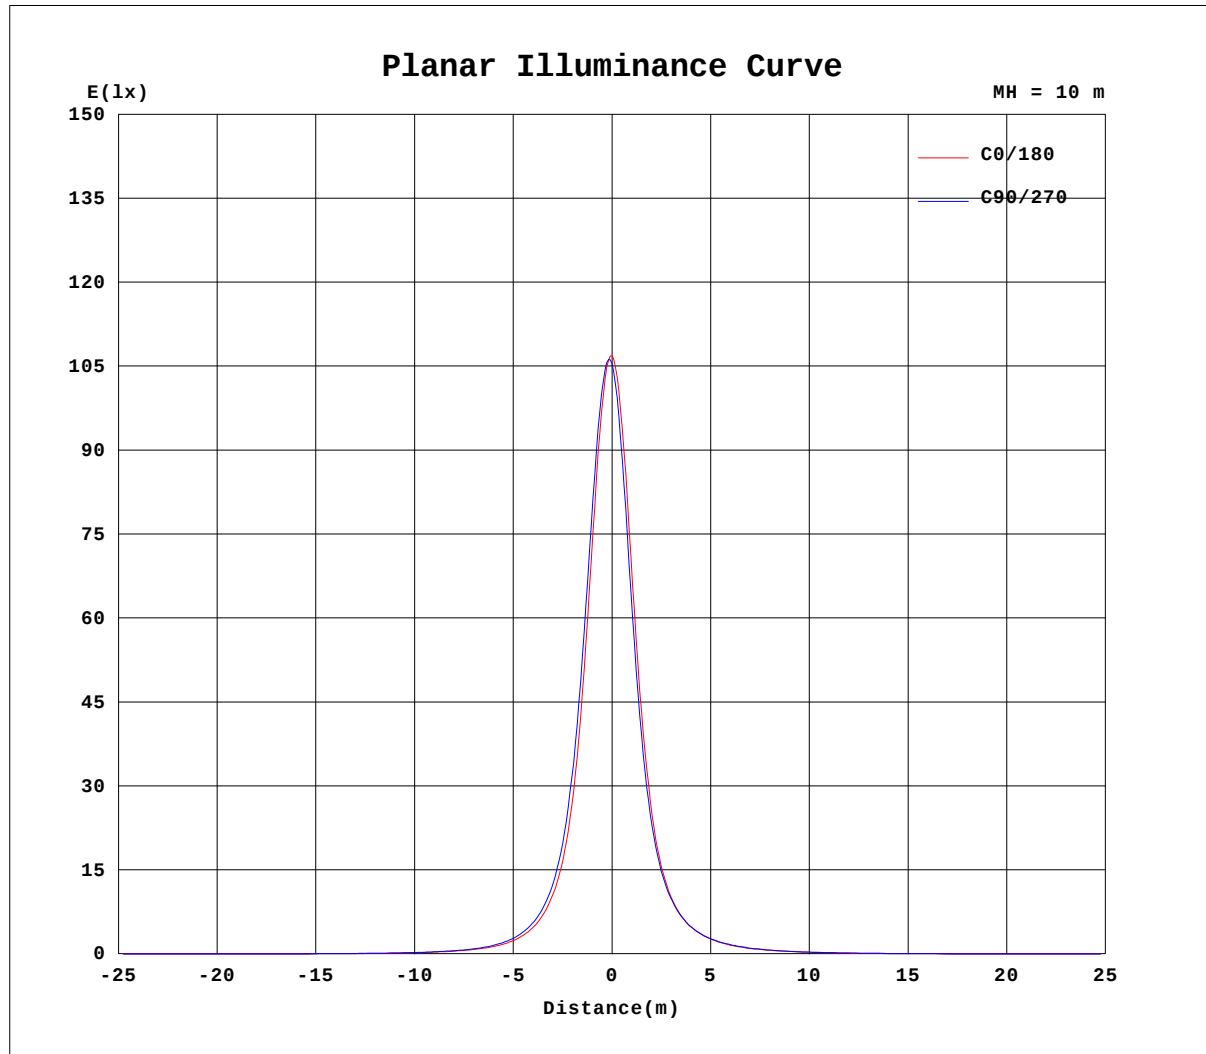


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-16

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoBody-600mm-RGBW GREEN-15D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228-G
MFR.:	SUR.:	Shielding Angle:

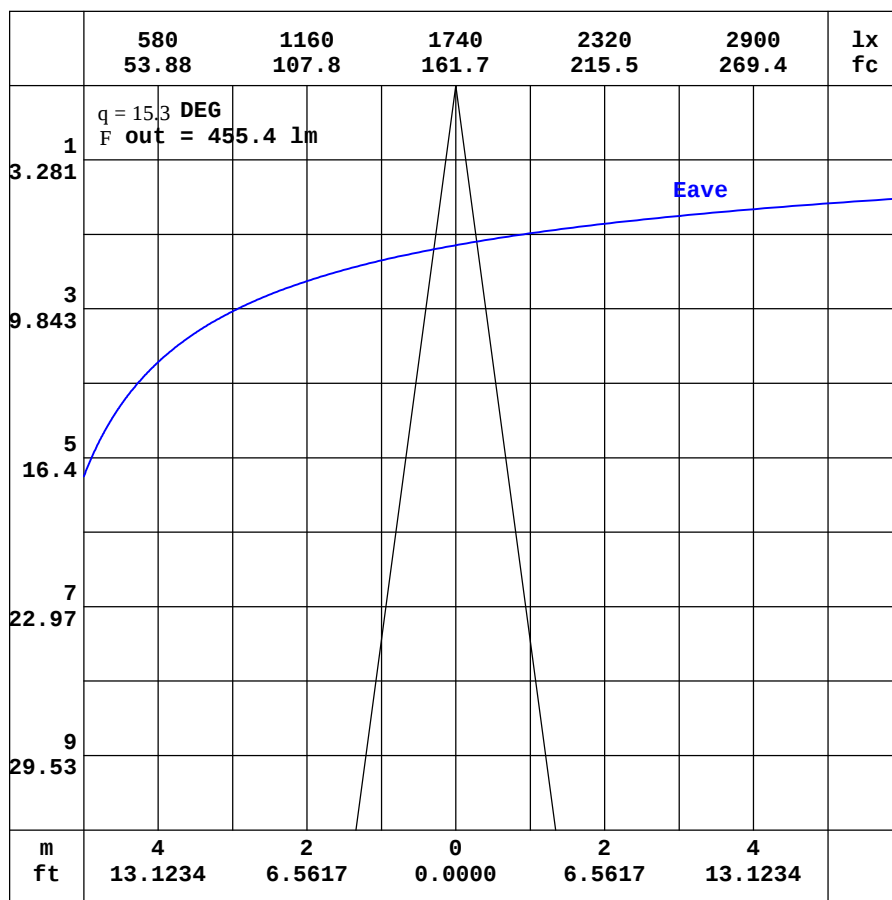

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

$H(b)$ Range:-90 - 90DEG
 $H(b)$ Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-06-16

$V(B)$ Range:-180 - 180DEG
 $V(B)$ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-600mm-RGBW GREEN-15D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228-G
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.59	0.52	0.47	0.45	0.45	0.47	0.52	0.63	0.81	1.01	1.17	1.26	1.27	1.23	1.17	1.11	1.04	0.97	1.01
-170	0.59	0.52	0.46	0.43	0.42	0.43	0.45	0.52	0.62	0.75	0.85	0.90	0.93	0.94	0.94	0.97	1.04	1.11	1.15
-160	0.59	0.51	0.45	0.42	0.40	0.39	0.39	0.39	0.43	0.47	0.50	0.51	0.53	0.66	0.78	0.88	0.97	1.01	1.04
-150	0.59	0.51	0.45	0.41	0.39	0.36	0.34	0.31	0.28	0.25	0.23	0.29	0.37	0.46	0.55	0.63	0.69	0.73	0.75
-140	0.59	0.51	0.45	0.40	0.37	0.35	0.31	0.27	0.21	0.18	0.18	0.20	0.23	0.27	0.32	0.36	0.40	0.42	0.43
-130	0.59	0.51	0.44	0.40	0.36	0.34	0.31	0.26	0.23	0.21	0.19	0.18	0.17	0.17	0.18	0.19	0.20	0.21	0.21
-120	0.59	0.51	0.45	0.40	0.36	0.33	0.30	0.28	0.27	0.26	0.25	0.23	0.22	0.21	0.19	0.19	0.18	0.18	0.17
-110	0.59	0.51	0.45	0.40	0.35	0.32	0.29	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.27	0.27	0.27	0.26	0.26
-100	0.59	0.52	0.45	0.40	0.34	0.30	0.26	0.26	0.26	0.27	0.27	0.27	0.27	0.28	0.28	0.28	0.28	0.29	0.29
-90	0.59	0.53	0.46	0.40	0.34	0.28	0.21	0.21	0.22	0.22	0.22	0.22	0.22	0.23	0.23	0.23	0.23	0.24	0.24
-80	0.59	0.53	0.48	0.42	0.36	0.30	0.25	0.27	0.30	0.32	0.35	0.38	0.40	0.43	0.46	0.49	0.51	0.52	0.54
-70	0.59	0.55	0.51	0.49	0.48	0.47	0.47	0.53	0.62	0.72	0.82	0.92	1.02	1.11	1.20	1.27	1.33	1.38	1.41
-60	0.59	0.56	0.57	0.61	0.67	0.74	0.81	0.91	1.11	1.32	1.54	1.77	1.99	2.20	2.40	2.58	2.72	2.82	2.88
-50	0.59	0.58	0.64	0.75	0.90	1.07	1.25	1.44	1.73	2.11	2.53	2.97	3.45	3.92	4.39	4.83	5.20	5.47	5.62
-40	0.59	0.61	0.73	0.92	1.16	1.44	1.77	2.14	2.54	3.11	3.86	4.75	5.75	6.87	8.03	9.22	10.3	11.1	11.5
-30	0.59	0.64	0.81	1.08	1.43	1.84	2.35	2.95	3.65	4.51	5.61	7.28	9.40	12.0	15.3	19.1	22.8	26.0	27.5
-20	0.59	0.66	0.89	1.24	1.67	2.23	2.92	3.79	4.89	6.34	8.26	10.9	14.8	21.4	31.8	46.3	64.1	81.0	88.8
-10	0.59	0.68	0.95	1.36	1.87	2.55	3.43	4.54	6.05	8.11	11.1	15.5	22.7	36.3	62.2	115	211	348	430
0	0.59	0.70	0.99	1.44	2.01	2.77	3.76	5.06	6.82	9.30	12.9	18.5	27.9	43.7	75.3	148	348	769	1069
10	0.59	0.70	0.98	1.42	1.96	2.70	3.65	4.87	6.52	8.78	12.0	16.9	24.4	36.5	57.1	95.9	168	276	312
20	0.59	0.69	0.95	1.35	1.85	2.50	3.34	4.39	5.74	7.51	9.87	13.1	17.8	24.2	33.2	45.1	59.2	70.5	74.5
30	0.59	0.68	0.90	1.24	1.67	2.21	2.89	3.71	4.71	5.94	7.47	9.41	11.8	14.8	18.2	21.9	25.3	27.9	28.9
40	0.59	0.66	0.84	1.10	1.45	1.86	2.36	2.96	3.65	4.45	5.40	6.47	7.67	8.95	10.3	11.5	12.6	13.4	13.8
50	0.59	0.64	0.77	0.96	1.21	1.51	1.84	2.23	2.67	3.18	3.73	4.30	4.90	5.49	6.04	6.54	6.95	7.23	7.36
60	0.59	0.62	0.70	0.83	0.98	1.17	1.38	1.60	1.86	2.13	2.43	2.72	3.02	3.31	3.56	3.78	3.95	4.07	4.13
70	0.59	0.61	0.65	0.71	0.79	0.88	0.98	1.10	1.23	1.35	1.48	1.61	1.73	1.84	1.95	2.03	2.10	2.15	2.18
80	0.59	0.60	0.62	0.63	0.65	0.68	0.71	0.74	0.78	0.82	0.86	0.89	0.93	0.96	0.98	1.01	1.02	1.03	1.04
90	0.59	0.59	0.59	0.60	0.60	0.60	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.61
100	0.59	0.58	0.57	0.56	0.55	0.55	0.54	0.53	0.52	0.51	0.50	0.49	0.49	0.48	0.48	0.48	0.47	0.47	0.47
110	0.59	0.57	0.55	0.53	0.51	0.50	0.48	0.47	0.46	0.46	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45
120	0.59	0.56	0.53	0.50	0.48	0.46	0.45	0.45	0.45	0.45	0.45	0.46	0.46	0.47	0.48	0.49	0.49	0.50	0.50
130	0.59	0.55	0.51	0.48	0.46	0.45	0.45	0.45	0.46	0.47	0.50	0.53	0.57	0.62	0.67	0.71	0.75	0.78	0.79
140	0.59	0.54	0.50	0.46	0.45	0.45	0.45	0.47	0.50	0.56	0.64	0.74	0.85	0.95	1.04	1.11	1.16	1.18	1.19
150	0.59	0.53	0.49	0.46	0.45	0.45	0.47	0.51	0.59	0.71	0.86	1.01	1.13	1.22	1.27	1.31	1.33	1.35	1.35
160	0.59	0.53	0.48	0.45	0.45	0.45	0.49	0.56	0.70	0.87	1.05	1.18	1.27	1.32	1.35	1.37	1.40	1.41	1.42
170	0.59	0.52	0.47	0.45	0.45	0.46	0.51	0.61	0.78	0.98	1.14	1.25	1.29	1.31	1.31	1.30	1.29	1.29	1.31
180	0.59	0.52	0.47	0.45	0.45	0.47	0.52	0.63	0.81	1.01	1.17	1.26	1.27	1.23	1.17	1.11	1.04	0.97	1.01

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-06-16

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-600mm-RGBW GREEN-15D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228-G
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: ×10cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.88	0.87	0.86	0.82	0.76	0.66	0.54	0.41	0.30	0.22	0.19	0.20	0.23	0.26	0.28	0.27	0.25	0.21
-170	1.11	1.03	0.98	0.89	0.78	0.66	0.52	0.39	0.28	0.21	0.18	0.20	0.23	0.26	0.28	0.28	0.25	0.21
-160	1.02	0.97	0.89	0.80	0.68	0.56	0.44	0.33	0.24	0.19	0.18	0.20	0.24	0.27	0.28	0.27	0.25	0.21
-150	0.74	0.70	0.65	0.57	0.49	0.40	0.31	0.24	0.20	0.18	0.19	0.22	0.25	0.27	0.28	0.27	0.25	0.21
-140	0.42	0.41	0.37	0.33	0.29	0.24	0.21	0.18	0.18	0.19	0.21	0.24	0.26	0.28	0.28	0.27	0.25	0.21
-130	0.21	0.20	0.20	0.18	0.17	0.17	0.18	0.18	0.20	0.22	0.24	0.26	0.28	0.28	0.28	0.26	0.24	0.21
-120	0.17	0.18	0.18	0.19	0.20	0.21	0.22	0.24	0.25	0.26	0.27	0.28	0.28	0.28	0.27	0.26	0.23	0.21
-110	0.26	0.26	0.27	0.27	0.27	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.27	0.26	0.25	0.23
-100	0.29	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.27	0.27	0.27	0.26	0.25	0.24	0.23	0.22	0.21
-90	0.24	0.24	0.24	0.24	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.22	0.22	0.22	0.21	0.21
-80	0.53	0.51	0.49	0.47	0.44	0.41	0.39	0.36	0.33	0.31	0.28	0.26	0.23	0.22	0.21	0.21	0.21	0.21
-70	1.38	1.33	1.27	1.20	1.11	1.02	0.93	0.83	0.73	0.63	0.54	0.45	0.38	0.31	0.25	0.22	0.20	0.21
-60	2.81	2.70	2.55	2.37	2.17	1.97	1.77	1.55	1.34	1.13	0.93	0.75	0.58	0.45	0.33	0.24	0.21	0.21
-50	5.45	5.15	4.76	4.31	3.84	3.40	2.95	2.53	2.13	1.76	1.42	1.12	0.85	0.62	0.43	0.29	0.21	0.21
-40	11.0	10.2	9.07	7.86	6.73	5.66	4.69	3.84	3.12	2.51	1.98	1.52	1.13	0.80	0.53	0.33	0.22	0.21
-30	25.6	22.2	18.5	14.9	11.8	9.23	7.18	5.55	4.31	3.33	2.56	1.92	1.40	0.97	0.63	0.38	0.23	0.21
-20	78.0	60.0	43.3	30.1	20.5	14.4	10.4	7.59	5.59	4.15	3.08	2.27	1.62	1.11	0.71	0.41	0.23	0.21
-10	319	189	103	57.4	33.4	20.5	13.6	9.40	6.66	4.78	3.47	2.51	1.78	1.20	0.76	0.44	0.24	0.21
0	810	369	156	75.4	40.3	23.7	15.1	10.2	7.09	5.03	3.62	2.60	1.83	1.23	0.78	0.44	0.24	0.21
10	254	153	88.1	53.9	34.1	22.2	14.9	10.3	7.30	5.24	3.80	2.73	1.92	1.29	0.81	0.47	0.25	0.21
20	68.8	56.7	43.2	32.0	23.4	17.2	12.4	9.11	6.73	4.98	3.67	2.67	1.89	1.28	0.81	0.47	0.26	0.21
30	27.7	24.9	21.3	17.7	14.4	11.5	9.22	7.35	5.71	4.37	3.30	2.44	1.75	1.21	0.78	0.46	0.26	0.21
40	13.4	12.5	11.4	10.1	8.78	7.53	6.38	5.35	4.44	3.59	2.78	2.09	1.53	1.07	0.71	0.44	0.27	0.21
50	7.20	6.90	6.47	5.96	5.40	4.83	4.26	3.71	3.18	2.68	2.19	1.69	1.27	0.91	0.63	0.40	0.27	0.21
60	4.06	3.93	3.74	3.52	3.26	2.99	2.70	2.41	2.13	1.86	1.60	1.29	1.00	0.75	0.54	0.37	0.27	0.21
70	2.15	2.10	2.02	1.93	1.83	1.71	1.60	1.47	1.34	1.21	1.09	0.95	0.77	0.60	0.46	0.35	0.27	0.21
80	1.03	1.02	1.00	0.97	0.94	0.91	0.88	0.84	0.81	0.77	0.73	0.70	0.60	0.50	0.42	0.34	0.27	0.21
90	0.61	0.61	0.61	0.61	0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.54	0.47	0.41	0.34	0.27	0.21
100	0.47	0.47	0.47	0.47	0.47	0.48	0.48	0.49	0.50	0.51	0.52	0.52	0.49	0.44	0.39	0.34	0.28	0.21
110	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.46	0.46	0.44	0.42	0.38	0.34	0.28	0.21
120	0.50	0.50	0.49	0.48	0.47	0.47	0.46	0.45	0.44	0.44	0.44	0.43	0.41	0.39	0.37	0.33	0.28	0.21
130	0.79	0.77	0.73	0.69	0.64	0.59	0.55	0.51	0.48	0.46	0.43	0.41	0.39	0.37	0.35	0.32	0.28	0.21
140	1.19	1.17	1.13	1.07	0.99	0.89	0.78	0.67	0.58	0.50	0.42	0.38	0.37	0.35	0.34	0.32	0.28	0.21
150	1.35	1.33	1.31	1.28	1.23	1.16	1.05	0.90	0.68	0.51	0.40	0.35	0.34	0.33	0.32	0.31	0.27	0.21
160	1.41	1.40	1.38	1.35	1.32	1.28	1.10	0.88	0.66	0.48	0.36	0.31	0.30	0.31	0.31	0.30	0.27	0.21
170	1.30	1.31	1.32	1.27	1.15	1.01	0.86	0.69	0.52	0.37	0.29	0.26	0.27	0.29	0.29	0.29	0.26	0.21
180	0.88	0.87	0.86	0.82	0.76	0.66	0.54	0.41	0.30	0.22	0.19	0.20	0.23	0.26	0.28	0.27	0.25	0.21

H_b Range: -90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-06-16

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: