

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		7400.5 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	33.8V x 33.2H
	At 50% of Imax	15.0V x 14.9H
	At 90% of Imax	5.8V x 5.8H
Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	629.8 lumens per klm.
	To 50% of Imax	286.9 lumens per klm.
	To 90% of Imax	61.1 lumens per klm.
	Upward LOR	2.2 %
	Downward LOR	97.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoBody-600mm-RGBW RED-15D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228-R
MFR.:	SUR.:	Shielding Angle:

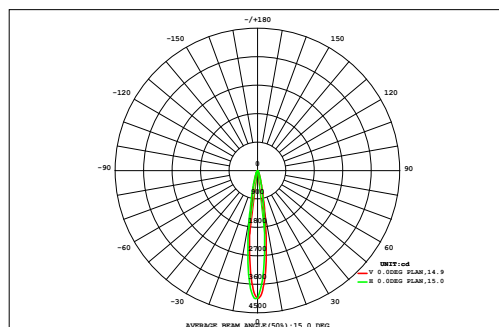

DATA OF LAMP			Eff:37.30lm/W	
MODEL			Imax(cd)	4058
NOMINAL POWER(W)	14.6		AVAILABILITY(%)	63.1
RATED VOLTAGE(V)	220		Avai. FLUX(lm)	346.1
NOMINAL FLUX(lm)	548.3		LOR(%)	100.0
LAMPS INSIDE	1		TOTAL FLUX(lm)	548.3
TEST VOLTAGE(V)	221.4		q @50%(H,V)	15,15DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.15	0.18	0.21	0.25	0.28	0.32	0.35	0.37	0.39	0.39	0.37	0.34	0.31	0.28	0.24	0.21	0.17	0.15	4.96	0.00
27	0.15	0.18	0.21	0.25	0.28	0.32	0.35	0.37	0.39	0.39	0.37	0.34	0.31	0.28	0.24	0.21	0.17	0.15	4.96	0.00
24	0.17	0.21	0.25	0.30	0.36	0.41	0.46	0.50	0.52	0.51	0.49	0.45	0.40	0.34	0.29	0.25	0.20	0.17	6.28	0.00
21	0.20	0.24	0.30	0.37	0.45	0.54	0.62	0.69	0.72	0.72	0.67	0.60	0.51	0.43	0.36	0.29	0.24	0.19	8.15	0.00
18	0.22	0.28	0.36	0.46	0.58	0.73	0.88	1.00	1.06	1.05	0.96	0.84	0.69	0.55	0.44	0.35	0.28	0.22	11.0	1.18
15	0.25	0.33	0.43	0.57	0.76	1.00	1.29	1.53	1.65	1.62	1.45	1.20	0.93	0.71	0.54	0.41	0.32	0.24	15.2	8.66
12	0.28	0.37	0.50	0.69	0.97	1.38	1.93	2.47	2.77	2.70	2.30	1.76	1.27	0.91	0.65	0.48	0.36	0.27	22.1	16.9
9	0.31	0.42	0.58	0.83	1.23	1.88	2.88	4.07	4.73	4.57	3.72	2.61	1.72	1.15	0.80	0.56	0.40	0.29	32.7	28.0
	0.33	0.45	0.64	0.96	1.50	2.44	4.02	6.14	7.59	7.30	5.61	3.69	2.34	1.48	0.96	0.64	0.44	0.30	46.8	42.6
	0.34	0.47	0.68	1.04	1.68	2.88	4.99	7.83	10.00	9.72	7.68	5.14	3.08	1.79	1.09	0.69	0.46	0.31	59.9	55.9
	0.34	0.47	0.70	1.08	1.78	3.14	5.58	8.75	10.8	10.5	8.57	5.66	3.30	1.88	1.12	0.71	0.46	0.31	65.1	61.4
	0.33	0.46	0.68	1.07	1.75	3.06	5.26	7.66	9.17	8.89	7.10	4.79	2.88	1.70	1.05	0.67	0.44	0.30	57.3	53.3
	0.30	0.43	0.63	0.97	1.53	2.44	3.75	5.21	6.31	6.15	4.86	3.43	2.22	1.41	0.91	0.60	0.41	0.28	41.8	37.7
-9	0.27	0.38	0.54	0.81	1.18	1.72	2.43	3.20	3.76	3.70	3.05	2.26	1.59	1.09	0.75	0.51	0.36	0.25	27.9	23.2
-12	0.24	0.32	0.45	0.63	0.88	1.19	1.55	1.93	2.18	2.16	1.86	1.47	1.11	0.82	0.59	0.42	0.31	0.22	18.3	12.7
-15	0.20	0.27	0.36	0.48	0.64	0.83	1.02	1.21	1.33	1.32	1.18	0.98	0.78	0.61	0.46	0.35	0.26	0.19	12.5	4.63
-18	0.17	0.22	0.29	0.37	0.47	0.58	0.70	0.79	0.86	0.85	0.78	0.67	0.56	0.45	0.36	0.28	0.22	0.17	8.77	0.00
-21	0.14	0.18	0.23	0.28	0.35	0.42	0.48	0.54	0.57	0.56	0.53	0.47	0.40	0.34	0.28	0.22	0.18	0.14	6.31	0.00
-24	0.12	0.15	0.18	0.22	0.26	0.30	0.34	0.38	0.40	0.39	0.37	0.34	0.30	0.25	0.22	0.18	0.15	0.12	4.67	0.00
-27	0.12	0.15	0.18	0.22	0.26	0.30	0.34	0.38	0.40	0.39	0.37	0.34	0.30	0.25	0.22	0.18	0.15	0.12	4.67	0.00
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)	6	9	12	15	18	21	24	27			
F t	4.36	5.83	8.01	11.4	16.6	25.3	38.5	54.3	64.8	63.1	51.6	36.7	24.4	16.2	11.1	7.81	5.64	4.14	450	---
F a	0.00	0.00	0.00	2.09	10.3	20.1	33.8	49.9	60.5	58.9	47.2	31.9	19.1	9.86	2.37	0.00	0.00	0.00	---	346

one-half-peak spread: U:7.5,D:7.6 , L:7.2,R:7.8


NEMA Beam Type: Type 3

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:DecoBody-600mm-RGBW RED-15D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228-R
MFR.:	SUR.:	Shielding Angle:

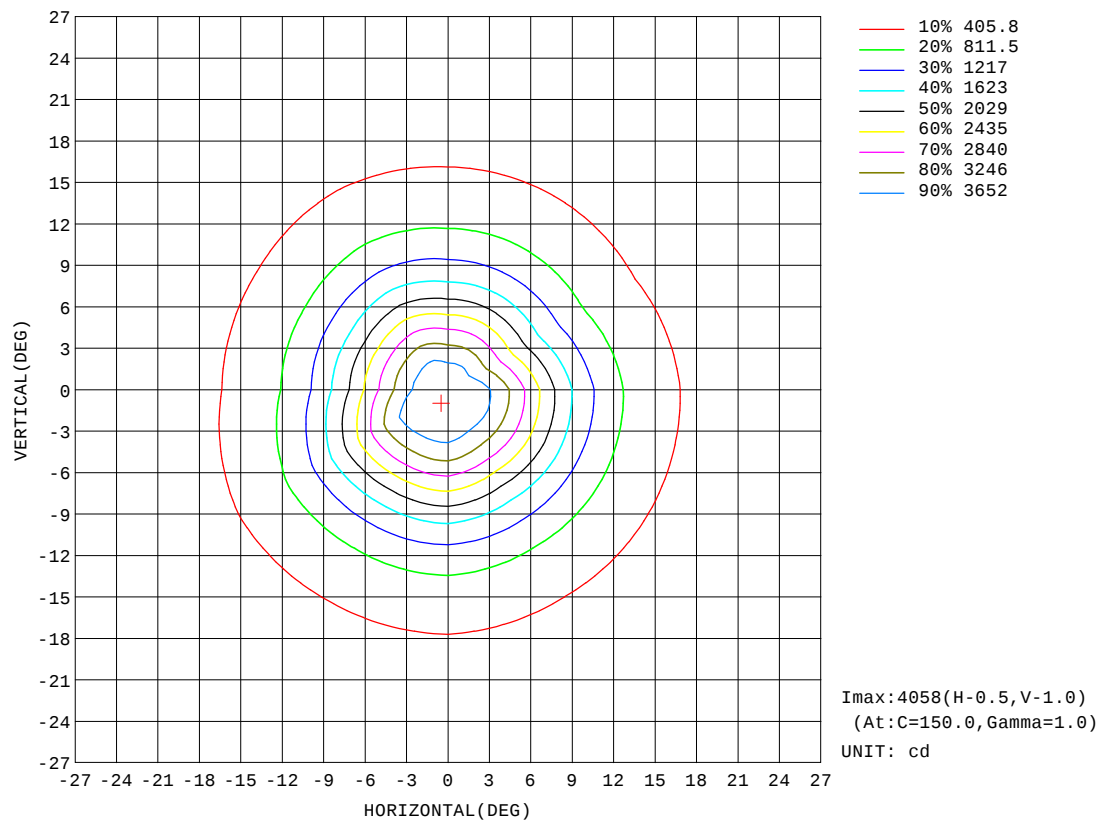


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoBody-600mm-RGBW RED-15D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228-R
MFR.:	SUR.:	Shielding Angle:

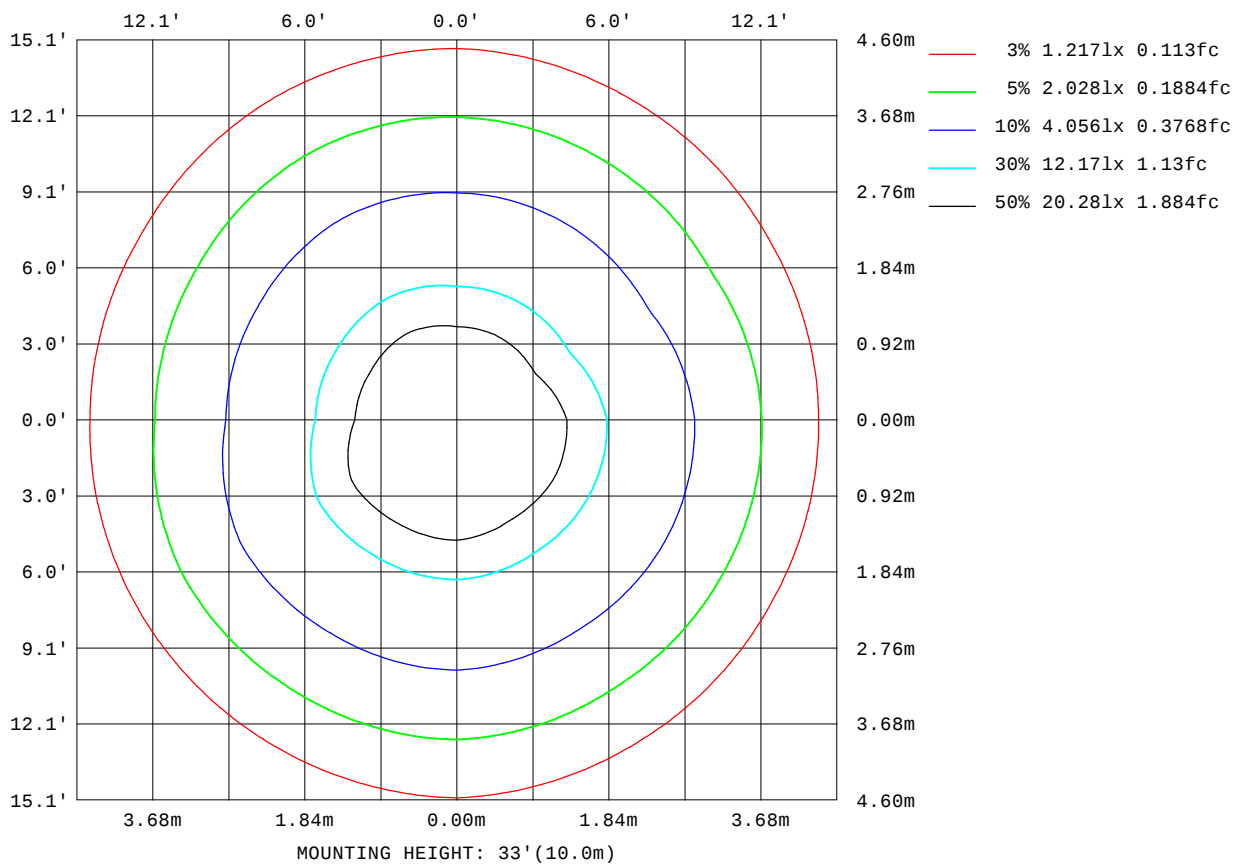

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

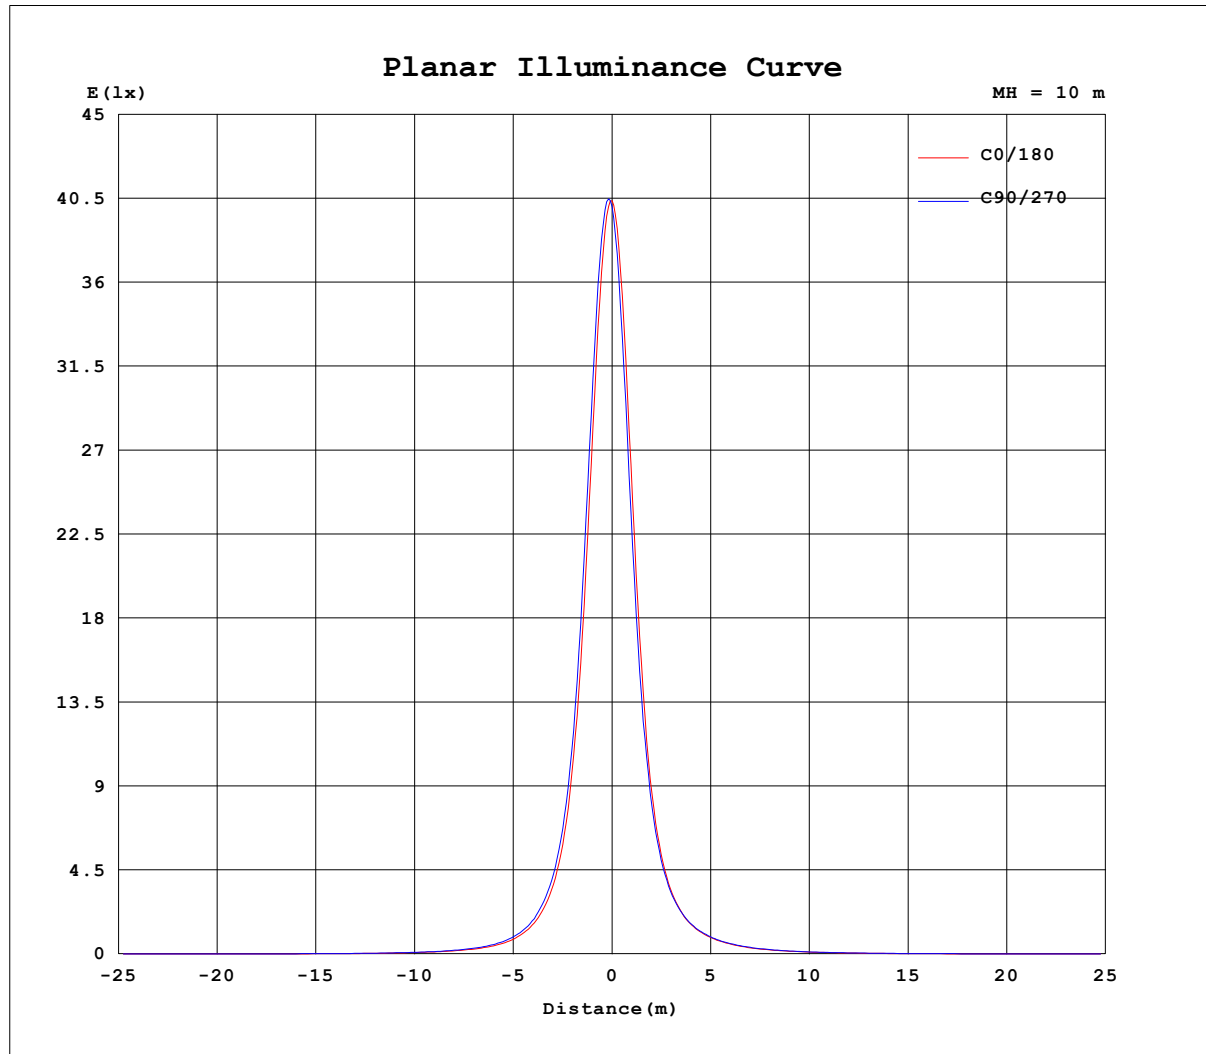


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoBody-600mm-RGBW RED-15D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228-R
MFR.:	SUR.:	Shielding Angle:

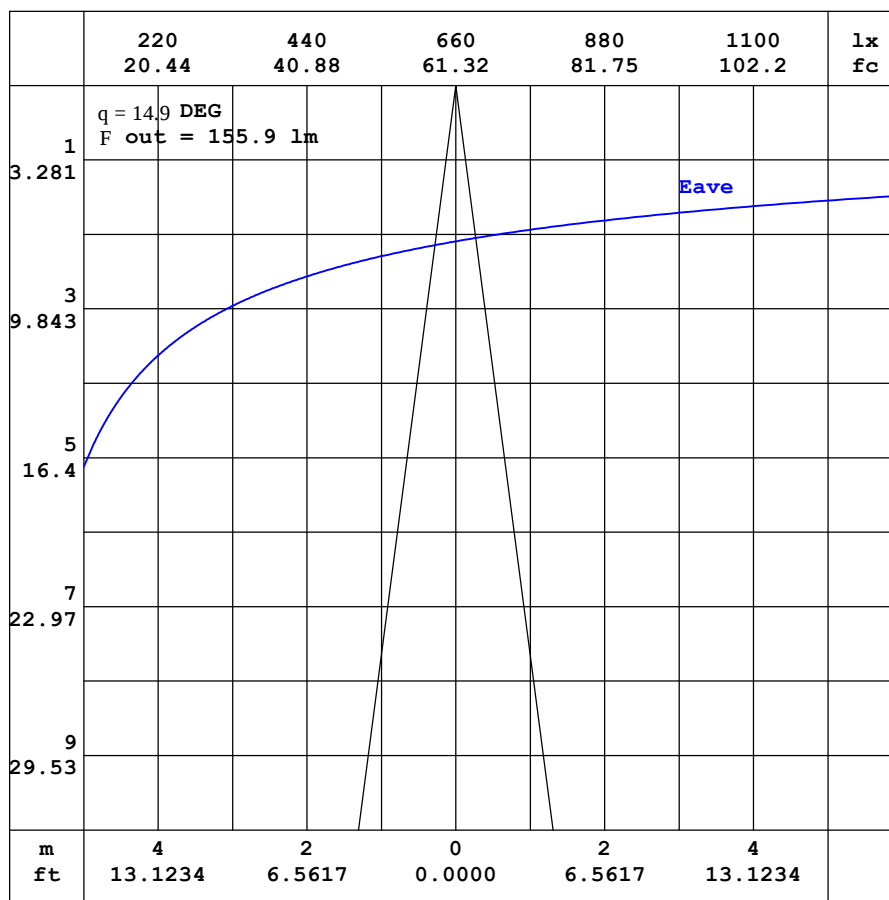

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-600mm-RGBW RED-15D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228-R
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.98	1.73	1.56	1.48	1.49	1.56	1.75	2.17	2.83	3.56	4.12	4.40	4.38	4.23	4.02	3.79	3.52	3.27	3.49
-170	1.98	1.72	1.53	1.44	1.42	1.43	1.51	1.75	2.15	2.60	2.96	3.17	3.25	3.31	3.38	3.52	3.73	3.98	4.11
-160	1.98	1.71	1.51	1.39	1.35	1.31	1.28	1.32	1.45	1.61	1.73	1.78	1.87	2.34	2.77	3.16	3.47	3.65	3.74
-150	1.98	1.70	1.49	1.36	1.30	1.23	1.12	1.01	0.92	0.82	0.74	0.96	1.26	1.58	1.90	2.19	2.42	2.57	2.64
-140	1.98	1.70	1.49	1.35	1.26	1.18	1.06	0.88	0.67	0.57	0.56	0.61	0.72	0.86	1.02	1.19	1.32	1.41	1.45
-130	1.98	1.70	1.50	1.35	1.23	1.16	1.05	0.91	0.78	0.69	0.61	0.56	0.55	0.54	0.54	0.58	0.61	0.64	0.66
-120	1.98	1.71	1.50	1.35	1.24	1.13	1.04	0.98	0.94	0.91	0.86	0.80	0.75	0.69	0.64	0.60	0.58	0.54	0.52
-110	1.98	1.73	1.52	1.36	1.23	1.13	1.03	1.00	1.00	0.99	0.99	0.99	0.99	0.99	0.97	0.95	0.93	0.92	0.91
-100	1.98	1.75	1.55	1.36	1.21	1.07	0.95	0.95	0.96	0.97	0.98	0.98	0.98	0.99	0.99	0.99	1.00	1.00	1.00
-90	1.98	1.78	1.58	1.38	1.18	0.98	0.78	0.78	0.79	0.79	0.80	0.80	0.81	0.82	0.82	0.83	0.84	0.85	0.86
-80	1.98	1.81	1.63	1.43	1.23	1.02	0.82	0.89	0.98	1.07	1.17	1.26	1.36	1.44	1.52	1.59	1.65	1.70	1.74
-70	1.98	1.86	1.73	1.64	1.59	1.55	1.52	1.72	2.01	2.32	2.65	2.99	3.31	3.62	3.90	4.15	4.36	4.51	4.61
-60	1.98	1.90	1.91	2.02	2.21	2.42	2.62	2.92	3.58	4.27	5.00	5.75	6.47	7.18	7.88	8.47	8.94	9.29	9.49
-50	1.98	1.98	2.17	2.52	2.98	3.49	4.06	4.66	5.61	6.85	8.23	9.69	11.2	12.8	14.4	15.9	17.2	18.1	18.7
-40	1.98	2.07	2.45	3.06	3.83	4.74	5.80	6.96	8.23	10.0	12.5	15.5	18.8	22.4	26.3	30.3	34.0	36.9	38.5
-30	1.98	2.15	2.73	3.61	4.71	6.06	7.70	9.63	11.9	14.7	18.2	23.7	30.6	39.2	49.5	61.5	74.2	84.6	89.9
-20	1.98	2.24	2.98	4.11	5.53	7.35	9.60	12.4	16.0	20.7	27.1	35.6	48.0	69.2	102	150	209	266	295
-10	1.98	2.31	3.19	4.52	6.20	8.44	11.3	15.0	19.9	26.7	36.5	51.2	75.0	117	202	383	715	1223	1537
0	1.98	2.37	3.34	4.80	6.66	9.18	12.4	16.7	22.6	30.8	42.9	61.8	92.2	143	246	498	1195	2844	4037
10	1.98	2.36	3.30	4.72	6.52	8.96	12.1	16.2	21.6	29.1	39.9	56.0	81.0	120	189	319	569	947	1104
20	1.98	2.33	3.20	4.50	6.14	8.30	11.1	14.5	19.0	24.9	32.7	43.5	58.5	80.3	110	149	194	233	248
30	1.98	2.29	3.05	4.15	5.56	7.34	9.59	12.3	15.6	19.7	24.8	31.2	39.3	49.1	60.7	73.3	84.8	93.2	96.7
40	1.98	2.24	2.84	3.71	4.85	6.19	7.84	9.85	12.1	14.8	17.9	21.5	25.5	29.9	34.4	38.6	42.4	45.0	46.3
50	1.98	2.17	2.61	3.26	4.08	5.03	6.13	7.42	8.92	10.6	12.4	14.3	16.3	18.3	20.2	21.9	23.3	24.3	24.8
60	1.98	2.12	2.40	2.81	3.33	3.94	4.61	5.35	6.19	7.10	8.07	9.06	10.0	11.0	11.9	12.6	13.3	13.7	14.0
70	1.98	2.08	2.22	2.43	2.70	3.01	3.35	3.73	4.12	4.53	4.95	5.37	5.77	6.16	6.51	6.81	7.05	7.23	7.33
80	1.98	2.04	2.10	2.17	2.25	2.36	2.47	2.57	2.68	2.80	2.92	3.04	3.15	3.25	3.34	3.42	3.48	3.52	3.55
90	1.98	2.00	2.02	2.03	2.05	2.07	2.09	2.09	2.08	2.08	2.08	2.07	2.07	2.08	2.09	2.10	2.10	2.11	2.12
100	1.98	1.95	1.93	1.90	1.88	1.86	1.83	1.80	1.75	1.71	1.68	1.65	1.62	1.60	1.60	1.60	1.60	1.61	1.61
110	1.98	1.91	1.85	1.78	1.73	1.68	1.64	1.59	1.55	1.53	1.52	1.52	1.52	1.52	1.52	1.53	1.53	1.53	1.53
120	1.98	1.87	1.76	1.68	1.61	1.56	1.53	1.52	1.51	1.51	1.52	1.53	1.56	1.58	1.61	1.63	1.65	1.66	1.66
130	1.98	1.84	1.71	1.60	1.53	1.51	1.50	1.51	1.51	1.57	1.67	1.79	1.94	2.11	2.29	2.46	2.60	2.69	2.73
140	1.98	1.80	1.65	1.54	1.50	1.50	1.51	1.55	1.67	1.88	2.18	2.56	2.98	3.36	3.69	3.93	4.08	4.18	4.21
150	1.98	1.78	1.61	1.51	1.49	1.51	1.55	1.70	1.99	2.44	3.00	3.54	3.99	4.30	4.50	4.64	4.71	4.75	4.75
160	1.98	1.76	1.58	1.49	1.49	1.52	1.64	1.91	2.39	3.04	3.67	4.14	4.45	4.63	4.74	4.85	4.92	4.98	5.03
170	1.98	1.74	1.57	1.49	1.49	1.55	1.71	2.09	2.71	3.43	4.02	4.38	4.52	4.57	4.61	4.59	4.53	4.53	4.67
180	1.98	1.73	1.56	1.48	1.49	1.56	1.75	2.17	2.83	3.56	4.12	4.40	4.38	4.23	4.02	3.79	3.52	3.27	3.50

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-06-16

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-600mm-RGBW RED-15D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES001228-R
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	3.01	3.01	2.97	2.83	2.60	2.25	1.81	1.33	0.91	0.64	0.59	0.65	0.79	0.94	0.99	0.97	0.87	0.71	
-170	3.94	3.67	3.47	3.15	2.74	2.27	1.76	1.28	0.88	0.63	0.59	0.65	0.80	0.94	0.99	0.97	0.87	0.71	
-160	3.63	3.45	3.16	2.79	2.37	1.92	1.46	1.06	0.75	0.59	0.59	0.67	0.82	0.95	0.99	0.97	0.87	0.71	
-150	2.59	2.45	2.23	1.95	1.63	1.30	1.00	0.77	0.62	0.58	0.61	0.74	0.87	0.97	0.99	0.95	0.86	0.71	
-140	1.42	1.34	1.22	1.06	0.89	0.74	0.63	0.58	0.57	0.59	0.70	0.82	0.93	0.98	0.99	0.95	0.85	0.71	
-130	0.65	0.62	0.59	0.55	0.54	0.55	0.56	0.59	0.66	0.74	0.84	0.92	0.97	0.99	0.98	0.92	0.83	0.71	
-120	0.54	0.57	0.59	0.62	0.67	0.72	0.77	0.82	0.87	0.92	0.94	0.98	0.99	0.98	0.96	0.89	0.80	0.71	
-110	0.92	0.93	0.94	0.96	0.98	1.00	0.99	0.99	0.99	0.99	0.99	0.99	0.98	0.96	0.91	0.85	0.78	0.71	
-100	1.00	1.00	1.00	0.99	0.99	0.99	0.99	0.99	0.99	0.98	0.97	0.95	0.92	0.88	0.84	0.80	0.75	0.71	
-90	0.85	0.85	0.84	0.83	0.82	0.82	0.81	0.81	0.81	0.81	0.81	0.81	0.79	0.77	0.76	0.74	0.72	0.71	
-80	1.70	1.65	1.59	1.52	1.44	1.35	1.27	1.18	1.09	1.00	0.90	0.82	0.76	0.74	0.73	0.72	0.71	0.71	
-70	4.51	4.35	4.15	3.90	3.62	3.32	3.01	2.69	2.36	2.03	1.72	1.44	1.20	0.99	0.82	0.73	0.71	0.71	
-60	9.26	8.89	8.40	7.79	7.10	6.44	5.76	5.06	4.35	3.66	3.01	2.41	1.87	1.42	1.07	0.81	0.71	0.71	
-50	18.1	17.1	15.8	14.2	12.7	11.2	9.70	8.33	6.99	5.76	4.63	3.62	2.73	1.97	1.38	0.94	0.72	0.71	
-40	36.9	34.0	30.3	26.2	22.3	18.7	15.5	12.6	10.2	8.24	6.47	4.94	3.65	2.56	1.70	1.09	0.74	0.71	
-30	84.4	73.9	61.3	49.4	39.1	30.6	23.7	18.2	14.1	10.9	8.37	6.26	4.53	3.13	2.02	1.23	0.76	0.71	
-20	261	201	144	99.1	68.0	47.5	34.2	24.9	18.3	13.6	10.1	7.39	5.26	3.59	2.27	1.34	0.79	0.71	
-10	1157	660	352	191	110	67.8	44.7	30.9	21.8	15.6	11.3	8.19	5.74	3.88	2.43	1.41	0.80	0.71	
0	3046	1339	542	254	134	77.4	49.5	33.4	23.2	16.4	11.8	8.46	5.90	3.97	2.49	1.43	0.81	0.71	
10	871	522	299	182	114	73.8	49.4	34.2	24.1	17.3	12.5	8.96	6.25	4.20	2.63	1.52	0.85	0.71	
20	227	186	143	107	78.7	57.7	41.8	30.5	22.4	16.5	12.2	8.80	6.20	4.19	2.65	1.55	0.88	0.71	
30	92.5	83.4	71.7	59.5	48.3	38.8	31.0	24.7	19.1	14.6	11.0	8.10	5.77	3.96	2.55	1.53	0.90	0.71	
40	44.8	42.0	38.1	33.8	29.4	25.2	21.4	17.9	14.9	12.0	9.30	6.95	5.08	3.55	2.34	1.47	0.91	0.71	
50	24.2	23.2	21.7	20.0	18.1	16.2	14.3	12.4	10.7	9.01	7.32	5.65	4.23	3.04	2.10	1.37	0.92	0.71	
60	13.7	13.2	12.6	11.8	10.9	9.97	9.05	8.08	7.13	6.22	5.37	4.34	3.35	2.53	1.82	1.28	0.92	0.71	
70	7.22	7.04	6.80	6.49	6.13	5.75	5.35	4.93	4.51	4.08	3.69	3.23	2.62	2.06	1.59	1.21	0.93	0.71	
80	3.52	3.46	3.39	3.31	3.20	3.09	2.99	2.87	2.76	2.65	2.54	2.43	2.08	1.75	1.46	1.19	0.94	0.71	
90	2.11	2.11	2.10	2.09	2.08	2.07	2.08	2.08	2.09	2.10	2.10	2.11	1.88	1.64	1.41	1.17	0.94	0.71	
100	1.61	1.60	1.60	1.60	1.60	1.61	1.64	1.67	1.70	1.74	1.79	1.82	1.69	1.54	1.37	1.17	0.95	0.71	
110	1.53	1.52	1.52	1.52	1.51	1.51	1.51	1.51	1.52	1.54	1.57	1.59	1.53	1.44	1.32	1.17	0.96	0.71	
120	1.67	1.66	1.64	1.62	1.60	1.57	1.53	1.52	1.51	1.51	1.51	1.47	1.41	1.35	1.27	1.15	0.96	0.71	
130	2.71	2.64	2.51	2.35	2.17	2.00	1.84	1.70	1.60	1.52	1.47	1.39	1.33	1.28	1.22	1.12	0.96	0.71	
140	4.20	4.12	3.99	3.78	3.47	3.09	2.67	2.27	1.95	1.65	1.41	1.30	1.26	1.22	1.18	1.10	0.95	0.71	
150	4.76	4.73	4.67	4.55	4.37	4.09	3.67	3.13	2.32	1.70	1.34	1.19	1.17	1.17	1.14	1.07	0.94	0.71	
160	5.01	4.98	4.90	4.79	4.68	4.52	3.87	3.06	2.24	1.59	1.20	1.05	1.04	1.09	1.09	1.04	0.92	0.71	
170	4.63	4.66	4.74	4.50	4.05	3.55	2.99	2.37	1.73	1.21	0.94	0.86	0.92	1.01	1.04	1.01	0.90	0.71	
180	3.01	3.01	2.97	2.83	2.60	2.25	1.81	1.33	0.91	0.64	0.59	0.65	0.79	0.94	0.99	0.97	0.87	0.71	

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: