

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1843.6 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	74.3V x 72.8H
	At 50% of Imax	35.1V x 34.5H
	At 90% of Imax	13.3V x 13.2H
Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	779.7 lumens per klm.
	To 50% of Imax	376.0 lumens per klm.
	To 90% of Imax	74.4 lumens per klm.
Upward LOR		2.3 %
Downward LOR		97.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoBody-600mm-RGBW 3000K-35D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:35 DEG	DIM.:600mm	SERIAL No.:IES001250-W
MFR.:	SUR.:	Shielding Angle:

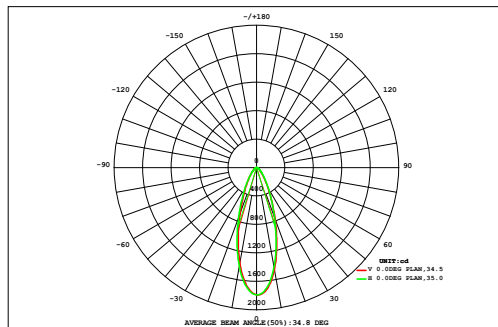

DATA OF LAMP		Eff:52.49lm/W	
MODEL		Imax(cd)	1790
NOMINAL POWER(W)	18.5	AVAILABILITY(%)	78.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	757.6
NOMINAL FLUX(lm)	971	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	971.0
TEST VOLTAGE(V)	221.4	q @50%(H,V)	35,35DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.05	0.08	0.13	0.19	0.26	0.33	0.39	0.43	0.45	0.45	0.43	0.38	0.33	0.26	0.19	0.13	0.08	0.04	4.62	0.00
72	0.05	0.08	0.13	0.19	0.26	0.33	0.39	0.43	0.45	0.45	0.43	0.38	0.33	0.26	0.19	0.13	0.08	0.04	4.62	0.00
64	0.06	0.12	0.19	0.29	0.41	0.54	0.65	0.73	0.77	0.77	0.72	0.64	0.53	0.41	0.29	0.19	0.11	0.05	7.46	0.00
56	0.08	0.15	0.26	0.41	0.60	0.82	1.03	1.19	1.28	1.28	1.18	1.01	0.81	0.60	0.42	0.27	0.15	0.07	11.6	0.00
48	0.10	0.19	0.34	0.56	0.86	1.24	1.65	1.99	2.20	2.19	1.96	1.61	1.22	0.86	0.57	0.35	0.18	0.08	18.1	0.00
40	0.11	0.23	0.43	0.74	1.22	1.87	2.66	3.43	3.94	3.93	3.40	2.62	1.84	1.21	0.75	0.43	0.22	0.10	29.1	10.3
32	0.13	0.27	0.52	0.95	1.66	2.76	4.31	6.10	7.36	7.36	6.10	4.31	2.76	1.66	0.95	0.51	0.25	0.11	48.1	36.8
24	0.14	0.31	0.61	1.17	2.17	3.92	6.83	10.8	14.0	14.0	10.9	6.94	3.98	2.18	1.15	0.58	0.28	0.12	80.0	71.0
	0.15	0.33	0.67	1.35	2.64	5.15	9.94	17.4	23.8	23.8	17.6	10.3	5.37	2.68	1.31	0.63	0.29	0.12	123	116
	0.15	0.34	0.71	1.44	2.90	5.97	12.3	22.4	31.4	31.6	23.3	13.3	6.46	3.00	1.39	0.65	0.30	0.12	158	150
	0.15	0.34	0.69	1.41	2.84	5.93	12.3	22.5	31.1	31.6	23.7	13.5	6.49	2.98	1.37	0.64	0.29	0.12	158	151
	0.14	0.31	0.63	1.26	2.48	4.99	9.91	17.2	23.3	23.6	17.8	10.6	5.38	2.59	1.24	0.60	0.27	0.11	122	114
	0.13	0.28	0.54	1.04	1.94	3.61	6.53	10.4	13.7	13.9	10.7	6.87	3.84	2.02	1.04	0.52	0.25	0.10	77.5	68.5
-24	0.11	0.23	0.44	0.80	1.41	2.42	3.91	5.68	7.11	7.16	5.80	4.05	2.53	1.47	0.82	0.44	0.22	0.09	44.7	33.4
-32	0.09	0.19	0.34	0.59	0.99	1.56	2.28	3.05	3.60	3.62	3.09	2.33	1.60	1.02	0.62	0.35	0.18	0.08	25.6	6.67
-40	0.08	0.15	0.25	0.43	0.67	0.99	1.34	1.68	1.91	1.91	1.69	1.35	1.00	0.69	0.45	0.26	0.14	0.06	15.1	0.00
-48	0.06	0.11	0.18	0.30	0.45	0.62	0.80	0.95	1.05	1.06	0.96	0.80	0.63	0.46	0.31	0.19	0.11	0.05	9.10	0.00
-56	0.04	0.08	0.13	0.20	0.29	0.38	0.48	0.55	0.60	0.60	0.55	0.48	0.39	0.29	0.21	0.13	0.07	0.04	5.50	0.00
-64	0.03	0.05	0.08	0.12	0.17	0.22	0.27	0.31	0.33	0.33	0.31	0.27	0.22	0.17	0.12	0.08	0.05	0.02	3.14	0.00
-72	0.03	0.05	0.08	0.12	0.17	0.22	0.27	0.31	0.33	0.33	0.31	0.27	0.22	0.17	0.12	0.08	0.05	0.02	3.14	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
F t	1.79	3.76	7.15	13.2	23.9	43.3	77.6	127	168	169	130	81.3	45.4	24.6	13.2	6.97	3.44	1.48	941	---
F a	0.00	0.00	0.00	0.00	5.23	29.7	65.5	115	157	158	119	69.5	32.1	6.36	0.00	0.00	0.00	0.00	---	758

one-half-peak spread: U:18.2,D:17.2 , L:17.2,R:17.6


NEMA Beam Type: Type 5

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:DecoHody-600mm-RGBW 3000K-35D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:35 DEG	DIM.:600mm	SERIAL No.:IES001250-W
MFR.:	SUR.:	Shielding Angle:

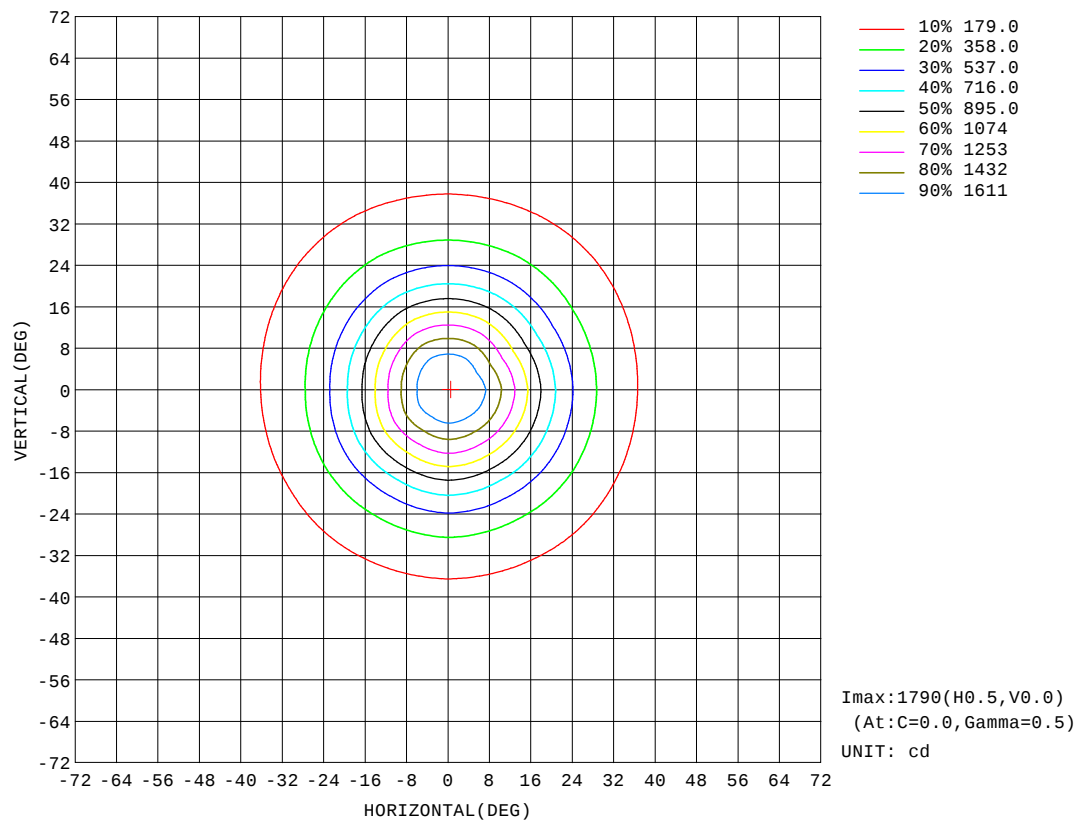


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoHody-600mm-RGBW 3000K-35D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:35 DEG	DIM.:600mm	SERIAL No.:IES001250-W
MFR.:	SUR.:	Shielding Angle:

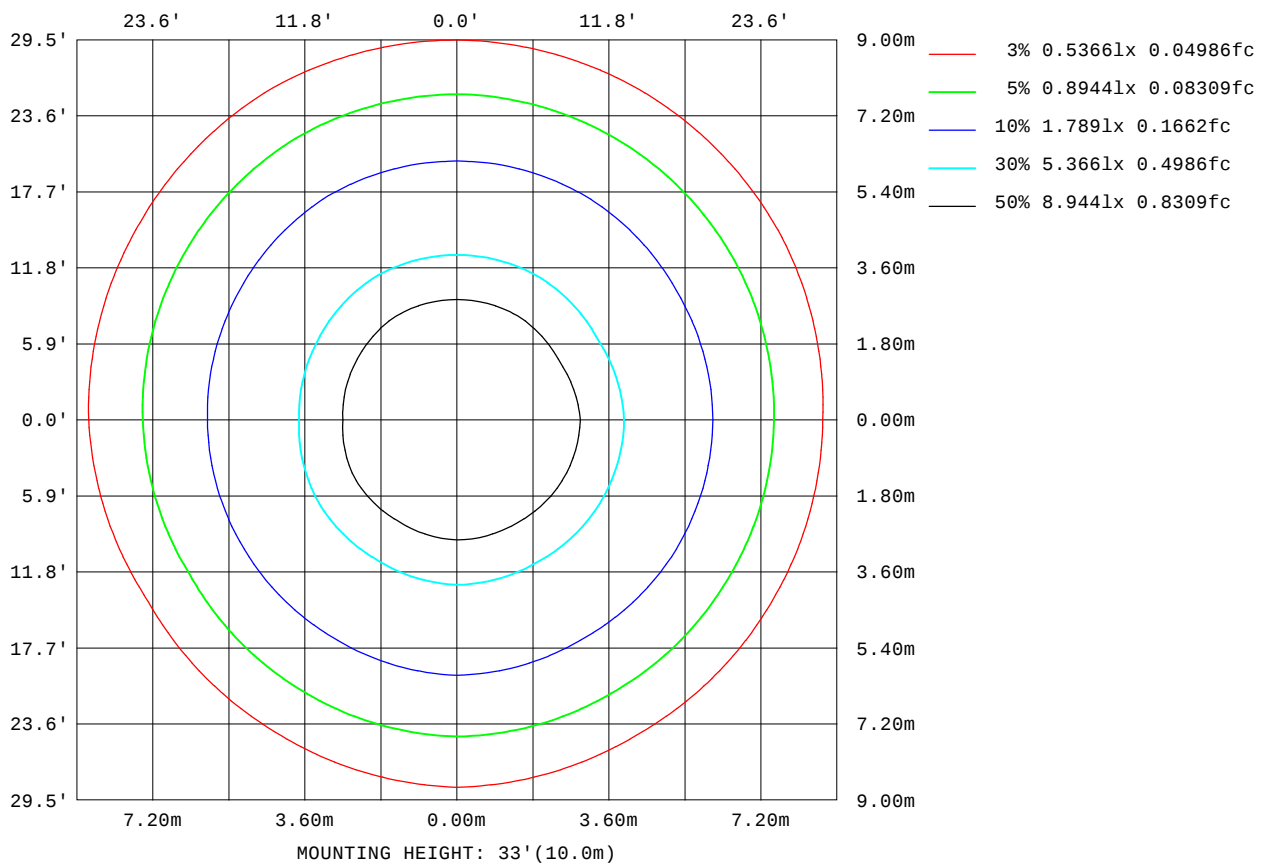

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

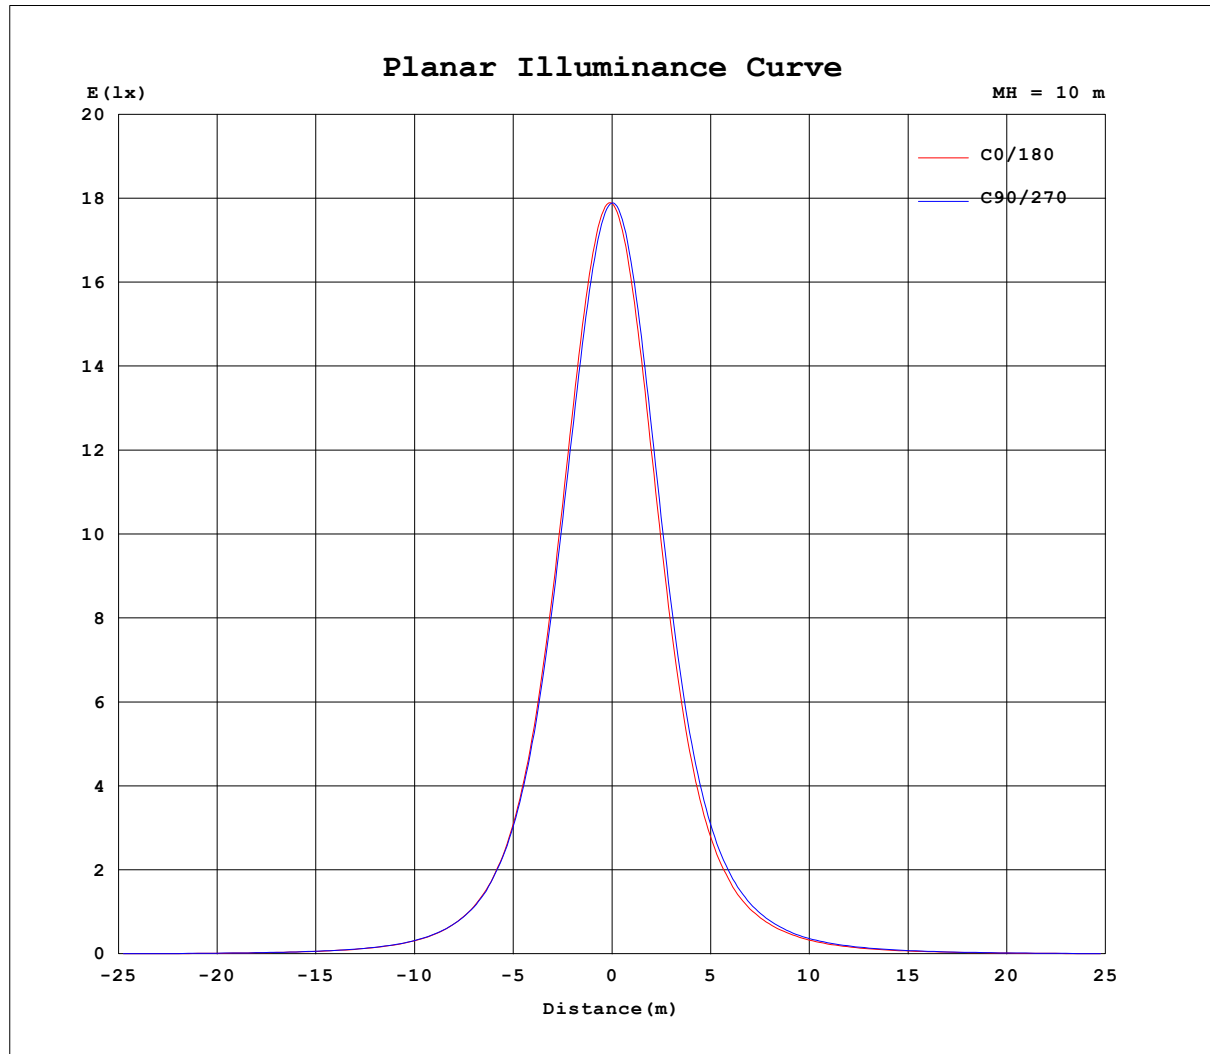


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoBody-600mm-RGBW 3000K-35D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:35 DEG	DIM.:600mm	SERIAL No.:IES001250-W
MFR.:	SUR.:	Shielding Angle:

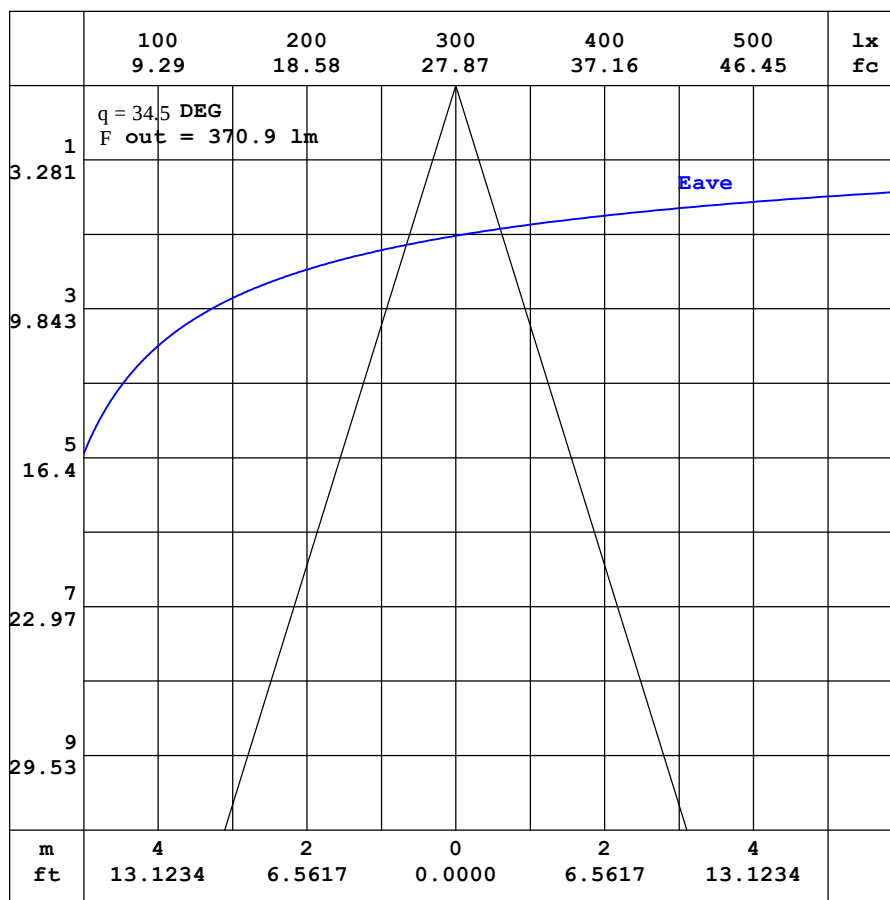

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoHody-600mm-RGBW 3000K-35D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:35 DEG	DIM.:600mm	SERIAL No.:IES001250-W
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	3.91	3.60	3.38	3.34	3.39	3.63	4.04	4.62	5.30	6.00	6.59	7.02	7.27	7.30	7.22	7.04	6.80	6.61	6.92
-170	3.91	3.53	3.27	3.16	3.15	3.26	3.50	3.85	4.26	4.67	5.02	5.27	5.40	5.43	5.40	5.50	5.87	6.16	6.34
-160	3.91	3.48	3.17	2.99	2.90	2.89	2.94	3.05	3.18	3.30	3.37	3.39	3.43	3.97	4.47	4.91	5.25	5.43	5.50
-150	3.91	3.44	3.09	2.84	2.67	2.54	2.45	2.35	2.24	2.09	1.97	2.32	2.71	3.11	3.50	3.83	4.08	4.23	4.28
-140	3.91	3.41	3.01	2.71	2.48	2.26	2.06	1.84	1.57	1.50	1.61	1.77	1.98	2.21	2.43	2.63	2.79	2.89	2.93
-130	3.91	3.38	2.96	2.61	2.32	2.06	1.79	1.51	1.38	1.39	1.41	1.45	1.50	1.58	1.66	1.75	1.81	1.86	1.88
-120	3.91	3.38	2.93	2.55	2.21	1.91	1.61	1.38	1.38	1.38	1.38	1.38	1.38	1.38	1.39	1.39	1.41	1.43	1.44
-110	3.91	3.38	2.92	2.51	2.14	1.80	1.48	1.38	1.38	1.38	1.38	1.38	1.38	1.38	1.38	1.39	1.39	1.39	1.39
-100	3.91	3.41	2.94	2.51	2.09	1.70	1.33	1.31	1.32	1.33	1.34	1.34	1.35	1.36	1.38	1.39	1.40	1.41	1.42
-90	3.91	3.46	3.01	2.56	2.11	1.66	1.21	1.21	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.19
-80	3.91	3.51	3.10	2.70	2.37	2.08	1.80	2.04	2.35	2.64	2.94	3.25	3.54	3.83	4.11	4.36	4.57	4.73	4.85
-70	3.91	3.59	3.38	3.41	3.60	3.89	4.23	5.04	6.03	7.06	8.11	9.19	10.2	11.3	12.2	13.0	13.7	14.1	14.4
-60	3.91	3.69	3.93	4.55	5.47	6.62	7.76	9.13	11.3	13.6	16.0	18.6	21.1	23.6	25.8	27.7	29.2	30.4	31.0
-50	3.91	3.89	4.63	5.97	7.83	9.89	12.1	14.5	17.9	22.2	27.0	32.3	37.9	43.5	49.0	54.1	58.4	61.5	63.1
-40	3.91	4.12	5.36	7.53	10.3	13.5	17.2	21.5	26.6	33.8	43.0	53.8	65.9	79.5	93.8	108	121	131	136
-30	3.91	4.35	6.12	9.08	12.8	17.2	22.6	29.4	38.2	49.7	64.7	85.6	112	146	184	226	267	300	316
-20	3.91	4.55	6.76	10.5	14.9	20.6	27.8	37.4	50.4	68.5	93.9	129	179	253	352	468	588	691	742
-10	3.91	4.71	7.25	11.5	16.6	23.4	32.1	43.9	60.7	85.7	121	174	256	387	580	836	1101	1306	1409
0	3.91	4.82	7.55	12.1	17.6	25.0	34.6	47.6	66.2	94.8	136	196	294	444	681	1003	1363	1656	1788
10	3.91	4.80	7.47	11.9	17.3	24.5	33.7	46.2	64.1	90.7	128	183	265	391	578	830	1113	1345	1422
20	3.91	4.73	7.19	11.2	16.2	22.6	30.8	41.5	56.2	77.2	106	145	198	271	368	488	613	704	739
30	3.91	4.62	6.72	10.2	14.6	19.9	26.6	34.9	45.4	59.6	78.6	102	131	166	206	248	289	315	326
40	3.91	4.46	6.11	8.83	12.4	16.5	21.5	27.5	34.6	43.3	54.1	67.2	81.7	97.2	113	128	140	148	151
50	3.91	4.29	5.48	7.40	10.0	13.1	16.5	20.4	25.0	30.3	36.3	42.8	49.7	56.9	62.9	67.8	71.8	74.2	74.8
60	3.91	4.14	4.87	6.06	7.66	9.64	11.8	14.2	16.9	19.9	23.0	26.3	29.7	32.7	35.1	37.0	38.4	39.3	39.5
70	3.91	4.07	4.37	4.94	5.73	6.69	7.79	9.07	10.4	11.8	13.3	14.8	16.2	17.4	18.3	19.1	19.6	20.0	20.1
80	3.91	4.00	4.10	4.23	4.44	4.70	5.00	5.35	5.75	6.17	6.59	7.02	7.45	7.76	8.03	8.23	8.38	8.47	8.49
90	3.91	3.93	3.96	3.99	4.02	4.05	4.07	4.08	4.08	4.08	4.08	4.08	4.08	4.08	4.08	4.09	4.09	4.09	4.09
100	3.91	3.87	3.83	3.79	3.75	3.73	3.70	3.66	3.62	3.59	3.56	3.53	3.51	3.50	3.49	3.49	3.49	3.49	3.49
110	3.91	3.80	3.72	3.64	3.57	3.51	3.47	3.42	3.38	3.35	3.35	3.34	3.34	3.35	3.35	3.35	3.35	3.34	3.33
120	3.91	3.76	3.63	3.52	3.43	3.38	3.36	3.35	3.35	3.37	3.43	3.49	3.57	3.64	3.70	3.75	3.79	3.81	3.81
130	3.91	3.71	3.55	3.43	3.36	3.35	3.35	3.39	3.51	3.67	3.85	4.07	4.28	4.49	4.67	4.83	4.94	5.00	5.01
140	3.91	3.68	3.49	3.37	3.35	3.35	3.44	3.62	3.88	4.21	4.58	4.97	5.34	5.68	5.96	6.20	6.35	6.45	6.48
150	3.91	3.64	3.45	3.35	3.35	3.42	3.62	3.95	4.37	4.87	5.39	5.90	6.34	6.72	7.02	7.25	7.39	7.47	7.49
160	3.91	3.62	3.41	3.34	3.36	3.51	3.81	4.27	4.83	5.45	6.05	6.57	6.97	7.28	7.48	7.61	7.68	7.72	7.79
170	3.91	3.60	3.39	3.34	3.39	3.59	3.97	4.51	5.16	5.84	6.45	6.93	7.24	7.38	7.42	7.39	7.30	7.27	7.38
180	3.91	3.60	3.38	3.34	3.39	3.63	4.04	4.62	5.30	6.00	6.59	7.02	7.27	7.30	7.22	7.04	6.80	6.61	6.95

H_b Range:-90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-07-03

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoHody-600mm-RGBW 3000K-35D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:35 DEG	DIM.:600mm	SERIAL No.:IES001250-W
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	5.98	5.63	5.28	4.87	4.34	3.76	3.16	2.60	2.11	1.74	1.52	1.42	1.41	1.41	1.38	1.33	1.20	1.07	
-170	5.96	5.66	5.32	4.85	4.31	3.71	3.11	2.54	2.07	1.72	1.51	1.43	1.41	1.41	1.38	1.33	1.21	1.07	
-160	5.35	5.10	4.76	4.33	3.82	3.30	2.76	2.28	1.90	1.63	1.48	1.42	1.41	1.42	1.38	1.33	1.21	1.07	
-150	4.19	4.01	3.74	3.39	3.01	2.61	2.24	1.93	1.68	1.52	1.44	1.42	1.42	1.41	1.39	1.32	1.20	1.07	
-140	2.87	2.76	2.59	2.38	2.16	1.94	1.75	1.60	1.50	1.45	1.42	1.42	1.42	1.40	1.37	1.30	1.18	1.07	
-130	1.85	1.81	1.74	1.65	1.57	1.50	1.46	1.44	1.42	1.42	1.42	1.42	1.41	1.40	1.35	1.28	1.16	1.07	
-120	1.43	1.43	1.41	1.41	1.41	1.41	1.42	1.42	1.42	1.42	1.43	1.42	1.41	1.37	1.32	1.24	1.15	1.07	
-110	1.40	1.40	1.41	1.42	1.42	1.42	1.43	1.43	1.42	1.42	1.42	1.42	1.40	1.37	1.32	1.26	1.19	1.12	1.07
-100	1.41	1.40	1.40	1.39	1.38	1.37	1.37	1.36	1.35	1.34	1.33	1.32	1.32	1.28	1.23	1.19	1.14	1.09	1.07
-90	1.19	1.19	1.19	1.19	1.19	1.19	1.18	1.18	1.18	1.18	1.18	1.18	1.16	1.14	1.12	1.10	1.09	1.07	
-80	4.74	4.59	4.38	4.14	3.86	3.56	3.28	2.98	2.67	2.37	2.07	1.76	1.53	1.33	1.17	1.11	1.08	1.07	
-70	14.1	13.7	13.1	12.4	11.5	10.5	9.43	8.34	7.24	6.17	5.17	4.22	3.31	2.48	1.78	1.33	1.09	1.07	
-60	30.4	29.3	27.8	25.9	23.8	21.5	19.0	16.5	14.0	11.7	9.49	7.51	5.79	4.22	2.81	1.75	1.16	1.07	
-50	61.6	58.6	54.4	49.4	43.9	38.6	33.3	28.1	23.3	18.9	14.9	11.6	8.66	6.18	4.05	2.33	1.29	1.07	
-40	131	122	109	94.9	80.8	67.5	55.3	44.7	35.5	27.8	21.5	16.2	11.8	8.17	5.32	2.92	1.42	1.07	
-30	303	272	232	190	151	117	89.1	67.5	51.1	38.4	28.5	20.9	14.8	10.1	6.41	3.49	1.55	1.07	
-20	700	602	486	370	270	191	135	95.9	68.4	49.1	35.2	25.1	17.4	11.7	7.28	3.93	1.66	1.07	
-10	1328	1135	876	622	419	277	183	122	83.4	57.6	40.2	28.0	19.3	12.8	7.85	4.22	1.72	1.07	
0	1712	1455	1105	764	497	319	206	135	89.8	61.2	42.1	29.2	19.9	13.1	8.05	4.32	1.75	1.07	
10	1347	1123	846	602	412	278	188	127	87.1	60.6	42.4	29.6	20.3	13.4	8.25	4.44	1.82	1.07	
20	705	615	492	374	276	201	146	104	75.4	54.5	39.3	28.0	19.4	13.0	8.06	4.35	1.84	1.07	
30	315	288	247	205	165	130	101	78.7	60.2	45.4	33.8	24.7	17.5	11.8	7.50	4.08	1.82	1.07	
40	148	138	126	111	95.2	80.3	66.9	55.0	44.7	35.6	27.4	20.4	14.8	10.2	6.62	3.66	1.76	1.07	
50	73.7	70.9	66.6	61.4	55.5	49.1	42.8	36.7	31.0	25.7	20.7	15.9	11.8	8.38	5.47	3.18	1.69	1.07	
60	39.1	38.1	36.5	34.5	32.1	29.3	26.2	23.1	20.1	17.2	14.5	11.5	8.81	6.38	4.30	2.68	1.61	1.07	
70	19.9	19.5	18.9	18.1	17.1	16.0	14.6	13.3	11.9	10.5	9.18	7.74	6.06	4.60	3.31	2.31	1.57	1.07	
80	8.44	8.34	8.17	7.94	7.67	7.35	6.96	6.55	6.15	5.75	5.34	4.95	4.14	3.40	2.72	2.11	1.57	1.07	
90	4.08	4.07	4.07	4.06	4.05	4.05	4.05	4.05	4.05	4.05	4.05	4.05	3.55	3.05	2.56	2.06	1.56	1.07	
100	3.48	3.48	3.47	3.47	3.47	3.49	3.51	3.53	3.56	3.60	3.64	3.65	3.28	2.88	2.46	2.02	1.55	1.07	
110	3.33	3.33	3.33	3.32	3.31	3.31	3.31	3.31	3.33	3.35	3.39	3.34	3.04	2.72	2.37	1.98	1.53	1.07	
120	3.80	3.77	3.73	3.66	3.59	3.52	3.44	3.37	3.32	3.30	3.31	3.10	2.84	2.56	2.27	1.92	1.52	1.07	
130	4.99	4.91	4.78	4.61	4.41	4.21	3.99	3.78	3.60	3.44	3.21	2.91	2.65	2.40	2.14	1.85	1.49	1.07	
140	6.44	6.33	6.15	5.90	5.61	5.26	4.88	4.49	4.12	3.66	3.12	2.73	2.46	2.23	2.01	1.77	1.44	1.07	
150	7.47	7.39	7.23	6.99	6.68	6.28	5.81	5.29	4.39	3.57	2.96	2.54	2.25	2.05	1.88	1.67	1.40	1.07	
160	7.74	7.71	7.66	7.53	7.30	6.97	6.00	4.96	4.02	3.24	2.64	2.25	2.01	1.86	1.72	1.56	1.34	1.07	
170	7.28	7.41	7.53	7.12	6.43	5.65	4.82	3.99	3.23	2.60	2.15	1.88	1.73	1.64	1.55	1.45	1.27	1.07	
180	5.98	5.63	5.28	4.87	4.34	3.76	3.16	2.60	2.11	1.74	1.52	1.42	1.41	1.41	1.38	1.33	1.20	1.07	

H_b Range:-90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-07-03

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: