

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1753.0 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	77.0V x 75.1H
	At 50% of Imax	36.1V x 35.4H
	At 90% of Imax	13.8V x 13.6H
Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	786.6 lumens per klm.
	To 50% of Imax	379.6 lumens per klm.
	To 90% of Imax	71.0 lumens per klm.
Upward LOR		2.0 %
Downward LOR		98.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoBody-600mm-RGBW BLUE-35D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:35 DEG	DIM.:600mm	SERIAL No.:IES001250-B
MFR.:	SUR.:	Shielding Angle:

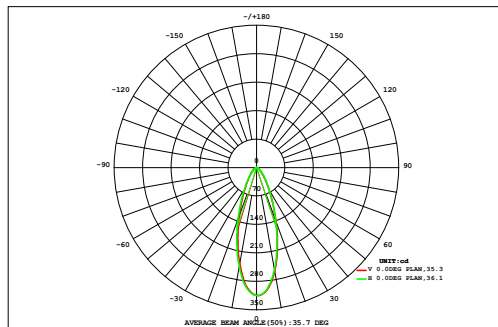

DATA OF LAMP		Eff:9.81lm/W	
MODEL		Imax(cd)	314.7
NOMINAL POWER(W)	18.1	AVAILABILITY(%)	78.7
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	141.2
NOMINAL FLUX(lm)	179.5	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	179.5
TEST VOLTAGE(V)	221.4	q @50%(H,V)	35,36DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.01	0.02	0.03	0.04	0.05	0.06	0.08	0.08	0.09	0.09	0.08	0.08	0.06	0.05	0.04	0.03	0.02	0.01	0.90	0.00
72	0.01	0.02	0.04	0.06	0.08	0.10	0.13	0.14	0.15	0.15	0.14	0.13	0.10	0.08	0.06	0.04	0.02	0.01	1.47	0.00
64	0.02	0.03	0.05	0.08	0.12	0.16	0.20	0.24	0.25	0.25	0.23	0.20	0.16	0.12	0.08	0.05	0.03	0.01	2.29	0.00
56	0.02	0.04	0.07	0.11	0.17	0.24	0.32	0.39	0.43	0.43	0.39	0.32	0.24	0.17	0.11	0.07	0.04	0.02	3.58	0.00
48	0.02	0.05	0.08	0.15	0.24	0.36	0.52	0.67	0.77	0.77	0.67	0.52	0.36	0.24	0.15	0.08	0.04	0.02	5.70	2.66
40	0.02	0.05	0.10	0.19	0.32	0.53	0.83	1.17	1.41	1.41	1.17	0.83	0.54	0.32	0.19	0.10	0.05	0.02	9.26	7.35
32	0.03	0.06	0.12	0.23	0.42	0.75	1.29	2.02	2.59	2.60	2.04	1.32	0.76	0.42	0.23	0.12	0.05	0.02	15.1	13.5
24	0.03	0.07	0.13	0.26	0.50	0.97	1.85	3.16	4.26	4.27	3.20	1.91	1.02	0.52	0.26	0.13	0.06	0.02	22.6	21.3
	0.03	0.07	0.14	0.28	0.55	1.12	2.25	4.00	5.55	5.58	4.19	2.45	1.22	0.58	0.27	0.13	0.06	0.02	28.5	27.2
	0.03	0.07	0.14	0.27	0.54	1.11	2.24	3.98	5.48	5.57	4.22	2.47	1.22	0.57	0.27	0.13	0.06	0.02	28.4	27.1
	0.03	0.06	0.12	0.24	0.48	0.94	1.82	3.10	4.14	4.19	3.21	1.94	1.02	0.50	0.25	0.12	0.05	0.02	22.2	20.9
	0.02	0.05	0.11	0.20	0.38	0.69	1.23	1.92	2.50	2.53	1.98	1.29	0.74	0.40	0.21	0.10	0.05	0.02	14.4	12.9
-24	0.02	0.05	0.09	0.16	0.28	0.47	0.75	1.07	1.33	1.34	1.10	0.78	0.49	0.29	0.16	0.09	0.04	0.02	8.53	6.58
-32	0.02	0.04	0.07	0.12	0.19	0.31	0.44	0.59	0.70	0.70	0.60	0.45	0.32	0.20	0.12	0.07	0.04	0.02	4.99	1.78
-40	0.01	0.03	0.05	0.09	0.13	0.19	0.26	0.33	0.37	0.38	0.33	0.27	0.20	0.14	0.09	0.05	0.03	0.01	2.97	0.00
-48	0.01	0.02	0.04	0.06	0.09	0.12	0.16	0.19	0.21	0.21	0.19	0.16	0.13	0.09	0.06	0.04	0.02	0.01	1.80	0.00
-56	0.01	0.01	0.02	0.04	0.06	0.08	0.09	0.11	0.12	0.12	0.11	0.09	0.08	0.06	0.04	0.03	0.01	0.01	1.08	0.00
-64	0.01	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.06	0.06	0.06	0.05	0.04	0.03	0.02	0.02	0.01	0.00	0.61	0.00
-72	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
F t	0.35	0.74	1.41	2.59	4.63	8.27	14.5	23.2	30.4	30.7	23.9	15.3	8.70	4.79	2.61	1.38	0.68	0.29	174	---
F a	0.00	0.00	0.00	0.00	1.38	5.91	12.4	21.2	28.5	28.7	21.9	13.2	6.38	1.65	0.00	0.00	0.00	0.00	---	141

one-half-peak spread: U:18.5,D:17.9 , L:18.0,R:17.6


NEMA Beam Type: Type 5

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:DecoHody-600mm-RGBW BLUE-35D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:35 DEG	DIM.:600mm	SERIAL No.:IES001250-B
MFR.:	SUR.:	Shielding Angle:

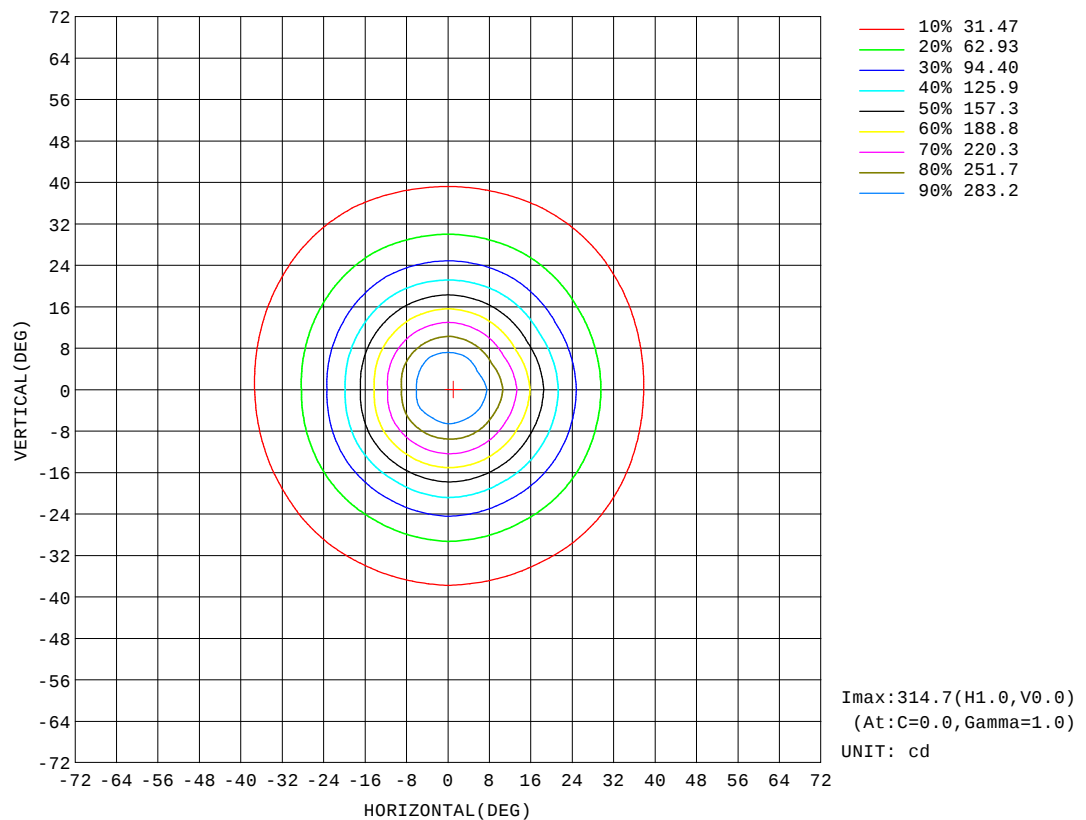


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoHody-600mm-RGBW BLUE-35D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:35 DEG	DIM.:600mm	SERIAL No.:IES001250-B
MFR.:	SUR.:	Shielding Angle:

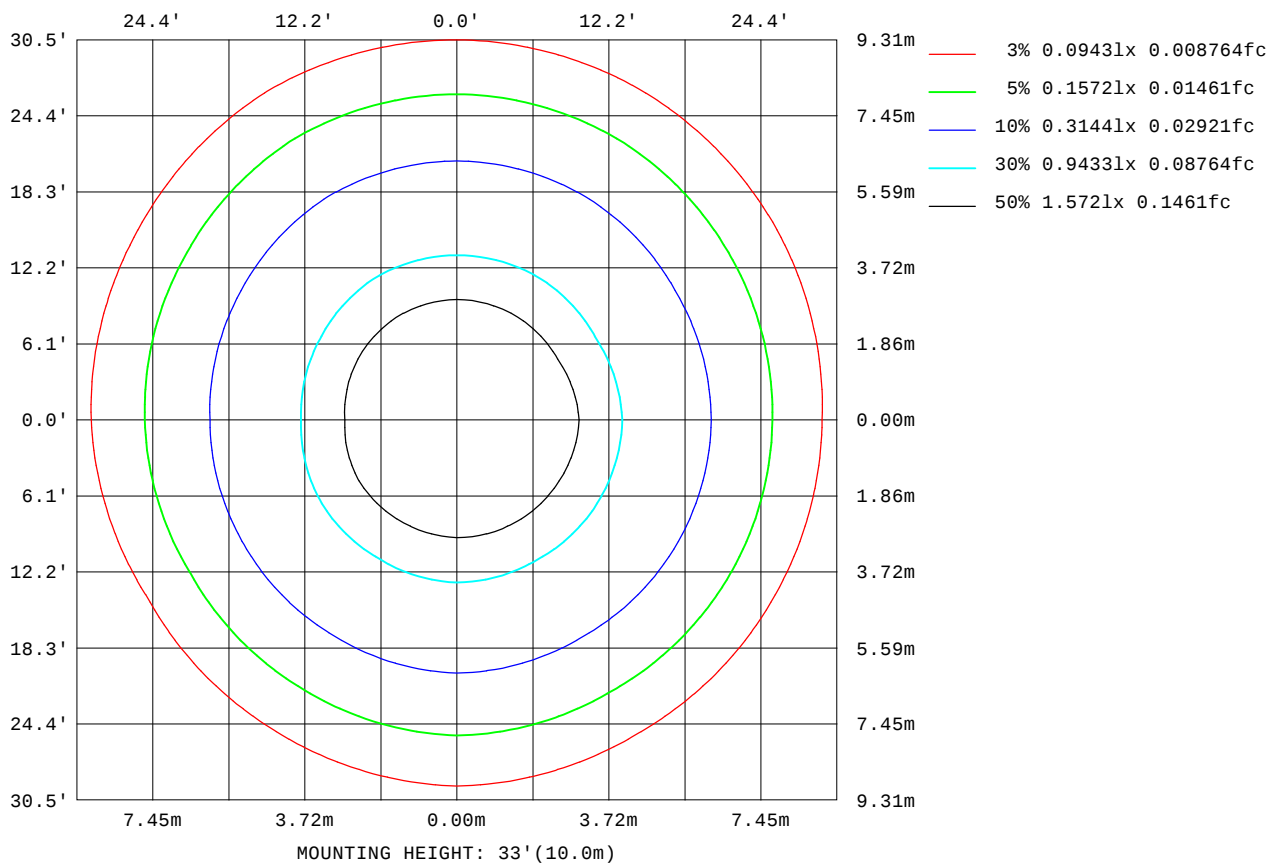

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

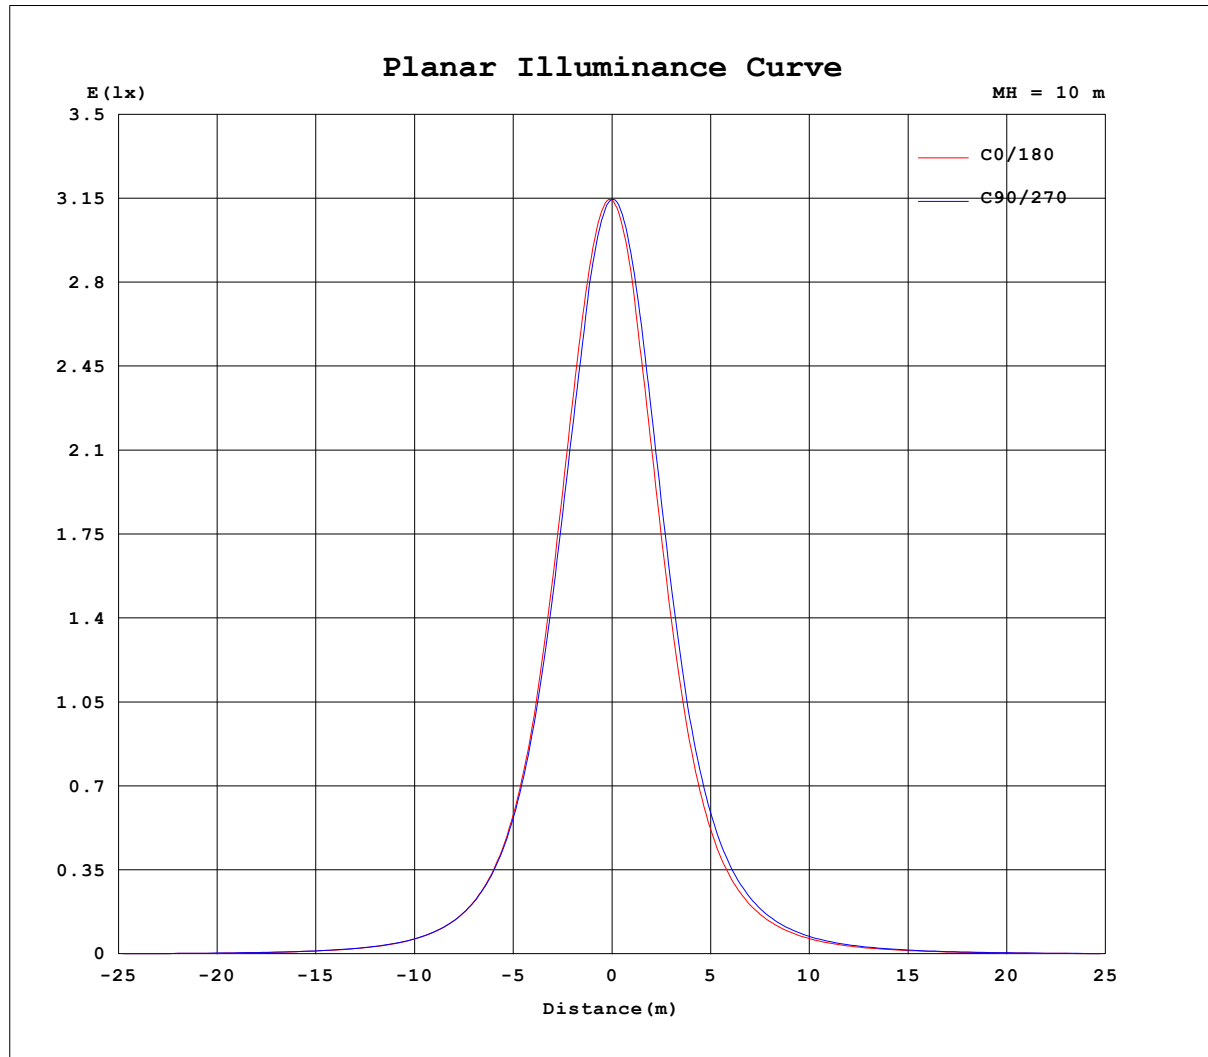


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoHody-600mm-RGBW BLUE-35D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:35 DEG	DIM.:600mm	SERIAL No.:IES001250-B
MFR.:	SUR.:	Shielding Angle:

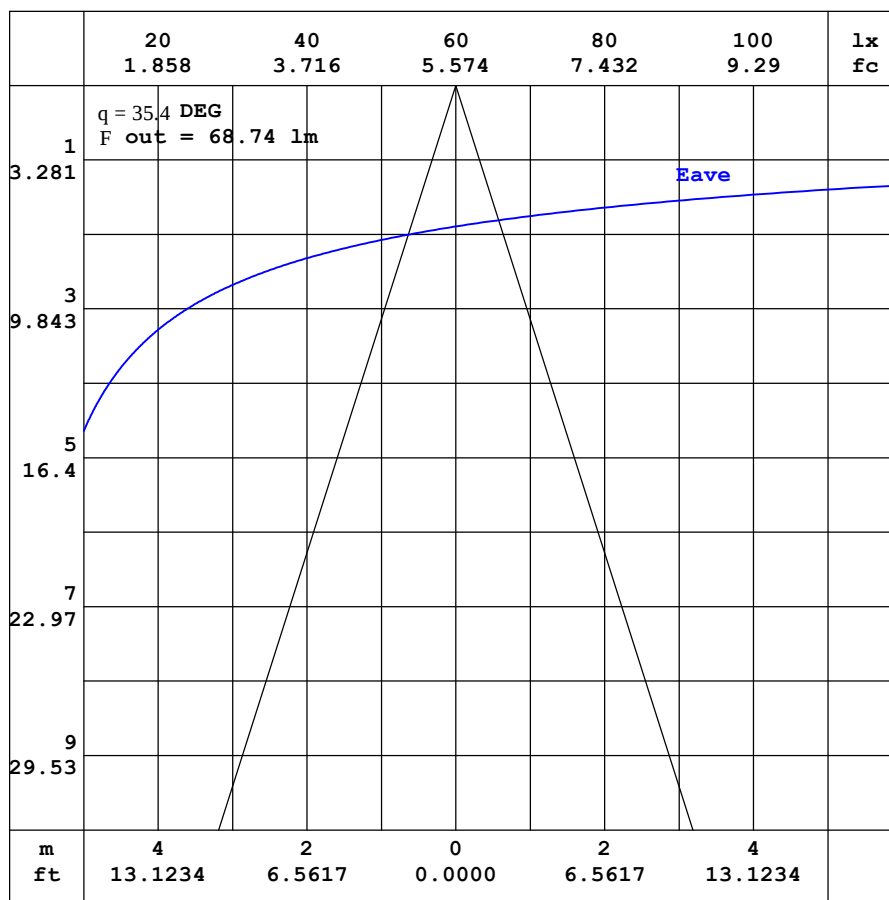

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoHody-600mm-RGBW BLUE-35D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:35 DEG	DIM.:600mm	SERIAL No.:IES001250-B
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.70	0.62	0.59	0.59	0.59	0.63	0.70	0.80	0.92	1.04	1.15	1.23	1.23	1.23	1.22	1.20	1.15	1.14	1.18
-170	0.70	0.61	0.56	0.55	0.54	0.56	0.60	0.65	0.73	0.80	0.86	0.90	0.92	0.92	0.93	0.94	1.00	1.03	1.10
-160	0.70	0.60	0.54	0.51	0.49	0.48	0.49	0.51	0.53	0.55	0.56	0.57	0.57	0.66	0.74	0.81	0.87	0.91	0.94
-150	0.70	0.59	0.52	0.48	0.44	0.41	0.39	0.37	0.35	0.32	0.30	0.36	0.43	0.49	0.56	0.61	0.66	0.71	0.73
-140	0.70	0.58	0.50	0.45	0.40	0.35	0.31	0.27	0.21	0.20	0.22	0.25	0.29	0.31	0.35	0.40	0.44	0.47	0.48
-130	0.70	0.58	0.50	0.42	0.36	0.31	0.25	0.19	0.17	0.17	0.17	0.17	0.18	0.19	0.21	0.24	0.26	0.28	0.28
-120	0.70	0.58	0.48	0.40	0.34	0.27	0.21	0.16	0.16	0.16	0.15	0.15	0.15	0.15	0.15	0.16	0.17	0.18	0.19
-110	0.70	0.57	0.48	0.40	0.32	0.24	0.18	0.16	0.15	0.15	0.15	0.14	0.14	0.14	0.15	0.15	0.16	0.17	0.17
-100	0.70	0.58	0.48	0.40	0.31	0.23	0.15	0.14	0.15	0.14	0.13	0.14	0.13	0.14	0.14	0.15	0.15	0.16	0.16
-90	0.70	0.61	0.51	0.41	0.31	0.21	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12
-80	0.70	0.60	0.52	0.43	0.35	0.28	0.22	0.28	0.36	0.43	0.49	0.56	0.62	0.68	0.73	0.78	0.81	0.84	0.86
-70	0.70	0.62	0.56	0.56	0.60	0.67	0.75	0.93	1.14	1.35	1.57	1.79	2.00	2.21	2.39	2.54	2.66	2.75	2.80
-60	0.70	0.63	0.67	0.80	1.00	1.24	1.49	1.78	2.21	2.69	3.18	3.68	4.16	4.65	5.08	5.47	5.78	6.00	6.12
-50	0.70	0.67	0.81	1.10	1.48	1.91	2.38	2.90	3.60	4.45	5.40	6.42	7.53	8.63	9.70	10.7	11.5	12.2	12.5
-40	0.70	0.72	0.96	1.41	1.98	2.64	3.40	4.30	5.35	6.75	8.53	10.6	13.0	15.6	18.4	21.2	23.7	25.5	26.5
-30	0.70	0.76	1.13	1.72	2.48	3.38	4.49	5.87	7.61	9.80	12.7	16.8	21.9	28.2	35.3	43.1	50.8	56.6	59.5
-20	0.70	0.80	1.26	2.00	2.91	4.06	5.52	7.43	9.94	13.5	18.3	25.0	34.7	48.4	66.1	87.0	108	126	135
-10	0.70	0.84	1.35	2.20	3.24	4.60	6.35	8.70	12.0	16.6	23.4	33.5	48.8	72.2	107	151	197	232	247
0	0.70	0.86	1.41	2.32	3.44	4.90	6.83	9.38	13.1	18.3	26.0	37.3	54.9	82.5	124	179	240	292	314
10	0.70	0.86	1.40	2.29	3.38	4.80	6.65	9.15	12.6	17.5	24.6	34.9	50.3	73.5	107	153	201	239	254
20	0.70	0.85	1.34	2.16	3.16	4.44	6.08	8.23	11.1	15.0	20.4	27.7	37.8	51.7	69.8	91.8	114	131	138
30	0.70	0.82	1.25	1.94	2.83	3.89	5.23	6.89	9.04	11.8	15.2	19.8	25.4	32.2	40.1	48.4	55.4	60.7	62.7
40	0.70	0.79	1.12	1.68	2.40	3.24	4.23	5.43	6.83	8.60	10.7	13.2	16.0	19.1	22.3	25.1	27.4	29.0	29.6
50	0.70	0.76	1.00	1.39	1.92	2.54	3.23	4.01	4.92	5.98	7.15	8.43	9.77	11.2	12.4	13.4	14.2	14.7	14.9
60	0.70	0.73	0.88	1.12	1.45	1.86	2.30	2.77	3.32	3.90	4.51	5.15	5.81	6.42	6.88	7.28	7.57	7.75	7.81
70	0.70	0.72	0.78	0.90	1.07	1.26	1.49	1.74	2.01	2.29	2.57	2.86	3.14	3.38	3.57	3.73	3.84	3.91	3.94
80	0.70	0.71	0.74	0.77	0.81	0.87	0.94	1.01	1.08	1.15	1.23	1.32	1.40	1.46	1.52	1.56	1.60	1.62	1.63
90	0.70	0.71	0.72	0.73	0.74	0.75	0.76	0.75	0.75	0.74	0.74	0.73	0.73	0.73	0.74	0.75	0.75	0.76	0.77
100	0.70	0.69	0.68	0.68	0.69	0.68	0.69	0.67	0.66	0.64	0.63	0.62	0.61	0.61	0.61	0.62	0.63	0.63	0.64
110	0.70	0.67	0.66	0.65	0.64	0.64	0.63	0.62	0.61	0.60	0.59	0.59	0.59	0.59	0.59	0.59	0.59	0.59	0.59
120	0.70	0.66	0.64	0.62	0.61	0.61	0.60	0.60	0.59	0.59	0.59	0.61	0.62	0.62	0.63	0.63	0.64	0.63	0.62
130	0.70	0.65	0.63	0.61	0.60	0.59	0.59	0.59	0.59	0.61	0.65	0.69	0.73	0.78	0.80	0.82	0.83	0.84	0.84
140	0.70	0.64	0.61	0.60	0.59	0.59	0.60	0.60	0.64	0.70	0.77	0.84	0.91	0.97	1.03	1.06	1.08	1.08	1.08
150	0.70	0.64	0.60	0.59	0.59	0.60	0.61	0.66	0.73	0.80	0.89	0.99	1.08	1.15	1.21	1.26	1.27	1.28	1.28
160	0.70	0.63	0.59	0.59	0.59	0.61	0.65	0.73	0.81	0.92	1.02	1.10	1.16	1.23	1.27	1.29	1.30	1.31	1.32
170	0.70	0.63	0.59	0.59	0.59	0.62	0.68	0.77	0.89	1.00	1.10	1.18	1.23	1.25	1.27	1.28	1.26	1.23	1.28
180	0.70	0.62	0.59	0.59	0.59	0.63	0.70	0.80	0.92	1.04	1.15	1.23	1.23	1.23	1.22	1.20	1.15	1.14	1.21

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-07-03

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoHody-600mm-RGBW BLUE-35D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:35 DEG	DIM.:600mm	SERIAL No.:IES001250-B
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.00	0.94	0.87	0.79	0.70	0.59	0.48	0.37	0.28	0.21	0.17	0.14	0.14	0.14	0.14	0.13	0.10	0.10	
-170	1.00	0.95	0.91	0.82	0.71	0.61	0.49	0.38	0.29	0.22	0.18	0.15	0.14	0.14	0.14	0.13	0.10	0.10	
-160	0.90	0.84	0.78	0.71	0.63	0.54	0.44	0.35	0.27	0.22	0.17	0.15	0.15	0.14	0.14	0.13	0.11	0.10	
-150	0.70	0.65	0.59	0.53	0.47	0.41	0.35	0.29	0.24	0.20	0.17	0.16	0.15	0.15	0.14	0.12	0.11	0.10	
-140	0.46	0.43	0.39	0.34	0.30	0.28	0.24	0.22	0.20	0.19	0.17	0.16	0.16	0.15	0.14	0.12	0.11	0.10	
-130	0.27	0.25	0.23	0.20	0.19	0.18	0.17	0.17	0.17	0.17	0.17	0.17	0.16	0.15	0.14	0.12	0.11	0.10	
-120	0.18	0.17	0.16	0.16	0.15	0.14	0.15	0.15	0.16	0.17	0.17	0.16	0.16	0.15	0.13	0.12	0.11	0.10	
-110	0.16	0.16	0.15	0.14	0.14	0.14	0.14	0.15	0.15	0.16	0.16	0.16	0.15	0.14	0.12	0.11	0.11	0.10	
-100	0.16	0.15	0.15	0.14	0.13	0.13	0.14	0.14	0.14	0.14	0.15	0.14	0.14	0.14	0.12	0.12	0.11	0.10	
-90	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.13	0.13	0.12	0.12	0.11	0.11	0.11	0.10	
-80	0.84	0.81	0.78	0.73	0.68	0.62	0.56	0.49	0.42	0.35	0.29	0.22	0.17	0.14	0.13	0.11	0.11	0.10	
-70	2.75	2.68	2.56	2.41	2.23	2.04	1.82	1.60	1.37	1.15	0.94	0.74	0.55	0.38	0.24	0.15	0.11	0.10	
-60	6.01	5.81	5.51	5.13	4.69	4.24	3.76	3.26	2.76	2.28	1.83	1.42	1.07	0.75	0.46	0.24	0.13	0.10	
-50	12.2	11.6	10.8	9.81	8.76	7.71	6.62	5.61	4.64	3.75	2.96	2.26	1.66	1.15	0.72	0.36	0.15	0.10	
-40	25.7	23.9	21.5	18.7	16.0	13.4	11.0	8.91	7.13	5.58	4.28	3.20	2.30	1.56	0.98	0.49	0.18	0.10	
-30	57.1	51.6	44.2	36.5	29.3	22.9	17.6	13.4	10.2	7.69	5.70	4.15	2.92	1.96	1.20	0.60	0.21	0.10	
-20	128	111	90.4	69.5	51.4	37.1	26.5	19.0	13.6	9.80	7.04	4.99	3.45	2.28	1.38	0.70	0.23	0.10	
-10	236	203	158	114	78.4	52.7	35.4	24.0	16.5	11.5	8.05	5.58	3.81	2.49	1.50	0.76	0.25	0.10	
0	302	259	199	141	92.7	60.6	39.6	26.3	17.8	12.2	8.43	5.79	3.93	2.56	1.54	0.78	0.25	0.10	
10	239	203	156	112	77.7	53.0	36.1	24.8	17.2	12.0	8.44	5.85	4.00	2.62	1.58	0.80	0.27	0.10	
20	131	115	92.7	71.0	52.7	38.6	28.1	20.4	14.8	10.8	7.75	5.50	3.80	2.51	1.53	0.78	0.27	0.10	
30	60.7	55.4	48.2	40.0	32.2	25.4	19.9	15.4	11.8	8.93	6.61	4.83	3.40	2.29	1.42	0.73	0.27	0.10	
40	28.9	27.2	24.8	21.9	18.8	15.9	13.2	10.8	8.76	6.91	5.32	3.96	2.87	1.96	1.24	0.65	0.26	0.10	
50	14.7	14.1	13.2	12.2	11.0	9.69	8.43	7.19	6.04	4.98	3.99	3.07	2.26	1.59	1.01	0.55	0.24	0.10	
60	7.73	7.53	7.22	6.82	6.34	5.76	5.13	4.50	3.89	3.32	2.78	2.20	1.67	1.19	0.78	0.45	0.23	0.10	
70	3.91	3.83	3.71	3.54	3.35	3.10	2.83	2.55	2.27	2.00	1.74	1.46	1.13	0.84	0.58	0.37	0.22	0.10	
80	1.62	1.59	1.55	1.50	1.44	1.37	1.30	1.22	1.14	1.07	1.00	0.93	0.76	0.60	0.46	0.33	0.22	0.10	
90	0.76	0.75	0.74	0.74	0.73	0.72	0.73	0.73	0.74	0.75	0.75	0.76	0.65	0.54	0.43	0.32	0.21	0.10	
100	0.63	0.62	0.62	0.61	0.60	0.60	0.62	0.63	0.64	0.65	0.66	0.67	0.58	0.50	0.40	0.31	0.21	0.10	
110	0.59	0.58	0.58	0.58	0.58	0.58	0.58	0.59	0.59	0.60	0.62	0.61	0.54	0.46	0.37	0.29	0.20	0.10	
120	0.63	0.63	0.63	0.62	0.63	0.61	0.60	0.59	0.58	0.58	0.59	0.54	0.48	0.42	0.35	0.27	0.19	0.10	
130	0.84	0.82	0.81	0.79	0.76	0.72	0.67	0.64	0.60	0.58	0.55	0.49	0.43	0.38	0.32	0.25	0.18	0.10	
140	1.08	1.08	1.06	1.02	0.96	0.89	0.82	0.74	0.68	0.60	0.50	0.44	0.38	0.34	0.29	0.23	0.17	0.10	
150	1.28	1.27	1.25	1.20	1.14	1.06	0.97	0.88	0.71	0.57	0.45	0.37	0.33	0.29	0.25	0.20	0.15	0.10	
160	1.31	1.30	1.30	1.29	1.23	1.17	0.99	0.81	0.64	0.50	0.39	0.31	0.27	0.24	0.22	0.18	0.14	0.10	
170	1.23	1.28	1.29	1.21	1.08	0.93	0.78	0.63	0.49	0.38	0.29	0.23	0.20	0.19	0.18	0.16	0.12	0.10	
180	1.00	0.94	0.87	0.79	0.70	0.59	0.48	0.37	0.28	0.21	0.17	0.14	0.14	0.14	0.14	0.13	0.10	0.10	

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-07-03

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: