

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	1902.0 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	73.1V x 71.2H
	At 50% of Imax	34.6V x 34.0H
	At 90% of Imax	13.2V x 13.1H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	778.2 lumens per klm.
	To 50% of Imax	379.7 lumens per klm.
	To 90% of Imax	72.2 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-07-03

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoBody-600mm-RGBW RED-35D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:35 DEG	DIM.:600mm	SERIAL No.:IES001250-R
MFR.:	SUR.:	Shielding Angle:

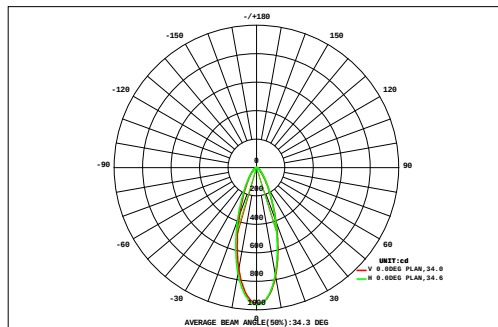

DATA OF LAMP		Eff:34.69lm/W	
MODEL		Imax(cd)	963.4
NOMINAL POWER(W)	14.6	AVAILABILITY(%)	77.8
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	394.0
NOMINAL FLUX(lm)	506.5	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	506.5
TEST VOLTAGE(V)	221.4	q @50%(H,V)	34,35DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	0.02	0.04	0.07	0.10	0.13	0.17	0.19	0.22	0.23	0.23	0.22	0.19	0.16	0.13	0.10	0.07	0.04	0.02	2.33	0.00		
	64	0.03	0.06	0.10	0.15	0.20	0.27	0.32	0.37	0.39	0.39	0.36	0.32	0.27	0.21	0.15	0.10	0.06	0.03	3.77	0.00	
	56	0.04	0.08	0.13	0.21	0.30	0.41	0.52	0.60	0.65	0.65	0.60	0.51	0.41	0.30	0.21	0.14	0.07	0.03	5.87	0.00	
	48	0.05	0.10	0.17	0.28	0.43	0.62	0.83	1.01	1.12	1.12	1.00	0.82	0.62	0.44	0.29	0.18	0.09	0.04	9.21	0.00	
	40	0.06	0.12	0.22	0.37	0.61	0.94	1.35	1.75	2.01	2.01	1.74	1.34	0.93	0.61	0.38	0.22	0.11	0.05	14.8	4.40	
	32	0.06	0.14	0.26	0.48	0.83	1.39	2.19	3.11	3.80	3.81	3.13	2.21	1.40	0.84	0.48	0.26	0.13	0.05	24.6	18.4	
	24	0.07	0.15	0.31	0.59	1.09	1.98	3.50	5.63	7.34	7.35	5.68	3.58	2.03	1.10	0.58	0.29	0.14	0.06	41.5	36.6	
		0.07	0.17	0.34	0.68	1.33	2.62	5.16	9.18	12.7	12.7	9.31	5.36	2.76	1.35	0.66	0.32	0.15	0.06	64.9	60.6	
		0.08	0.17	0.36	0.73	1.46	3.03	6.40	11.9	16.8	17.0	12.4	6.97	3.32	1.51	0.70	0.32	0.15	0.06	83.3	79.3	
		0.08	0.17	0.35	0.71	1.44	3.00	6.43	12.0	16.7	16.9	12.6	7.06	3.32	1.49	0.68	0.32	0.14	0.06	83.5	79.5	
	-24	0.07	0.16	0.32	0.64	1.26	2.54	5.17	9.11	12.4	12.6	9.39	5.48	2.73	1.30	0.62	0.30	0.14	0.06	64.3	60.0	
		0.06	0.14	0.28	0.52	0.98	1.85	3.37	5.45	7.26	7.32	5.60	3.53	1.95	1.02	0.52	0.26	0.12	0.05	40.3	35.5	
		0.06	0.12	0.22	0.40	0.71	1.24	2.01	2.94	3.67	3.70	2.99	2.07	1.28	0.74	0.41	0.22	0.11	0.05	22.9	16.7	
		0.05	0.10	0.17	0.30	0.50	0.79	1.17	1.57	1.86	1.87	1.58	1.18	0.81	0.51	0.31	0.17	0.09	0.04	13.1	2.94	
	-48	0.04	0.07	0.13	0.22	0.34	0.50	0.68	0.86	0.98	0.98	0.86	0.69	0.51	0.35	0.22	0.13	0.07	0.03	7.68	0.00	
	-56	0.03	0.06	0.09	0.15	0.23	0.32	0.41	0.49	0.54	0.54	0.49	0.41	0.32	0.23	0.16	0.10	0.05	0.02	4.63	0.00	
	-64	0.02	0.04	0.06	0.10	0.14	0.19	0.24	0.28	0.31	0.31	0.28	0.24	0.20	0.15	0.10	0.07	0.04	0.02	2.79	0.00	
	-72	0.02	0.02	0.04	0.06	0.08	0.11	0.14	0.16	0.17	0.17	0.16	0.14	0.11	0.09	0.06	0.04	0.02	0.01	1.59	0.00	
	-72 -64 -56 -48 -40 -32 -24 -16 HORIZONTAL (DEG) 16 24 32 40 48 56 64 72																					
F t	0.91	1.90	3.63	6.68	12.1	22.0	40.1	66.6	89.0	89.6	68.4	42.1	23.1	12.4	6.62	3.48	1.72	0.74	491	---		
F a	0.00	0.00	0.00	0.00	1.95	14.6	33.6	60.5	83.1	83.7	62.4	35.7	16.0	2.51	0.00	0.00	0.00	0.00	---	394		

one-half-peak spread: U:18.0,D:16.9 , L:16.9,R:17.3


NEMA Beam Type: Type 5

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-07-03

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:DecoBody-600mm-RGBW RED-35D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:35 DEG	DIM.:600mm	SERIAL No.:IES001250-R
MFR.:	SUR.:	Shielding Angle:

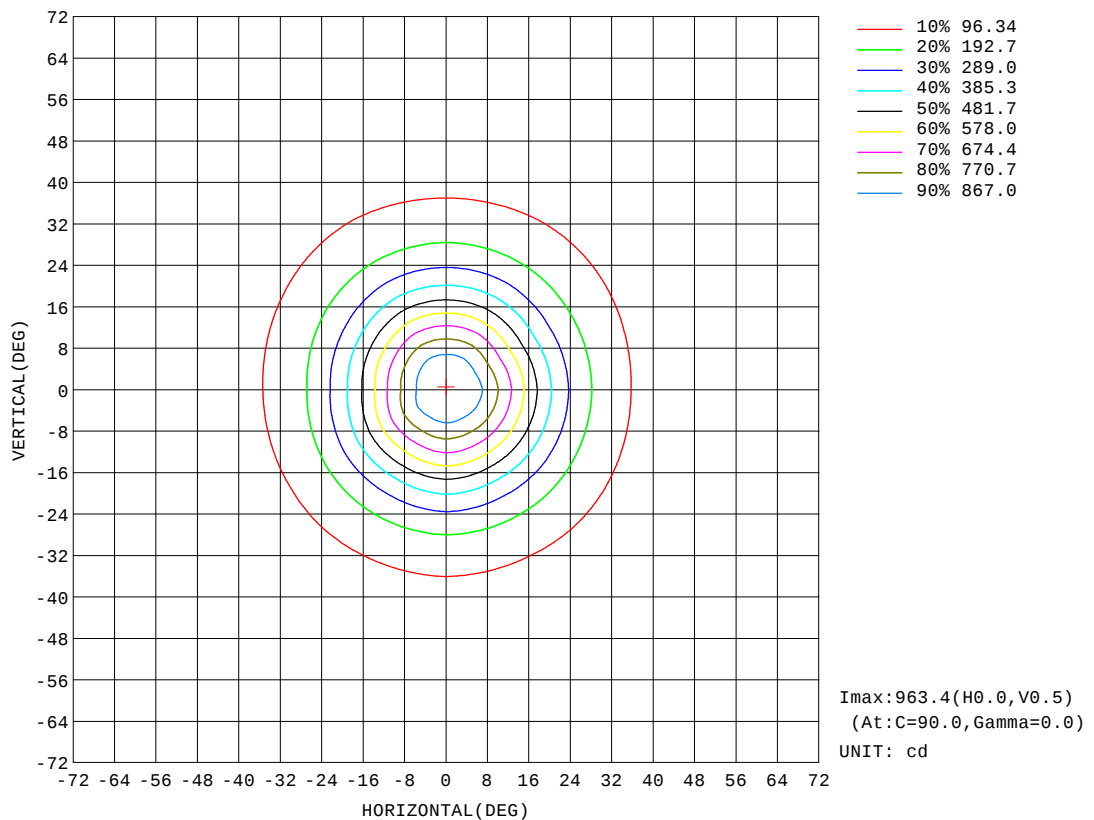


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoBody-600mm-RGBW RED-35D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:35 DEG	DIM.:600mm	SERIAL No.:IES001250-R
MFR.:	SUR.:	Shielding Angle:

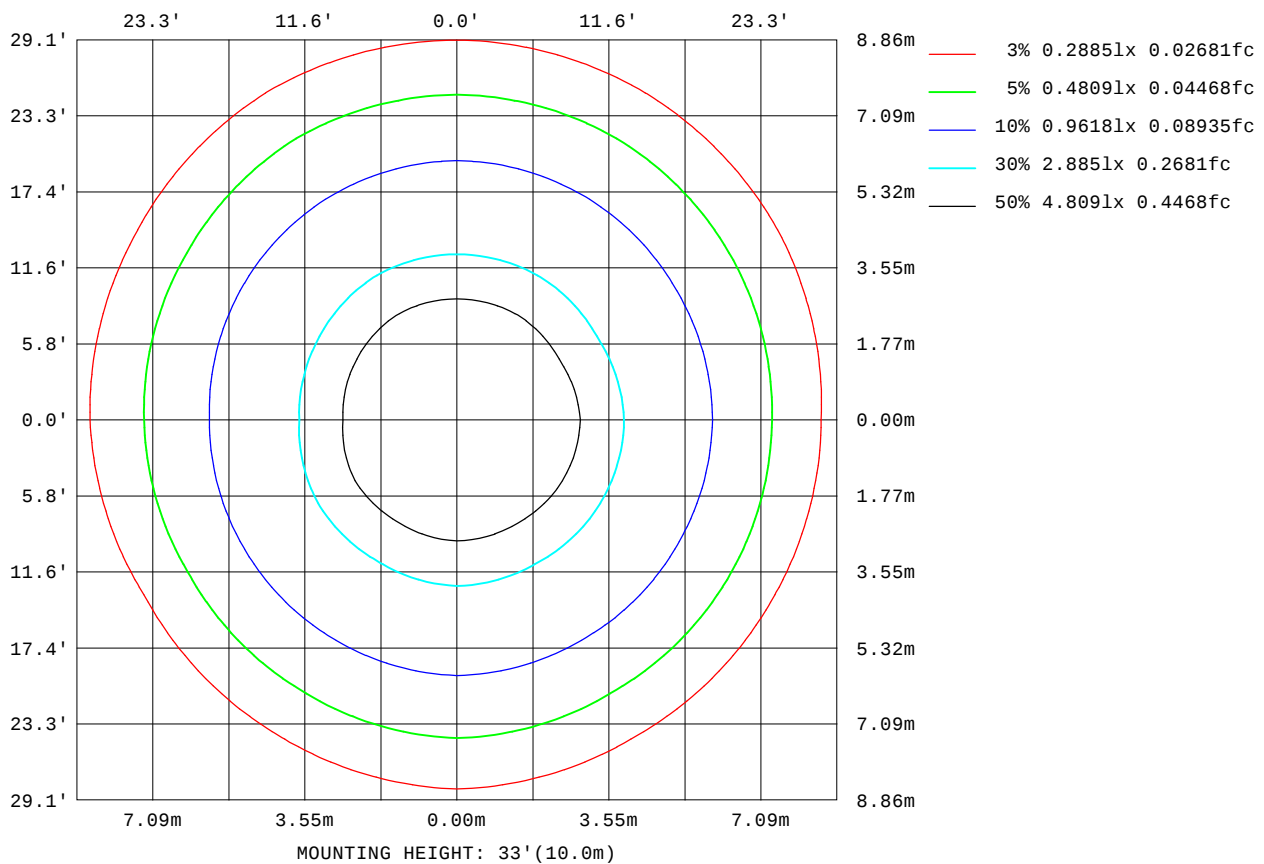

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-07-03

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

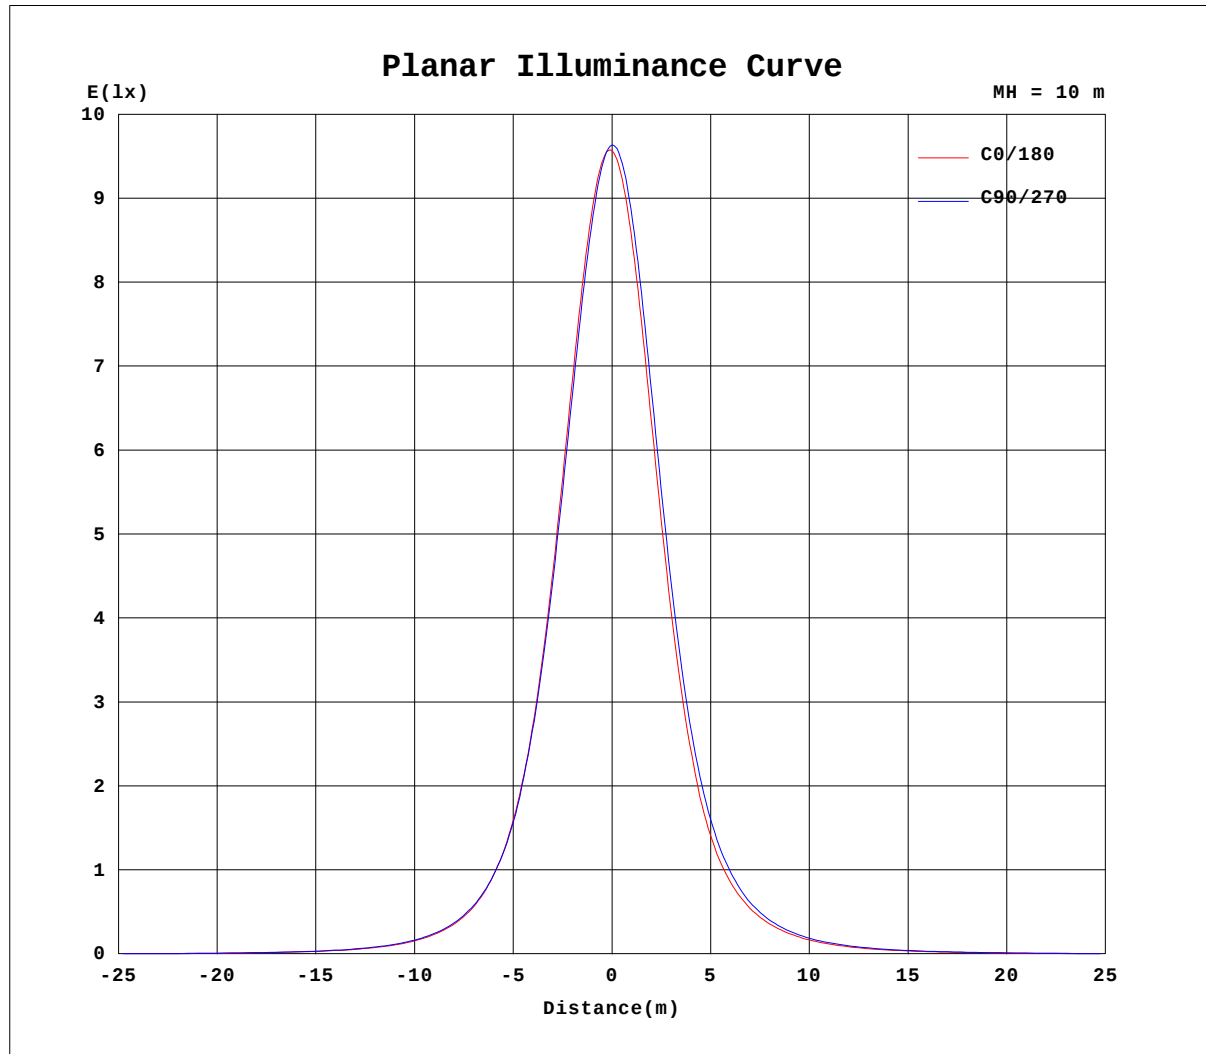


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-07-03

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoBody-600mm-RGBW RED-35D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:35 DEG	DIM.:600mm	SERIAL No.:IES001250-R
MFR.:	SUR.:	Shielding Angle:

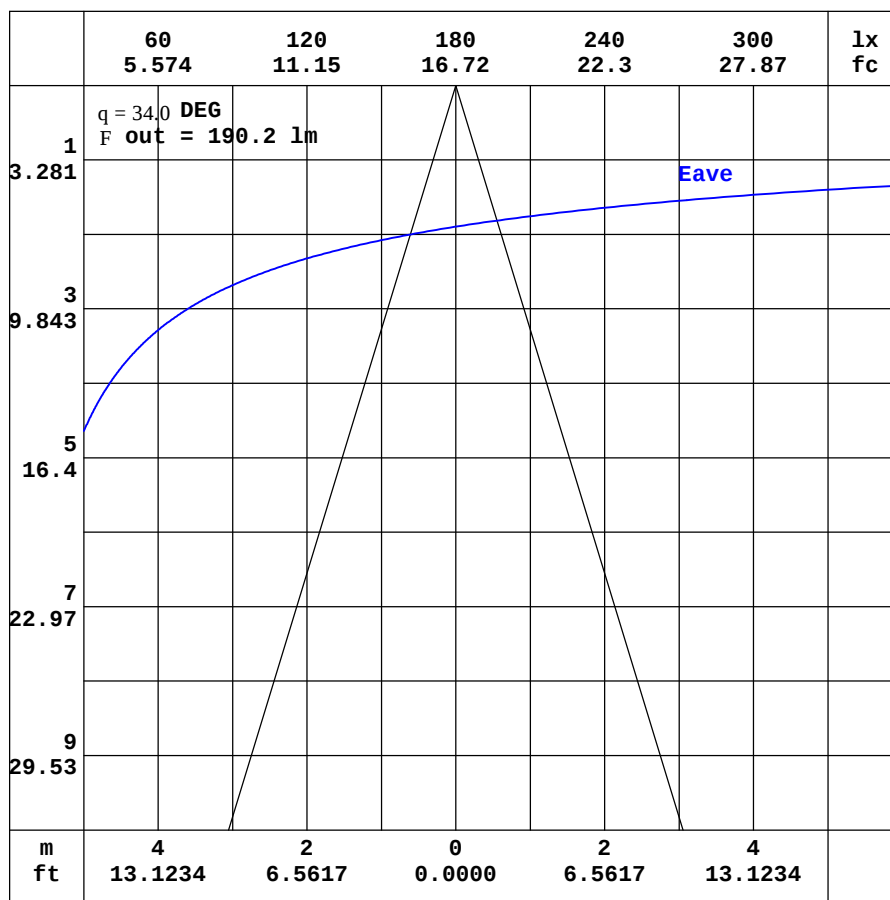

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-600mm-RGBW RED-35D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:35 DEG	DIM.:600mm	SERIAL No.:IES001250-R
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.99	1.81	1.71	1.69	1.73	1.84	2.07	2.38	2.75	3.12	3.44	3.67	3.79	3.79	3.74	3.66	3.52	3.41	3.62
-170	1.99	1.78	1.65	1.60	1.60	1.66	1.79	1.97	2.20	2.42	2.62	2.75	2.84	2.86	2.85	2.91	3.10	3.24	3.34
-160	1.99	1.75	1.60	1.52	1.47	1.47	1.50	1.56	1.63	1.70	1.74	1.76	1.80	2.09	2.36	2.59	2.76	2.87	2.91
-150	1.99	1.74	1.55	1.44	1.35	1.28	1.24	1.19	1.13	1.06	1.00	1.18	1.39	1.60	1.81	1.99	2.13	2.22	2.25
-140	1.99	1.72	1.52	1.37	1.25	1.15	1.04	0.92	0.78	0.74	0.80	0.88	0.99	1.10	1.23	1.34	1.42	1.48	1.50
-130	1.99	1.71	1.50	1.32	1.17	1.04	0.90	0.76	0.69	0.70	0.70	0.71	0.73	0.76	0.81	0.86	0.90	0.93	0.94
-120	1.99	1.71	1.48	1.29	1.12	0.96	0.81	0.69	0.69	0.70	0.70	0.69	0.69	0.69	0.70	0.70	0.70	0.71	0.71
-110	1.99	1.71	1.48	1.27	1.09	0.91	0.75	0.69	0.69	0.69	0.70	0.70	0.70	0.70	0.70	0.70	0.70	0.69	0.69
-100	1.99	1.73	1.49	1.27	1.06	0.87	0.68	0.67	0.67	0.67	0.68	0.67	0.67	0.68	0.69	0.69	0.70	0.70	0.70
-90	1.99	1.76	1.53	1.30	1.07	0.84	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.61
-80	1.99	1.78	1.58	1.36	1.17	1.02	0.87	1.00	1.15	1.30	1.46	1.61	1.76	1.91	2.05	2.19	2.31	2.40	2.47
-70	1.99	1.82	1.70	1.71	1.79	1.92	2.10	2.52	3.02	3.53	4.07	4.61	5.17	5.72	6.21	6.61	6.94	7.17	7.31
-60	1.99	1.87	1.98	2.28	2.74	3.32	3.90	4.58	5.67	6.85	8.07	9.39	10.7	11.9	13.1	14.1	14.9	15.5	15.9
-50	1.99	1.97	2.32	3.00	3.94	4.98	6.10	7.32	9.03	11.2	13.7	16.4	19.2	22.1	25.0	27.7	29.9	31.6	32.4
-40	1.99	2.08	2.70	3.79	5.20	6.79	8.62	10.8	13.5	17.1	21.8	27.2	33.5	40.5	48.1	55.7	62.6	67.6	70.2
-30	1.99	2.19	3.09	4.57	6.44	8.65	11.4	14.9	19.3	25.0	32.6	43.4	57.2	74.4	94.2	116	138	155	162
-20	1.99	2.29	3.42	5.27	7.53	10.4	14.1	18.9	25.5	34.6	47.4	65.6	92.0	130	181	243	309	365	392
-10	1.99	2.38	3.66	5.79	8.37	11.8	16.3	22.3	30.8	43.2	61.3	88.6	131	197	304	442	587	699	755
0	1.99	2.44	3.81	6.10	8.88	12.6	17.5	24.2	33.7	47.7	68.4	99.0	147	225	354	528	724	885	957
10	1.99	2.43	3.78	6.00	8.72	12.3	17.1	23.5	32.5	45.6	64.4	92.2	135	200	300	436	591	718	761
20	1.99	2.39	3.64	5.67	8.20	11.4	15.6	21.1	28.5	38.8	53.0	72.5	99.5	138	188	251	321	370	388
30	1.99	2.33	3.41	5.13	7.36	10.0	13.4	17.7	23.1	30.1	39.4	51.2	65.9	83.9	105	127	147	162	168
40	1.99	2.26	3.10	4.45	6.27	8.38	10.9	13.9	17.6	22.0	27.4	33.8	41.0	49.0	57.3	64.8	70.9	75.2	76.9
50	1.99	2.18	2.77	3.75	5.06	6.62	8.36	10.4	12.6	15.4	18.3	21.6	25.0	28.5	31.6	34.2	36.3	37.7	38.1
60	1.99	2.11	2.47	3.07	3.87	4.87	5.97	7.21	8.56	10.0	11.6	13.2	14.9	16.4	17.6	18.6	19.4	19.9	20.0
70	1.99	2.07	2.22	2.51	2.91	3.39	3.93	4.58	5.26	5.98	6.69	7.41	8.10	8.69	9.19	9.60	9.90	10.1	10.2
80	1.99	2.03	2.09	2.16	2.27	2.41	2.56	2.74	2.93	3.14	3.35	3.57	3.78	3.93	4.06	4.17	4.24	4.29	4.30
90	1.99	2.00	2.02	2.04	2.06	2.07	2.09	2.09	2.09	2.08	2.08	2.08	2.07	2.08	2.09	2.10	2.11	2.12	2.13
100	1.99	1.97	1.95	1.93	1.92	1.91	1.89	1.88	1.85	1.83	1.81	1.79	1.77	1.77	1.77	1.78	1.78	1.79	1.79
110	1.99	1.93	1.89	1.85	1.82	1.79	1.77	1.75	1.72	1.71	1.70	1.70	1.71	1.71	1.71	1.71	1.71	1.71	1.71
120	1.99	1.90	1.83	1.78	1.75	1.73	1.71	1.70	1.71	1.71	1.74	1.78	1.82	1.87	1.89	1.92	1.94	1.94	1.94
130	1.99	1.88	1.80	1.74	1.71	1.70	1.70	1.71	1.77	1.86	1.97	2.09	2.20	2.32	2.42	2.50	2.55	2.59	2.59
140	1.99	1.86	1.76	1.71	1.70	1.71	1.74	1.83	1.97	2.15	2.35	2.57	2.77	2.96	3.12	3.24	3.32	3.37	3.38
150	1.99	1.84	1.74	1.70	1.70	1.73	1.83	2.01	2.23	2.50	2.78	3.05	3.31	3.51	3.69	3.81	3.87	3.91	3.93
160	1.99	1.83	1.72	1.69	1.71	1.78	1.94	2.19	2.49	2.82	3.14	3.42	3.64	3.79	3.92	3.98	4.02	4.04	4.08
170	1.99	1.81	1.71	1.69	1.72	1.82	2.03	2.31	2.67	3.03	3.36	3.62	3.77	3.85	3.86	3.86	3.81	3.79	3.88
180	1.99	1.81	1.71	1.69	1.73	1.84	2.07	2.38	2.75	3.12	3.44	3.67	3.79	3.79	3.74	3.66	3.52	3.41	3.62

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-07-03

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoBody-600mm-RGBW RED-35D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:35 DEG	DIM.:600mm	SERIAL No.:IES001250-R
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	3.10	2.92	2.74	2.52	2.24	1.92	1.59	1.29	1.02	0.84	0.72	0.70	0.70	0.70	0.69	0.66	0.59	0.53	
-170	3.12	2.96	2.79	2.54	2.24	1.91	1.57	1.27	1.01	0.84	0.73	0.70	0.70	0.70	0.69	0.66	0.59	0.53	
-160	2.81	2.67	2.48	2.25	1.98	1.69	1.40	1.14	0.93	0.79	0.72	0.70	0.70	0.70	0.69	0.66	0.59	0.53	
-150	2.19	2.08	1.92	1.73	1.53	1.32	1.12	0.96	0.83	0.74	0.71	0.70	0.70	0.70	0.68	0.65	0.58	0.53	
-140	1.47	1.40	1.30	1.19	1.07	0.95	0.86	0.79	0.74	0.72	0.71	0.70	0.70	0.70	0.68	0.65	0.58	0.53	
-130	0.92	0.89	0.85	0.80	0.76	0.73	0.72	0.71	0.71	0.71	0.71	0.71	0.70	0.69	0.67	0.63	0.57	0.53	
-120	0.71	0.70	0.70	0.70	0.70	0.70	0.71	0.71	0.71	0.71	0.71	0.71	0.70	0.69	0.66	0.61	0.57	0.53	
-110	0.70	0.70	0.70	0.70	0.71	0.71	0.71	0.71	0.71	0.71	0.71	0.71	0.70	0.69	0.66	0.63	0.59	0.55	0.53
-100	0.70	0.70	0.70	0.70	0.69	0.69	0.68	0.68	0.68	0.68	0.68	0.67	0.64	0.61	0.59	0.56	0.55	0.53	
-90	0.61	0.61	0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.59	0.58	0.57	0.56	0.55	0.54	0.53	
-80	2.40	2.32	2.20	2.07	1.92	1.76	1.62	1.47	1.31	1.15	1.00	0.85	0.73	0.64	0.58	0.55	0.54	0.53	
-70	7.19	6.97	6.65	6.27	5.80	5.27	4.72	4.16	3.61	3.06	2.56	2.08	1.59	1.19	0.87	0.65	0.55	0.53	
-60	15.6	15.0	14.2	13.1	12.0	10.8	9.56	8.28	7.03	5.85	4.72	3.71	2.85	2.06	1.35	0.85	0.57	0.53	
-50	31.6	30.0	27.7	25.1	22.2	19.5	16.7	14.1	11.7	9.42	7.45	5.78	4.28	3.03	1.96	1.13	0.63	0.53	
-40	67.8	62.8	56.1	48.4	41.0	34.0	27.8	22.3	17.7	13.9	10.7	8.06	5.86	4.01	2.60	1.40	0.70	0.53	
-30	156	140	118	96.6	76.6	59.0	44.8	33.7	25.4	19.1	14.2	10.4	7.39	4.97	3.13	1.67	0.76	0.53	
-20	369	316	252	190	137	97.1	68.2	48.0	34.1	24.4	17.5	12.5	8.69	5.79	3.56	1.89	0.81	0.53	
-10	709	602	461	324	214	141	91.9	61.3	41.5	28.6	20.0	13.9	9.60	6.33	3.84	2.04	0.85	0.53	
0	915	774	583	399	257	163	103	67.1	44.7	30.3	20.9	14.5	9.92	6.52	3.93	2.09	0.86	0.53	
10	721	598	447	315	213	143	94.3	63.7	43.5	30.2	21.1	14.8	10.2	6.69	4.05	2.15	0.90	0.53	
20	371	322	255	193	142	102	73.4	52.6	37.8	27.3	19.7	14.0	9.74	6.46	3.96	2.11	0.91	0.53	
30	162	147	127	105	84.3	66.1	51.4	39.7	30.3	22.8	17.0	12.4	8.79	5.90	3.70	1.99	0.90	0.53	
40	75.0	70.5	64.1	56.4	48.4	40.7	33.8	27.8	22.6	18.0	13.8	10.3	7.46	5.09	3.28	1.80	0.88	0.53	
50	37.5	36.1	33.8	31.1	28.1	24.9	21.6	18.6	15.7	13.0	10.5	8.04	5.93	4.18	2.70	1.59	0.85	0.53	
60	19.8	19.3	18.5	17.4	16.2	14.8	13.3	11.7	10.2	8.72	7.35	5.81	4.43	3.19	2.15	1.36	0.81	0.53	
70	10.1	9.88	9.57	9.15	8.65	8.08	7.41	6.72	6.01	5.32	4.65	3.92	3.06	2.33	1.69	1.18	0.80	0.53	
80	4.28	4.23	4.15	4.05	3.91	3.75	3.55	3.35	3.14	2.94	2.75	2.56	2.14	1.76	1.40	1.08	0.80	0.53	
90	2.12	2.11	2.10	2.09	2.08	2.07	2.07	2.08	2.09	2.09	2.10	2.10	1.84	1.58	1.32	1.06	0.79	0.53	
100	1.79	1.78	1.78	1.77	1.77	1.77	1.79	1.81	1.83	1.85	1.88	1.89	1.69	1.48	1.26	1.03	0.79	0.53	
110	1.71	1.71	1.71	1.70	1.70	1.69	1.70	1.70	1.71	1.72	1.75	1.72	1.57	1.40	1.21	1.00	0.77	0.53	
120	1.94	1.93	1.91	1.88	1.84	1.80	1.76	1.72	1.70	1.70	1.70	1.60	1.45	1.31	1.16	0.97	0.76	0.53	
130	2.58	2.54	2.48	2.39	2.29	2.17	2.05	1.93	1.84	1.75	1.64	1.49	1.36	1.22	1.09	0.94	0.74	0.53	
140	3.37	3.31	3.23	3.09	2.93	2.74	2.53	2.31	2.11	1.86	1.58	1.38	1.25	1.14	1.02	0.89	0.72	0.53	
150	3.92	3.88	3.81	3.68	3.51	3.29	3.03	2.75	2.26	1.82	1.50	1.28	1.14	1.04	0.94	0.84	0.69	0.53	
160	4.06	4.04	4.02	3.97	3.83	3.66	3.13	2.57	2.06	1.64	1.33	1.13	1.01	0.93	0.87	0.78	0.66	0.53	
170	3.81	3.90	3.97	3.73	3.37	2.94	2.49	2.04	1.63	1.30	1.06	0.93	0.86	0.82	0.78	0.72	0.62	0.53	
180	3.10	2.92	2.74	2.52	2.24	1.92	1.59	1.29	1.02	0.84	0.72	0.70	0.70	0.70	0.69	0.66	0.59	0.53	

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: