

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	6727.2 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	35.0V x 35.4H
	At 50% of Imax	19.6V x 19.7H
	At 90% of Imax	8.3V x 8.3H

Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	795.9 lumens per klm.
	To 50% of Imax	465.5 lumens per klm.
	To 90% of Imax	115.4 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Nuit 100-100mm-3000K-20D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:20 DEG	DIM.:100MM	SERIAL No.:IES001925
MFR.:	SUR.:	Shielding Angle:

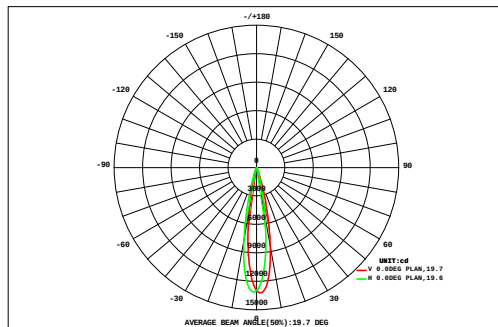

DATA OF LAMP		Eff:100.11lm/W	
MODEL		Imax(cd)	13199
NOMINAL POWER(W)	19.6	AVAILABILITY(%)	79.8
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1565
NOMINAL FLUX(lm)	1962	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1962
TEST VOLTAGE(V)	220	q @50%(H,V)	20,20DEG

		AREA FLUX DIAGRAM															UNIT:lm				F t	F a
VERTICAL (DEG)	27	0.31	0.38	0.46	0.54	0.63	0.72	0.79	0.86	0.89	0.91	0.89	0.84	0.78	0.69	0.60	0.51	0.43	0.36	11.6	0.00	
	24	0.36	0.45	0.55	0.66	0.80	0.93	1.07	1.20	1.28	1.31	1.28	1.18	1.04	0.90	0.75	0.62	0.51	0.42	15.3	0.00	
	21	0.41	0.52	0.65	0.82	1.03	1.29	1.58	1.86	2.06	2.14	2.07	1.84	1.54	1.22	0.96	0.76	0.60	0.48	21.8	0.00	
	18	0.47	0.60	0.78	1.03	1.39	1.88	2.51	3.18	3.68	3.89	3.73	3.18	2.47	1.81	1.30	0.95	0.71	0.55	34.1	8.82	
	15	0.52	0.69	0.93	1.31	1.93	2.90	4.23	5.73	6.89	7.39	7.04	5.78	4.16	2.82	1.83	1.22	0.85	0.61	56.8	40.6	
	12	0.56	0.77	1.11	1.68	2.73	4.48	7.18	10.2	12.5	13.3	12.5	10.1	6.93	4.32	2.64	1.62	1.03	0.68	94.3	81.2	
	9	0.60	0.86	1.30	2.13	3.69	6.61	11.2	16.3	20.0	21.3	19.8	15.5	10.6	6.51	3.86	2.21	1.26	0.76	144	133	
		0.63	0.93	1.47	2.58	4.80	8.98	15.2	22.4	27.6	29.2	26.6	21.1	15.1	9.57	5.42	2.91	1.52	0.84	197	187	
		0.63	0.96	1.57	2.87	5.62	10.8	18.4	26.5	32.4	34.5	32.1	26.9	19.6	12.4	6.86	3.50	1.72	0.90	238	229	
		0.61	0.94	1.61	3.07	6.24	12.1	20.5	29.3	34.8	35.9	34.3	29.0	21.2	13.3	7.32	3.65	1.75	0.89	256	248	
		0.55	0.87	1.55	3.06	6.36	12.3	20.4	27.8	32.3	33.6	31.6	26.6	19.4	12.1	6.60	3.28	1.59	0.81	241	232	
		0.46	0.75	1.34	2.64	5.38	10.1	16.1	22.0	26.5	27.7	25.7	21.2	15.4	9.74	5.25	2.65	1.32	0.68	195	186	
	-9	0.37	0.59	1.03	1.96	3.72	6.72	10.7	15.1	18.6	19.7	18.0	14.6	10.5	6.58	3.69	1.94	1.01	0.54	135	125	
	-12	0.27	0.42	0.73	1.28	2.30	3.90	6.17	8.90	11.1	11.8	10.7	8.57	6.08	3.88	2.28	1.28	0.72	0.40	80.8	69.1	
	-15	0.18	0.29	0.47	0.78	1.28	2.08	3.20	4.49	5.57	5.92	5.40	4.34	3.16	2.08	1.30	0.80	0.47	0.29	42.1	26.1	
	-18	0.12	0.19	0.30	0.46	0.70	1.04	1.53	2.07	2.49	2.63	2.46	2.03	1.50	1.06	0.72	0.47	0.30	0.19	20.2	0.00	
-21	0.08	0.12	0.17	0.26	0.38	0.54	0.74	0.94	1.09	1.14	1.08	0.93	0.72	0.54	0.39	0.27	0.18	0.12	9.68	0.00		
-24	0.05	0.07	0.10	0.14	0.19	0.27	0.35	0.43	0.49	0.51	0.49	0.43	0.35	0.27	0.20	0.15	0.11	0.07	4.65	0.00		
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27		
F t	7.15	10.4	16.1	27.3	49.2	87.7	142	199	240	253	236	194	140	89.7	52.0	28.8	16.1	9.58	1798	---		
F a	0.00	0.00	0.00	3.73	33.5	75.1	130	189	230	243	226	184	129	77.4	36.6	7.49	0.00	0.00	---	1565		

one-half-peak spread: U:9.7,D:10.1 , L:10.0,R:9.9


NEMA Beam Type: Type 3

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-10-18

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Nuit 100-100mm-3000K-20D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:20 DEG	DIM.:100MM	SERIAL No.:IES001925
MFR.:	SUR.:	Shielding Angle:

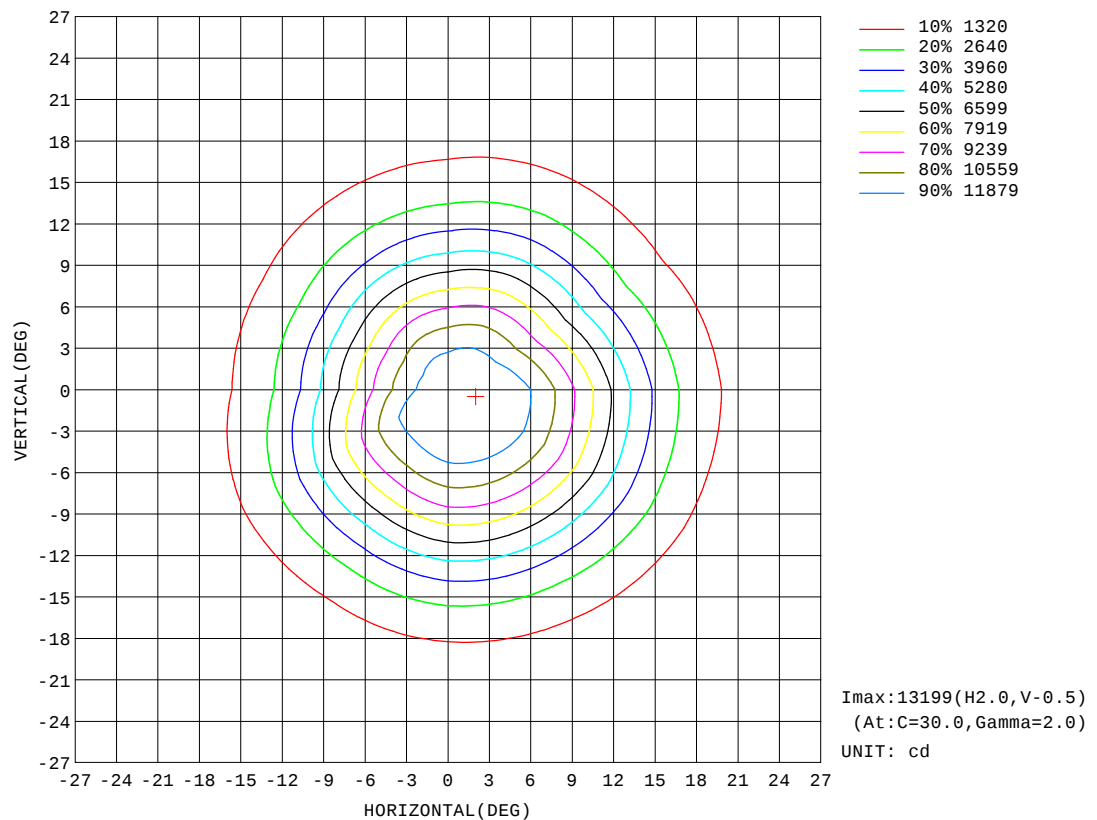


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Nuit 100-100mm-3000K-20D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:20 DEG	DIM.:100MM	SERIAL No.:IES001925
MFR.:	SUR.:	Shielding Angle:

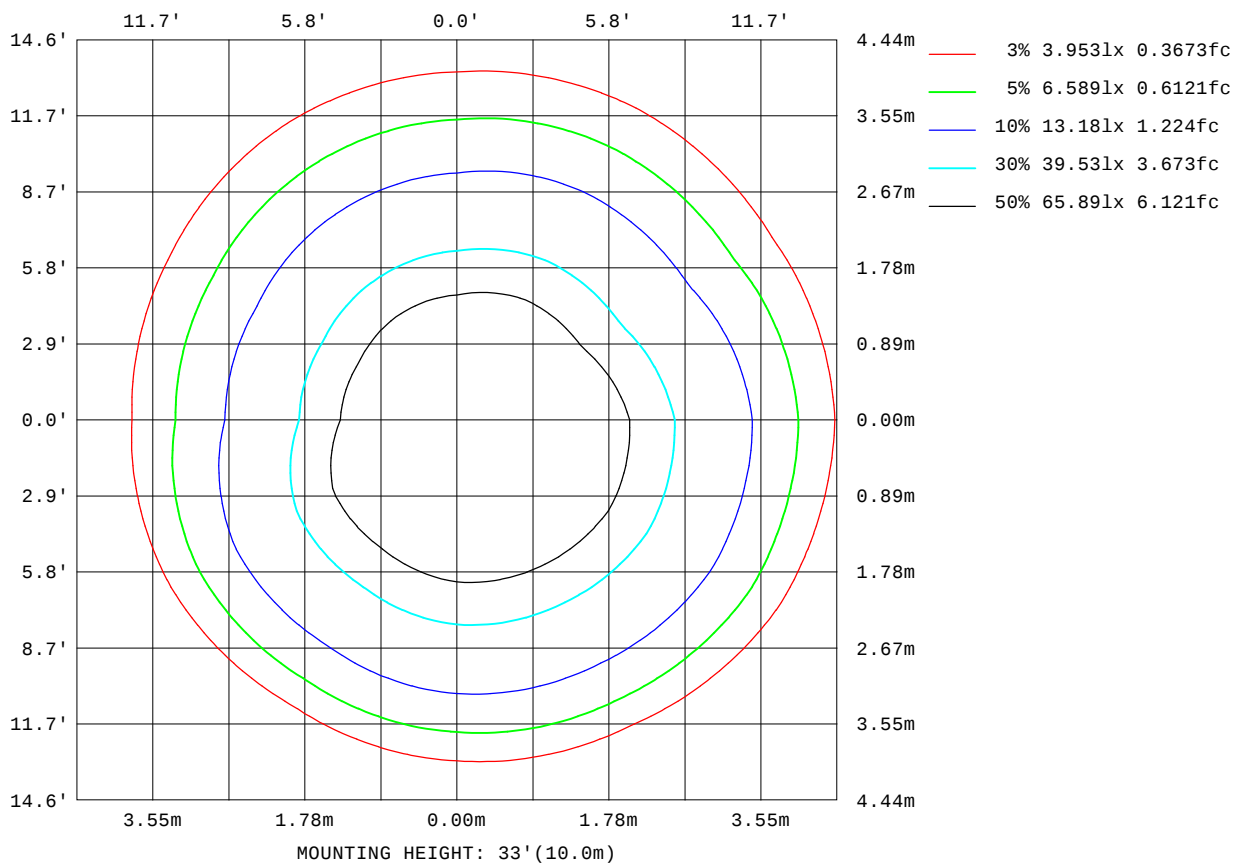

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

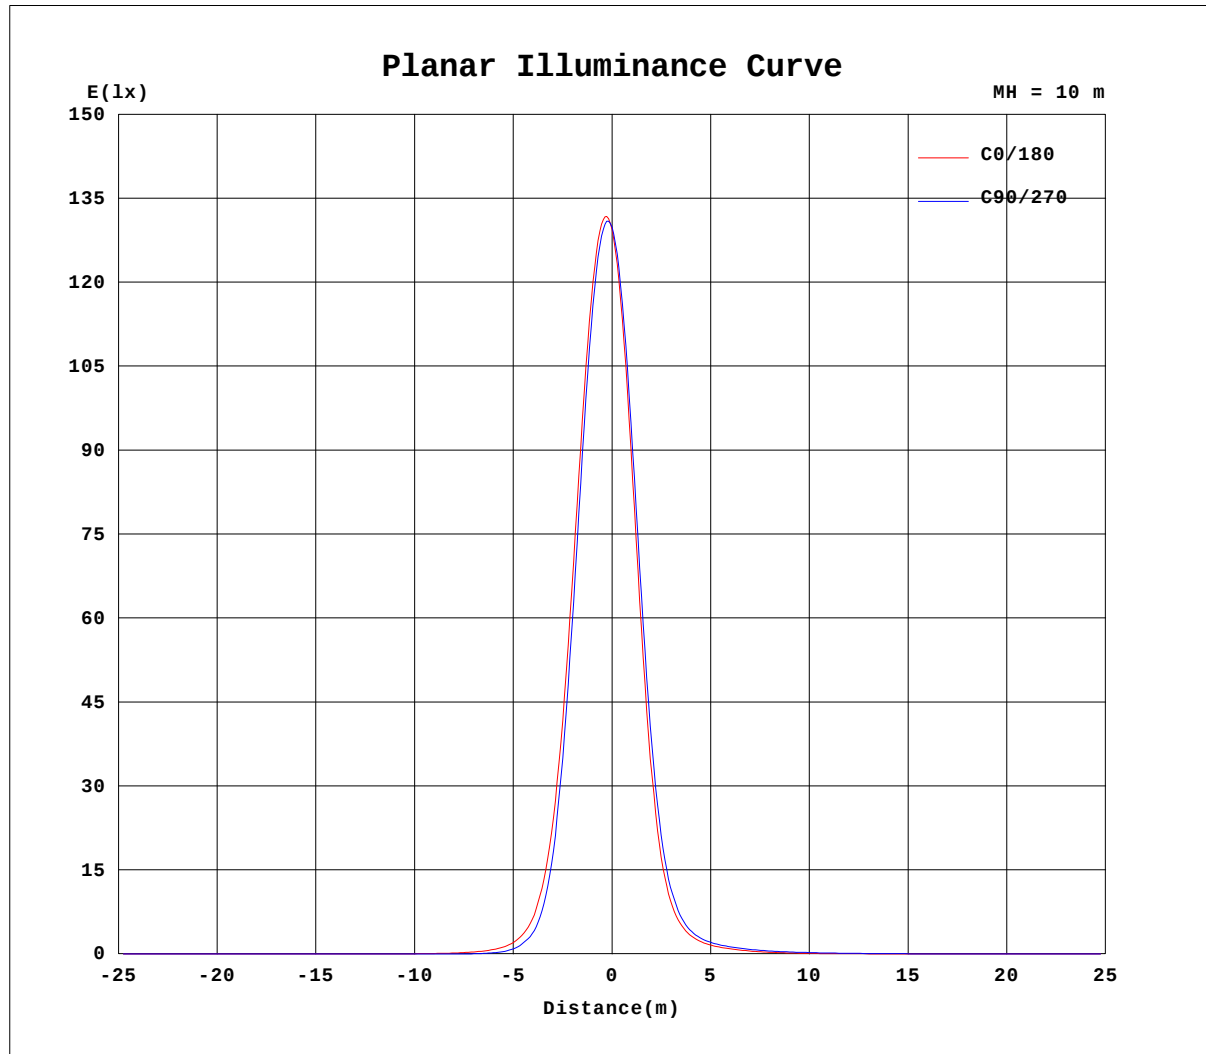


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Nuit 100-100mm-3000K-20D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:20 DEG	DIM.:100MM	SERIAL No.:IES001925
MFR.:	SUR.:	Shielding Angle:

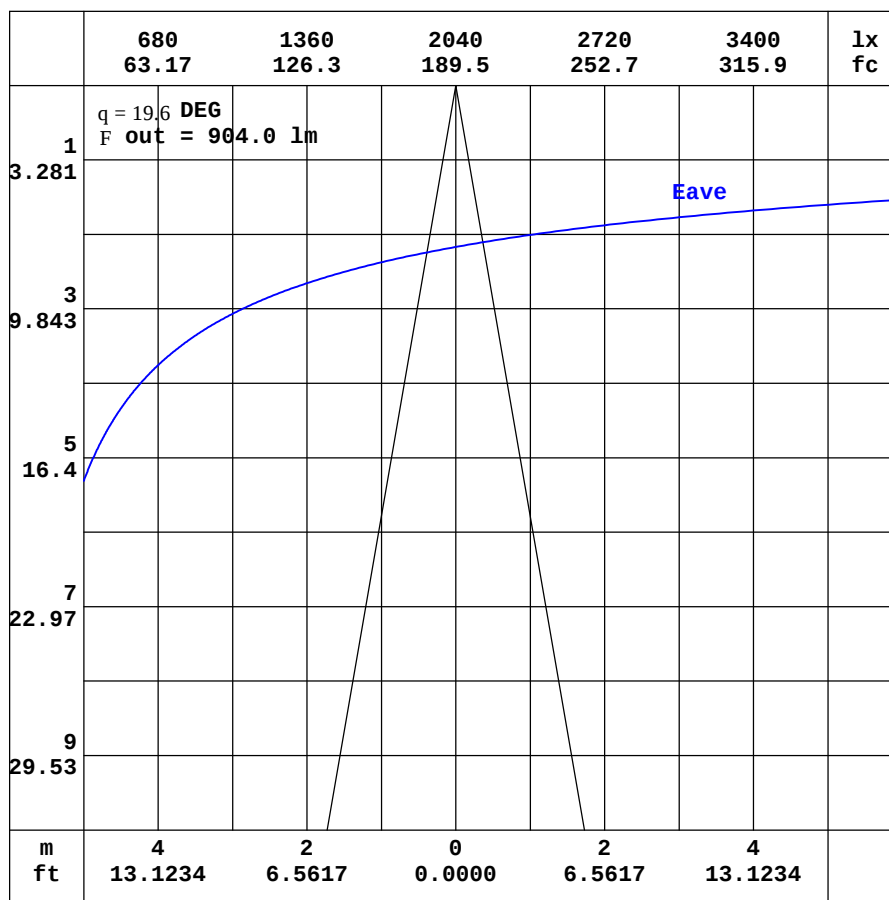

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Nuit 100-100mm-3000K-20D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:20 DEG	DIM.:100MM	SERIAL No.:IES001925
MFR.:	SUR.:	Shielding Angle:

Table--1
UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.64	0.53	0.47	0.46	0.46	0.48	0.57	0.79	1.11	1.43	1.64	1.72	1.71	1.67	1.64	1.60	1.45	1.25	1.24
-170	0.64	0.53	0.47	0.45	0.45	0.44	0.49	0.62	0.82	1.03	1.17	1.24	1.27	1.30	1.35	1.40	1.44	1.46	1.47
-160	0.64	0.53	0.47	0.45	0.44	0.42	0.41	0.44	0.52	0.60	0.65	0.67	0.71	0.90	1.08	1.23	1.34	1.39	1.40
-150	0.64	0.53	0.47	0.45	0.43	0.40	0.36	0.32	0.29	0.26	0.23	0.33	0.45	0.59	0.72	0.83	0.91	0.95	0.96
-140	0.64	0.53	0.47	0.45	0.43	0.41	0.36	0.30	0.21	0.16	0.16	0.18	0.23	0.29	0.36	0.42	0.46	0.48	0.49
-130	0.64	0.54	0.48	0.45	0.43	0.42	0.39	0.34	0.28	0.24	0.20	0.17	0.16	0.16	0.16	0.17	0.18	0.19	0.19
-120	0.64	0.55	0.49	0.46	0.44	0.42	0.41	0.39	0.37	0.35	0.32	0.29	0.27	0.24	0.23	0.22	0.21	0.20	0.20
-110	0.64	0.56	0.50	0.46	0.44	0.43	0.41	0.41	0.41	0.41	0.41	0.40	0.40	0.39	0.38	0.38	0.38	0.37	0.37
-100	0.64	0.57	0.52	0.47	0.44	0.41	0.39	0.40	0.40	0.41	0.41	0.41	0.41	0.42	0.42	0.42	0.42	0.42	0.42
-90	0.64	0.58	0.53	0.48	0.43	0.38	0.32	0.32	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.32	0.32
-80	0.64	0.60	0.55	0.49	0.41	0.33	0.23	0.21	0.20	0.19	0.18	0.17	0.16	0.15	0.14	0.14	0.13	0.13	0.13
-70	0.64	0.61	0.57	0.50	0.41	0.30	0.17	0.11	0.10	0.08	0.07	0.07	0.06	0.06	0.06	0.06	0.05	0.05	0.06
-60	0.64	0.63	0.60	0.53	0.44	0.32	0.18	0.07	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
-50	0.64	0.65	0.63	0.58	0.49	0.38	0.26	0.12	0.06	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.06
-40	0.64	0.67	0.68	0.64	0.57	0.50	0.42	0.33	0.18	0.10	0.12	0.14	0.15	0.17	0.18	0.20	0.23	0.25	0.25
-30	0.64	0.69	0.72	0.71	0.68	0.67	0.68	0.67	0.59	0.44	0.22	0.28	0.42	0.76	1.31	2.20	3.45	4.54	5.03
-20	0.64	0.71	0.77	0.79	0.81	0.88	1.01	1.13	1.23	1.29	1.35	1.56	2.30	4.63	9.67	19.2	35.8	61.8	80.4
-10	0.64	0.73	0.82	0.87	0.95	1.12	1.38	1.68	2.03	2.54	3.60	5.67	9.12	16.4	37.4	108	292	567	770
0	0.64	0.75	0.86	0.95	1.09	1.33	1.73	2.22	2.84	3.90	6.13	10.00	16.2	26.8	55.2	152	454	966	1294
10	0.64	0.75	0.87	0.96	1.10	1.34	1.72	2.21	2.89	4.04	6.19	9.82	15.5	24.1	41.1	82.5	191	386	516
20	0.64	0.75	0.87	0.96	1.08	1.30	1.63	2.06	2.66	3.64	5.28	7.90	11.6	16.8	23.5	33.1	46.2	60.9	69.7
30	0.64	0.74	0.86	0.95	1.05	1.22	1.49	1.83	2.26	2.90	3.96	5.57	7.64	10.3	13.3	16.4	19.1	21.1	22.0
40	0.64	0.74	0.85	0.94	1.02	1.14	1.32	1.57	1.87	2.24	2.81	3.66	4.71	5.98	7.32	8.46	9.46	10.2	10.6
50	0.64	0.73	0.83	0.91	0.99	1.06	1.17	1.32	1.51	1.73	2.00	2.33	2.77	3.30	3.85	4.36	4.82	5.17	5.40
60	0.64	0.71	0.79	0.88	0.95	1.01	1.07	1.14	1.24	1.35	1.48	1.62	1.76	1.90	2.03	2.17	2.31	2.42	2.49
70	0.64	0.70	0.76	0.83	0.89	0.95	1.01	1.05	1.10	1.14	1.19	1.25	1.31	1.36	1.40	1.44	1.47	1.50	1.52
80	0.64	0.68	0.72	0.77	0.81	0.86	0.91	0.95	0.99	1.02	1.05	1.08	1.11	1.13	1.14	1.16	1.17	1.18	1.19
90	0.64	0.66	0.68	0.70	0.72	0.74	0.77	0.79	0.81	0.84	0.86	0.88	0.91	0.92	0.93	0.94	0.95	0.96	0.97
100	0.64	0.64	0.63	0.63	0.63	0.63	0.62	0.62	0.63	0.64	0.64	0.65	0.67	0.67	0.67	0.67	0.68	0.68	0.69
110	0.64	0.62	0.59	0.57	0.55	0.54	0.52	0.52	0.52	0.52	0.53	0.54	0.54	0.54	0.54	0.55	0.55	0.56	0.56
120	0.64	0.59	0.56	0.53	0.50	0.48	0.47	0.46	0.47	0.48	0.48	0.48	0.48	0.49	0.50	0.51	0.52	0.53	0.53
130	0.64	0.58	0.53	0.50	0.47	0.46	0.46	0.46	0.46	0.49	0.53	0.60	0.67	0.76	0.84	0.91	0.96	0.99	0.99
140	0.64	0.56	0.51	0.48	0.46	0.46	0.46	0.48	0.54	0.66	0.81	0.99	1.16	1.31	1.42	1.50	1.55	1.58	1.58
150	0.64	0.55	0.49	0.47	0.46	0.46	0.48	0.56	0.71	0.94	1.19	1.42	1.57	1.67	1.73	1.76	1.79	1.80	1.80
160	0.64	0.54	0.48	0.46	0.46	0.46	0.52	0.66	0.91	1.21	1.48	1.65	1.74	1.79	1.83	1.87	1.91	1.93	1.95
170	0.64	0.53	0.48	0.46	0.46	0.47	0.55	0.75	1.06	1.38	1.61	1.72	1.76	1.78	1.81	1.82	1.77	1.70	1.73
180	0.64	0.53	0.47	0.46	0.46	0.48	0.57	0.79	1.11	1.43	1.64	1.72	1.71	1.67	1.64	1.60	1.45	1.25	1.25

H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Nuit 100-100mm-3000K-20D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:20 DEG	DIM.:100MM	SERIAL No.:IES001925
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: ×10cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	1.23	1.29	1.25	1.14	0.99	0.81	0.60	0.40	0.24	0.16	0.16	0.22	0.32	0.39	0.42	0.41	0.36	0.29
-170	1.45	1.40	1.32	1.18	0.99	0.78	0.56	0.37	0.23	0.16	0.16	0.23	0.32	0.39	0.42	0.40	0.36	0.29
-160	1.37	1.29	1.16	0.99	0.81	0.61	0.43	0.28	0.18	0.15	0.18	0.26	0.34	0.40	0.42	0.40	0.36	0.29
-150	0.93	0.87	0.77	0.65	0.51	0.38	0.27	0.19	0.15	0.17	0.22	0.30	0.37	0.41	0.42	0.40	0.36	0.29
-140	0.47	0.43	0.38	0.32	0.25	0.20	0.16	0.15	0.18	0.23	0.29	0.35	0.40	0.41	0.41	0.39	0.35	0.29
-130	0.19	0.18	0.17	0.16	0.16	0.17	0.19	0.22	0.27	0.32	0.36	0.39	0.41	0.41	0.41	0.38	0.34	0.29
-120	0.21	0.21	0.23	0.24	0.26	0.29	0.32	0.35	0.37	0.39	0.41	0.41	0.41	0.41	0.39	0.36	0.33	0.29
-110	0.38	0.38	0.38	0.39	0.40	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.40	0.38	0.37	0.34	0.31	0.29
-100	0.42	0.42	0.42	0.42	0.41	0.41	0.40	0.40	0.39	0.39	0.38	0.37	0.36	0.35	0.33	0.32	0.30	0.29
-90	0.32	0.32	0.32	0.31	0.31	0.31	0.30	0.30	0.30	0.30	0.29	0.29	0.29	0.29	0.29	0.29	0.29	0.29
-80	0.13	0.13	0.13	0.13	0.14	0.14	0.15	0.15	0.16	0.17	0.18	0.19	0.21	0.23	0.24	0.26	0.27	0.29
-70	0.05	0.05	0.05	0.05	0.06	0.06	0.06	0.07	0.07	0.08	0.09	0.11	0.14	0.17	0.20	0.23	0.26	0.29
-60	0.05	0.05	0.05	0.05	0.05	0.05	0.06	0.06	0.06	0.05	0.06	0.08	0.10	0.13	0.17	0.21	0.25	0.29
-50	0.07	0.07	0.08	0.08	0.08	0.09	0.08	0.09	0.09	0.08	0.07	0.08	0.09	0.12	0.15	0.19	0.24	0.29
-40	0.27	0.26	0.23	0.20	0.21	0.19	0.17	0.16	0.13	0.12	0.12	0.11	0.10	0.12	0.13	0.17	0.23	0.29
-30	5.08	4.23	3.02	2.02	1.28	0.76	0.41	0.29	0.25	0.20	0.17	0.15	0.13	0.12	0.14	0.17	0.22	0.29
-20	74.5	50.4	29.2	15.1	7.58	3.68	1.85	0.90	0.50	0.31	0.24	0.20	0.16	0.14	0.14	0.16	0.22	0.29
-10	691	443	199	70.1	24.7	10.2	4.68	2.23	1.03	0.48	0.31	0.24	0.19	0.16	0.15	0.16	0.22	0.29
0	1243	843	379	127	40.0	15.4	7.09	3.38	1.58	0.64	0.37	0.28	0.22	0.17	0.16	0.16	0.21	0.29
10	487	296	133	60.2	29.7	16.3	9.23	5.21	2.83	1.49	0.91	0.62	0.43	0.31	0.24	0.22	0.24	0.29
20	67.7	54.2	38.5	27.3	19.5	13.9	8.99	5.53	3.33	1.98	1.28	0.88	0.61	0.43	0.32	0.27	0.26	0.29
30	21.7	20.2	17.9	14.8	11.7	8.92	6.59	4.78	3.13	2.09	1.45	1.03	0.73	0.52	0.39	0.32	0.28	0.29
40	10.5	9.94	9.11	8.06	6.73	5.39	4.20	3.23	2.51	1.97	1.47	1.08	0.79	0.59	0.45	0.36	0.31	0.29
50	5.28	5.03	4.66	4.21	3.67	3.07	2.58	2.18	1.88	1.64	1.37	1.05	0.82	0.64	0.51	0.40	0.33	0.29
60	2.45	2.37	2.26	2.13	2.00	1.86	1.71	1.57	1.44	1.31	1.20	1.02	0.84	0.68	0.54	0.43	0.34	0.29
70	1.51	1.49	1.46	1.43	1.39	1.35	1.29	1.23	1.17	1.12	1.08	1.00	0.85	0.70	0.57	0.45	0.36	0.29
80	1.18	1.17	1.16	1.15	1.14	1.12	1.10	1.08	1.05	1.02	0.99	0.95	0.82	0.69	0.57	0.46	0.37	0.29
90	0.96	0.96	0.95	0.95	0.94	0.94	0.92	0.90	0.88	0.86	0.85	0.83	0.74	0.65	0.56	0.47	0.38	0.29
100	0.68	0.68	0.68	0.68	0.68	0.68	0.67	0.67	0.67	0.67	0.67	0.67	0.64	0.59	0.54	0.47	0.38	0.29
110	0.56	0.55	0.55	0.55	0.55	0.55	0.54	0.54	0.53	0.54	0.54	0.55	0.55	0.54	0.51	0.46	0.39	0.29
120	0.52	0.51	0.50	0.49	0.48	0.47	0.47	0.47	0.47	0.47	0.47	0.48	0.49	0.49	0.48	0.45	0.39	0.29
130	0.97	0.93	0.86	0.78	0.69	0.61	0.54	0.49	0.46	0.45	0.44	0.44	0.45	0.46	0.46	0.44	0.39	0.29
140	1.56	1.52	1.45	1.35	1.22	1.05	0.87	0.70	0.57	0.47	0.42	0.42	0.43	0.44	0.45	0.44	0.39	0.29
150	1.79	1.77	1.74	1.69	1.61	1.49	1.29	1.05	0.73	0.50	0.40	0.38	0.41	0.43	0.44	0.43	0.38	0.29
160	1.93	1.91	1.86	1.81	1.76	1.69	1.41	1.06	0.73	0.48	0.35	0.34	0.38	0.41	0.43	0.42	0.38	0.29
170	1.77	1.82	1.84	1.72	1.53	1.31	1.07	0.81	0.55	0.36	0.27	0.28	0.35	0.40	0.42	0.41	0.37	0.29
180	1.23	1.29	1.25	1.14	0.99	0.81	0.60	0.40	0.24	0.16	0.16	0.22	0.32	0.39	0.42	0.41	0.36	0.29

H_b Range: -90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-10-18

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks: