

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	3075.6 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	49.5V x 50.8H
	At 50% of Imax	32.1V x 33.0H
	At 90% of Imax	14.5V x 15.1H

Beam Flux	Total	999.8 lumens per klm.
	To 10% of Imax	861.0 lumens per klm.
	To 50% of Imax	595.6 lumens per klm.
	To 90% of Imax	158.2 lumens per klm.

Upward LOR	2.4 %
Downward LOR	97.6 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Nuit 60-60mm-3000K-35D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:35 DEG	DIM.:60MM	SERIAL No.:IES001929
MFR.:	SUR.:	Shielding Angle:

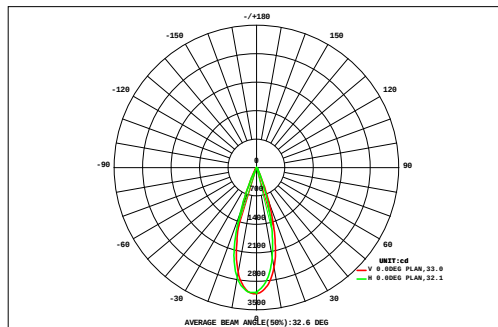

DATA OF LAMP		Eff:96.16lm/W	
MODEL		Imax(cd)	3106
NOMINAL POWER(W)	10.5	AVAILABILITY(%)	86.2
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	870.8
NOMINAL FLUX(lm)	1010	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1010
TEST VOLTAGE(V)	220	q @50%(H,V)	33,32DEG

		AREA FLUX DIAGRAM														UNIT:lm				F t	F a
		0.09	0.12	0.17	0.22	0.27	0.32	0.35	0.37	0.38	0.38	0.36	0.33	0.29	0.24	0.19	0.14	0.10	0.07	4.41	0.00
VERTICAL (DEG)	45	0.11	0.15	0.21	0.28	0.36	0.42	0.46	0.50	0.51	0.50	0.48	0.44	0.39	0.32	0.24	0.18	0.13	0.09	5.77	0.00
	40	0.13	0.19	0.27	0.36	0.45	0.55	0.63	0.69	0.72	0.71	0.67	0.59	0.51	0.40	0.31	0.22	0.15	0.10	7.65	0.00
	35	0.15	0.23	0.33	0.45	0.59	0.78	1.01	1.22	1.31	1.26	1.12	0.91	0.70	0.52	0.38	0.27	0.18	0.11	11.5	0.00
	30	0.17	0.27	0.40	0.57	0.85	1.36	2.08	2.80	3.14	3.01	2.47	1.72	1.09	0.71	0.47	0.32	0.20	0.11	21.7	10.1
	25	0.19	0.30	0.47	0.75	1.40	2.67	4.56	6.53	7.51	7.22	5.79	3.72	2.00	1.04	0.60	0.35	0.20	0.11	45.4	38.1
	20	0.21	0.33	0.54	1.02	2.32	4.89	8.72	12.3	13.9	13.5	11.1	7.22	3.68	1.62	0.75	0.38	0.19	0.10	82.8	77.0
	15	0.21	0.35	0.61	1.34	3.46	7.69	13.1	17.6	19.4	18.9	16.1	11.2	6.14	2.54	0.95	0.39	0.18	0.09	120	115
	10	0.21	0.36	0.66	1.58	4.47	9.91	16.1	20.6	22.5	22.0	19.4	14.7	8.60	3.47	1.11	0.39	0.15	0.06	146	142
	5	0.19	0.32	0.63	1.63	4.89	10.9	17.3	21.6	23.3	22.9	20.7	16.0	9.42	3.71	1.11	0.35	0.12	0.05	155	151
	0	0.15	0.25	0.52	1.43	4.42	10.4	16.5	20.3	22.0	21.6	19.3	14.6	8.13	3.03	0.89	0.26	0.09	0.04	144	140
	-5	0.11	0.18	0.36	0.99	3.14	7.63	12.9	16.8	18.6	18.3	15.6	10.8	5.39	1.92	0.57	0.16	0.06	0.03	113	110
	-10	0.07	0.11	0.19	0.54	1.58	3.92	7.45	10.7	12.5	12.1	9.44	5.78	2.63	0.91	0.27	0.08	0.04	0.02	68.4	64.3
	-15	0.04	0.05	0.08	0.22	0.57	1.43	2.86	4.51	5.48	5.19	3.78	2.07	0.89	0.30	0.10	0.04	0.02	0.01	27.6	22.2
	-20	0.02	0.02	0.04	0.07	0.16	0.33	0.70	1.13	1.40	1.30	0.89	0.44	0.18	0.08	0.04	0.02	0.01	0.01	6.84	0.79
	-25	0.01	0.01	0.02	0.03	0.04	0.07	0.10	0.15	0.17	0.15	0.11	0.07	0.04	0.02	0.01	0.01	0.01	0.01	1.04	0.00
	-30	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.03	0.03	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.23	0.00
-35	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.00	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
		-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
F t	2.09	3.27	5.50	11.5	29.0	63.3	105	138	153	149	127	90.6	50.1	20.9	8.00	3.57	1.81	1.01	963	---	
F a	0.00	0.00	0.00	1.23	22.0	57.6	99.8	133	149	145	122	85.2	43.9	12.5	0.00	0.00	0.00	0.00	---	871	

one-half-peak spread: U:16.1,D:14.1 , L:16.6,R:16.6


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-10-18

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Nuit 60-60mm-3000K-35D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:35 DEG	DIM.:60MM	SERIAL No.:IES001929
MFR.:	SUR.:	Shielding Angle:

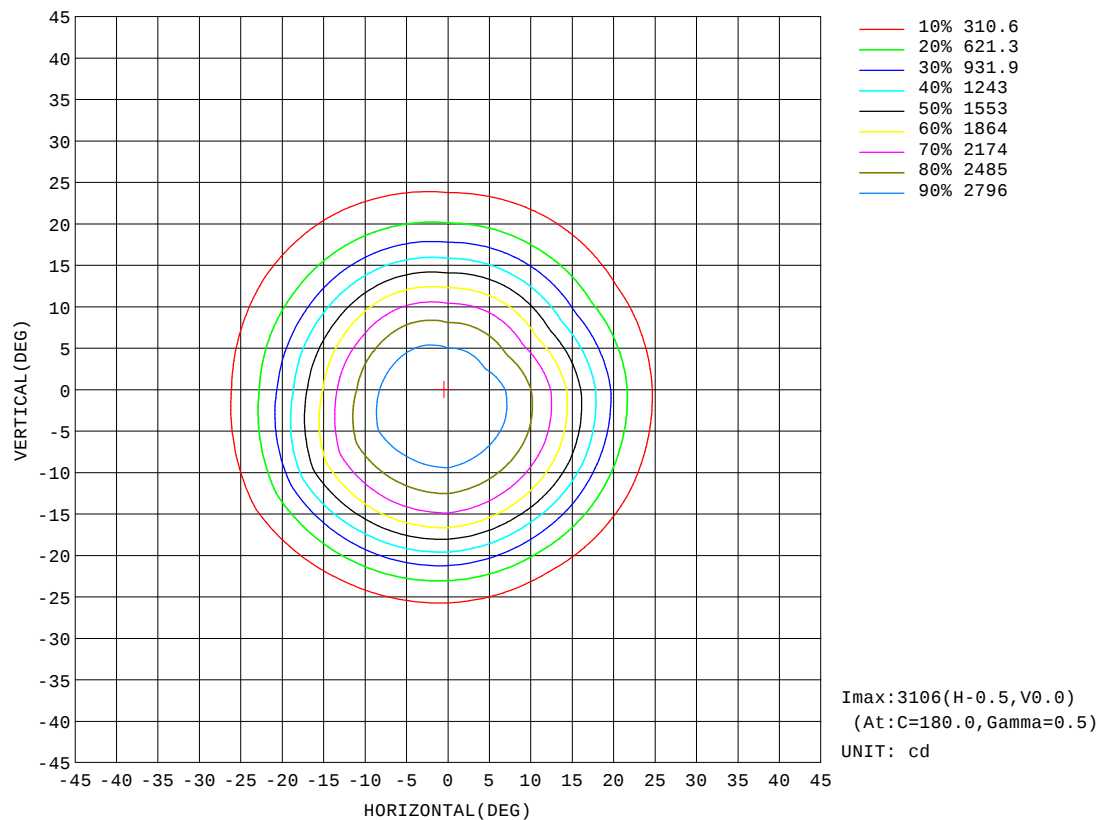


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Nuit 60-60mm-3000K-35D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:35 DEG	DIM.:60MM	SERIAL No.:IES001929
MFR.:	SUR.:	Shielding Angle:

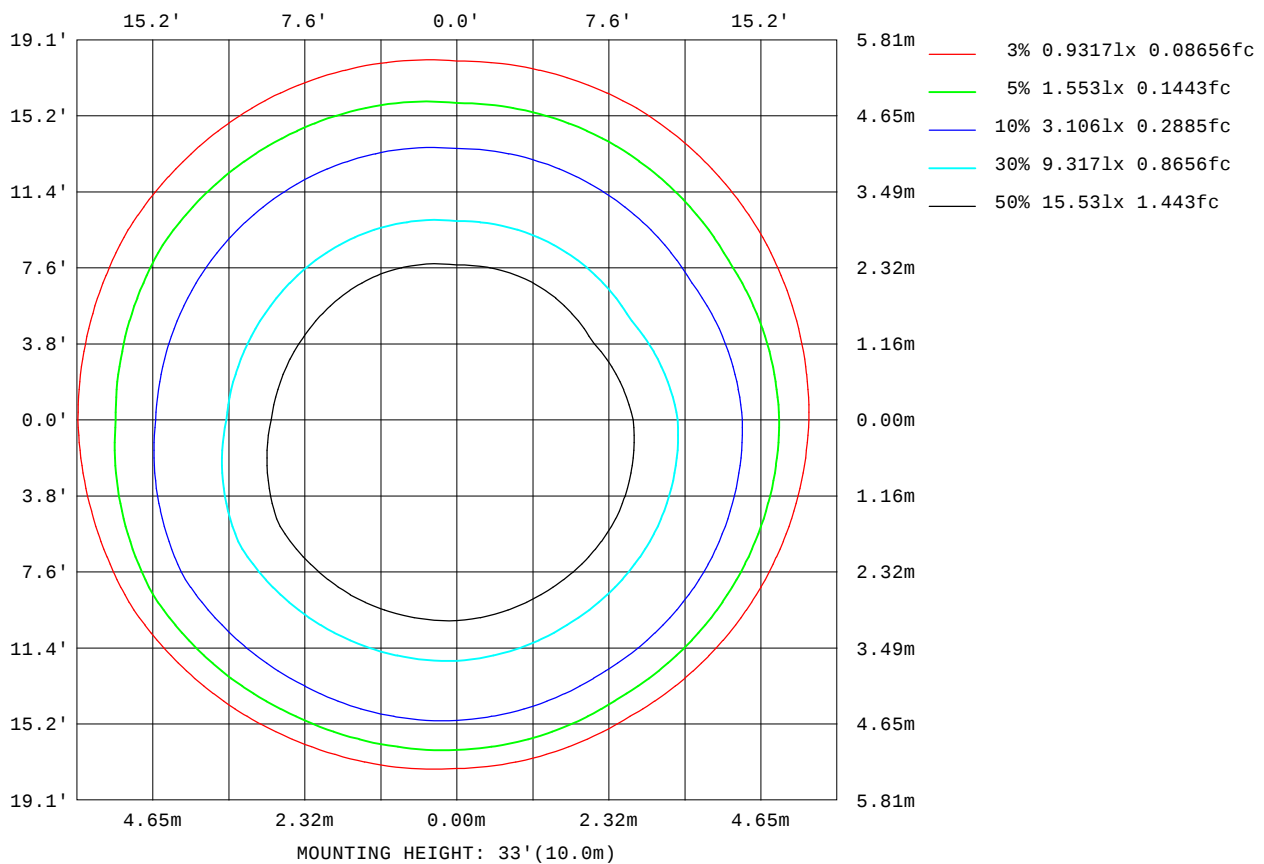

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

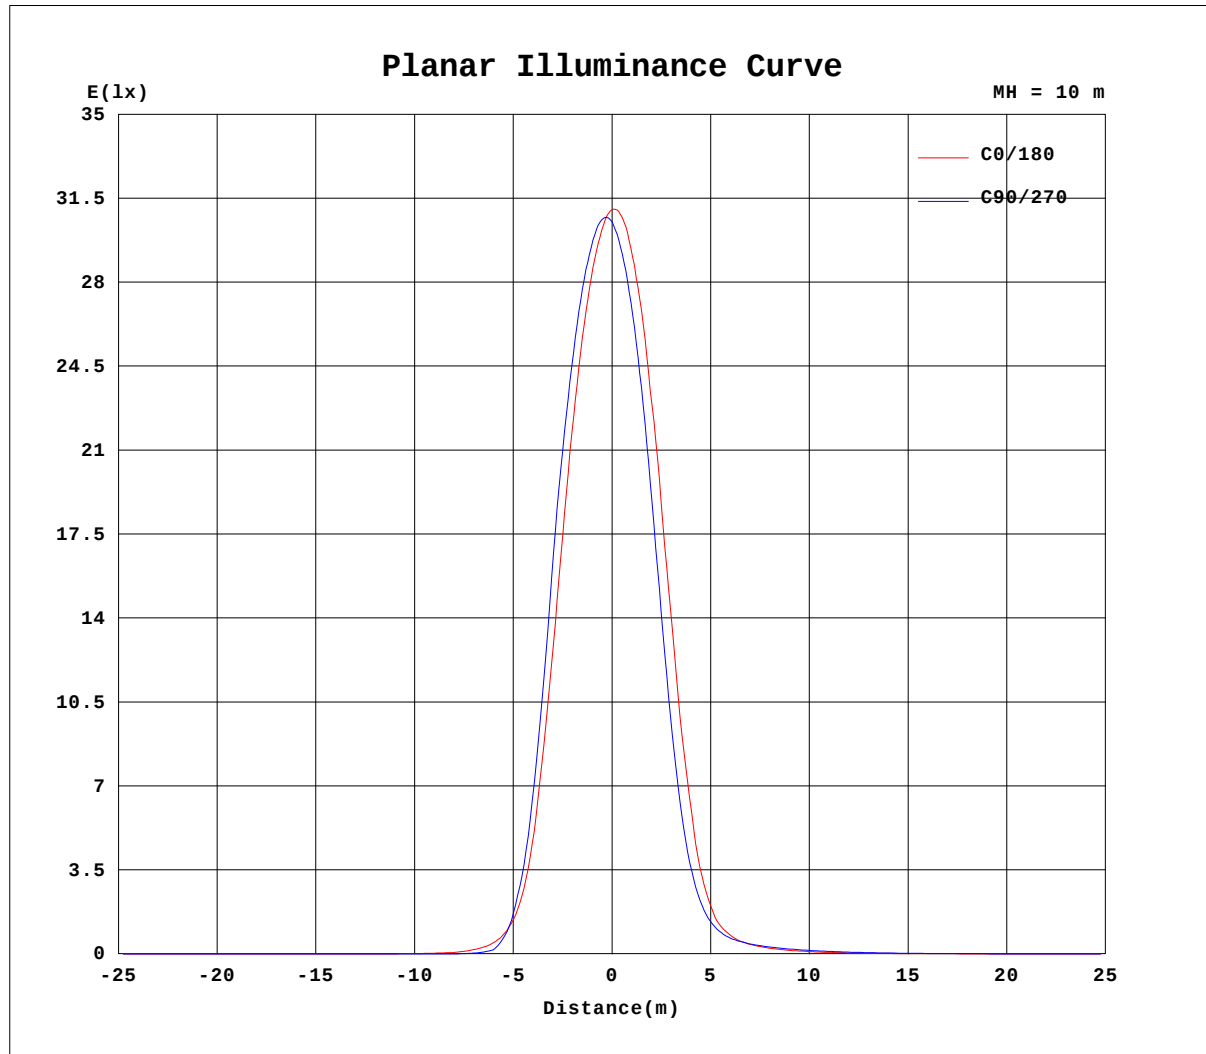


$H(b)$ Range: -90 - 90DEG
 $H(b)$ Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-18

$V(B)$ Range: -180 - 180DEG
 $V(B)$ Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Nuit 60-60mm-3000K-35D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:35 DEG	DIM.:60MM	SERIAL No.:IES001929
MFR.:	SUR.:	Shielding Angle:

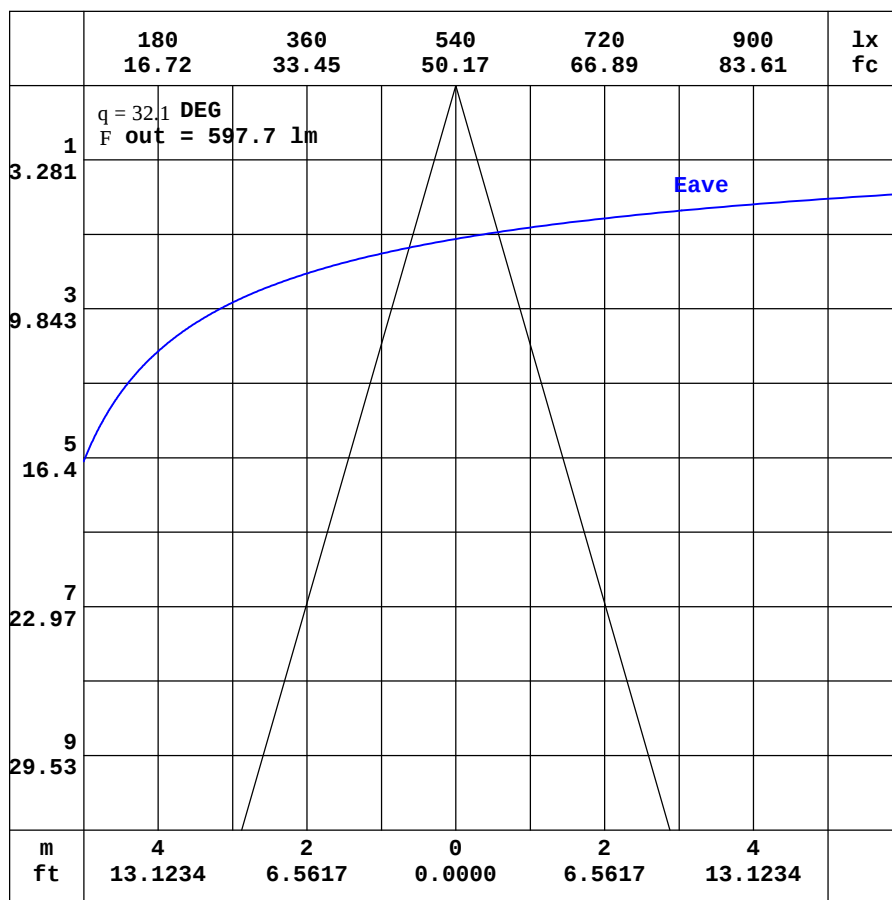

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Nuit 60-60mm-3000K-35D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:35 DEG	DIM.:60MM	SERIAL No.:IES001929
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	3.58	3.13	2.81	2.57	2.51	2.66	3.17	4.05	5.19	6.42	7.56	8.37	8.81	8.92	8.85	8.57	8.16	7.72	7.68
-170	3.58	3.09	2.76	2.51	2.42	2.46	2.74	3.27	3.95	4.68	5.34	5.85	6.17	6.34	6.36	6.50	6.93	7.15	7.34
-160	3.58	3.06	2.73	2.47	2.33	2.26	2.32	2.48	2.70	2.91	3.05	3.14	3.29	4.18	5.03	5.78	6.36	6.71	6.89
-150	3.58	3.04	2.72	2.46	2.28	2.14	2.01	1.89	1.75	1.54	1.32	1.68	2.20	2.81	3.44	4.00	4.45	4.76	4.90
-140	3.58	3.04	2.71	2.46	2.26	2.10	1.90	1.64	1.31	1.11	1.11	1.17	1.34	1.58	1.86	2.16	2.40	2.58	2.65
-130	3.58	3.05	2.70	2.47	2.27	2.10	1.93	1.68	1.48	1.34	1.22	1.15	1.12	1.12	1.13	1.17	1.23	1.28	1.31
-120	3.58	3.05	2.71	2.47	2.29	2.12	1.98	1.86	1.78	1.69	1.60	1.51	1.43	1.36	1.30	1.25	1.22	1.19	1.17
-110	3.58	3.06	2.73	2.45	2.24	2.08	1.96	1.91	1.92	1.91	1.92	1.90	1.88	1.84	1.80	1.76	1.74	1.72	1.70
-100	3.58	3.12	2.74	2.44	2.16	1.92	1.71	1.74	1.78	1.81	1.84	1.86	1.88	1.91	1.92	1.94	1.95	1.96	1.96
-90	3.58	3.21	2.84	2.48	2.11	1.74	1.37	1.38	1.38	1.39	1.39	1.40	1.41	1.42	1.43	1.45	1.46	1.47	1.49
-80	3.58	3.31	2.97	2.58	2.12	1.62	1.06	0.97	0.92	0.89	0.85	0.82	0.79	0.78	0.77	0.76	0.76	0.77	0.78
-70	3.58	3.41	3.13	2.74	2.24	1.63	0.91	0.61	0.54	0.47	0.42	0.38	0.35	0.33	0.32	0.31	0.31	0.32	0.32
-60	3.58	3.53	3.33	2.98	2.50	1.86	1.08	0.37	0.36	0.37	0.36	0.33	0.28	0.23	0.23	0.23	0.23	0.23	0.23
-50	3.58	3.65	3.57	3.33	2.94	2.39	1.71	0.90	0.53	0.55	0.54	0.54	0.51	0.45	0.42	0.43	0.41	0.36	0.29
-40	3.58	3.78	3.83	3.77	3.58	3.29	2.91	2.28	1.32	0.87	0.90	0.93	0.96	1.08	0.87	0.99	1.32	1.31	0.98
-30	3.58	3.91	4.14	4.30	4.39	4.50	4.54	4.41	3.91	2.92	1.40	2.70	5.11	8.29	14.5	19.9	39.8	55.8	55.3
-20	3.58	4.05	4.47	4.88	5.36	5.97	6.64	7.29	8.08	9.30	11.4	15.2	29.1	79.8	213	472	821	1092	1167
-10	3.58	4.17	4.78	5.47	6.35	7.48	8.89	10.7	13.9	19.5	28.3	45.6	102	311	867	1707	2312	2644	2750
0	3.58	4.27	5.05	6.01	7.25	8.88	11.1	14.1	19.8	30.1	45.9	74.5	145	390	1023	1876	2615	3009	3103
10	3.58	4.30	5.10	6.06	7.30	8.91	11.1	14.4	20.3	30.6	45.6	69.7	118	261	596	1166	1788	2193	2232
20	3.58	4.30	5.09	6.02	7.17	8.66	10.6	13.7	18.6	26.9	39.5	56.2	78.8	117	195	328	489	616	630
30	3.58	4.28	5.03	5.89	6.90	8.15	9.74	12.0	15.7	21.2	29.4	40.4	52.5	65.4	79.5	95.3	109	118	117
40	3.58	4.24	4.93	5.70	6.56	7.57	8.77	10.2	12.3	15.6	20.1	26.0	33.2	40.9	47.9	52.5	55.9	57.7	57.8
50	3.58	4.18	4.80	5.45	6.16	6.94	7.80	8.78	9.89	11.3	13.3	15.8	18.9	22.4	25.4	27.9	29.9	31.0	31.2
60	3.58	4.10	4.64	5.17	5.73	6.32	6.95	7.58	8.22	8.90	9.62	10.5	11.4	12.5	13.3	14.0	14.5	14.9	15.0
70	3.58	4.01	4.44	4.88	5.31	5.74	6.17	6.58	6.97	7.36	7.74	8.12	8.50	8.76	8.95	9.11	9.22	9.30	9.33
80	3.58	3.91	4.24	4.56	4.88	5.20	5.52	5.76	6.00	6.23	6.45	6.67	6.88	6.98	7.06	7.14	7.20	7.25	7.29
90	3.58	3.79	4.01	4.22	4.43	4.64	4.85	5.01	5.16	5.31	5.46	5.61	5.76	5.80	5.84	5.88	5.92	5.96	5.99
100	3.58	3.66	3.77	3.89	3.98	4.05	4.11	4.16	4.22	4.29	4.37	4.47	4.58	4.58	4.57	4.57	4.58	4.60	4.63
110	3.58	3.55	3.59	3.59	3.54	3.45	3.32	3.25	3.26	3.29	3.32	3.36	3.38	3.33	3.30	3.29	3.31	3.35	3.42
120	3.58	3.48	3.42	3.30	3.12	2.93	2.74	2.64	2.65	2.65	2.63	2.64	2.69	2.79	2.92	3.03	3.12	3.19	3.22
130	3.58	3.41	3.25	3.05	2.81	2.62	2.51	2.50	2.58	2.78	3.07	3.43	3.82	4.20	4.57	4.89	5.14	5.31	5.39
140	3.58	3.33	3.11	2.85	2.62	2.51	2.51	2.69	3.07	3.61	4.25	4.94	5.61	6.22	6.74	7.18	7.50	7.71	7.80
150	3.58	3.26	3.00	2.72	2.53	2.51	2.68	3.12	3.81	4.67	5.59	6.50	7.31	7.99	8.50	8.89	9.15	9.30	9.38
160	3.58	3.20	2.91	2.63	2.51	2.56	2.91	3.59	4.52	5.61	6.70	7.67	8.44	8.95	9.28	9.52	9.65	9.72	9.84
170	3.58	3.16	2.85	2.59	2.51	2.64	3.09	3.92	5.01	6.22	7.35	8.26	8.83	9.09	9.14	9.04	8.82	8.61	8.73
180	3.58	3.13	2.81	2.57	2.51	2.66	3.17	4.05	5.19	6.42	7.56	8.37	8.81	8.92	8.85	8.57	8.16	7.72	7.73

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-18

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Nuit 60-60mm-3000K-35D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:35 DEG	DIM.:60MM	SERIAL No.:IES001929
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	6.97	6.76	6.62	6.21	5.48	4.58	3.59	2.64	1.81	1.27	1.09	1.16	1.39	1.68	1.92	1.93	1.79	1.49
-170	7.12	6.96	6.65	6.12	5.35	4.42	3.42	2.48	1.72	1.24	1.10	1.17	1.41	1.69	1.92	1.93	1.79	1.49
-160	6.75	6.48	5.98	5.31	4.51	3.65	2.78	2.01	1.45	1.14	1.11	1.23	1.47	1.74	1.92	1.92	1.78	1.49
-150	4.83	4.60	4.21	3.68	3.07	2.46	1.90	1.46	1.19	1.11	1.15	1.34	1.57	1.81	1.93	1.91	1.76	1.49
-140	2.62	2.49	2.28	2.01	1.72	1.45	1.24	1.13	1.11	1.15	1.31	1.51	1.72	1.89	1.93	1.89	1.72	1.49
-130	1.29	1.26	1.20	1.14	1.12	1.12	1.13	1.17	1.27	1.40	1.55	1.71	1.86	1.92	1.93	1.85	1.69	1.49
-120	1.18	1.20	1.23	1.27	1.32	1.38	1.45	1.53	1.62	1.72	1.81	1.89	1.93	1.93	1.89	1.80	1.65	1.49
-110	1.71	1.72	1.75	1.78	1.81	1.85	1.88	1.90	1.92	1.93	1.93	1.93	1.92	1.88	1.80	1.71	1.60	1.49
-100	1.96	1.96	1.95	1.95	1.94	1.93	1.92	1.91	1.89	1.87	1.84	1.82	1.77	1.72	1.66	1.61	1.55	1.49
-90	1.49	1.49	1.49	1.49	1.49	1.49	1.49	1.50	1.50	1.51	1.51	1.51	1.51	1.51	1.50	1.50	1.49	1.49
-80	0.78	0.79	0.80	0.82	0.84	0.87	0.91	0.95	1.00	1.05	1.10	1.16	1.21	1.26	1.32	1.37	1.43	1.49
-70	0.32	0.32	0.33	0.34	0.36	0.39	0.44	0.50	0.56	0.64	0.72	0.83	0.96	1.07	1.15	1.25	1.37	1.49
-60	0.23	0.23	0.23	0.23	0.23	0.25	0.26	0.27	0.30	0.37	0.45	0.61	0.78	0.93	1.05	1.15	1.32	1.49
-50	0.33	0.35	0.35	0.36	0.37	0.39	0.39	0.41	0.39	0.33	0.35	0.52	0.69	0.85	0.98	1.11	1.26	1.49
-40	1.02	0.89	0.82	0.77	0.80	0.79	0.74	0.71	0.62	0.59	0.59	0.58	0.70	0.83	0.96	1.07	1.22	1.49
-30	42.5	22.8	13.6	7.90	4.61	2.43	1.36	1.11	1.06	0.97	0.90	0.82	0.78	0.86	0.96	1.06	1.18	1.49
-20	992	649	326	127	41.0	12.1	6.04	3.18	1.97	1.42	1.23	1.08	0.95	0.93	0.99	1.05	1.16	1.49
-10	2560	2110	1362	586	185	56.9	19.2	7.92	3.86	2.01	1.57	1.32	1.14	1.03	1.03	1.06	1.14	1.49
0	2932	2490	1741	879	287	92.7	34.1	12.0	5.92	2.64	1.84	1.54	1.30	1.13	1.08	1.08	1.14	1.49
10	2063	1574	920	437	180	82.9	42.3	22.5	12.5	7.00	4.53	3.23	2.43	1.87	1.55	1.34	1.25	1.49
20	567	413	257	149	95.4	64.4	41.5	25.5	15.6	9.75	6.43	4.60	3.37	2.54	1.98	1.59	1.37	1.49
30	114	103	87.9	72.3	57.4	44.0	31.9	22.8	15.5	10.4	7.42	5.47	4.06	3.07	2.34	1.81	1.48	1.49
40	56.5	53.6	49.1	43.7	35.6	28.0	21.3	16.4	12.7	10.1	7.68	5.86	4.49	3.43	2.62	2.00	1.59	1.49
50	30.1	28.1	25.4	22.6	19.6	16.2	13.7	11.5	9.96	8.75	7.44	5.92	4.66	3.64	2.80	2.14	1.70	1.49
60	14.5	13.9	13.1	12.2	11.2	10.3	9.53	8.77	8.05	7.39	6.77	5.71	4.63	3.70	2.90	2.23	1.78	1.49
70	9.19	9.01	8.79	8.53	8.24	7.90	7.52	7.12	6.71	6.30	5.91	5.35	4.45	3.65	2.92	2.33	1.85	1.49
80	7.18	7.05	6.91	6.76	6.61	6.43	6.19	5.94	5.69	5.43	5.17	4.86	4.16	3.51	2.92	2.38	1.91	1.49
90	5.89	5.78	5.67	5.56	5.45	5.34	5.16	4.97	4.79	4.61	4.42	4.24	3.78	3.32	2.86	2.40	1.94	1.49
100	4.53	4.44	4.37	4.30	4.24	4.18	4.05	3.92	3.80	3.70	3.62	3.53	3.33	3.06	2.75	2.39	1.97	1.49
110	3.32	3.24	3.18	3.14	3.11	3.11	3.08	3.04	2.98	2.91	2.85	2.83	2.82	2.76	2.62	2.35	1.97	1.49
120	3.22	3.17	3.10	2.99	2.87	2.75	2.67	2.60	2.57	2.56	2.51	2.47	2.45	2.48	2.45	2.30	1.97	1.49
130	5.36	5.24	5.04	4.76	4.42	4.04	3.65	3.27	2.93	2.66	2.43	2.32	2.29	2.28	2.30	2.22	1.96	1.49
140	7.77	7.62	7.36	6.98	6.50	5.92	5.27	4.58	3.91	3.19	2.54	2.21	2.14	2.17	2.18	2.16	1.94	1.49
150	9.35	9.25	9.05	8.70	8.24	7.63	6.87	6.01	4.61	3.40	2.57	2.12	1.98	2.05	2.10	2.10	1.91	1.49
160	9.78	9.79	9.67	9.44	9.16	8.70	7.31	5.76	4.32	3.14	2.35	1.92	1.82	1.92	2.04	2.04	1.88	1.49
170	8.64	8.84	9.13	8.82	8.01	7.00	5.79	4.51	3.33	2.39	1.82	1.58	1.61	1.79	1.98	1.98	1.84	1.49
180	6.97	6.76	6.62	6.21	5.48	4.58	3.59	2.64	1.81	1.27	1.09	1.16	1.39	1.68	1.92	1.93	1.79	1.49

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: