

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	8169.9 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	30.8V x 31.2H
	At 50% of Imax	17.2V x 17.3H
	At 90% of Imax	9.2V x 9.3H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	738.7 lumens per klm.
	To 50% of Imax	457.7 lumens per klm.
	To 90% of Imax	160.3 lumens per klm.

Upward LOR	2.4 %
Downward LOR	97.6 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Nuit 80-80mm-3000K-17D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:17 DEG	DIM.:80MM	SERIAL No.:IES001921
MFR.:	SUR.:	Shielding Angle:

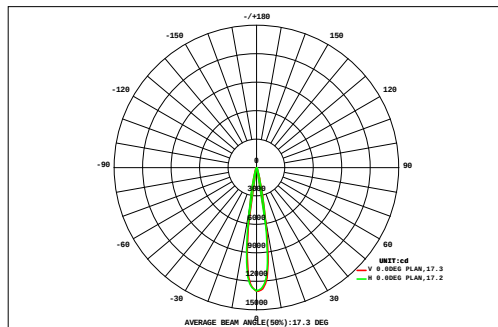

DATA OF LAMP		Eff:102.22lm/W	
MODEL		Imax(cd)	13031
NOMINAL POWER(W)	15.6	AVAILABILITY(%)	73.7
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1176
NOMINAL FLUX(lm)	1595	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1595
TEST VOLTAGE(V)	220	q @50%(H,V)	17,17DEG

		AREA FLUX DIAGRAM															UNIT:lm			F t	F a
		0.37	0.45	0.53	0.61	0.70	0.77	0.83	0.87	0.89	0.89	0.87	0.83	0.77	0.69	0.60	0.51	0.42	0.34	11.9	0.00
VERTICAL (DEG)	27	0.43	0.53	0.63	0.73	0.84	0.96	1.06	1.14	1.18	1.18	1.14	1.06	0.96	0.84	0.72	0.60	0.49	0.40	14.9	0.00
	24	0.49	0.61	0.73	0.87	1.05	1.25	1.46	1.63	1.72	1.72	1.62	1.45	1.25	1.04	0.86	0.71	0.57	0.45	19.5	0.00
	21	0.56	0.69	0.85	1.06	1.35	1.75	2.21	2.65	2.92	2.92	2.65	2.21	1.74	1.34	1.05	0.83	0.66	0.51	28.0	0.00
	18	0.61	0.77	0.99	1.31	1.82	2.61	3.68	4.73	5.43	5.45	4.76	3.70	2.61	1.81	1.30	0.98	0.74	0.55	43.9	25.0
	15	0.66	0.85	1.15	1.63	2.50	3.97	6.37	9.48	11.6	11.6	9.58	6.48	3.99	2.50	1.62	1.14	0.82	0.59	76.6	61.0
	12	0.70	0.94	1.32	2.00	3.34	5.87	10.9	18.3	23.0	23.0	18.4	11.1	5.93	3.41	2.08	1.34	0.91	0.61	133	120
	9	0.73	1.00	1.46	2.36	4.20	8.08	16.2	26.6	32.0	31.9	26.6	16.7	8.86	4.72	2.65	1.55	0.99	0.63	187	175
		0.74	1.04	1.54	2.55	4.74	9.61	19.4	30.2	34.7	34.6	31.4	23.1	12.4	5.98	3.12	1.71	1.03	0.63	219	207
		0.71	1.02	1.54	2.60	4.93	10.0	20.1	30.6	34.4	34.8	32.3	24.0	12.9	6.17	3.17	1.72	1.01	0.59	223	212
		0.64	0.94	1.45	2.48	4.65	9.19	17.5	26.1	30.5	30.8	26.8	18.5	10.1	5.16	2.78	1.55	0.91	0.53	191	180
		0.54	0.82	1.27	2.12	3.79	6.73	11.0	16.2	20.5	20.7	16.5	11.2	6.78	3.87	2.22	1.29	0.76	0.45	127	115
	0.44	0.65	1.03	1.64	2.65	4.20	6.26	8.58	10.5	10.5	8.61	6.25	4.21	2.67	1.64	0.99	0.59	0.36	71.8	58.9	
	0.33	0.48	0.75	1.14	1.73	2.55	3.52	4.56	5.28	5.27	4.56	3.54	2.56	1.72	1.11	0.70	0.43	0.26	40.5	22.6	
	0.23	0.34	0.51	0.75	1.07	1.49	2.00	2.47	2.76	2.77	2.48	1.98	1.46	1.03	0.70	0.46	0.30	0.18	23.0	0.00	
	0.15	0.23	0.33	0.47	0.64	0.84	1.08	1.29	1.41	1.41	1.27	1.04	0.79	0.60	0.42	0.28	0.18	0.11	12.5	0.00	
	0.10	0.14	0.20	0.27	0.37	0.47	0.58	0.67	0.71	0.71	0.65	0.55	0.44	0.32	0.23	0.16	0.10	0.06	6.73	0.00	
	0.06	0.08	0.11	0.15	0.18	0.24	0.30	0.33	0.35	0.34	0.32	0.27	0.21	0.15	0.11	0.08	0.05	0.04	3.37	0.00	
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)			6	9	12	15	18	21	24	27		
F t	8.50	11.6	16.4	24.8	40.6	70.6	124	186	220	221	191	134	77.8	44.0	26.4	16.6	11.0	7.28	1431	---	
F a	0.00	0.00	0.00	0.00	22.3	55.9	112	175	208	209	179	122	63.6	27.0	2.93	0.00	0.00	0.00	---	1176	

one-half-peak spread: U:8.4,D:8.9 , L:8.5,R:8.9


NEMA Beam Type: Type 3

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-10-18

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Nuit 80-80mm-3000K-17D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:17 DEG	DIM.:80MM	SERIAL No.:IES001921
MFR.:	SUR.:	Shielding Angle:

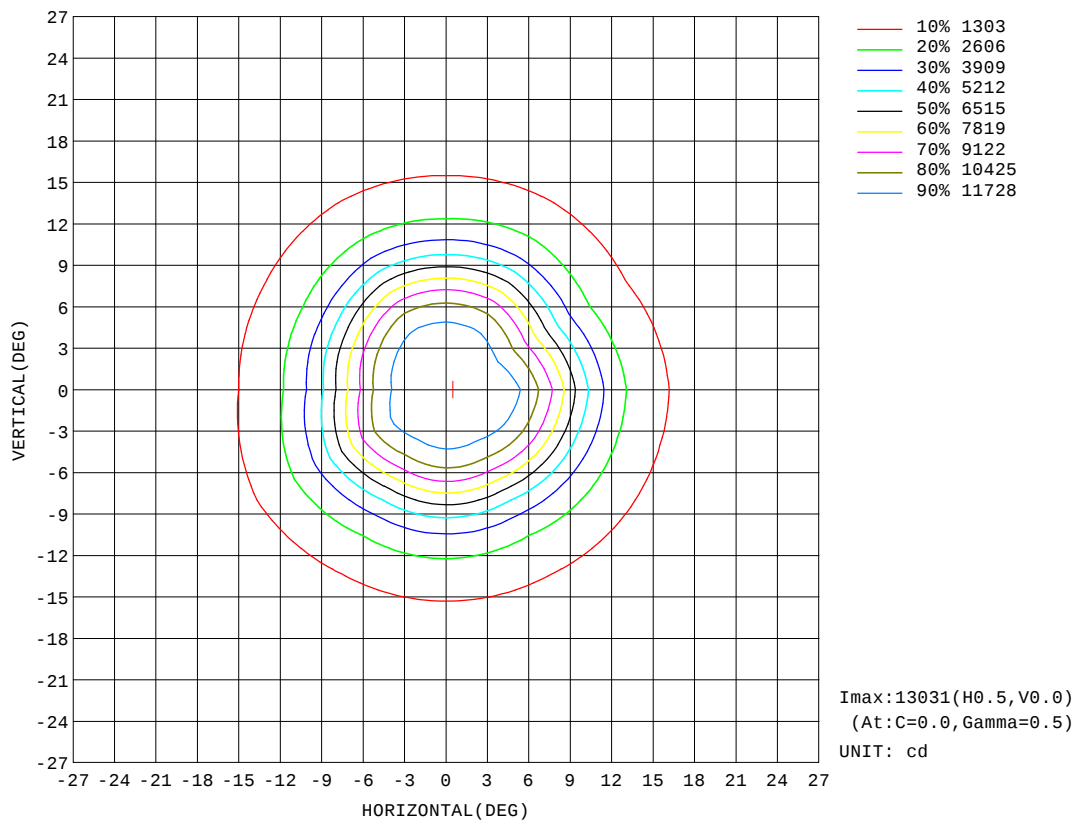


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Nuit 80-80mm-3000K-17D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:17 DEG	DIM.:80MM	SERIAL No.:IES001921
MFR.:	SUR.:	Shielding Angle:

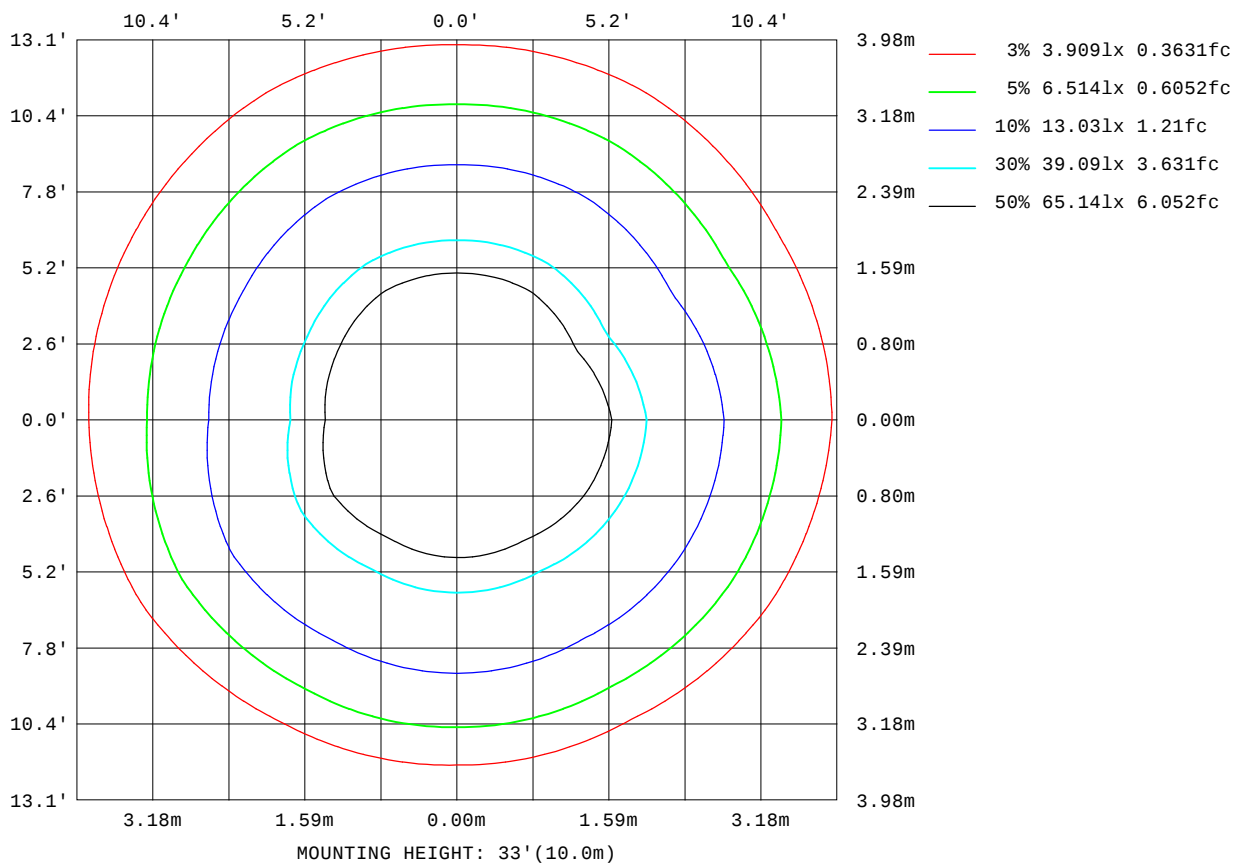

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

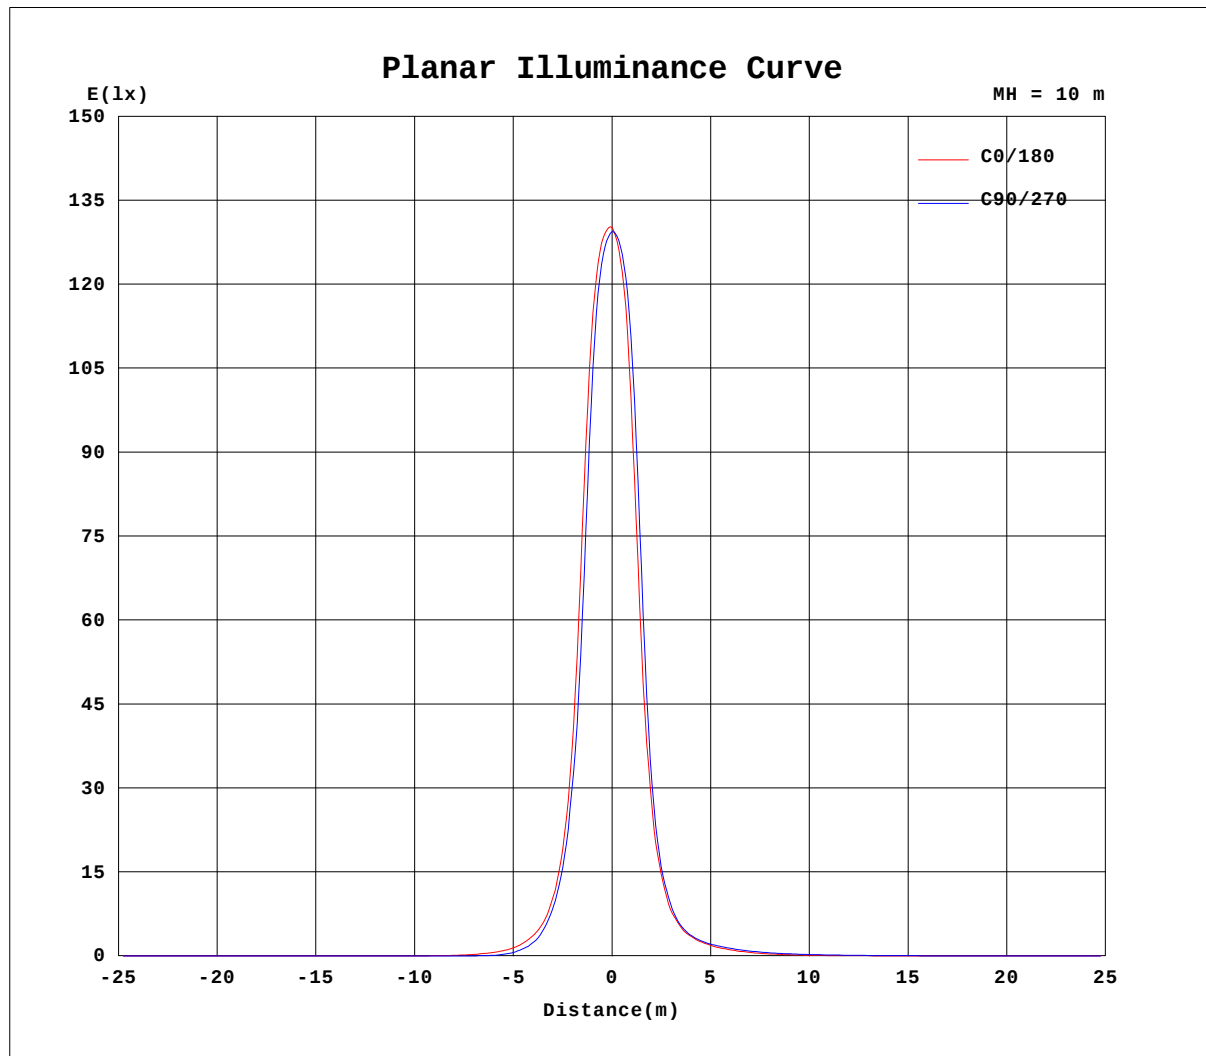


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Nuit 80-80mm-3000K-17D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:17 DEG	DIM.:80MM	SERIAL No.:IES001921
MFR.:	SUR.:	Shielding Angle:

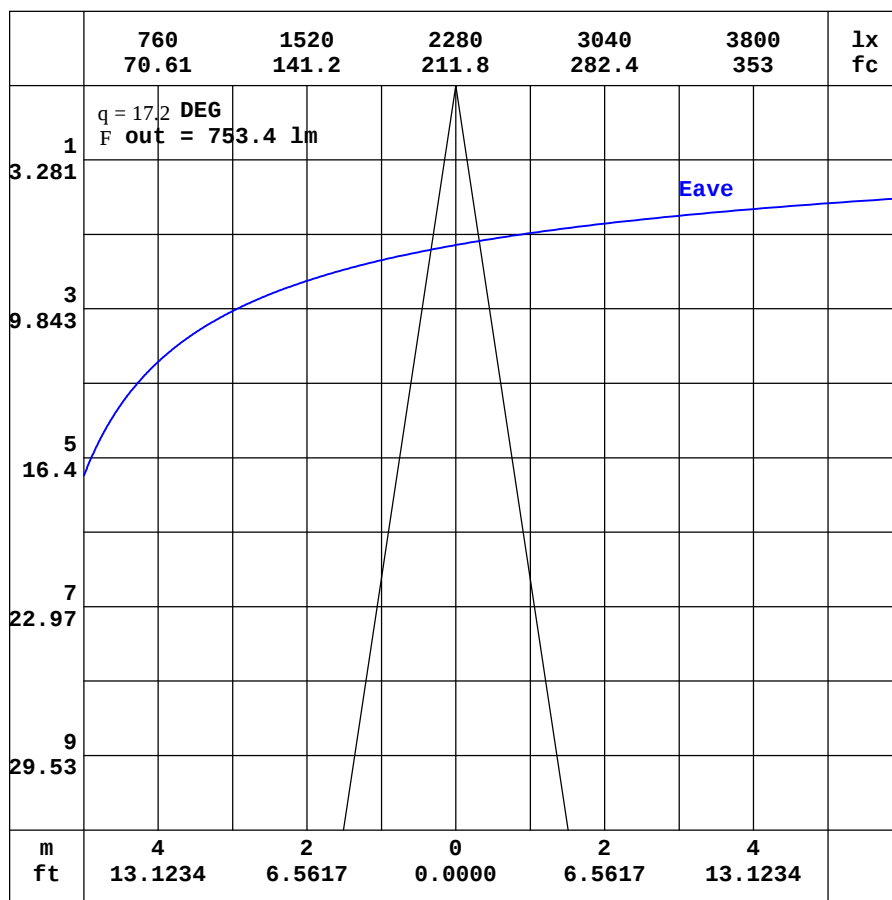

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Nuit 80-80mm-3000K-17D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:17 DEG	DIM.:80MM	SERIAL No.:IES001921
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.61	0.44	0.39	0.39	0.39	0.39	0.44	0.58	0.85	1.13	1.32	1.39	1.38	1.34	1.32	1.31	1.21	1.00	1.01
-170	0.61	0.44	0.39	0.38	0.38	0.37	0.38	0.46	0.63	0.81	0.94	1.00	1.03	1.06	1.10	1.14	1.18	1.19	1.19
-160	0.61	0.44	0.39	0.38	0.37	0.35	0.32	0.33	0.39	0.47	0.52	0.55	0.58	0.74	0.90	1.03	1.13	1.17	1.19
-150	0.61	0.44	0.39	0.38	0.36	0.34	0.30	0.25	0.22	0.20	0.19	0.27	0.38	0.50	0.61	0.71	0.79	0.83	0.85
-140	0.61	0.45	0.39	0.37	0.36	0.34	0.30	0.24	0.17	0.12	0.13	0.15	0.20	0.26	0.32	0.38	0.42	0.45	0.46
-130	0.61	0.46	0.40	0.37	0.36	0.35	0.33	0.28	0.23	0.19	0.16	0.13	0.13	0.13	0.14	0.16	0.17	0.18	0.18
-120	0.61	0.48	0.41	0.37	0.36	0.35	0.34	0.33	0.31	0.29	0.26	0.24	0.21	0.19	0.18	0.16	0.16	0.15	0.15
-110	0.61	0.51	0.43	0.38	0.36	0.35	0.34	0.34	0.34	0.34	0.34	0.33	0.33	0.32	0.32	0.31	0.31	0.30	0.30
-100	0.61	0.53	0.46	0.41	0.37	0.34	0.32	0.32	0.33	0.33	0.33	0.34	0.34	0.34	0.34	0.34	0.35	0.35	0.35
-90	0.61	0.55	0.50	0.44	0.38	0.33	0.27	0.27	0.27	0.28	0.28	0.28	0.28	0.29	0.29	0.29	0.29	0.29	0.29
-80	0.61	0.58	0.53	0.47	0.39	0.30	0.19	0.18	0.17	0.16	0.15	0.15	0.14	0.13	0.13	0.13	0.12	0.12	0.12
-70	0.61	0.60	0.57	0.50	0.41	0.29	0.15	0.09	0.08	0.07	0.06	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.05
-60	0.61	0.63	0.61	0.54	0.44	0.32	0.17	0.06	0.08	0.09	0.08	0.07	0.06	0.04	0.04	0.04	0.04	0.04	0.04
-50	0.61	0.66	0.66	0.60	0.51	0.39	0.30	0.19	0.14	0.14	0.14	0.13	0.13	0.11	0.10	0.10	0.09	0.08	0.07
-40	0.61	0.69	0.70	0.66	0.60	0.55	0.51	0.43	0.29	0.23	0.24	0.25	0.25	0.25	0.23	0.25	0.26	0.25	0.22
-30	0.61	0.72	0.76	0.75	0.73	0.75	0.78	0.78	0.72	0.59	0.39	0.52	0.81	1.12	1.57	1.86	2.68	3.18	2.97
-20	0.61	0.74	0.81	0.83	0.88	0.98	1.11	1.24	1.36	1.54	1.78	2.24	3.15	6.16	10.9	18.9	28.9	40.6	45.3
-10	0.61	0.76	0.86	0.93	1.03	1.22	1.47	1.76	2.21	2.99	4.35	6.86	11.5	19.3	38.2	82.0	179	328	435
0	0.61	0.78	0.91	1.02	1.17	1.44	1.82	2.28	3.08	4.52	7.11	12.0	19.5	31.5	54.4	131	398	1073	1302
10	0.61	0.79	0.93	1.04	1.20	1.47	1.85	2.39	3.27	4.81	7.37	11.9	18.7	27.9	43.2	77.8	168	369	488
20	0.61	0.79	0.93	1.05	1.20	1.45	1.80	2.31	3.11	4.44	6.46	9.62	14.3	20.2	26.8	34.7	45.2	54.5	58.2
30	0.61	0.79	0.93	1.05	1.18	1.39	1.68	2.08	2.69	3.62	5.01	6.84	9.18	12.0	15.4	18.7	21.3	23.0	23.7
40	0.61	0.78	0.92	1.04	1.15	1.31	1.53	1.81	2.17	2.73	3.54	4.55	5.79	7.16	8.55	9.59	10.4	11.0	11.2
50	0.61	0.77	0.90	1.02	1.12	1.23	1.38	1.57	1.79	2.06	2.43	2.91	3.48	4.14	4.65	5.08	5.44	5.66	5.74
60	0.61	0.75	0.87	0.98	1.08	1.17	1.27	1.38	1.50	1.64	1.79	1.96	2.15	2.38	2.55	2.69	2.82	2.91	2.95
70	0.61	0.72	0.83	0.93	1.03	1.11	1.19	1.26	1.33	1.40	1.47	1.54	1.62	1.68	1.72	1.75	1.78	1.80	1.81
80	0.61	0.70	0.78	0.86	0.94	1.02	1.09	1.15	1.20	1.25	1.29	1.34	1.39	1.40	1.42	1.43	1.44	1.45	1.46
90	0.61	0.66	0.72	0.77	0.83	0.88	0.94	0.98	1.01	1.05	1.09	1.12	1.16	1.17	1.17	1.18	1.19	1.19	1.20
100	0.61	0.63	0.65	0.68	0.70	0.72	0.75	0.76	0.77	0.78	0.80	0.81	0.83	0.83	0.82	0.82	0.82	0.82	0.82
110	0.61	0.60	0.58	0.59	0.59	0.59	0.60	0.60	0.60	0.60	0.61	0.62	0.64	0.64	0.63	0.62	0.62	0.62	0.62
120	0.61	0.56	0.53	0.52	0.52	0.51	0.49	0.45	0.45	0.46	0.47	0.46	0.45	0.42	0.41	0.42	0.42	0.42	0.42
130	0.61	0.53	0.49	0.48	0.47	0.44	0.40	0.39	0.40	0.40	0.41	0.44	0.48	0.53	0.59	0.65	0.70	0.72	0.73
140	0.61	0.50	0.46	0.45	0.43	0.40	0.39	0.39	0.42	0.48	0.58	0.71	0.86	0.99	1.09	1.18	1.23	1.26	1.27
150	0.61	0.48	0.44	0.43	0.40	0.39	0.39	0.42	0.51	0.68	0.89	1.09	1.24	1.33	1.38	1.42	1.44	1.45	1.45
160	0.61	0.47	0.42	0.41	0.39	0.39	0.41	0.49	0.66	0.91	1.16	1.31	1.39	1.44	1.47	1.51	1.54	1.56	1.57
170	0.61	0.45	0.41	0.40	0.39	0.39	0.43	0.55	0.79	1.07	1.28	1.38	1.42	1.44	1.48	1.53	1.51	1.49	1.53
180	0.61	0.44	0.39	0.39	0.39	0.39	0.44	0.58	0.85	1.13	1.32	1.39	1.38	1.34	1.32	1.31	1.21	1.00	1.00

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Nuit 80-80mm-3000K-17D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:17 DEG	DIM.:80MM	SERIAL No.:IES001921
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: ×10cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.97	1.06	1.03	0.94	0.83	0.69	0.53	0.36	0.22	0.14	0.13	0.17	0.25	0.32	0.34	0.33	0.31	0.25
-170	1.18	1.16	1.11	1.01	0.85	0.68	0.51	0.34	0.21	0.14	0.13	0.18	0.26	0.32	0.34	0.33	0.31	0.25
-160	1.17	1.11	1.01	0.87	0.72	0.56	0.40	0.27	0.17	0.13	0.14	0.20	0.28	0.33	0.34	0.33	0.31	0.25
-150	0.83	0.78	0.70	0.60	0.48	0.37	0.26	0.18	0.13	0.13	0.17	0.24	0.30	0.33	0.34	0.33	0.30	0.25
-140	0.44	0.41	0.37	0.31	0.25	0.19	0.15	0.13	0.13	0.17	0.22	0.28	0.32	0.34	0.34	0.33	0.30	0.25
-130	0.18	0.17	0.15	0.14	0.13	0.13	0.14	0.16	0.20	0.25	0.29	0.32	0.34	0.34	0.33	0.32	0.29	0.25
-120	0.15	0.16	0.17	0.18	0.20	0.22	0.25	0.27	0.30	0.32	0.33	0.34	0.34	0.34	0.33	0.31	0.28	0.25
-110	0.30	0.31	0.31	0.32	0.33	0.33	0.34	0.34	0.34	0.34	0.34	0.34	0.33	0.33	0.33	0.31	0.30	0.27
-100	0.35	0.35	0.35	0.34	0.34	0.34	0.34	0.34	0.33	0.33	0.32	0.32	0.31	0.30	0.29	0.28	0.26	0.25
-90	0.29	0.29	0.29	0.29	0.28	0.28	0.28	0.28	0.27	0.27	0.27	0.26	0.26	0.26	0.26	0.25	0.25	0.25
-80	0.12	0.12	0.12	0.13	0.13	0.14	0.14	0.15	0.15	0.16	0.17	0.18	0.19	0.20	0.21	0.22	0.23	0.25
-70	0.05	0.05	0.05	0.05	0.05	0.05	0.06	0.06	0.07	0.08	0.09	0.10	0.12	0.14	0.17	0.19	0.22	0.25
-60	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.05	0.05	0.07	0.09	0.11	0.13	0.17	0.21	0.25
-50	0.07	0.07	0.07	0.07	0.06	0.07	0.08	0.07	0.06	0.04	0.06	0.08	0.09	0.10	0.12	0.14	0.19	0.25
-40	0.23	0.21	0.19	0.16	0.16	0.16	0.15	0.14	0.12	0.11	0.10	0.10	0.11	0.12	0.11	0.12	0.18	0.25
-30	2.67	2.04	1.42	1.00	0.67	0.43	0.30	0.25	0.22	0.20	0.18	0.15	0.15	0.14	0.12	0.12	0.17	0.25
-20	39.6	27.4	17.2	9.37	4.40	1.82	1.00	0.59	0.40	0.31	0.27	0.22	0.18	0.16	0.13	0.12	0.17	0.25
-10	329	179	83.0	36.5	16.2	7.21	3.14	1.40	0.72	0.43	0.35	0.28	0.23	0.19	0.15	0.12	0.16	0.25
0	1198	562	168	61.5	26.7	12.2	5.41	2.23	1.05	0.55	0.42	0.33	0.26	0.21	0.16	0.12	0.16	0.25
10	368	169	77.5	42.8	25.1	14.5	7.79	4.01	2.19	1.29	0.87	0.63	0.46	0.33	0.24	0.18	0.18	0.25
20	54.3	45.0	34.6	25.9	18.6	12.4	7.54	4.46	2.75	1.74	1.19	0.86	0.62	0.44	0.31	0.22	0.21	0.25
30	23.0	21.1	18.3	14.6	11.0	7.93	5.58	4.00	2.70	1.87	1.37	1.00	0.73	0.52	0.38	0.27	0.23	0.25
40	10.9	10.1	9.09	7.84	6.28	4.92	3.81	2.91	2.29	1.83	1.39	1.05	0.78	0.58	0.43	0.31	0.26	0.25
50	5.51	5.15	4.68	4.14	3.58	3.01	2.53	2.14	1.83	1.58	1.31	1.03	0.80	0.62	0.47	0.35	0.28	0.25
60	2.84	2.70	2.52	2.33	2.14	1.95	1.77	1.61	1.45	1.30	1.18	0.99	0.81	0.64	0.49	0.38	0.30	0.25
70	1.77	1.72	1.67	1.61	1.55	1.48	1.39	1.30	1.22	1.14	1.07	0.97	0.81	0.65	0.52	0.40	0.31	0.25
80	1.43	1.40	1.36	1.33	1.30	1.26	1.21	1.15	1.10	1.04	0.98	0.91	0.77	0.64	0.52	0.42	0.32	0.25
90	1.18	1.15	1.13	1.10	1.08	1.06	1.01	0.96	0.91	0.86	0.81	0.76	0.68	0.59	0.51	0.42	0.33	0.25
100	0.80	0.78	0.76	0.75	0.74	0.73	0.69	0.67	0.64	0.61	0.59	0.57	0.55	0.52	0.47	0.41	0.34	0.25
110	0.60	0.58	0.56	0.55	0.54	0.53	0.51	0.50	0.48	0.45	0.42	0.41	0.43	0.44	0.43	0.40	0.34	0.25
120	0.42	0.42	0.41	0.40	0.39	0.38	0.39	0.41	0.41	0.41	0.39	0.38	0.37	0.38	0.39	0.39	0.34	0.25
130	0.72	0.69	0.64	0.58	0.53	0.48	0.43	0.40	0.38	0.38	0.37	0.37	0.37	0.36	0.37	0.37	0.34	0.25
140	1.26	1.23	1.17	1.08	0.97	0.84	0.69	0.56	0.46	0.39	0.35	0.35	0.36	0.36	0.35	0.36	0.33	0.25
150	1.45	1.43	1.41	1.38	1.32	1.23	1.07	0.86	0.59	0.40	0.32	0.32	0.34	0.35	0.35	0.35	0.33	0.25
160	1.56	1.54	1.50	1.47	1.43	1.38	1.17	0.89	0.60	0.39	0.28	0.27	0.31	0.34	0.35	0.34	0.32	0.25
170	1.55	1.55	1.54	1.42	1.25	1.08	0.89	0.69	0.47	0.30	0.22	0.22	0.28	0.33	0.34	0.34	0.31	0.25
180	0.97	1.06	1.03	0.94	0.83	0.69	0.53	0.36	0.22	0.14	0.13	0.17	0.25	0.32	0.34	0.33	0.31	0.25

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-10-18

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks: