

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	2588.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	55.0V x 56.6H
	At 50% of Imax	34.5V x 35.4H
	At 90% of Imax	15.1V x 16.5H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	853.9 lumens per klm.
	To 50% of Imax	565.7 lumens per klm.
	To 90% of Imax	145.2 lumens per klm.

Upward LOR	2.5 %
Downward LOR	97.5 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Nuit 80-80mm-3000K-35D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:35 DEG	DIM.:80MM	SERIAL No.:IES001922
MFR.:	SUR.:	Shielding Angle:

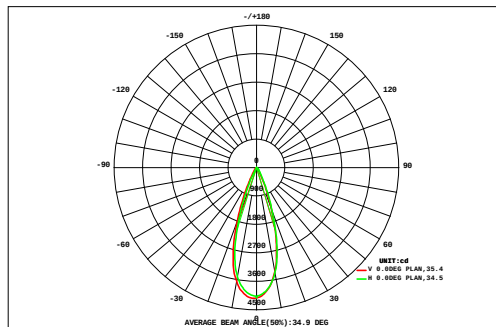

DATA OF LAMP		Eff:102.36lm/W	
MODEL		Imax(cd)	4134
NOMINAL POWER(W)	15.6	AVAILABILITY(%)	85.4
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1364
NOMINAL FLUX(lm)	1597	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1597
TEST VOLTAGE(V)	220	q @50%(H,V)	35,34DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.20	0.28	0.37	0.49	0.60	0.70	0.77	0.83	0.85	0.83	0.77	0.68	0.57	0.45	0.33	0.24	0.17	0.13	9.25	0.00
45	0.20	0.28	0.37	0.49	0.60	0.70	0.77	0.83	0.85	0.83	0.77	0.68	0.57	0.45	0.33	0.24	0.17	0.13	9.25	0.00
40	0.24	0.35	0.49	0.64	0.80	0.95	1.08	1.17	1.22	1.19	1.09	0.96	0.80	0.62	0.45	0.31	0.21	0.14	12.7	0.00
35	0.30	0.44	0.62	0.83	1.06	1.33	1.61	1.84	1.94	1.88	1.69	1.41	1.12	0.84	0.59	0.39	0.25	0.16	18.3	0.00
30	0.35	0.54	0.77	1.07	1.49	2.11	2.87	3.53	3.81	3.65	3.13	2.40	1.69	1.16	0.77	0.49	0.30	0.17	30.3	11.4
25	0.41	0.64	0.95	1.43	2.29	3.80	5.79	7.39	8.06	7.71	6.48	4.68	2.89	1.69	1.02	0.61	0.34	0.18	56.3	45.0
20	0.45	0.73	1.16	1.97	3.73	6.74	10.5	13.7	15.0	14.3	11.9	8.41	5.03	2.60	1.35	0.71	0.36	0.18	98.8	89.9
15	0.49	0.81	1.38	2.70	5.70	10.5	16.3	20.9	22.7	21.8	18.5	13.0	7.68	3.92	1.77	0.81	0.37	0.16	150	142
10	0.51	0.87	1.60	3.45	7.62	14.2	21.3	26.2	28.0	27.1	23.5	17.3	10.6	5.42	2.26	0.88	0.35	0.13	191	185
5	0.51	0.90	1.73	3.93	8.92	16.6	24.1	28.8	30.6	29.6	26.4	20.7	13.0	6.51	2.62	0.90	0.30	0.09	216	210
0	0.47	0.84	1.67	3.91	9.07	17.0	24.4	28.9	30.6	30.1	27.3	21.4	13.3	6.56	2.54	0.80	0.23	0.06	219	213
-5	0.38	0.69	1.41	3.37	7.92	15.3	22.5	26.7	28.3	27.8	24.8	18.9	11.4	5.45	1.99	0.60	0.17	0.05	198	192
-10	0.29	0.51	1.05	2.48	5.83	11.3	17.3	21.6	23.6	22.9	19.4	13.9	8.03	3.67	1.21	0.36	0.10	0.03	154	148
-15	0.19	0.34	0.66	1.52	3.39	6.54	10.4	13.9	15.7	15.0	12.0	8.09	4.47	1.84	0.56	0.16	0.05	0.02	94.8	88.5
-20	0.11	0.18	0.34	0.75	1.55	2.97	4.85	6.70	7.64	7.25	5.64	3.47	1.69	0.64	0.21	0.05	0.02	0.02	44.1	36.0
-25	0.06	0.08	0.16	0.31	0.58	0.99	1.62	2.27	2.56	2.34	1.69	0.92	0.43	0.16	0.05	0.02	0.01	0.01	14.3	3.06
-30	0.03	0.04	0.07	0.11	0.17	0.27	0.39	0.51	0.53	0.46	0.33	0.16	0.05	0.03	0.02	0.01	0.01	0.01	3.20	0.00
-35	0.02	0.02	0.03	0.04	0.04	0.04	0.07	0.08	0.06	0.04	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.56	0.00
-40	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.24	0.00
-45	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.24	0.00
-45 -40 -35 -30 -25 -20 -15 -10 HORIZONTAL (DEG) 10 15 20 25 30 35 40 45																				
F t	5.03	8.27	14.5	29.0	60.8	111	166	205	221	214	185	136	82.7	41.6	17.8	7.36	3.24	1.55	1510	---
F a	0.00	0.00	0.00	14.6	51.2	103	158	198	215	207	178	129	74.7	31.8	3.88	0.00	0.00	0.00	---	1364

one-half-peak spread: U:17.6,D:17.1 , L:17.3,R:18.2


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Nuit 80-80mm-3000K-35D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:35 DEG	DIM.:80MM	SERIAL No.:IES001922
MFR.:	SUR.:	Shielding Angle:

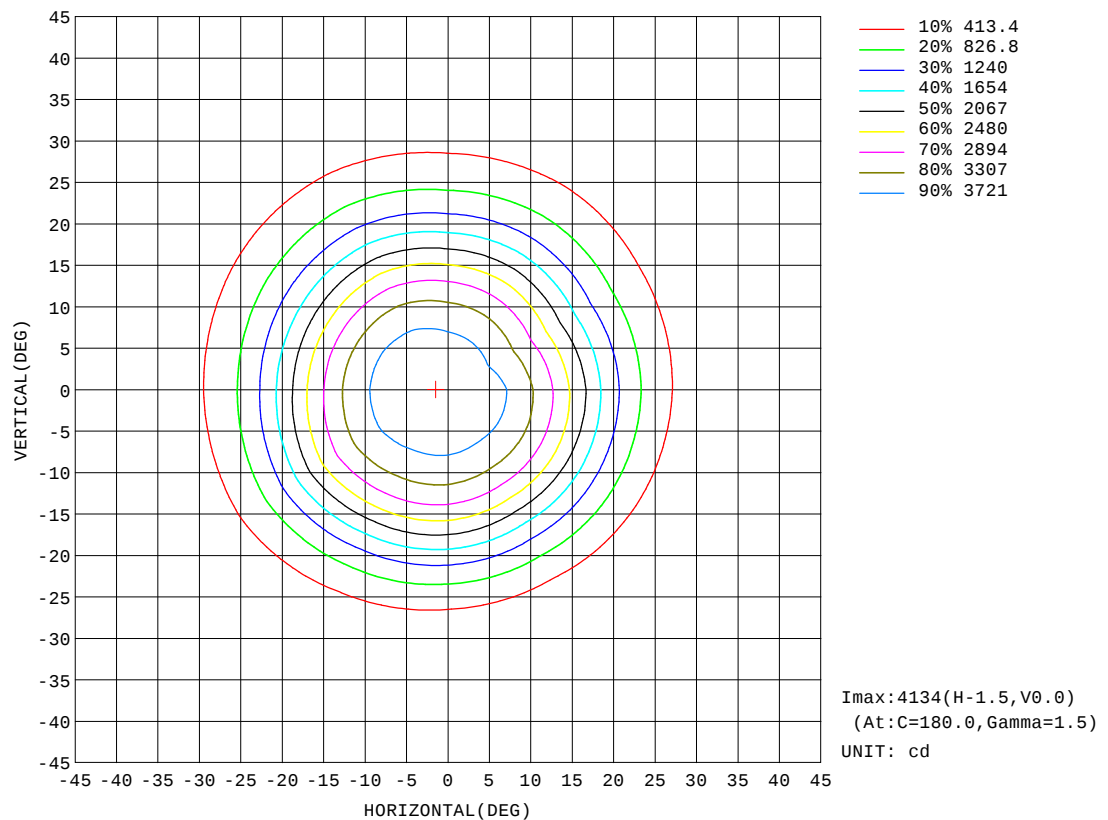


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Nuit 80-80mm-3000K-35D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:35 DEG	DIM.:80MM	SERIAL No.:IES001922
MFR.:	SUR.:	Shielding Angle:

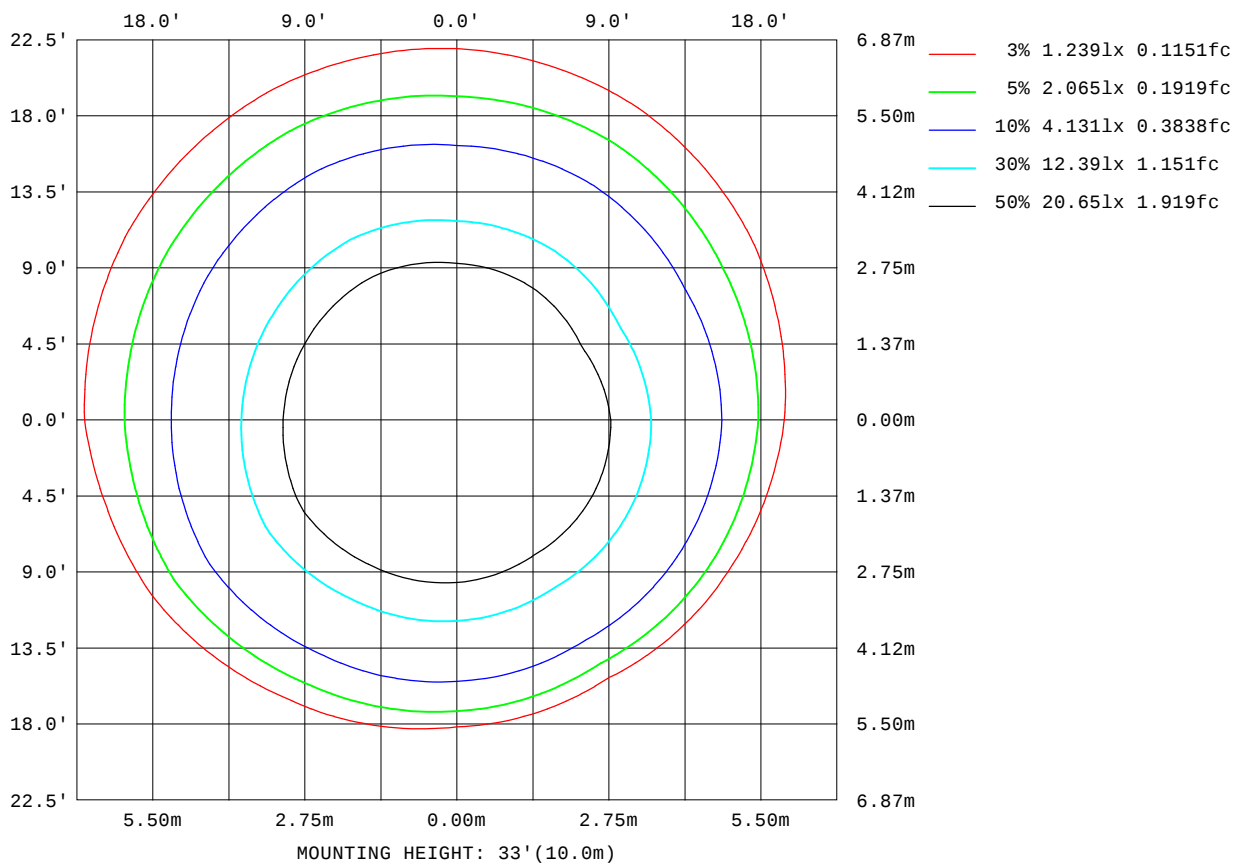

H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

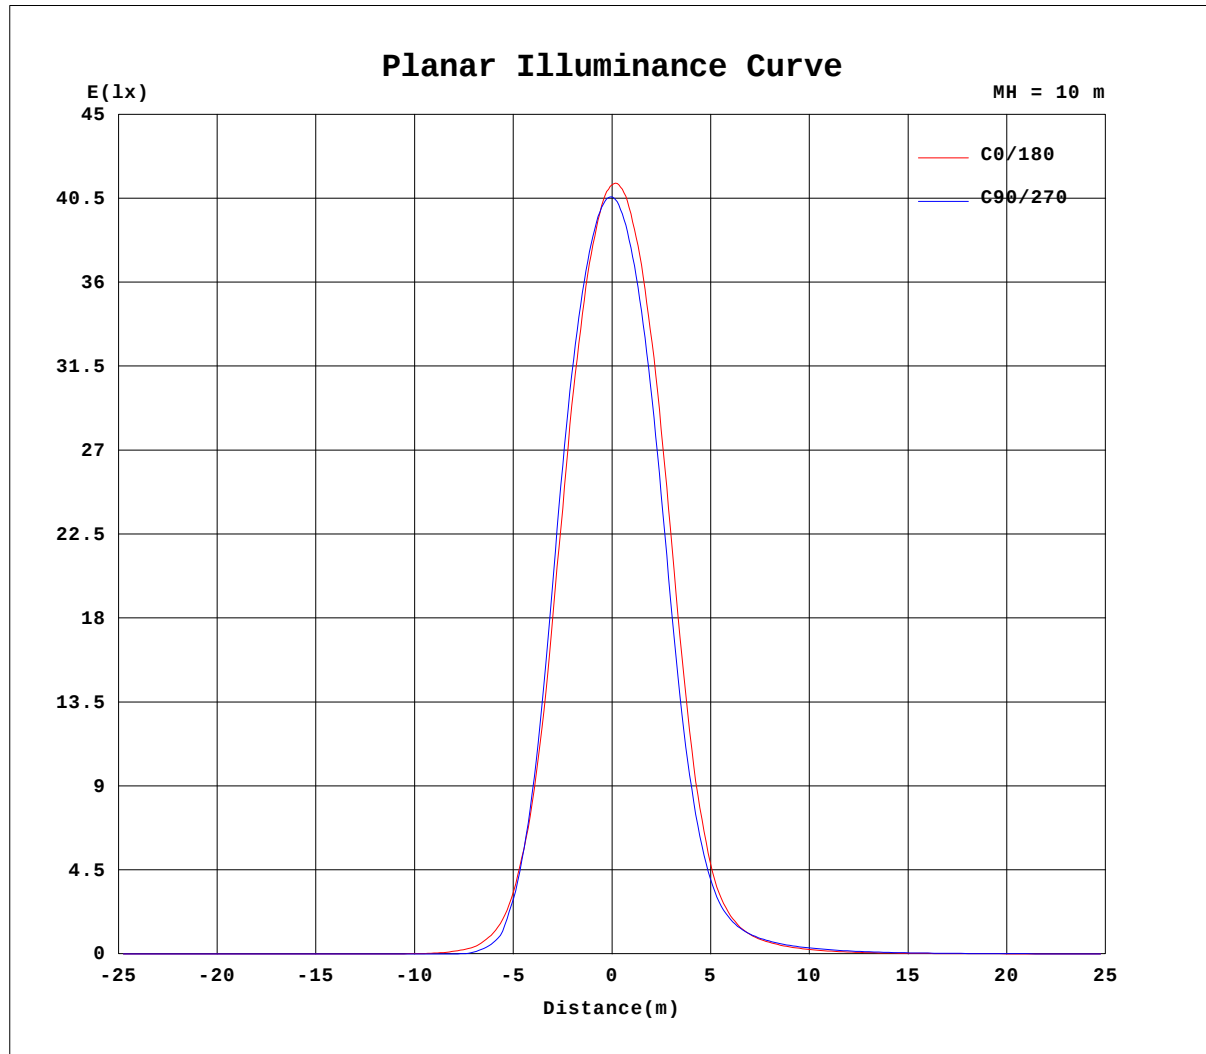


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Nuit 80-80mm-3000K-35D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:35 DEG	DIM.:80MM	SERIAL No.:IES001922
MFR.:	SUR.:	Shielding Angle:

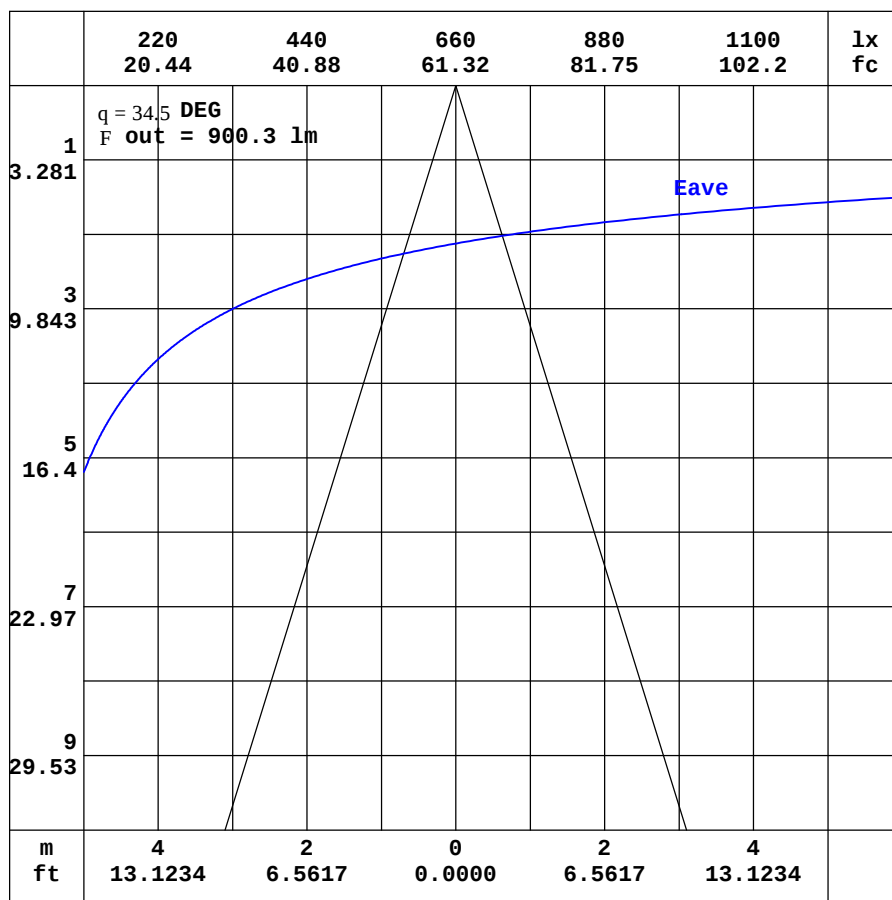

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Nuit 80-80mm-3000K-35D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:35 DEG	DIM.:80MM	SERIAL No.:IES001922
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	7.85	6.38	4.90	4.34	4.28	4.56	5.35	6.62	8.25	10.0	11.6	12.9	13.7	14.0	13.8	13.4	12.7	12.1	12.6
-170	7.85	6.29	4.83	4.22	4.08	4.18	4.63	5.41	6.39	7.44	8.42	9.21	9.72	9.95	9.93	10.1	10.8	11.2	11.5
-160	7.85	6.25	4.82	4.13	3.89	3.80	3.90	4.16	4.48	4.79	5.05	5.22	5.46	6.81	8.09	9.20	10.0	10.5	10.8
-150	7.85	6.25	4.88	4.06	3.75	3.52	3.34	3.18	2.99	2.69	2.42	3.06	3.91	4.88	5.88	6.78	7.47	7.92	8.15
-140	7.85	6.28	4.98	4.03	3.67	3.38	3.05	2.68	2.18	1.95	2.00	2.20	2.54	3.00	3.51	3.98	4.38	4.66	4.80
-130	7.85	6.33	5.11	4.19	3.65	3.33	3.00	2.60	2.31	2.15	2.03	1.99	2.00	2.04	2.15	2.28	2.40	2.50	2.56
-120	7.85	6.43	5.29	4.39	3.73	3.31	3.02	2.79	2.68	2.57	2.45	2.35	2.26	2.19	2.13	2.09	2.06	2.06	2.05
-110	7.85	6.57	5.48	4.59	3.88	3.35	2.97	2.88	2.89	2.90	2.88	2.85	2.82	2.77	2.72	2.68	2.66	2.64	2.63
-100	7.85	6.72	5.70	4.78	3.98	3.27	2.66	2.68	2.74	2.79	2.84	2.88	2.91	2.94	2.97	2.98	3.00	3.02	3.03
-90	7.85	6.90	5.96	5.01	4.07	3.12	2.18	2.20	2.22	2.25	2.27	2.29	2.32	2.34	2.36	2.39	2.41	2.43	2.46
-80	7.85	7.12	6.27	5.31	4.24	3.07	1.78	1.64	1.59	1.55	1.51	1.48	1.46	1.43	1.43	1.42	1.43	1.44	1.45
-70	7.85	7.36	6.66	5.74	4.61	3.27	1.83	1.42	1.42	1.36	1.23	1.05	0.82	0.72	0.70	0.69	0.68	0.69	0.70
-60	7.85	7.62	7.11	6.32	5.30	4.21	2.92	1.82	1.76	1.61	1.38	1.09	0.76	0.56	0.66	0.68	0.64	0.55	0.45
-50	7.85	7.91	7.65	7.11	6.48	5.67	4.56	3.09	2.35	2.29	2.21	2.08	1.88	1.61	1.55	1.45	1.29	1.08	0.83
-40	7.85	8.21	8.26	8.13	7.94	7.55	6.84	5.80	4.12	3.27	3.29	3.40	3.65	3.92	2.96	3.29	3.49	3.27	2.30
-30	7.85	8.52	8.92	9.28	9.61	9.85	9.92	9.68	8.98	7.71	5.75	11.3	21.6	33.0	57.5	79.6	120	144	130
-20	7.85	8.81	9.61	10.5	11.5	12.5	13.7	15.0	17.6	22.3	32.5	53.4	106	225	455	795	1158	1430	1487
-10	7.85	9.09	10.3	11.6	13.3	15.2	17.7	21.5	30.0	46.0	76.2	132	279	653	1390	2360	3062	3420	3500
0	7.85	9.33	10.9	12.7	15.0	17.8	21.7	28.0	42.6	69.2	115	192	382	886	1803	2891	3655	4047	4123
10	7.85	9.40	11.0	12.9	15.2	18.0	22.1	29.3	44.2	70.7	111	175	312	655	1291	2157	2935	3361	3377
20	7.85	9.42	11.0	12.9	15.1	17.8	21.5	28.0	40.3	62.1	93.2	135	197	310	534	876	1225	1433	1444
30	7.85	9.40	11.0	12.7	14.7	17.1	20.0	24.8	33.3	47.4	68.9	94.1	122	156	198	250	301	334	335
40	7.85	9.32	10.8	12.3	14.1	16.2	18.5	21.2	25.8	33.5	44.6	58.6	74.5	90.8	106	117	126	131	131
50	7.85	9.21	10.5	11.9	13.4	15.0	16.8	18.8	20.8	23.7	28.3	34.5	41.9	50.0	56.0	60.9	64.2	65.8	65.7
60	7.85	9.05	10.2	11.4	12.6	13.9	15.2	16.6	17.8	19.1	20.4	22.0	23.9	26.3	27.8	29.0	30.0	30.4	30.2
70	7.85	8.86	9.86	10.8	11.8	12.7	13.7	14.6	15.4	16.2	17.0	17.7	18.4	18.9	19.1	19.3	19.4	19.4	19.4
80	7.85	8.64	9.42	10.2	11.0	11.7	12.4	12.9	13.4	13.9	14.3	14.8	15.3	15.4	15.4	15.5	15.5	15.4	15.4
90	7.85	8.40	8.94	9.49	10.0	10.6	11.1	11.4	11.7	12.0	12.3	12.6	12.9	12.9	12.8	12.8	12.7	12.7	12.6
100	7.85	8.14	8.43	8.72	9.03	9.35	9.68	9.78	9.87	9.98	10.1	10.2	10.4	10.2	10.1	9.94	9.81	9.71	9.64
110	7.85	7.87	7.89	7.93	7.97	8.04	8.12	8.02	7.87	7.76	7.72	7.75	7.84	7.69	7.45	7.25	7.09	6.96	6.87
120	7.85	7.59	7.35	7.11	6.90	6.72	6.48	6.09	5.71	5.60	5.67	5.81	5.88	5.79	5.56	5.42	5.38	5.39	5.40
130	7.85	7.33	6.81	6.32	5.98	5.62	5.05	4.54	4.63	4.96	5.20	5.55	6.03	6.52	7.02	7.46	7.81	8.05	8.16
140	7.85	7.09	6.31	5.63	5.29	4.79	4.45	4.58	5.10	5.84	6.70	7.63	8.54	9.39	10.1	10.8	11.2	11.6	11.7
150	7.85	6.86	5.85	5.18	4.80	4.43	4.57	5.21	6.16	7.34	8.62	9.90	11.1	12.1	12.9	13.5	14.0	14.2	14.3
160	7.85	6.66	5.46	4.83	4.50	4.43	4.92	5.89	7.20	8.71	10.3	11.7	12.9	13.8	14.4	14.7	14.9	15.0	15.2
170	7.85	6.50	5.14	4.56	4.36	4.51	5.22	6.41	7.95	9.66	11.3	12.7	13.6	14.2	14.3	14.2	13.9	13.7	13.9
180	7.85	6.38	4.90	4.34	4.28	4.56	5.35	6.62	8.25	10.0	11.6	12.9	13.7	14.0	13.8	13.4	12.7	12.1	12.6

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Nuit 80-80mm-3000K-35D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:35 DEG	DIM.:80MM	SERIAL No.:IES001922
MFR.:	SUR.:	Shielding Angle:

Table--2
UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	11.0	10.6	10.3	9.63	8.56	7.23	5.77	4.37	3.17	2.35	1.96	2.01	2.27	2.62	2.91	2.95	2.75	2.34
-170	11.0	10.7	10.3	9.56	8.45	7.09	5.61	4.21	3.07	2.30	1.98	2.02	2.29	2.64	2.92	2.94	2.75	2.34
-160	10.6	10.2	9.50	8.53	7.36	6.06	4.74	3.57	2.68	2.14	1.98	2.07	2.36	2.69	2.94	2.94	2.73	2.34
-150	8.04	7.69	7.12	6.29	5.33	4.36	3.46	2.73	2.24	2.01	2.01	2.19	2.49	2.78	2.94	2.92	2.71	2.34
-140	4.75	4.54	4.21	3.77	3.27	2.78	2.39	2.12	2.01	2.00	2.16	2.40	2.67	2.88	2.95	2.90	2.67	2.34
-130	2.53	2.47	2.36	2.24	2.11	2.03	2.02	2.03	2.11	2.26	2.45	2.66	2.84	2.94	2.95	2.85	2.63	2.34
-120	2.05	2.06	2.08	2.11	2.16	2.22	2.30	2.41	2.53	2.66	2.78	2.89	2.95	2.95	2.90	2.77	2.57	2.34
-110	2.64	2.65	2.68	2.71	2.76	2.81	2.85	2.89	2.93	2.96	2.96	2.96	2.95	2.89	2.79	2.66	2.51	2.34
-100	3.03	3.03	3.02	3.02	3.01	3.00	2.98	2.96	2.94	2.91	2.87	2.82	2.76	2.68	2.61	2.52	2.43	2.34
-90	2.46	2.46	2.46	2.46	2.46	2.46	2.45	2.45	2.44	2.44	2.43	2.43	2.41	2.40	2.38	2.37	2.36	2.34
-80	1.46	1.47	1.49	1.52	1.55	1.60	1.64	1.69	1.74	1.80	1.87	1.94	2.00	2.06	2.13	2.20	2.27	2.34
-70	0.70	0.71	0.73	0.76	0.79	0.85	0.92	1.00	1.09	1.20	1.32	1.44	1.58	1.73	1.88	2.03	2.19	2.34
-60	0.45	0.45	0.45	0.45	0.45	0.48	0.52	0.58	0.66	0.75	0.88	1.04	1.21	1.41	1.63	1.87	2.11	2.34
-50	0.81	0.77	0.70	0.57	0.49	0.58	0.57	0.45	0.47	0.52	0.68	0.89	0.99	1.15	1.42	1.73	2.04	2.34
-40	2.16	1.90	1.61	1.37	1.33	1.29	1.21	1.05	0.85	0.58	0.82	0.98	1.04	1.00	1.24	1.59	1.97	2.34
-30	111	73.7	34.4	10.8	4.41	2.68	2.18	1.86	1.67	1.55	1.26	1.27	1.23	1.09	1.10	1.49	1.91	2.34
-20	1297	931	558	253	83.3	25.7	6.97	3.78	2.84	2.43	2.09	1.70	1.50	1.24	1.01	1.42	1.87	2.34
-10	3257	2680	1786	957	399	123	37.5	11.4	4.37	3.33	2.79	2.23	1.82	1.40	1.00	1.37	1.85	2.34
0	3892	3342	2415	1361	634	222	69.7	22.1	6.06	4.12	3.38	2.72	2.11	1.52	1.00	1.35	1.84	2.34
10	3123	2484	1622	922	441	193	86.0	38.5	18.3	11.0	7.76	5.67	4.11	2.87	1.88	1.83	2.02	2.34
20	1307	1025	680	386	220	135	76.3	42.3	23.8	15.4	11.1	8.04	5.79	4.02	2.70	2.30	2.20	2.34
30	312	265	210	160	118	82.8	55.3	35.5	24.0	17.5	13.0	9.61	6.98	4.89	3.43	2.73	2.38	2.34
40	125	114	101	85.5	66.1	48.7	35.8	27.1	21.7	17.6	13.6	10.3	7.62	5.45	4.02	3.09	2.54	2.34
50	61.6	55.9	49.1	41.7	34.4	28.3	23.7	20.4	17.9	15.7	13.1	10.2	7.79	5.85	4.41	3.37	2.69	2.34
60	28.7	26.8	24.8	22.8	21.1	19.5	17.9	16.4	14.8	13.3	11.8	9.73	7.69	5.99	4.61	3.56	2.81	2.34
70	18.9	18.4	17.7	17.0	16.3	15.4	14.4	13.4	12.3	11.3	10.2	8.89	7.27	5.85	4.64	3.66	2.89	2.34
80	15.0	14.5	14.1	13.6	13.1	12.6	11.8	11.0	10.2	9.41	8.57	7.69	6.52	5.47	4.52	3.67	2.95	2.34
90	12.2	11.8	11.4	11.0	10.6	10.2	9.53	8.87	8.21	7.54	6.88	6.22	5.57	4.93	4.28	3.63	2.99	2.34
100	9.24	8.87	8.52	8.19	7.89	7.60	7.21	6.81	6.38	5.93	5.45	4.94	4.62	4.31	3.98	3.54	3.00	2.34
110	6.48	6.13	5.81	5.53	5.29	5.15	5.16	5.14	5.05	4.90	4.68	4.44	4.29	4.07	3.79	3.43	2.99	2.34
120	5.38	5.33	5.23	5.06	4.78	4.57	4.42	4.28	4.27	4.29	4.21	4.08	3.98	3.87	3.68	3.39	2.98	2.34
130	8.14	7.99	7.72	7.34	6.89	6.41	5.88	5.37	4.89	4.51	4.14	3.86	3.74	3.66	3.56	3.34	2.95	2.34
140	11.7	11.5	11.1	10.6	9.92	9.11	8.20	7.26	6.33	5.28	4.28	3.71	3.51	3.48	3.42	3.28	2.92	2.34
150	14.3	14.1	13.8	13.3	12.6	11.7	10.6	9.33	7.32	5.53	4.28	3.55	3.26	3.27	3.29	3.20	2.90	2.34
160	15.1	15.1	14.9	14.6	14.1	13.4	11.3	8.99	6.85	5.12	3.91	3.22	2.99	3.05	3.18	3.12	2.86	2.34
170	13.8	14.0	14.3	13.7	12.5	10.9	9.05	7.15	5.40	3.99	3.09	2.68	2.64	2.83	3.04	3.04	2.81	2.34
180	11.0	10.6	10.3	9.63	8.56	7.23	5.77	4.37	3.17	2.35	1.96	2.01	2.27	2.62	2.91	2.95	2.75	2.34

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: