

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1355.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	74.2V x 74.8H
	At 50% of Imax	51.0V x 52.0H
	At 90% of Imax	31.6V x 33.2H
Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	891.0 lumens per klm.
	To 50% of Imax	661.6 lumens per klm.
	To 90% of Imax	288.8 lumens per klm.
Upward LOR		2.7 %
Downward LOR		97.3 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(β) Range:-180 - 180DEG
V(β) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Nuit 80-80mm-3000K-50D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:50 DEG	DIM.:80MM	SERIAL No.:IES001923
MFR.:	SUR.:	Shielding Angle:

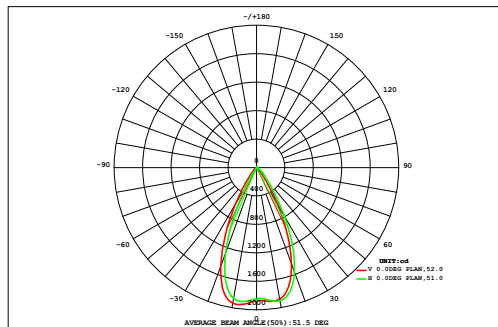

DATA OF LAMP		Eff:91.85lm/W	
MODEL		Imax(cd)	1942
NOMINAL POWER(W)	15.6	AVAILABILITY(%)	89.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1276
NOMINAL FLUX(lm)	1433	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1433
TEST VOLTAGE(V)	220	q @50%(H,V)	52,51DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.09	0.15	0.21	0.27	0.34	0.41	0.46	0.50	0.53	0.52	0.48	0.44	0.38	0.31	0.24	0.18	0.12	0.06	5.70	0.00
72	0.09	0.15	0.21	0.27	0.34	0.41	0.46	0.50	0.53	0.52	0.48	0.44	0.38	0.31	0.24	0.18	0.12	0.06	5.70	0.00
64	0.10	0.16	0.23	0.31	0.41	0.56	0.73	0.87	0.96	0.93	0.81	0.64	0.49	0.37	0.28	0.20	0.13	0.07	8.25	0.00
56	0.11	0.17	0.26	0.38	0.61	0.97	1.34	1.63	1.81	1.77	1.53	1.20	0.83	0.51	0.33	0.22	0.14	0.07	13.9	0.00
48	0.11	0.19	0.29	0.51	0.97	1.63	2.38	2.99	3.39	3.34	2.85	2.17	1.39	0.76	0.41	0.24	0.14	0.07	23.8	3.29
40	0.12	0.20	0.34	0.72	1.48	2.66	4.39	6.31	7.64	7.53	6.04	4.06	2.31	1.17	0.51	0.25	0.14	0.07	45.9	34.6
32	0.12	0.21	0.41	0.97	2.21	4.63	9.11	14.5	17.8	17.6	13.9	8.41	4.05	1.74	0.66	0.25	0.13	0.06	96.8	89.0
24	0.12	0.22	0.46	1.18	3.13	7.88	16.6	25.3	29.6	29.2	24.2	15.4	6.98	2.49	0.77	0.24	0.11	0.05	164	158
	0.12	0.22	0.47	1.33	4.00	11.4	23.3	32.9	36.3	35.7	31.4	21.8	10.5	3.32	0.79	0.21	0.09	0.05	214	209
	0.12	0.21	0.42	1.31	4.42	13.3	26.5	35.6	37.0	36.4	34.3	25.5	12.8	3.77	0.70	0.13	0.07	0.03	233	228
	0.11	0.19	0.34	1.06	3.90	12.6	25.8	35.0	36.7	36.7	34.2	25.0	12.1	3.25	0.49	0.08	0.05	0.03	227	223
	0.10	0.16	0.26	0.65	2.54	9.11	20.6	30.1	34.3	34.3	29.6	19.7	8.29	1.84	0.26	0.06	0.04	0.02	192	188
	0.08	0.13	0.18	0.30	0.99	4.36	11.2	18.8	23.8	23.8	18.6	10.5	3.47	0.48	0.10	0.05	0.03	0.02	117	113
-24	0.07	0.10	0.12	0.12	0.16	0.96	3.03	6.29	8.85	8.74	5.86	2.32	0.47	0.07	0.05	0.04	0.03	0.02	37.3	30.7
-32	0.06	0.07	0.07	0.05	0.06	0.09	0.14	0.35	0.57	0.48	0.18	0.06	0.05	0.04	0.03	0.03	0.02	0.02	2.36	0.00
-40	0.05	0.05	0.04	0.04	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.02	0.03	0.02	0.02	0.01	0.02	0.01	0.53	0.00
-48	0.04	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.31	0.00
-56	0.03	0.02	0.01	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.24	0.00
-64	0.03	0.02	0.01	0.01	0.02	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.28	0.00
-72	0.03	0.02	0.01	0.01	0.02	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.28	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
F t	1.57	2.50	4.13	9.25	25.3	70.7	146	211	239	237	204	137	64.1	20.2	5.69	2.24	1.28	0.69	1382	---
F a	0.00	0.00	0.00	0.00	13.4	62.6	139	205	233	231	198	130	56.2	8.70	0.00	0.00	0.00	0.00	---	1276

one-half-peak spread: U:16.2,D:19.0 , L:18.2,R:18.5


NEMA Beam Type: Type 5

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Nuit 80-80mm-3000K-50D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:50 DEG	DIM.:80MM	SERIAL No.:IES001923
MFR.:	SUR.:	Shielding Angle:

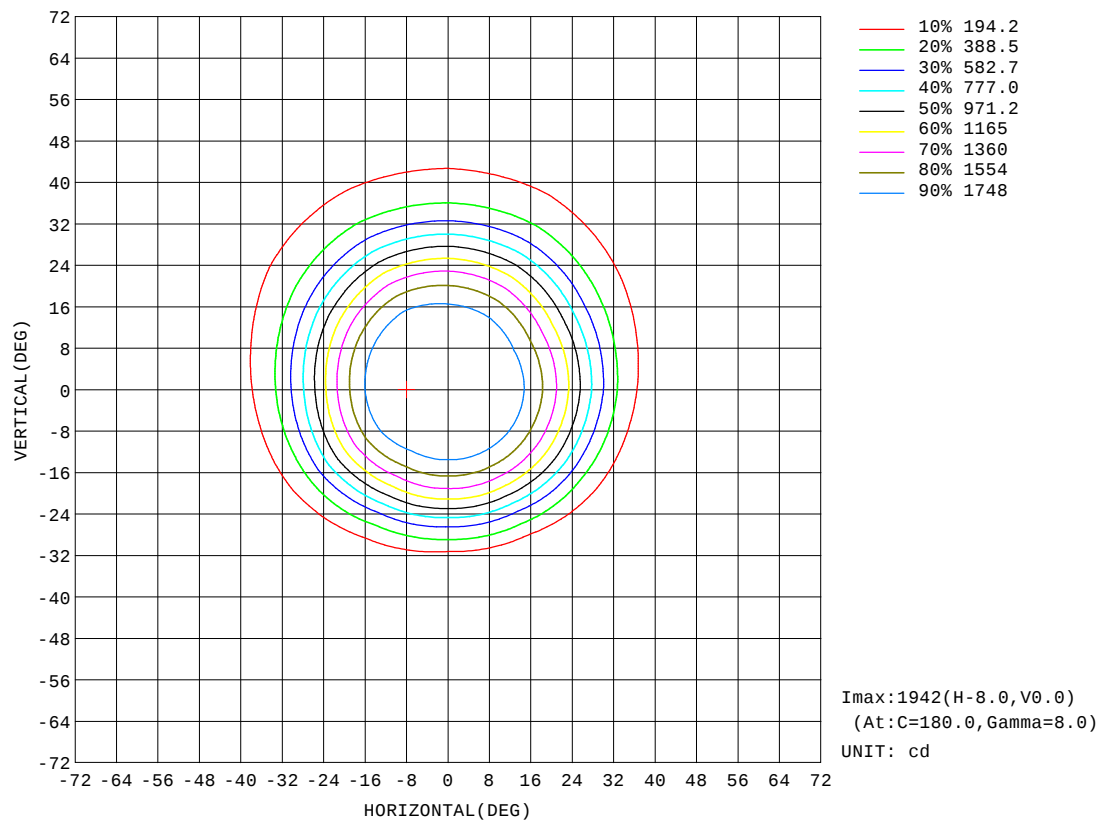


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Nuit 80-80mm-3000K-50D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:50 DEG	DIM.:80MM	SERIAL No.:IES001923
MFR.:	SUR.:	Shielding Angle:

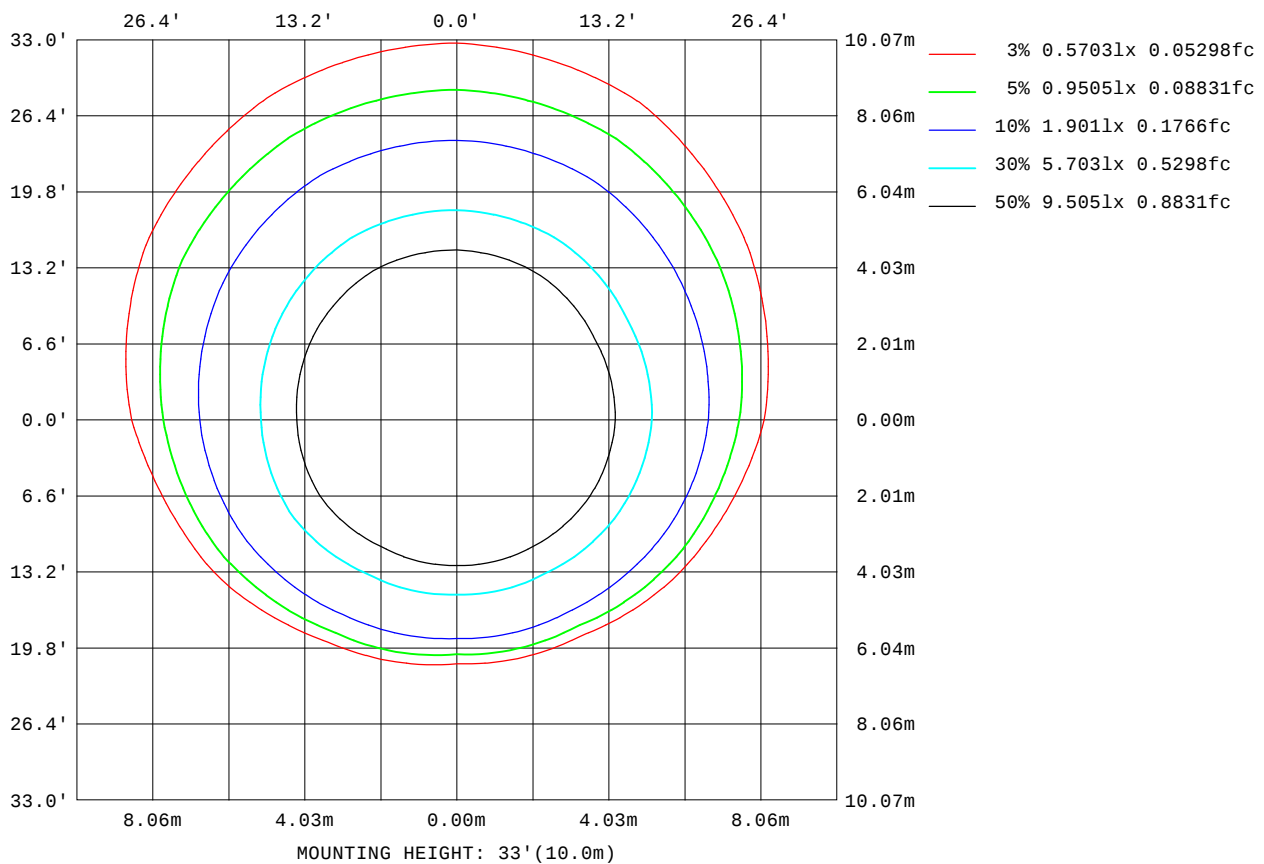

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

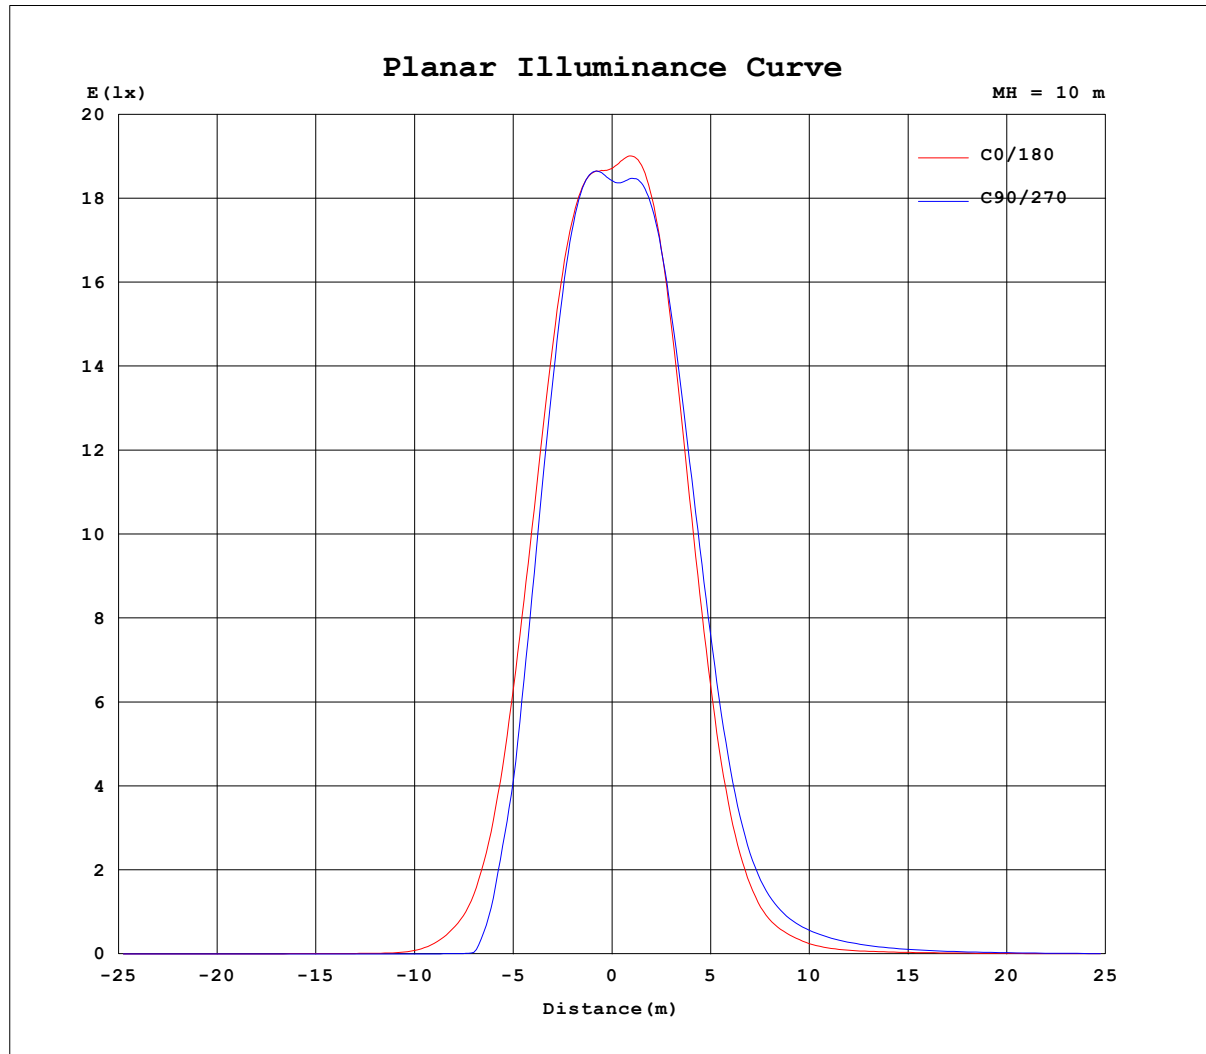


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Nuit 80-80mm-3000K-50D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:50 DEG	DIM.:80MM	SERIAL No.:IES001923
MFR.:	SUR.:	Shielding Angle:

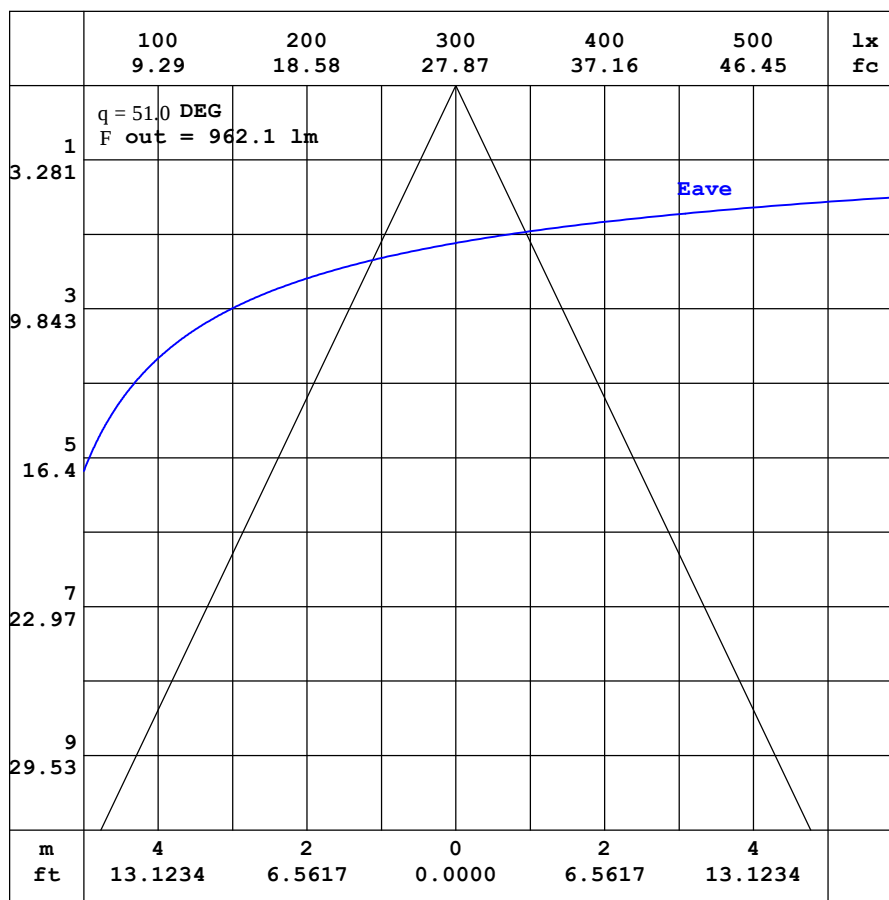

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Nuit 80-80mm-3000K-50D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:50 DEG	DIM.:80MM	SERIAL No.:IES001923
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	6.11	4.84	4.53	4.43	4.58	5.05	5.81	6.76	7.84	8.93	9.98	10.9	11.5	11.9	11.7	11.4	11.0	10.9	11.7
-170	6.11	4.77	4.39	4.22	4.26	4.54	5.02	5.64	6.31	6.98	7.61	8.13	8.50	8.67	8.63	8.77	9.43	9.98	10.3
-160	6.11	4.70	4.27	4.01	3.93	4.00	4.20	4.46	4.71	4.94	5.12	5.23	5.36	6.32	7.21	7.96	8.51	8.81	8.96
-150	6.11	4.65	4.17	3.82	3.62	3.51	3.46	3.41	3.30	3.13	3.02	3.62	4.32	5.06	5.79	6.42	6.87	7.15	7.30
-140	6.11	4.61	4.09	3.67	3.38	3.13	2.90	2.63	2.29	2.24	2.48	2.80	3.19	3.63	4.08	4.44	4.74	4.94	5.03
-130	6.11	4.62	4.04	3.57	3.19	2.85	2.52	2.17	2.03	2.06	2.14	2.25	2.41	2.59	2.76	2.93	3.06	3.16	3.21
-120	6.11	4.74	4.01	3.51	3.07	2.67	2.29	2.02	2.04	2.06	2.08	2.10	2.12	2.15	2.18	2.23	2.28	2.31	2.34
-110	6.11	4.94	4.01	3.48	3.01	2.57	2.15	2.04	2.06	2.07	2.10	2.12	2.14	2.16	2.17	2.17	2.18	2.19	2.20
-100	6.11	5.15	4.30	3.56	2.96	2.46	1.99	1.98	2.02	2.04	2.07	2.10	2.12	2.15	2.17	2.19	2.21	2.22	2.24
-90	6.11	5.39	4.66	3.94	3.21	2.49	1.76	1.78	1.80	1.82	1.84	1.86	1.87	1.90	1.92	1.94	1.96	1.98	2.00
-80	6.11	5.65	5.08	4.39	3.58	2.65	1.61	1.51	1.49	1.47	1.45	1.44	1.43	1.43	1.43	1.43	1.44	1.45	1.47
-70	6.11	5.94	5.56	4.95	4.10	3.02	1.70	1.19	1.14	1.08	1.03	0.99	0.95	0.92	0.91	0.89	0.89	0.89	0.91
-60	6.11	6.25	6.10	5.64	4.86	3.74	2.26	0.91	0.98	1.15	1.16	1.03	0.78	0.55	0.53	0.53	0.53	0.53	0.54
-50	6.11	6.57	6.70	6.49	5.90	4.92	3.66	2.36	1.86	1.92	1.79	1.57	1.40	1.21	1.17	1.11	1.03	0.91	0.74
-40	6.11	6.89	7.35	7.50	7.27	6.80	6.29	5.31	3.70	3.00	3.04	2.96	2.86	2.74	2.36	2.35	2.28	2.12	1.83
-30	6.11	7.20	8.05	8.62	8.94	9.34	9.49	9.20	8.45	6.83	4.38	5.58	16.1	39.8	73.5	144	230	288	299
-20	6.11	7.49	8.74	9.84	10.9	12.1	13.2	14.2	15.3	18.9	27.5	65.5	178	357	603	863	1077	1233	1279
-10	6.11	7.75	9.38	11.0	12.9	14.9	17.2	20.0	25.0	43.7	88.2	206	440	823	1235	1573	1766	1840	1865
0	6.11	7.97	9.95	12.1	14.6	17.5	21.0	25.6	35.5	71.2	144	303	604	1032	1474	1799	1934	1923	1872
10	6.11	8.10	10.2	12.5	15.1	18.1	22.0	29.1	43.9	79.5	152	288	551	942	1352	1679	1861	1914	1899
20	6.11	8.16	10.3	12.6	15.2	18.2	21.8	28.9	44.7	72.3	126	213	361	600	906	1202	1424	1533	1559
30	6.11	8.17	10.3	12.5	15.0	17.8	21.0	25.7	36.7	58.7	89.6	134	195	283	403	545	666	747	775
40	6.11	8.11	10.1	12.3	14.5	17.0	19.7	22.8	27.4	38.4	57.1	81.0	107	137	170	198	224	242	250
50	6.11	7.99	9.88	11.8	13.8	15.9	18.1	20.6	23.2	27.2	34.4	45.1	58.0	71.8	83.8	94.1	102	107	109
60	6.11	7.82	9.53	11.2	13.0	14.7	16.5	18.3	20.0	21.8	23.7	26.4	30.0	34.9	38.9	42.7	46.1	48.5	49.7
70	6.11	7.60	9.09	10.6	12.0	13.4	14.9	16.2	17.4	18.7	19.9	21.1	22.3	23.0	23.6	24.0	24.4	24.7	24.9
80	6.11	7.34	8.56	9.78	11.0	12.2	13.3	14.2	15.0	15.9	16.7	17.6	18.4	18.8	19.1	19.3	19.6	19.8	20.0
90	6.11	7.04	7.97	8.91	9.84	10.8	11.7	12.3	13.0	13.6	14.2	14.8	15.5	15.6	15.7	15.9	16.0	16.2	16.3
100	6.11	6.72	7.34	7.96	8.61	9.29	9.90	10.3	10.7	11.0	11.5	11.9	12.4	12.4	12.4	12.4	12.5	12.6	12.7
110	6.11	6.39	6.71	7.24	7.64	7.93	8.11	8.21	8.30	8.45	8.66	8.93	9.29	9.31	9.22	9.16	9.16	9.20	9.29
120	6.11	6.04	6.33	6.61	6.73	6.67	6.36	5.93	5.90	6.06	6.39	6.70	6.90	6.89	6.71	6.61	6.57	6.61	6.72
130	6.11	5.73	5.96	6.04	5.92	5.54	4.99	4.63	5.00	5.49	5.70	5.67	5.97	6.25	6.53	6.76	6.93	7.03	7.06
140	6.11	5.51	5.60	5.54	5.27	4.83	4.67	4.98	5.43	5.96	6.51	7.07	7.61	8.10	8.52	8.91	9.20	9.37	9.43
150	6.11	5.34	5.29	5.14	4.84	4.66	5.00	5.57	6.25	7.01	7.79	8.57	9.32	9.99	10.6	11.1	11.4	11.6	11.7
160	6.11	5.16	5.01	4.84	4.66	4.81	5.37	6.13	7.02	7.95	8.91	9.85	10.7	11.3	11.8	12.2	12.5	12.6	12.7
170	6.11	5.00	4.76	4.62	4.60	4.96	5.66	6.55	7.57	8.62	9.66	10.6	11.4	11.8	12.0	12.0	11.9	11.9	12.2
180	6.11	4.84	4.53	4.43	4.58	5.05	5.81	6.76	7.84	8.93	9.98	10.9	11.5	11.9	11.7	11.4	11.0	10.9	11.7

H(°) Range:-90 - 90DEG

H(°) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-18

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Nuit 80-80mm-3000K-50D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:50 DEG	DIM.:80MM	SERIAL No.:IES001923
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	9.78	8.97	8.31	7.66	6.83	5.85	4.84	3.91	3.14	2.55	2.18	2.04	2.06	2.11	2.14	2.10	2.00	1.77	
-170	9.57	8.96	8.38	7.72	6.85	5.85	4.85	3.92	3.14	2.56	2.20	2.06	2.07	2.12	2.14	2.10	1.99	1.77	
-160	8.66	8.27	7.75	7.04	6.19	5.28	4.39	3.58	2.93	2.45	2.17	2.07	2.08	2.13	2.14	2.10	1.98	1.77	
-150	7.11	6.80	6.33	5.71	5.00	4.28	3.62	3.04	2.59	2.28	2.12	2.08	2.10	2.14	2.14	2.09	1.97	1.77	
-140	4.93	4.72	4.42	4.05	3.62	3.20	2.82	2.51	2.29	2.15	2.10	2.10	2.12	2.14	2.13	2.08	1.95	1.77	
-130	3.16	3.07	2.93	2.77	2.60	2.43	2.29	2.18	2.14	2.12	2.11	2.12	2.14	2.15	2.12	2.05	1.93	1.77	
-120	2.32	2.28	2.25	2.21	2.18	2.17	2.16	2.15	2.14	2.13	2.15	2.14	2.15	2.13	2.10	2.02	1.91	1.77	
-110	2.20	2.20	2.20	2.21	2.21	2.22	2.20	2.19	2.18	2.17	2.16	2.15	2.14	2.10	2.04	1.96	1.88	1.77	
-100	2.24	2.23	2.22	2.21	2.20	2.18	2.17	2.17	2.15	2.14	2.11	2.09	2.05	2.00	1.95	1.90	1.84	1.77	
-90	1.99	1.98	1.97	1.96	1.95	1.94	1.93	1.93	1.92	1.91	1.90	1.90	1.88	1.86	1.84	1.82	1.80	1.77	
-80	1.46	1.46	1.46	1.47	1.48	1.50	1.51	1.53	1.55	1.58	1.61	1.64	1.66	1.68	1.71	1.73	1.75	1.77	
-70	0.90	0.90	0.91	0.94	0.97	1.00	1.04	1.10	1.16	1.21	1.29	1.40	1.50	1.51	1.57	1.64	1.71	1.77	
-60	0.53	0.53	0.53	0.56	0.57	0.61	0.66	0.72	0.80	0.88	0.98	1.30	1.54	1.62	1.52	1.55	1.67	1.77	
-50	0.80	0.81	0.76	0.66	0.56	0.86	1.02	1.02	0.79	0.64	0.93	1.40	1.71	1.82	1.71	1.49	1.62	1.77	
-40	1.92	1.92	1.87	1.77	1.92	2.03	2.09	1.92	1.82	1.59	1.42	1.77	2.03	2.10	1.94	1.55	1.59	1.77	
-30	279	200	106	33.8	17.1	4.31	3.45	3.20	3.20	3.01	2.79	2.45	2.51	2.45	2.19	1.70	1.56	1.77	
-20	1236	1077	841	565	307	122	25.4	12.1	5.55	4.45	3.99	3.51	3.10	2.85	2.44	1.83	1.54	1.77	
-10	1845	1745	1524	1192	779	399	155	51.2	13.7	5.99	5.09	4.46	3.80	3.27	2.68	1.94	1.52	1.77	
0	1885	1876	1737	1435	1019	585	259	101	25.0	7.61	6.07	5.27	4.45	3.65	2.87	2.00	1.51	1.77	
10	1879	1796	1588	1270	881	503	242	108	41.4	19.0	11.5	8.68	6.76	5.22	3.88	2.59	1.78	1.77	
20	1503	1369	1138	840	541	313	172	88.0	45.7	23.9	15.1	11.4	8.67	6.56	4.74	3.09	2.05	1.77	
30	734	640	513	371	253	165	107	67.5	37.8	23.3	17.1	13.1	10.0	7.55	5.40	3.48	2.29	1.77	
40	238	216	188	157	122	90.6	62.8	42.3	29.2	22.4	17.7	13.9	10.8	8.14	5.81	3.75	2.51	1.77	
50	104	96.4	86.1	75.1	63.2	49.1	37.1	28.7	23.5	20.2	17.2	13.9	10.9	8.31	5.99	3.96	2.68	1.77	
60	46.9	43.2	38.7	34.0	29.6	26.2	23.6	21.5	19.5	17.6	15.7	13.2	10.5	8.14	5.92	4.16	2.82	1.77	
70	24.4	23.9	23.3	22.6	21.8	20.8	19.4	17.9	16.5	15.1	13.7	12.0	9.78	7.68	5.85	4.26	2.91	1.77	
80	19.5	19.1	18.6	18.1	17.5	16.9	15.9	14.9	13.8	12.8	11.7	10.6	8.82	7.19	5.66	4.25	2.95	1.77	
90	15.9	15.5	15.1	14.8	14.4	14.0	13.1	12.3	11.4	10.5	9.69	8.83	7.65	6.48	5.30	4.13	2.95	1.77	
100	12.3	12.0	11.6	11.4	11.1	10.8	10.1	9.43	8.78	8.15	7.54	6.94	6.35	5.64	4.84	3.94	2.92	1.77	
110	8.91	8.57	8.29	8.06	7.88	7.69	7.31	6.86	6.34	5.74	5.34	5.12	5.03	4.77	4.34	3.70	2.85	1.77	
120	6.45	6.19	5.86	5.48	5.24	5.35	5.45	5.40	5.21	4.87	4.39	4.02	3.84	3.95	3.83	3.44	2.76	1.77	
130	7.04	6.95	6.78	6.55	6.26	5.93	5.57	5.22	4.96	4.70	4.22	3.81	3.51	3.28	3.37	3.17	2.65	1.77	
140	9.39	9.23	8.95	8.54	8.14	7.64	7.07	6.47	5.88	5.11	4.26	3.67	3.30	3.06	2.97	2.93	2.53	1.77	
150	11.7	11.5	11.2	10.7	10.1	9.38	8.61	7.79	6.40	5.13	4.16	3.49	3.08	2.86	2.69	2.69	2.40	1.77	
160	12.6	12.5	12.4	12.0	11.5	10.8	9.10	7.41	5.93	4.71	3.78	3.16	2.80	2.63	2.51	2.48	2.27	1.77	
170	12.1	12.2	12.3	11.6	10.3	8.87	7.40	6.01	4.79	3.80	3.09	2.66	2.45	2.38	2.33	2.29	2.14	1.77	
180	9.78	8.97	8.31	7.66	6.83	5.85	4.84	3.91	3.14	2.55	2.18	2.04	2.06	2.11	2.14	2.10	2.00	1.77	

H(°) Range:-90 - 90DEG

H(°) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-18

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: