

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	360.4 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	---

Beam Spread	At 10% of Imax	158.2V x 157.9H
	At 50% of Imax	109.2V x 110.7H
	At 90% of Imax	45.7V x 47.1H

Beam Flux	Total	999.9 lumens per klm.
	To 10% of Imax	960.4 lumens per klm.
	To 50% of Imax	704.2 lumens per klm.
	To 90% of Imax	152.6 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:ScapeDirect-1000mm-RGB ALL-110D-Rev1	TYPE:RGB	WEIGHT:
SPEC.:110 DEG	DIM.:1000mm	SERIAL No.:IES001537
MFR.:	SUR.:	Shielding Angle:

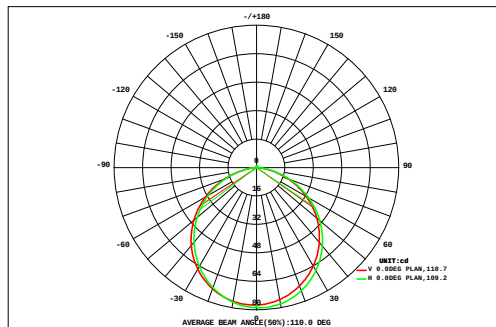

DATA OF LAMP		Eff:14.24lm/W	
MODEL		Imax(cd)	78.85
NOMINAL POWER(W)	15.36	AVAILABILITY(%)	96.0
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	210.1
NOMINAL FLUX(lm)	218.8	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	218.8
TEST VOLTAGE(V)	24	q @50%(H,V)	111,109DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.00	0.01	0.02	0.03	0.05	0.07	0.08	0.09	0.10	0.10	0.09	0.08	0.06	0.04	0.03	0.02	0.01	0.00	0.88	0.00
90	0.00	0.01	0.02	0.03	0.05	0.07	0.08	0.09	0.10	0.10	0.09	0.08	0.06	0.04	0.03	0.02	0.01	0.00	0.88	0.00
80	0.00	0.02	0.04	0.10	0.17	0.25	0.33	0.38	0.41	0.40	0.37	0.31	0.23	0.16	0.09	0.04	0.01	0.00	3.30	2.62
70	0.00	0.03	0.09	0.21	0.35	0.51	0.66	0.76	0.81	0.81	0.75	0.64	0.49	0.34	0.20	0.09	0.02	0.00	6.77	6.59
60	0.00	0.04	0.15	0.33	0.55	0.78	0.99	1.14	1.21	1.21	1.12	0.96	0.76	0.53	0.32	0.15	0.04	0.00	10.3	10.2
50	0.01	0.06	0.21	0.44	0.72	1.02	1.28	1.47	1.57	1.57	1.46	1.26	1.00	0.71	0.43	0.20	0.06	0.00	13.5	13.4
40	0.01	0.08	0.26	0.54	0.87	1.22	1.53	1.76	1.88	1.87	1.74	1.51	1.20	0.86	0.53	0.25	0.08	0.01	16.2	16.1
30	0.01	0.09	0.30	0.62	0.99	1.37	1.72	1.98	2.12	2.11	1.96	1.70	1.35	0.97	0.60	0.29	0.09	0.01	18.3	18.3
20	0.01	0.10	0.33	0.67	1.07	1.48	1.85	2.13	2.29	2.27	2.10	1.82	1.45	1.04	0.65	0.32	0.10	0.01	19.7	19.7
10	0.01	0.10	0.34	0.69	1.11	1.53	1.91	2.19	2.35	2.33	2.15	1.86	1.49	1.07	0.67	0.33	0.10	0.01	20.3	20.2
0	0.01	0.10	0.34	0.69	1.10	1.52	1.88	2.15	2.31	2.32	2.14	1.85	1.48	1.07	0.67	0.33	0.10	0.01	20.1	20.0
-10	0.01	0.10	0.33	0.66	1.04	1.43	1.77	2.05	2.22	2.24	2.07	1.78	1.42	1.02	0.64	0.32	0.10	0.01	19.2	19.2
-20	0.01	0.09	0.30	0.60	0.95	1.30	1.63	1.89	2.05	2.05	1.90	1.64	1.31	0.94	0.59	0.29	0.09	0.01	17.6	17.6
-30	0.01	0.08	0.26	0.52	0.83	1.15	1.44	1.66	1.79	1.79	1.67	1.44	1.15	0.83	0.52	0.25	0.08	0.01	15.5	15.4
-40	0.01	0.06	0.21	0.43	0.68	0.95	1.20	1.38	1.48	1.48	1.38	1.19	0.95	0.68	0.42	0.20	0.06	0.00	12.8	12.7
-50	0.00	0.04	0.15	0.32	0.52	0.73	0.91	1.06	1.13	1.13	1.05	0.91	0.72	0.51	0.31	0.15	0.04	0.00	9.69	9.60
-60	0.00	0.03	0.09	0.20	0.34	0.48	0.61	0.70	0.76	0.75	0.70	0.59	0.47	0.33	0.20	0.09	0.02	0.00	6.36	6.18
-70	0.00	0.01	0.04	0.09	0.16	0.23	0.30	0.35	0.37	0.37	0.34	0.28	0.22	0.15	0.09	0.04	0.01	0.00	3.05	2.31
-80	0.00	0.01	0.01	0.02	0.03	0.05	0.06	0.07	0.07	0.07	0.06	0.05	0.04	0.03	0.01	0.01	0.00	0.00	0.59	0.00
-90	0.00	0.01	0.01	0.02	0.03	0.05	0.06	0.07	0.07	0.07	0.06	0.05	0.04	0.03	0.01	0.01	0.00	0.00	0.59	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
F t	0.11	1.05	3.46	7.14	11.5	16.1	20.1	23.2	24.9	24.9	23.1	19.9	15.8	11.3	6.95	3.38	1.02	0.09	214	---
F a	0.00	0.76	3.24	6.92	11.3	15.8	19.9	23.0	24.7	24.7	22.8	19.7	15.6	11.1	6.73	3.16	0.75	0.00	---	210

one-half-peak spread: U:55.4,D:53.5 , L:54.2,R:55.6


NEMA Beam Type: Type 7

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:ScapeDirect-1000mm-RGB ALL-110D-Rev1	TYPE:RGB	WEIGHT:
SPEC.:110 DEG	DIM.:1000mm	SERIAL No.:IES001537
MFR.:	SUR.:	Shielding Angle:

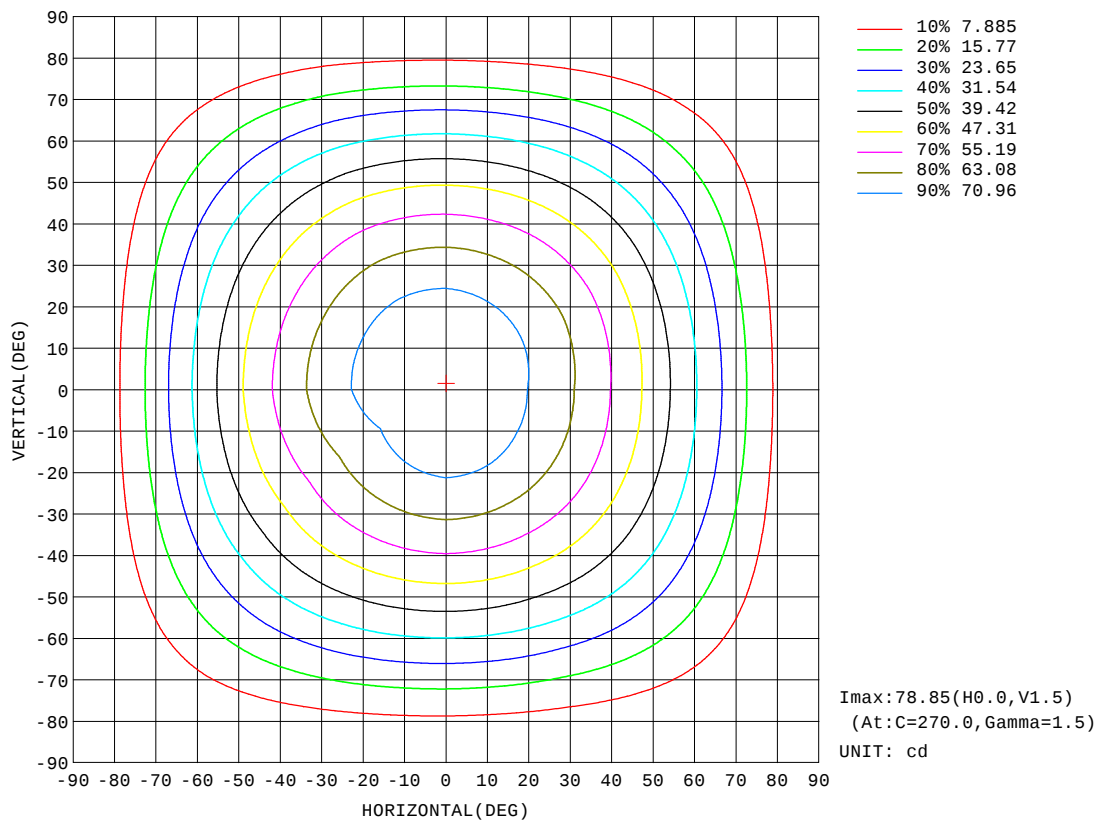


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:ScapeDirect-1000mm-RGB ALL-110D-Rev1	TYPE:RGB	WEIGHT:
SPEC.:110 DEG	DIM.:1000mm	SERIAL No.:IES001537
MFR.:	SUR.:	Shielding Angle:

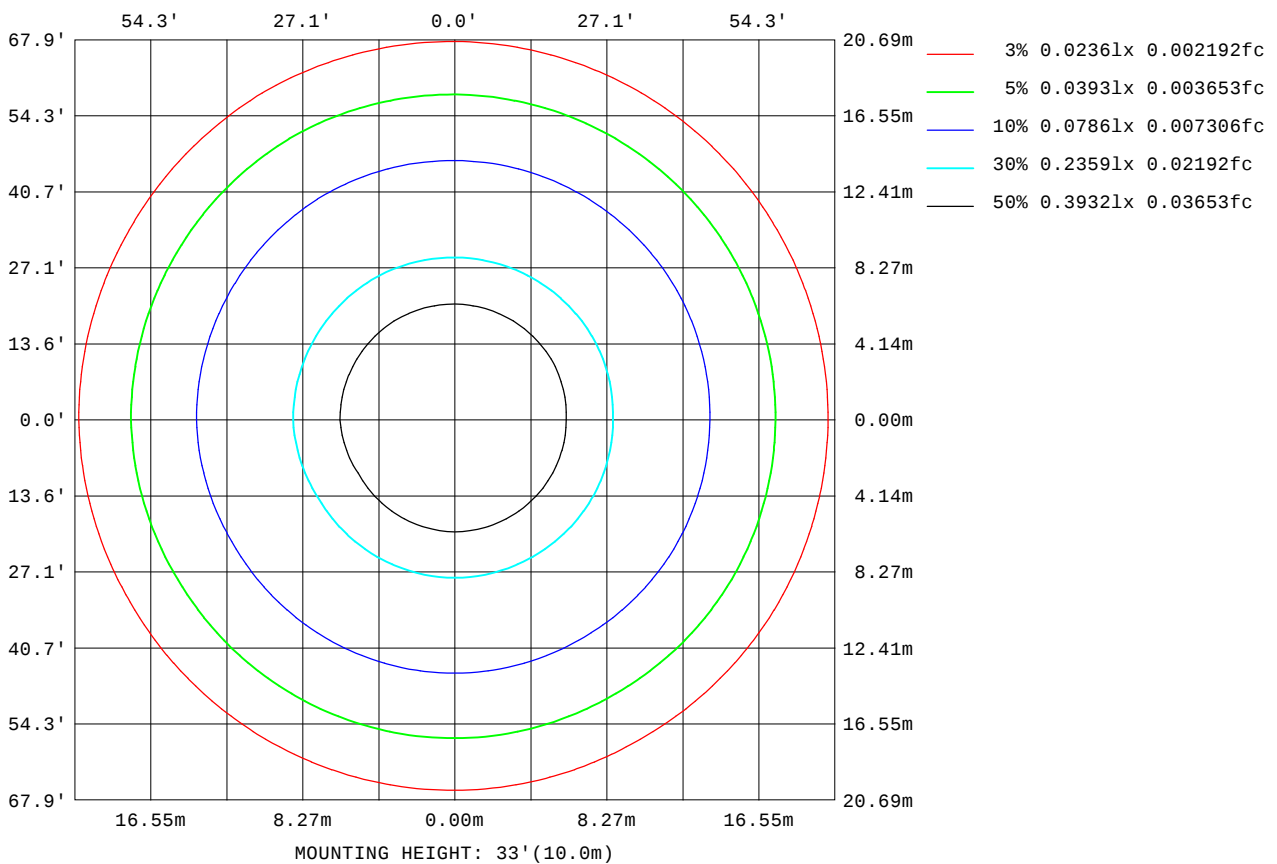

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

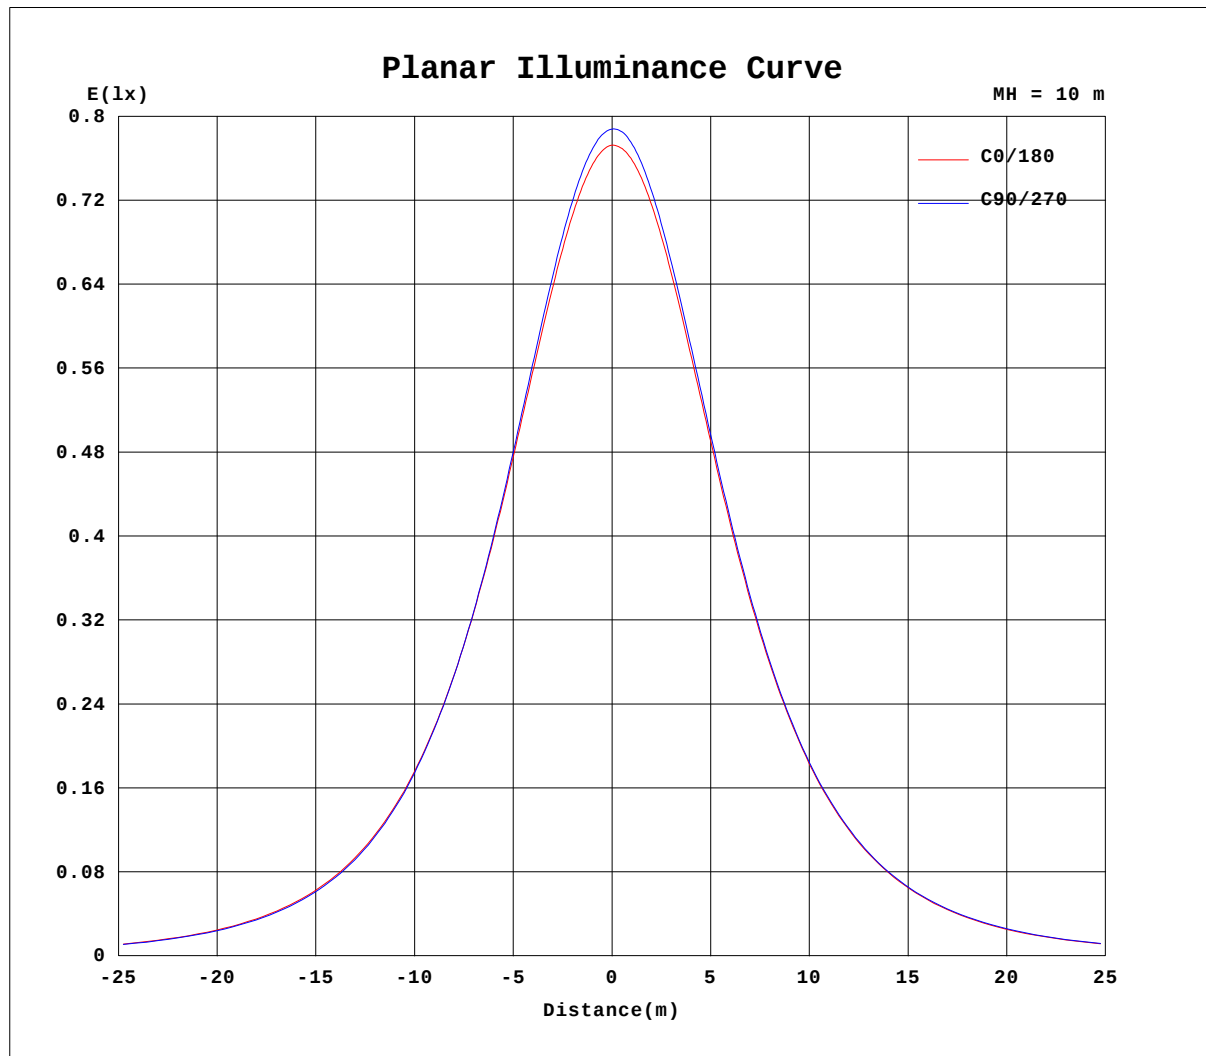


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:ScapeDirect-1000mm-RGB ALL-110D-Rev1	TYPE:RGB	WEIGHT:
SPEC.:110 DEG	DIM.:1000mm	SERIAL No.:IES001537
MFR.:	SUR.:	Shielding Angle:

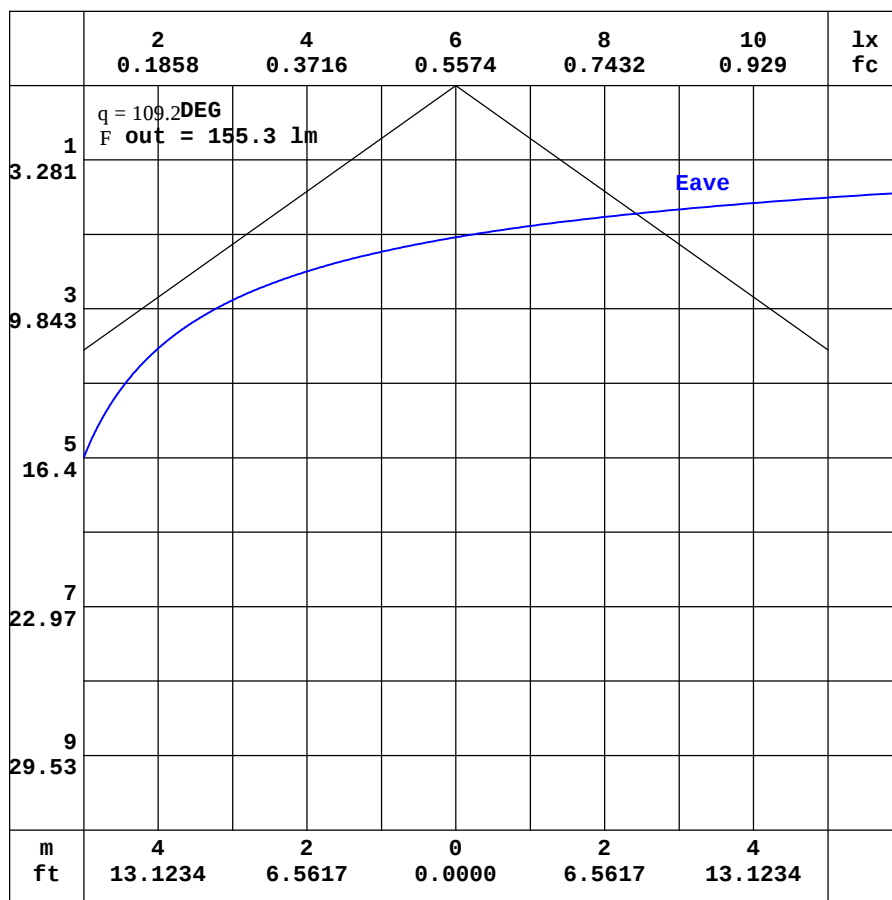

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:ScapeDirect-1000mm-RGB ALL-110D-Rev1	TYPE:RGB	WEIGHT:
SPEC.:110 DEG	DIM.:1000mm	SERIAL No.:IES001537
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.32	1.24	1.17	1.13	1.09	1.09	1.09	1.10	1.10	1.11	1.12	1.13	1.14	1.14	1.14	1.12	1.10	1.09	1.08
-170	1.32	1.21	1.12	1.05	0.99	0.97	0.95	0.94	0.92	0.92	0.91	0.90	0.89	0.89	0.87	0.88	0.91	0.92	0.99
-160	1.32	1.19	1.07	0.98	0.90	0.86	0.82	0.78	0.75	0.72	0.69	0.67	0.65	0.69	0.73	0.75	0.78	0.82	0.84
-150	1.32	1.17	1.03	0.91	0.81	0.75	0.69	0.63	0.58	0.53	0.50	0.53	0.56	0.59	0.61	0.63	0.67	0.70	0.71
-140	1.32	1.15	0.98	0.86	0.74	0.63	0.56	0.48	0.42	0.40	0.43	0.45	0.47	0.49	0.50	0.53	0.56	0.58	0.60
-130	1.32	1.13	0.96	0.80	0.67	0.54	0.44	0.35	0.32	0.34	0.36	0.37	0.38	0.39	0.42	0.43	0.45	0.47	0.49
-120	1.32	1.12	0.94	0.76	0.61	0.47	0.35	0.26	0.26	0.28	0.29	0.29	0.29	0.30	0.32	0.34	0.36	0.37	0.38
-110	1.32	1.12	0.93	0.74	0.57	0.41	0.25	0.22	0.22	0.22	0.21	0.21	0.21	0.22	0.24	0.26	0.27	0.28	0.29
-100	1.32	1.13	0.93	0.74	0.55	0.37	0.19	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.19	0.19	0.20	0.21	0.21
-90	1.32	1.13	0.94	0.75	0.56	0.37	0.18	0.18	0.19	0.20	0.21	0.22	0.23	0.22	0.22	0.21	0.20	0.20	0.19
-80	1.32	1.16	1.06	1.06	1.25	1.59	2.04	2.61	3.18	3.72	4.25	4.76	5.21	5.59	5.93	6.20	6.39	6.50	6.53
-70	1.32	1.21	1.42	2.20	3.42	4.94	6.60	8.24	9.83	11.4	12.8	14.1	15.3	16.3	17.2	17.8	18.3	18.6	18.6
-60	1.32	1.28	2.17	4.02	6.48	9.20	12.0	14.8	17.4	19.9	22.2	24.3	26.1	27.7	29.1	30.1	30.9	31.3	31.5
-50	1.32	1.44	3.12	6.12	9.74	13.6	17.5	21.3	24.8	28.1	31.1	33.9	36.4	38.5	40.3	41.7	42.8	43.4	43.6
-40	1.32	1.66	4.16	8.16	12.9	17.8	22.6	27.1	31.3	35.3	39.0	42.4	45.4	48.1	50.3	52.2	53.5	54.4	54.8
-30	1.32	1.88	5.10	9.97	15.6	21.3	26.8	32.1	37.0	41.4	45.5	49.4	52.9	56.0	58.7	60.9	62.6	63.8	64.3
-20	1.32	2.06	5.84	11.4	17.6	24.0	30.1	36.0	41.5	46.5	51.0	55.0	58.5	61.9	65.0	67.5	69.6	71.0	71.8
-10	1.32	2.19	6.30	12.2	18.9	25.7	32.3	38.6	44.6	50.0	55.0	59.4	63.2	66.5	69.0	71.3	73.6	75.4	76.8
0	1.32	2.23	6.44	12.5	19.4	26.4	33.3	39.8	46.1	51.8	57.1	61.9	66.0	69.6	72.6	74.8	76.3	77.1	77.3
10	1.32	2.20	6.29	12.3	19.0	25.9	32.6	39.1	45.2	50.9	56.2	60.9	65.0	68.6	71.6	74.0	75.9	77.3	77.7
20	1.32	2.09	5.83	11.4	17.8	24.2	30.7	36.8	42.7	48.1	53.1	57.6	61.6	65.2	68.1	70.6	72.4	73.3	73.6
30	1.32	1.92	5.09	10.00	15.7	21.6	27.5	33.1	38.5	43.5	48.1	52.3	56.1	59.3	62.1	64.2	65.7	66.5	66.8
40	1.32	1.72	4.16	8.16	12.9	18.0	23.1	28.1	32.8	37.2	41.4	45.1	48.4	51.3	53.7	55.4	56.7	57.4	57.6
50	1.32	1.53	3.16	6.09	9.77	13.8	17.9	22.0	25.9	29.6	33.1	36.2	39.0	41.4	43.3	44.7	45.7	46.3	46.5
60	1.32	1.39	2.27	4.03	6.44	9.22	12.2	15.2	18.1	20.9	23.6	26.0	28.2	30.0	31.4	32.5	33.2	33.7	33.8
70	1.32	1.37	1.62	2.36	3.48	4.92	6.55	8.32	10.1	11.9	13.6	15.2	16.6	17.7	18.6	19.3	19.8	20.1	20.2
80	1.32	1.35	1.38	1.46	1.67	1.98	2.40	2.91	3.50	4.11	4.75	5.38	5.97	6.37	6.70	6.96	7.14	7.24	7.26
90	1.32	1.34	1.35	1.36	1.37	1.38	1.39	1.39	1.39	1.38	1.38	1.38	1.38	1.38	1.39	1.39	1.40	1.41	1.41
100	1.32	1.32	1.31	1.31	1.31	1.30	1.30	1.28	1.25	1.23	1.21	1.19	1.17	1.17	1.18	1.18	1.19	1.19	1.20
110	1.32	1.30	1.29	1.27	1.25	1.24	1.22	1.20	1.17	1.14	1.12	1.10	1.08	1.07	1.08	1.08	1.08	1.09	1.10
120	1.32	1.29	1.26	1.23	1.20	1.18	1.16	1.14	1.11	1.09	1.08	1.07	1.07	1.06	1.06	1.06	1.06	1.06	1.06
130	1.32	1.28	1.24	1.20	1.17	1.13	1.12	1.10	1.08	1.08	1.07	1.07	1.07	1.06	1.07	1.06	1.06	1.06	1.05
140	1.32	1.28	1.21	1.18	1.14	1.11	1.10	1.09	1.08	1.07	1.07	1.07	1.07	1.08	1.08	1.08	1.07	1.06	1.05
150	1.32	1.26	1.21	1.16	1.11	1.10	1.09	1.08	1.08	1.08	1.07	1.07	1.08	1.09	1.09	1.10	1.09	1.08	1.07
160	1.32	1.25	1.19	1.14	1.10	1.09	1.09	1.08	1.08	1.08	1.08	1.08	1.08	1.09	1.09	1.10	1.10	1.10	1.10
170	1.32	1.25	1.18	1.14	1.09	1.09	1.09	1.09	1.09	1.10	1.11	1.10	1.10	1.11	1.09	1.09	1.09	1.09	1.10
180	1.32	1.24	1.17	1.13	1.09	1.09	1.09	1.10	1.10	1.11	1.12	1.13	1.14	1.14	1.14	1.12	1.10	1.09	1.10

H_b Range: -90 - 90DEG
 H_b Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:ScapeDirect-1000mm-RGB ALL-110D-Rev1	TYPE:RGB	WEIGHT:
SPEC.:110 DEG	DIM.:1000mm	SERIAL No.:IES001537
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	1.00	0.95	0.88	0.83	0.77	0.71	0.63	0.57	0.51	0.45	0.41	0.34	0.28	0.25	0.19	0.16	0.14	0.14
-170	0.93	0.91	0.88	0.82	0.76	0.70	0.63	0.57	0.51	0.45	0.40	0.34	0.29	0.25	0.20	0.16	0.14	0.14
-160	0.82	0.77	0.75	0.73	0.69	0.66	0.60	0.54	0.49	0.44	0.39	0.34	0.29	0.24	0.21	0.16	0.14	0.14
-150	0.70	0.67	0.63	0.62	0.59	0.57	0.54	0.50	0.46	0.41	0.37	0.32	0.29	0.23	0.20	0.16	0.14	0.14
-140	0.59	0.57	0.54	0.50	0.49	0.47	0.45	0.44	0.41	0.38	0.34	0.30	0.26	0.22	0.19	0.16	0.14	0.14
-130	0.47	0.45	0.43	0.42	0.40	0.38	0.37	0.36	0.34	0.32	0.30	0.27	0.23	0.21	0.18	0.15	0.14	0.14
-120	0.37	0.36	0.35	0.33	0.31	0.30	0.29	0.29	0.29	0.27	0.26	0.24	0.22	0.19	0.17	0.15	0.14	0.14
-110	0.29	0.28	0.26	0.25	0.23	0.23	0.22	0.22	0.22	0.22	0.22	0.21	0.19	0.17	0.16	0.15	0.15	0.14
-100	0.21	0.20	0.19	0.19	0.18	0.18	0.18	0.19	0.19	0.19	0.19	0.18	0.18	0.17	0.16	0.15	0.14	0.14
-90	0.19	0.19	0.20	0.20	0.20	0.20	0.20	0.19	0.18	0.18	0.17	0.17	0.16	0.16	0.16	0.15	0.15	0.14
-80	6.41	6.20	5.92	5.56	5.14	4.67	4.26	3.81	3.33	2.82	2.28	1.77	1.31	0.89	0.53	0.28	0.16	0.14
-70	18.5	18.1	17.5	16.8	15.8	14.7	13.6	12.3	10.9	9.39	7.84	6.25	4.66	3.18	1.88	0.90	0.26	0.14
-60	31.2	30.7	29.9	28.7	27.3	25.7	23.9	21.8	19.5	17.1	14.5	11.7	8.97	6.31	3.84	1.83	0.48	0.14
-50	43.4	42.7	41.6	40.1	38.2	36.1	33.7	30.9	27.9	24.6	21.0	17.2	13.4	9.63	6.04	2.96	0.81	0.14
-40	54.4	53.6	52.2	50.3	48.1	45.4	42.4	39.0	35.3	31.2	26.9	22.3	17.5	12.8	8.17	4.07	1.14	0.14
-30	63.9	62.8	61.1	58.9	56.3	53.2	49.7	45.7	41.4	36.7	31.7	26.4	21.0	15.4	10.0	5.09	1.43	0.14
-20	71.3	70.0	68.0	65.5	62.5	59.0	55.1	50.8	45.9	40.8	35.3	29.6	23.6	17.4	11.4	5.87	1.66	0.14
-10	76.0	74.3	72.1	69.5	66.3	62.6	58.5	53.8	48.8	43.4	37.6	31.5	25.2	18.7	12.3	6.39	1.81	0.14
0	76.6	75.3	73.3	70.8	67.6	63.9	59.6	54.9	49.8	44.3	38.4	32.2	25.8	19.2	12.7	6.57	1.87	0.14
10	76.6	75.0	73.0	70.5	67.3	63.5	59.2	54.5	49.3	43.8	37.9	31.7	25.3	18.7	12.3	6.38	1.83	0.14
20	72.9	71.6	69.7	67.3	64.3	60.8	56.6	51.9	46.9	41.5	35.8	29.8	23.7	17.5	11.4	5.85	1.69	0.14
30	66.3	65.2	63.5	61.3	58.5	55.3	51.5	47.3	42.6	37.6	32.3	26.8	21.1	15.4	10.00	5.07	1.48	0.14
40	57.2	56.3	54.8	52.9	50.5	47.6	44.3	40.6	36.5	32.0	27.4	22.5	17.6	12.7	8.12	4.07	1.21	0.14
50	46.1	45.4	44.2	42.6	40.6	38.2	35.4	32.3	28.9	25.1	21.3	17.4	13.4	9.57	5.98	3.01	0.91	0.14
60	33.5	32.9	32.0	30.8	29.2	27.4	25.2	22.8	20.2	17.4	14.5	11.6	8.87	6.21	3.86	1.95	0.61	0.14
70	20.0	19.5	18.9	18.1	17.1	15.8	14.4	12.9	11.2	9.53	7.79	6.10	4.61	3.26	2.07	1.13	0.43	0.14
80	7.14	6.93	6.65	6.29	5.88	5.40	4.86	4.29	3.72	3.17	2.66	2.18	1.77	1.38	0.98	0.64	0.35	0.14
90	1.40	1.39	1.38	1.37	1.36	1.35	1.35	1.35	1.36	1.36	1.37	1.37	1.17	0.96	0.76	0.55	0.35	0.14
100	1.19	1.18	1.18	1.17	1.17	1.17	1.18	1.20	1.22	1.24	1.26	1.26	1.09	0.91	0.72	0.53	0.34	0.14
110	1.09	1.08	1.08	1.07	1.07	1.07	1.09	1.11	1.13	1.16	1.18	1.15	1.00	0.84	0.67	0.50	0.33	0.14
120	1.06	1.06	1.06	1.06	1.06	1.07	1.07	1.08	1.09	1.11	1.13	1.04	0.91	0.77	0.62	0.47	0.31	0.14
130	1.06	1.07	1.07	1.07	1.07	1.07	1.07	1.07	1.07	1.08	1.05	0.93	0.81	0.70	0.56	0.42	0.29	0.14
140	1.07	1.08	1.09	1.10	1.09	1.08	1.07	1.07	1.07	1.03	0.93	0.83	0.72	0.61	0.51	0.38	0.26	0.14
150	1.08	1.08	1.09	1.09	1.09	1.08	1.08	1.07	1.00	0.91	0.81	0.72	0.64	0.53	0.44	0.33	0.24	0.14
160	1.10	1.09	1.09	1.09	1.08	1.07	1.01	0.93	0.85	0.77	0.68	0.60	0.52	0.44	0.37	0.28	0.21	0.14
170	1.09	1.09	1.09	1.05	0.98	0.90	0.83	0.76	0.69	0.62	0.55	0.47	0.40	0.34	0.28	0.22	0.17	0.14
180	1.00	0.95	0.88	0.83	0.77	0.71	0.63	0.57	0.51	0.45	0.41	0.34	0.28	0.25	0.19	0.16	0.14	0.14

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: