

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	3999.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	49.7V x 49.1H
	At 50% of Imax	20.5V x 20.5H
	At 90% of Imax	7.3V x 7.3H

Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	684.2 lumens per klm.
	To 50% of Imax	274.4 lumens per klm.
	To 90% of Imax	44.8 lumens per klm.

Upward LOR	2.5 %
Downward LOR	97.5 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-17

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:medusa-510mm-RGBW ALL-20D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:20 DEG	DIM.:510mm	SERIAL No.:IES001031
MFR.:	SUR.:	Shielding Angle:

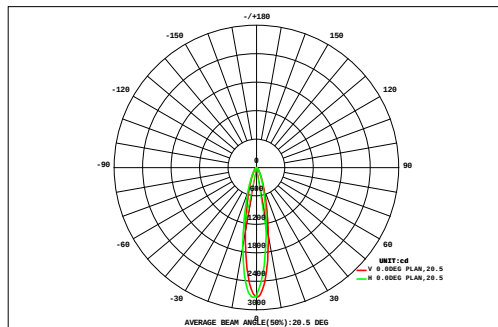

DATA OF LAMP		Eff:27.37lm/W	
MODEL		Imax(cd)	2733
NOMINAL POWER(W)	24.96	AVAILABILITY(%)	68.1
RATED VOLTAGE(V)	48	Avai. FLUX(lm)	465.0
NOMINAL FLUX(lm)	683.3	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	683.3
TEST VOLTAGE(V)	48	q @50%(H,V)	20,21DEG

		AREA FLUX DIAGRAM															UNIT:lm			F t	F a
VERTICAL (DEG)	45	0.13	0.16	0.20	0.25	0.30	0.35	0.39	0.42	0.43	0.42	0.40	0.36	0.31	0.26	0.22	0.18	0.14	0.11	5.02	0.00
	40	0.15	0.19	0.25	0.32	0.40	0.48	0.55	0.60	0.63	0.61	0.57	0.50	0.42	0.35	0.28	0.23	0.17	0.13	6.85	0.00
	35	0.17	0.23	0.32	0.43	0.55	0.68	0.80	0.89	0.94	0.92	0.84	0.72	0.59	0.47	0.37	0.28	0.21	0.15	9.55	0.00
	30	0.20	0.29	0.41	0.55	0.74	0.96	1.17	1.35	1.44	1.41	1.26	1.05	0.83	0.63	0.47	0.35	0.25	0.18	13.5	0.00
	25	0.24	0.35	0.50	0.71	1.00	1.35	1.75	2.11	2.30	2.22	1.90	1.52	1.17	0.85	0.60	0.42	0.29	0.20	19.5	5.24
	20	0.27	0.41	0.61	0.90	1.33	1.91	2.66	3.41	3.84	3.63	2.93	2.23	1.63	1.12	0.75	0.50	0.34	0.23	28.7	19.1
	15	0.31	0.47	0.72	1.11	1.70	2.63	3.98	5.59	6.67	6.18	4.61	3.32	2.24	1.46	0.94	0.60	0.38	0.25	43.2	35.1
	-15	0.33	0.51	0.81	1.28	2.09	3.44	5.67	8.91	11.6	10.4	7.39	4.86	3.08	1.89	1.14	0.69	0.42	0.26	64.8	57.8
		0.34	0.54	0.87	1.40	2.36	4.09	7.25	12.4	17.3	15.5	11.5	7.08	4.03	2.27	1.29	0.75	0.45	0.27	89.6	83.1
		0.34	0.54	0.87	1.43	2.44	4.29	7.76	13.3	18.1	19.1	13.8	8.01	4.36	2.39	1.34	0.77	0.45	0.27	99.6	93.2
		0.33	0.52	0.83	1.35	2.29	3.93	6.78	10.9	14.8	14.9	11.0	6.76	3.87	2.19	1.25	0.73	0.43	0.26	83.1	76.6
		0.30	0.47	0.74	1.19	1.94	3.15	4.96	7.31	9.30	9.24	7.16	4.83	3.02	1.81	1.08	0.65	0.40	0.25	57.8	50.8
		0.27	0.41	0.63	0.97	1.50	2.29	3.33	4.48	5.32	5.27	4.34	3.18	2.16	1.39	0.88	0.55	0.35	0.22	37.5	29.3
		0.23	0.34	0.51	0.76	1.11	1.58	2.15	2.70	3.06	3.03	2.61	2.04	1.48	1.02	0.68	0.45	0.30	0.20	24.3	13.8
		0.19	0.28	0.41	0.58	0.80	1.08	1.38	1.64	1.80	1.78	1.58	1.30	1.00	0.73	0.52	0.36	0.25	0.17	15.8	0.96
	-30	0.16	0.23	0.32	0.43	0.57	0.73	0.89	1.02	1.10	1.08	0.99	0.84	0.67	0.52	0.39	0.28	0.20	0.14	10.5	0.00
-35	0.13	0.18	0.24	0.32	0.41	0.50	0.58	0.65	0.69	0.69	0.63	0.55	0.46	0.37	0.29	0.22	0.16	0.12	7.19	0.00	
-40	0.11	0.14	0.19	0.24	0.29	0.34	0.39	0.43	0.45	0.45	0.42	0.37	0.32	0.27	0.21	0.17	0.13	0.10	5.02	0.00	
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)			10	15	20	25	30	35	40	45		
F t	4.20	6.28	9.42	14.2	21.8	33.8	52.5	78.1	99.7	96.8	73.9	49.5	31.6	20.0	12.7	8.16	5.33	3.52	622	---	
F a	0.00	0.00	0.00	0.00	9.66	24.3	44.1	70.2	92.0	89.2	65.7	40.9	21.7	7.28	0.00	0.00	0.00	0.00	---	465	

one-half-peak spread: U:10.5,D:8.7 , L:10.1,R:10.6


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-05-17

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:medusa-510mm-RGBW ALL-20D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:20 DEG	DIM.:510mm	SERIAL No.:IES001031
MFR.:	SUR.:	Shielding Angle:

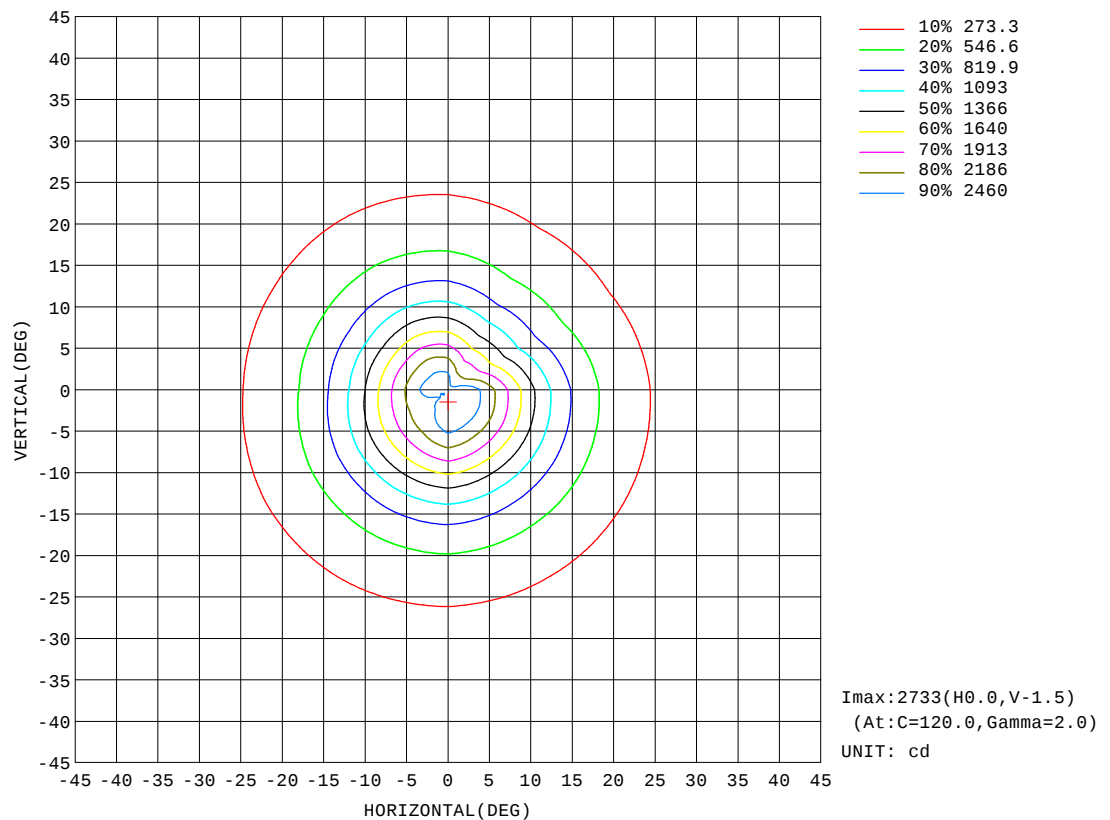


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-17

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:medusa-510mm-RGBW ALL-20D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:20 DEG	DIM.:510mm	SERIAL No.:IES001031
MFR.:	SUR.:	Shielding Angle:

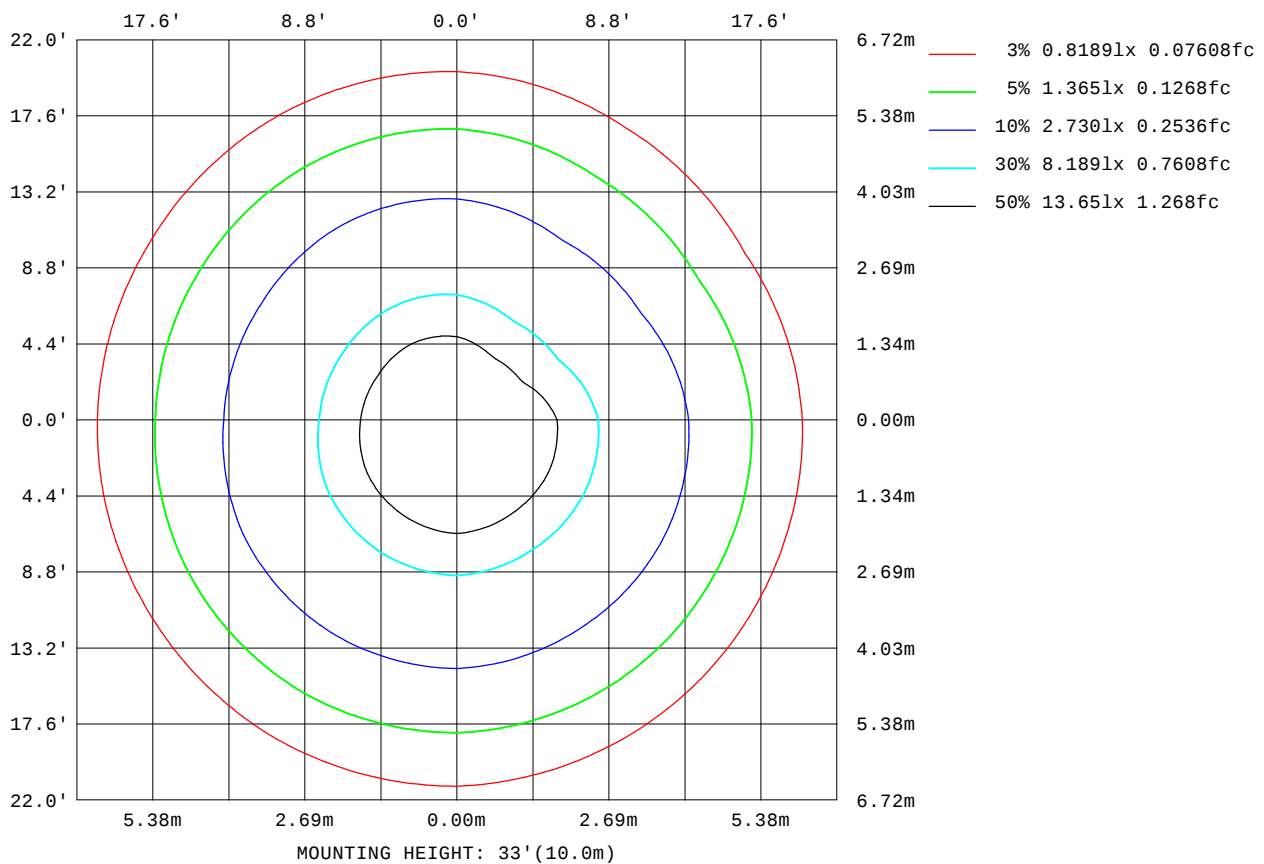

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-17

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

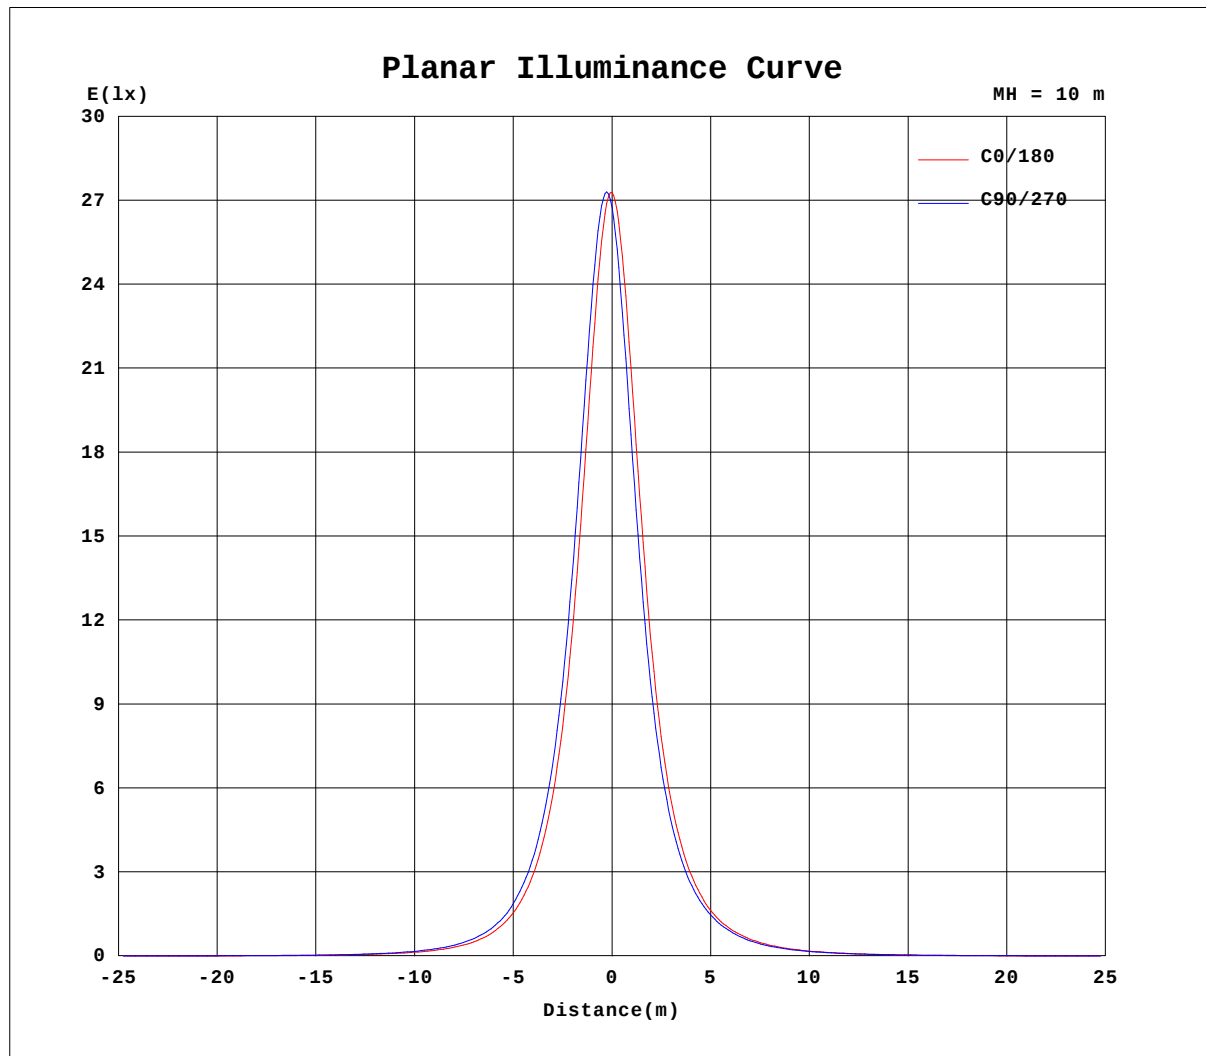


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-17

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME: medusa-510mm-RGBW ALL-20D-Rev1	TYPE: RGBW W=3000K	WEIGHT:
SPEC.: 20 DEG	DIM.: 510mm	SERIAL No.: IES001031
MFR.:	SUR.:	Shielding Angle:

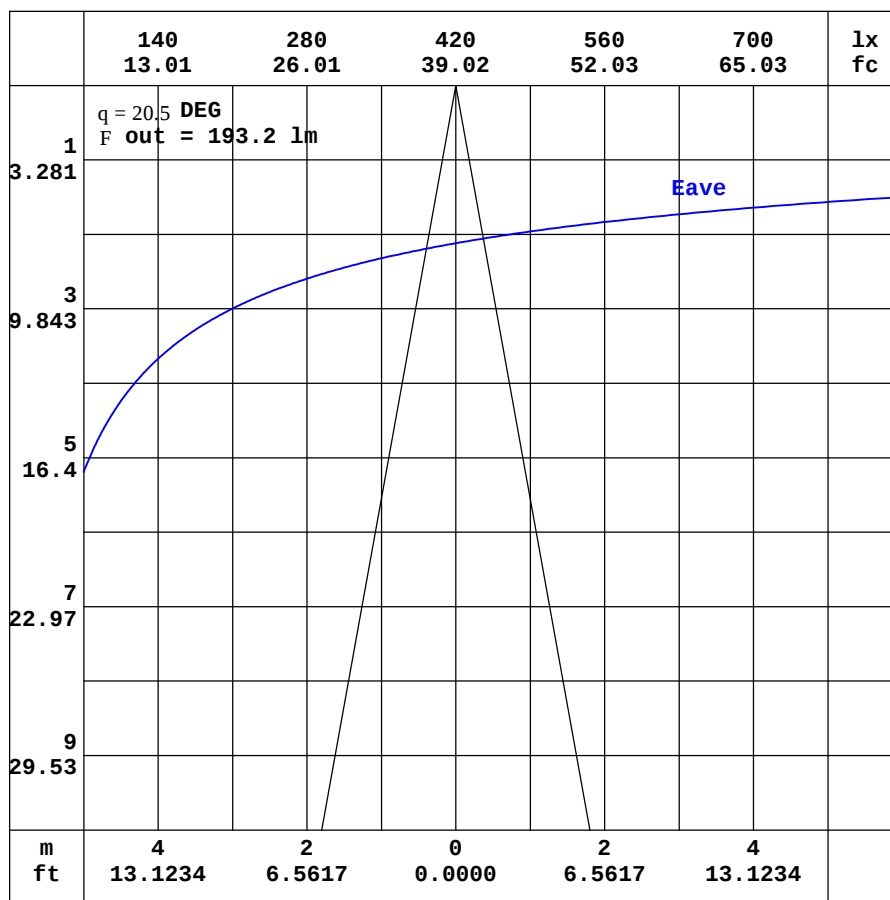

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-17

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:medusa-510mm-RGBW ALL-20D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:20 DEG	DIM.:510mm	SERIAL No.:IES001031
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.66	2.43	2.24	2.17	2.19	2.32	2.58	3.02	3.63	4.28	4.84	5.22	5.41	5.47	5.47	5.45	5.38	5.27	5.09
-170	2.66	2.41	2.22	2.15	2.17	2.25	2.41	2.63	2.94	3.28	3.55	3.71	3.77	3.78	3.73	3.77	4.05	4.29	4.86
-160	2.66	2.40	2.21	2.13	2.14	2.18	2.25	2.27	2.28	2.31	2.28	2.19	2.11	2.50	2.86	3.18	3.47	3.81	4.08
-150	2.66	2.40	2.21	2.11	2.11	2.11	2.14	2.08	1.89	1.61	1.43	1.61	1.80	2.02	2.24	2.44	2.62	2.79	2.91
-140	2.66	2.40	2.21	2.09	2.08	2.07	2.06	2.03	1.87	1.70	1.76	1.81	1.91	2.02	2.08	1.93	1.86	1.82	1.77
-130	2.66	2.40	2.21	2.10	2.04	2.05	2.02	1.98	2.04	2.12	2.17	2.23	2.38	2.56	2.28	1.93	1.62	1.34	1.07
-120	2.66	2.42	2.22	2.09	2.02	1.98	1.98	2.01	2.12	2.23	2.35	2.47	2.60	2.58	2.25	1.92	1.59	1.26	0.93
-110	2.66	2.44	2.24	2.08	1.98	1.91	1.87	1.97	2.12	2.27	2.40	2.52	2.65	2.49	2.21	1.92	1.64	1.35	1.06
-100	2.66	2.45	2.26	2.09	1.94	1.81	1.70	1.84	2.00	2.14	2.29	2.44	2.57	2.35	2.10	1.85	1.60	1.34	1.08
-90	2.66	2.48	2.30	2.12	1.94	1.76	1.58	1.74	1.90	2.07	2.23	2.39	2.56	2.30	2.04	1.79	1.53	1.27	1.02
-80	2.66	2.53	2.43	2.39	2.41	2.47	2.59	2.93	3.28	3.62	3.96	4.28	4.60	4.51	4.38	4.23	4.06	3.86	3.64
-70	2.66	2.59	2.64	2.81	3.09	3.47	3.98	4.61	5.26	5.91	6.56	7.19	7.81	8.11	8.23	8.30	8.31	8.22	8.05
-60	2.66	2.67	2.87	3.21	3.74	4.47	5.42	6.57	7.69	8.89	10.1	11.5	12.8	13.9	14.6	15.2	15.7	15.9	15.8
-50	2.66	2.75	3.07	3.56	4.31	5.37	6.91	8.85	10.8	13.0	15.5	18.2	21.2	24.2	26.9	29.2	31.1	32.3	32.6
-40	2.66	2.82	3.22	3.83	4.74	6.35	8.86	11.7	14.9	18.8	23.8	29.7	36.6	44.4	52.6	60.3	66.9	71.5	73.1
-30	2.66	2.88	3.32	3.98	4.98	7.74	11.1	15.1	20.5	27.1	35.8	48.0	63.9	83.8	107	135	159	177	183
-20	2.66	2.93	3.38	4.03	5.41	8.80	13.4	18.9	26.9	37.7	52.2	73.9	106	153	219	308	410	496	536
-10	2.66	2.96	3.39	3.96	5.75	9.72	14.6	22.1	32.3	46.9	67.3	99.7	151	235	383	622	986	1415	1677
0	2.66	2.98	3.37	3.81	5.67	9.76	15.3	23.3	36.0	51.4	74.2	110	167	265	441	766	1367	2217	2728
10	2.66	2.99	3.47	4.12	6.02	10.1	15.2	22.9	32.8	47.3	67.4	97.7	145	217	333	516	785	1082	1169
20	2.66	2.98	3.53	4.33	5.93	9.61	14.5	20.3	28.7	38.1	53.4	73.1	101	140	190	253	323	373	387
30	2.66	2.96	3.53	4.40	5.68	8.82	12.6	17.2	23.0	29.8	36.4	49.6	63.5	80.4	100	119	138	149	152
40	2.66	2.92	3.47	4.32	5.55	7.59	10.6	14.1	17.9	22.0	26.8	31.8	37.9	45.2	52.9	58.8	64.0	67.1	67.6
50	2.66	2.87	3.34	4.08	5.15	6.60	8.68	11.2	13.4	15.7	18.1	20.7	23.6	26.3	29.0	31.1	32.6	33.6	33.8
60	2.66	2.81	3.15	3.72	4.53	5.61	7.00	8.50	9.68	10.9	12.1	13.4	14.6	15.8	16.7	17.4	18.0	18.3	18.4
70	2.66	2.75	2.94	3.27	3.78	4.44	5.27	5.99	6.59	7.21	7.81	8.34	8.82	9.26	9.62	9.90	10.1	10.2	10.2
80	2.66	2.71	2.77	2.88	3.03	3.23	3.54	3.80	4.05	4.29	4.50	4.71	4.90	4.99	5.04	5.06	5.05	5.00	4.92
90	2.66	2.67	2.67	2.68	2.69	2.69	2.70	2.69	2.67	2.66	2.65	2.64	2.62	2.62	2.62	2.62	2.62	2.62	2.62
100	2.66	2.63	2.60	2.56	2.52	2.48	2.45	2.41	2.37	2.33	2.29	2.26	2.23	2.22	2.21	2.21	2.21	2.21	2.21
110	2.66	2.60	2.51	2.44	2.38	2.32	2.28	2.24	2.21	2.18	2.17	2.17	2.17	2.16	2.17	2.16	2.16	2.15	2.15
120	2.66	2.56	2.44	2.34	2.27	2.22	2.20	2.18	2.18	2.19	2.22	2.28	2.34	2.41	2.46	2.51	2.55	2.58	2.59
130	2.66	2.52	2.38	2.27	2.20	2.18	2.18	2.19	2.28	2.39	2.55	2.75	2.96	3.17	3.37	3.54	3.67	3.75	3.78
140	2.66	2.49	2.33	2.21	2.18	2.18	2.22	2.34	2.54	2.83	3.16	3.55	3.93	4.28	4.58	4.78	4.93	5.01	5.04
150	2.66	2.46	2.29	2.18	2.18	2.21	2.33	2.56	2.92	3.36	3.88	4.37	4.79	5.11	5.36	5.54	5.63	5.68	5.69
160	2.66	2.45	2.27	2.18	2.18	2.26	2.45	2.80	3.28	3.87	4.44	4.90	5.23	5.48	5.66	5.81	5.90	5.93	5.97
170	2.66	2.43	2.25	2.17	2.19	2.30	2.55	2.97	3.54	4.18	4.75	5.16	5.42	5.56	5.61	5.66	5.66	5.64	5.75
180	2.66	2.43	2.24	2.17	2.19	2.32	2.58	3.02	3.63	4.28	4.84	5.22	5.41	5.47	5.47	5.45	5.38	5.27	5.11

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-17

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:medusa-510mm-RGBW ALL-20D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:20 DEG	DIM.:510mm	SERIAL No.:IES001031
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	4.81	4.55	4.24	3.86	3.39	2.86	2.33	1.85	1.43	1.12	1.00	1.01	1.06	1.11	1.11	1.10	1.00	0.78
-170	4.70	4.51	4.22	3.80	3.31	2.77	2.26	1.78	1.39	1.12	1.01	1.02	1.06	1.11	1.11	1.11	1.01	0.78
-160	4.01	3.83	3.57	3.21	2.81	2.38	1.95	1.56	1.26	1.07	1.02	1.03	1.08	1.12	1.11	1.11	1.00	0.78
-150	2.88	2.76	2.57	2.32	2.04	1.75	1.49	1.28	1.11	1.03	1.03	1.04	1.11	1.12	1.12	1.11	1.00	0.78
-140	1.76	1.70	1.60	1.46	1.34	1.22	1.11	1.05	1.03	1.03	1.03	1.09	1.13	1.13	1.12	1.09	1.00	0.78
-130	1.07	1.05	1.03	0.99	0.99	0.99	1.00	1.02	1.03	1.06	1.10	1.13	1.14	1.13	1.13	1.05	0.98	0.78
-120	0.94	0.95	0.97	1.00	1.02	1.05	1.07	1.10	1.12	1.14	1.15	1.15	1.14	1.13	1.09	1.03	0.93	0.78
-110	1.08	1.09	1.10	1.12	1.13	1.14	1.14	1.14	1.14	1.15	1.15	1.15	1.14	1.09	1.04	1.00	0.89	0.78
-100	1.08	1.08	1.08	1.08	1.07	1.07	1.08	1.08	1.08	1.09	1.08	1.08	1.05	1.02	0.97	0.91	0.85	0.78
-90	1.02	1.02	1.02	1.02	1.02	1.02	1.01	1.00	0.99	0.98	0.98	0.97	0.94	0.91	0.88	0.85	0.81	0.78
-80	3.58	3.49	3.38	3.25	3.10	2.94	2.77	2.58	2.38	2.17	1.95	1.72	1.40	1.15	0.98	0.86	0.80	0.78
-70	7.90	7.66	7.34	6.96	6.53	6.07	5.59	5.10	4.58	4.08	3.58	2.97	2.22	1.64	1.22	0.95	0.81	0.78
-60	15.5	14.8	14.0	13.0	12.0	10.8	9.71	8.58	7.49	6.44	5.47	4.15	2.95	2.05	1.42	1.03	0.83	0.78
-50	31.6	29.8	27.4	24.6	21.7	18.8	16.0	13.5	11.3	9.37	7.59	5.60	3.74	2.32	1.53	1.06	0.84	0.78
-40	70.1	64.3	56.7	48.5	40.4	33.0	26.5	21.1	16.6	13.0	9.99	7.33	4.78	2.65	1.54	1.04	0.84	0.78
-30	173	152	126	98.8	76.0	57.2	42.7	31.6	23.6	17.6	13.0	9.03	5.93	3.23	1.42	0.98	0.82	0.78
-20	486	391	291	203	139	94.1	64.3	44.5	31.3	22.3	16.1	11.0	6.67	3.55	1.21	0.87	0.80	0.78
-10	1406	973	608	367	219	135	85.1	55.6	37.4	25.7	18.1	12.0	7.24	3.76	1.04	0.73	0.77	0.78
0	2286	1435	800	446	256	152	92.7	59.3	39.3	26.8	18.7	12.5	7.06	3.47	0.81	0.58	0.74	0.78
10	903	649	438	291	190	123	80.7	54.7	37.8	26.4	18.7	12.6	7.73	4.11	1.27	0.87	0.84	0.78
20	342	276	217	163	116	83.0	60.9	44.7	32.7	23.5	17.3	12.1	7.61	4.21	1.66	1.14	0.93	0.78
30	143	127	106	86.4	68.6	54.4	43.0	34.0	25.7	19.6	14.8	10.8	7.23	4.18	2.08	1.37	1.01	0.78
40	64.8	59.7	53.0	46.1	40.0	34.1	28.5	23.5	19.3	15.8	12.6	9.40	6.35	3.82	2.34	1.53	1.08	0.78
50	32.8	31.2	28.9	26.5	24.0	21.3	18.9	16.4	14.4	12.5	10.4	7.83	5.50	3.65	2.45	1.63	1.14	0.78
60	18.1	17.5	16.8	16.0	14.9	13.7	12.6	11.5	10.3	9.23	8.20	6.48	4.79	3.44	2.40	1.67	1.17	0.78
70	10.1	10.0	9.79	9.50	9.15	8.73	8.26	7.75	7.18	6.61	6.05	5.23	4.03	3.04	2.27	1.68	1.20	0.78
80	5.05	5.16	5.23	5.28	5.31	5.28	5.08	4.86	4.64	4.40	4.17	3.91	3.26	2.68	2.15	1.67	1.21	0.78
90	2.77	2.91	3.06	3.21	3.35	3.50	3.49	3.48	3.47	3.46	3.45	3.44	3.00	2.55	2.11	1.67	1.23	0.78
100	2.41	2.61	2.80	3.00	3.19	3.37	3.35	3.34	3.33	3.32	3.31	3.29	2.91	2.53	2.13	1.70	1.25	0.78
110	2.36	2.57	2.78	2.99	3.20	3.35	3.34	3.32	3.31	3.29	3.27	3.15	2.81	2.46	2.09	1.72	1.27	0.78
120	2.81	3.01	3.20	3.36	3.51	3.51	3.47	3.42	3.39	3.34	3.27	3.01	2.69	2.36	2.03	1.67	1.27	0.78
130	4.03	4.21	4.32	4.43	4.44	4.15	3.91	3.74	3.65	3.56	3.31	2.89	2.52	2.23	1.94	1.61	1.27	0.78
140	5.21	5.37	5.48	5.53	5.16	4.81	4.41	4.09	3.84	3.56	3.15	2.71	2.35	2.05	1.81	1.55	1.24	0.78
150	5.66	5.58	5.63	5.64	5.45	5.16	4.70	4.28	3.70	3.17	2.75	2.44	2.13	1.86	1.65	1.46	1.19	0.78
160	5.84	5.73	5.64	5.53	5.33	5.19	4.55	3.80	3.13	2.62	2.26	2.02	1.81	1.64	1.48	1.36	1.13	0.78
170	5.35	5.37	5.41	5.19	4.70	4.13	3.58	2.96	2.37	1.93	1.67	1.53	1.45	1.38	1.30	1.23	1.07	0.78
180	4.81	4.55	4.24	3.86	3.39	2.86	2.33	1.85	1.43	1.12	1.00	1.01	1.06	1.11	1.11	1.10	1.00	0.78

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-05-17

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: