

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	3892.6 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	50.5V x 49.9H
	At 50% of Imax	21.1V x 21.0H
	At 90% of Imax	7.5V x 7.4H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	689.0 lumens per klm.
	To 50% of Imax	280.7 lumens per klm.
	To 90% of Imax	45.7 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-17

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: Medusa-510mm-RGBW GREEN-20D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 20 DEG	DIM.: 510mm	SERIAL No.: IES001031-G
MFR.:	SUR.:	Shielding Angle:

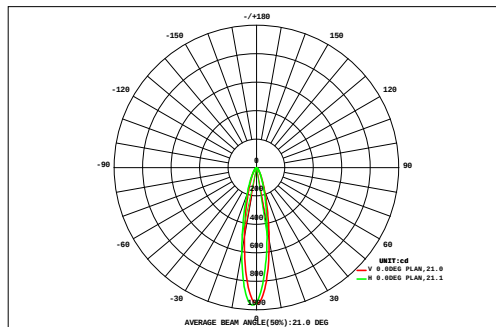

DATA OF LAMP		Eff: 32.33lm/W	
MODEL		Imax(cd)	966.5
NOMINAL POWER(W)	7.68	AVAILABILITY(%)	68.7
RATED VOLTAGE(V)	48	Avai. FLUX(lm)	170.6
NOMINAL FLUX(lm)	248.3	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	248.3
TEST VOLTAGE(V)	48	q @50%(H, V)	21, 21DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT: lm		F t	F a
	0.05	0.06	0.07	0.09	0.11	0.13	0.14	0.15	0.16	0.16	0.15	0.13	0.11	0.10	0.08	0.06	0.05	0.04	1.84	0.00
45	0.05	0.06	0.07	0.09	0.11	0.13	0.14	0.15	0.16	0.16	0.15	0.13	0.11	0.10	0.08	0.06	0.05	0.04	1.84	0.00
40	0.05	0.07	0.09	0.12	0.15	0.18	0.20	0.22	0.23	0.23	0.21	0.18	0.15	0.13	0.10	0.08	0.06	0.05	2.51	0.00
35	0.06	0.09	0.12	0.16	0.20	0.25	0.29	0.33	0.35	0.34	0.30	0.25	0.21	0.17	0.13	0.10	0.07	0.06	3.47	0.00
30	0.07	0.11	0.15	0.20	0.27	0.35	0.43	0.50	0.53	0.51	0.44	0.36	0.29	0.23	0.17	0.12	0.09	0.06	4.89	0.00
25	0.09	0.13	0.18	0.26	0.37	0.50	0.65	0.78	0.85	0.81	0.68	0.52	0.40	0.30	0.22	0.15	0.10	0.07	7.07	2.26
20	0.10	0.15	0.22	0.33	0.49	0.71	0.98	1.26	1.43	1.35	1.07	0.79	0.57	0.40	0.28	0.19	0.12	0.08	10.5	7.05
15	0.11	0.17	0.26	0.40	0.62	0.97	1.47	2.08	2.47	2.29	1.70	1.19	0.79	0.52	0.35	0.22	0.14	0.09	15.9	13.0
10	0.12	0.19	0.30	0.47	0.76	1.27	2.10	3.28	4.22	3.80	2.66	1.72	1.09	0.68	0.41	0.25	0.15	0.10	23.6	21.1
5	0.13	0.20	0.32	0.51	0.86	1.49	2.66	4.48	6.17	5.50	4.04	2.54	1.46	0.82	0.47	0.27	0.16	0.10	32.2	29.9
0	0.13	0.20	0.32	0.53	0.89	1.58	2.87	4.86	6.54	6.73	4.88	2.89	1.59	0.87	0.49	0.28	0.16	0.10	35.9	33.7
-5	0.12	0.19	0.31	0.50	0.85	1.47	2.57	4.06	5.36	5.30	3.91	2.44	1.40	0.80	0.46	0.27	0.16	0.10	30.3	28.0
-10	0.11	0.17	0.28	0.45	0.73	1.19	1.87	2.73	3.41	3.34	2.58	1.74	1.09	0.66	0.40	0.24	0.15	0.09	21.2	18.8
-15	0.10	0.15	0.24	0.37	0.57	0.86	1.25	1.67	1.96	1.92	1.58	1.16	0.79	0.51	0.32	0.20	0.13	0.08	13.8	11.0
-20	0.09	0.13	0.19	0.29	0.42	0.59	0.80	1.00	1.13	1.11	0.96	0.74	0.54	0.37	0.25	0.17	0.11	0.07	8.95	5.33
-25	0.07	0.10	0.15	0.22	0.30	0.40	0.51	0.61	0.67	0.66	0.58	0.48	0.37	0.27	0.19	0.13	0.09	0.06	5.86	0.53
-30	0.06	0.08	0.12	0.16	0.21	0.27	0.33	0.38	0.41	0.40	0.37	0.31	0.25	0.19	0.14	0.10	0.07	0.05	3.92	0.00
-35	0.05	0.07	0.09	0.12	0.15	0.19	0.22	0.24	0.26	0.26	0.23	0.20	0.17	0.14	0.11	0.08	0.06	0.04	2.67	0.00
-40	0.04	0.05	0.07	0.09	0.11	0.13	0.15	0.16	0.17	0.17	0.15	0.14	0.12	0.10	0.08	0.06	0.05	0.03	1.86	0.00
-45	0.04	0.05	0.07	0.09	0.11	0.13	0.15	0.16	0.17	0.17	0.15	0.14	0.12	0.10	0.08	0.06	0.05	0.03	1.86	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
F t	1.54	2.31	3.48	5.27	8.07	12.5	19.5	28.8	36.3	34.9	26.5	17.8	11.4	7.26	4.64	2.98	1.93	1.27	226	---
F a	0.00	0.00	0.00	0.00	3.91	9.16	16.6	26.0	33.6	32.1	23.6	14.7	7.95	2.89	0.00	0.00	0.00	0.00	---	171

one-half-peak spread: U:10.7, D:10.5 , L:10.4, R:10.7


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-05-17

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: Medusa-510mm-RGBW GREEN-20D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 20 DEG	DIM.: 510mm	SERIAL No.: IES001031-G
MFR.:	SUR.:	Shielding Angle:

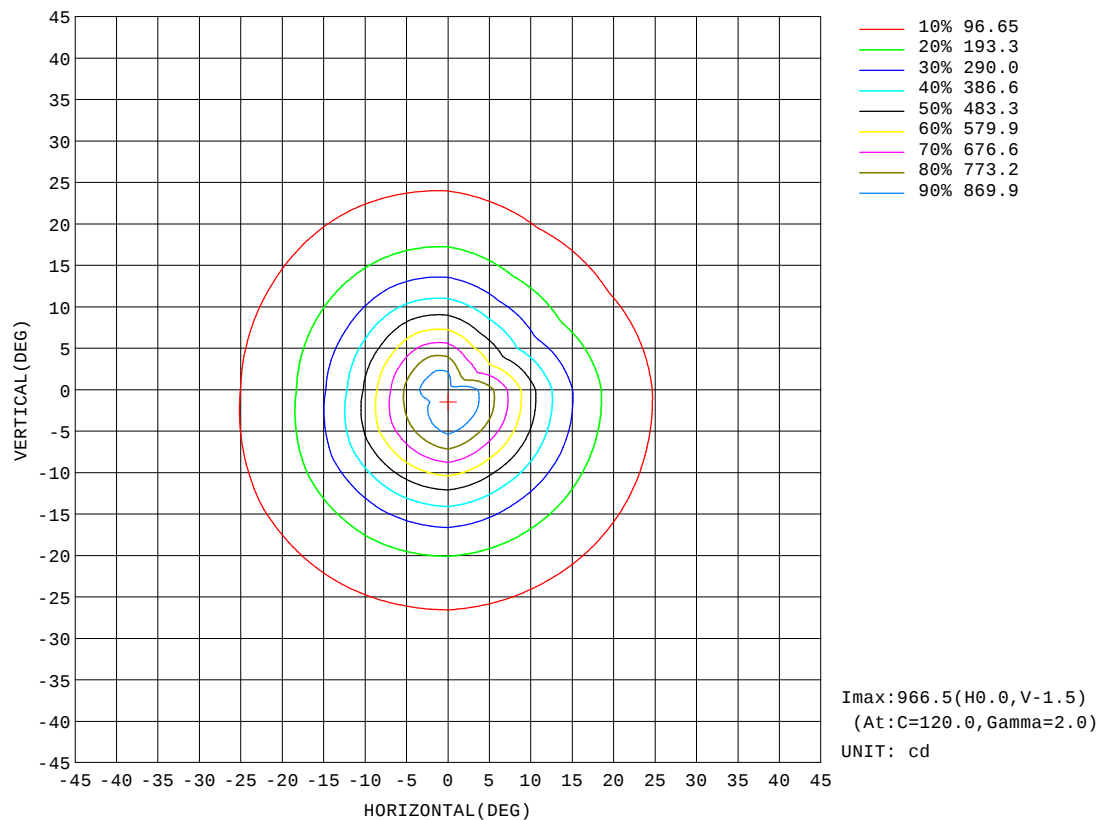


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-17

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME: Medusa-510mm-RGBW GREEN-20D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 20 DEG	DIM.: 510mm	SERIAL No.: IES001031-G
MFR.:	SUR.:	Shielding Angle:

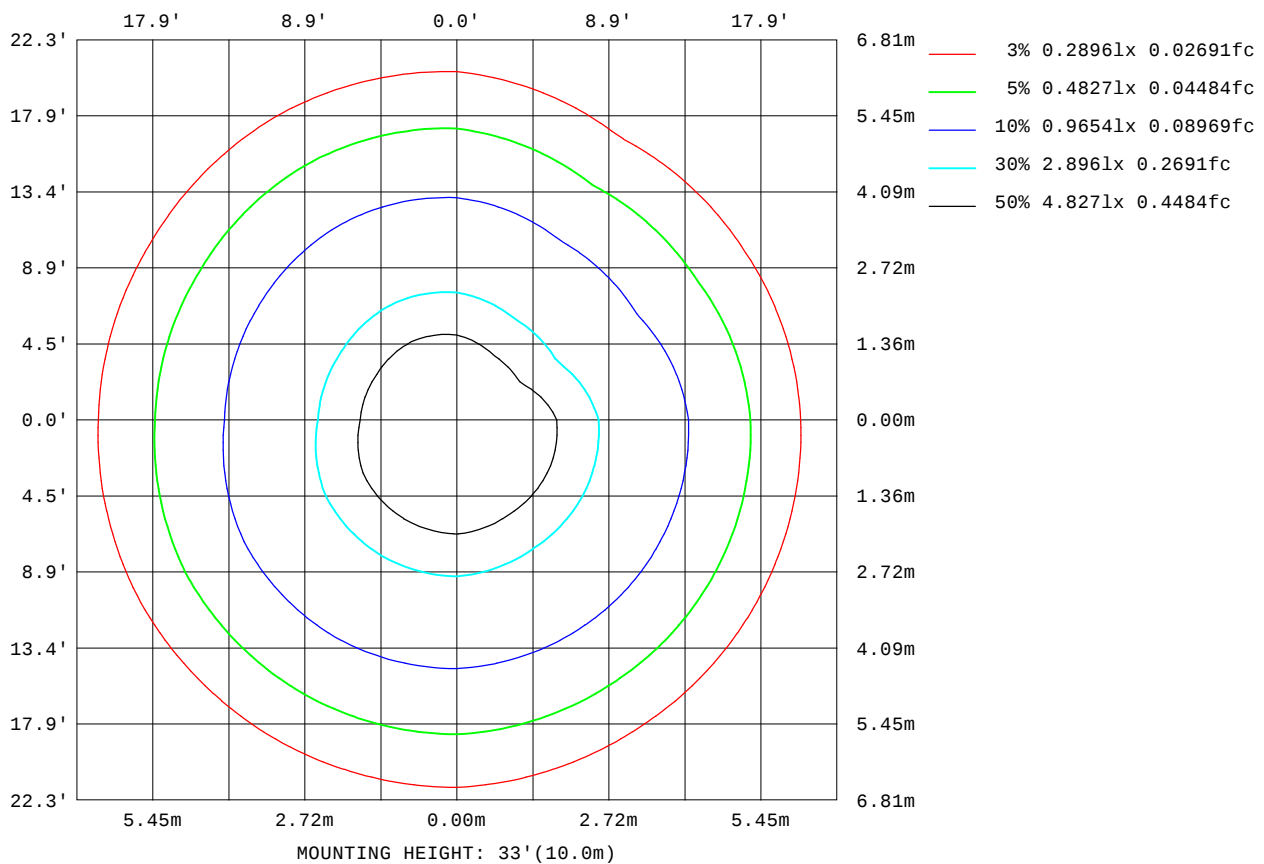

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-17

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

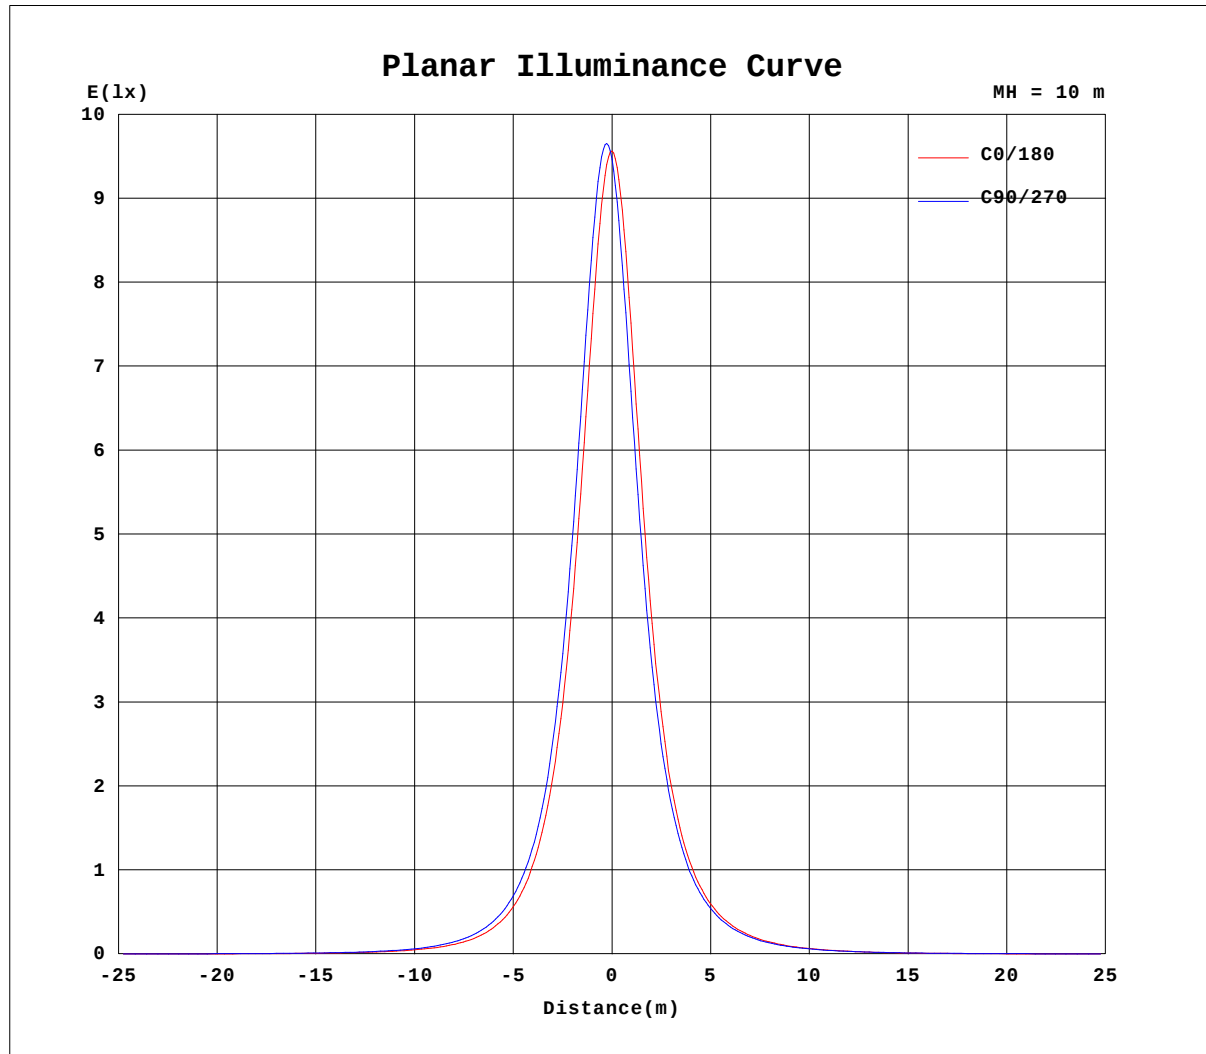


$H(b)$ Range: -90 - 90DEG
 $H(b)$ Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-17

$V(B)$ Range: -180 - 180DEG
 $V(B)$ Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME: Medusa-510mm-RGBW GREEN-20D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 20 DEG	DIM.: 510mm	SERIAL No.: IES001031-G
MFR.:	SUR.:	Shielding Angle:

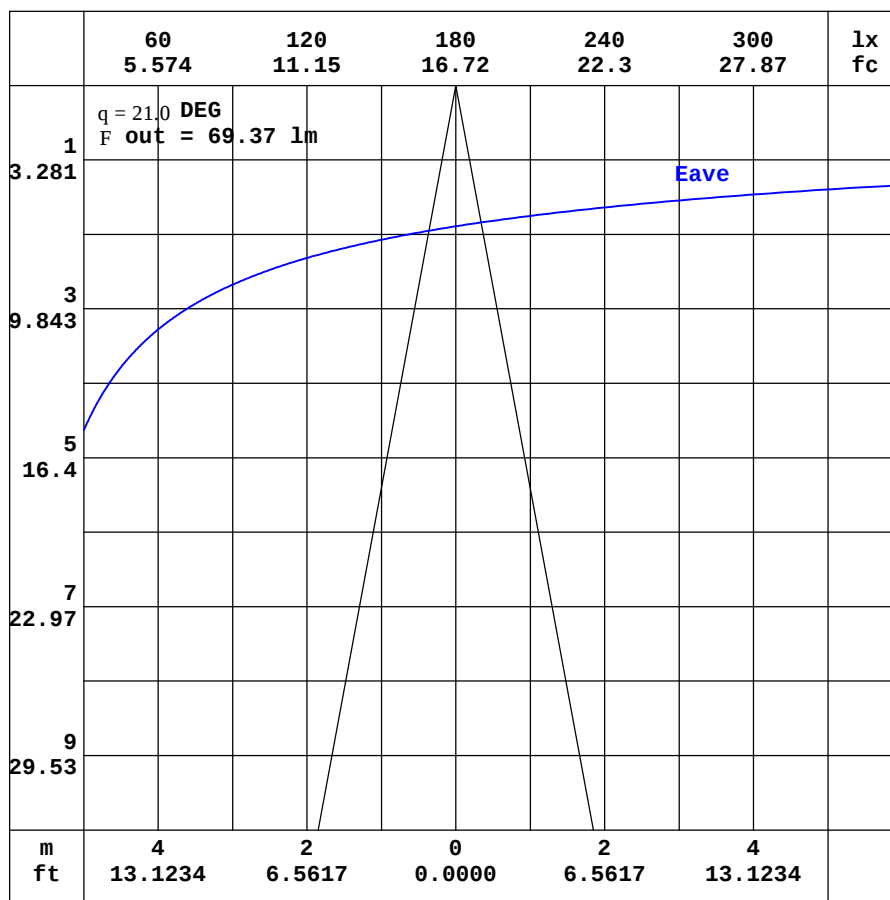

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-17

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Medusa-510mm-RGBW GREEN-20D-ReV1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 20 DEG	DIM.: 510mm	SERIAL No.: IES001031-G
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.88	0.80	0.74	0.73	0.75	0.79	0.89	1.04	1.26	1.49	1.69	1.83	1.89	1.89	1.89	1.88	1.86	1.83	1.78
-170	0.88	0.80	0.74	0.74	0.75	0.75	0.79	0.87	0.99	1.11	1.21	1.28	1.31	1.30	1.28	1.30	1.40	1.50	1.72
-160	0.88	0.80	0.74	0.75	0.76	0.73	0.70	0.69	0.72	0.73	0.73	0.71	0.70	0.84	0.97	1.08	1.19	1.33	1.43
-150	0.88	0.80	0.76	0.76	0.78	0.74	0.66	0.59	0.51	0.45	0.37	0.44	0.51	0.59	0.67	0.75	0.87	0.95	1.01
-140	0.88	0.81	0.77	0.76	0.78	0.78	0.69	0.57	0.44	0.39	0.41	0.43	0.45	0.48	0.50	0.51	0.55	0.58	0.60
-130	0.88	0.82	0.77	0.76	0.79	0.81	0.81	0.70	0.61	0.60	0.59	0.59	0.59	0.60	0.52	0.46	0.41	0.38	0.34
-120	0.88	0.82	0.78	0.77	0.78	0.81	0.83	0.85	0.86	0.83	0.84	0.87	0.92	0.89	0.75	0.61	0.49	0.39	0.28
-110	0.88	0.83	0.79	0.77	0.77	0.78	0.81	0.84	0.89	0.91	0.94	0.96	0.99	0.91	0.79	0.67	0.55	0.42	0.30
-100	0.88	0.83	0.80	0.77	0.75	0.74	0.74	0.78	0.82	0.85	0.89	0.92	0.96	0.86	0.75	0.64	0.53	0.42	0.30
-90	0.88	0.85	0.82	0.78	0.75	0.71	0.68	0.73	0.78	0.84	0.89	0.94	0.99	0.87	0.76	0.64	0.52	0.40	0.28
-80	0.88	0.86	0.85	0.86	0.90	0.96	1.03	1.16	1.29	1.42	1.54	1.67	1.78	1.73	1.66	1.58	1.49	1.39	1.28
-70	0.88	0.88	0.92	1.02	1.15	1.32	1.54	1.79	2.03	2.28	2.52	2.76	2.99	3.08	3.10	3.10	3.07	3.01	2.92
-60	0.88	0.90	1.01	1.16	1.38	1.68	2.07	2.52	2.94	3.38	3.86	4.34	4.83	5.24	5.49	5.70	5.83	5.88	5.83
-50	0.88	0.93	1.08	1.28	1.58	2.01	2.61	3.35	4.09	4.90	5.82	6.84	7.98	9.13	10.1	10.9	11.6	12.0	12.1
-40	0.88	0.96	1.12	1.36	1.73	2.37	3.31	4.39	5.58	7.06	8.87	11.1	13.7	16.6	19.7	22.6	25.0	26.7	27.2
-30	0.88	0.98	1.15	1.41	1.80	2.83	4.09	5.58	7.62	10.1	13.3	17.9	23.9	31.4	40.3	50.1	59.3	66.1	68.6
-20	0.88	0.99	1.16	1.41	1.97	3.23	4.89	7.00	9.91	14.0	19.4	27.5	39.7	57.4	82.3	115	153	184	196
-10	0.88	1.00	1.15	1.37	2.05	3.52	5.28	8.07	11.8	17.1	24.7	36.8	56.3	88.4	144	234	371	523	605
0	0.88	1.00	1.13	1.30	2.04	3.48	5.46	8.43	13.1	18.7	27.1	40.4	61.3	97.0	160	281	495	791	956
10	0.88	1.00	1.18	1.42	2.14	3.65	5.47	8.32	11.9	17.2	24.6	35.8	52.9	79.4	122	192	292	400	429
20	0.88	1.00	1.20	1.50	2.13	3.48	5.25	7.46	10.5	14.0	19.6	26.8	37.0	51.2	70.0	93.8	119	139	144
30	0.88	0.99	1.20	1.53	2.01	3.16	4.58	6.22	8.42	10.9	13.4	18.2	23.4	29.6	36.8	44.4	50.7	54.9	55.9
40	0.88	0.98	1.19	1.50	1.97	2.75	3.85	5.13	6.51	8.04	9.82	11.7	13.9	16.7	19.4	21.7	23.6	24.7	24.9
50	0.88	0.95	1.14	1.42	1.82	2.38	3.15	4.07	4.91	5.73	6.63	7.61	8.65	9.67	10.6	11.4	12.0	12.4	12.4
60	0.88	0.93	1.07	1.29	1.60	2.01	2.54	3.10	3.52	3.96	4.43	4.89	5.36	5.78	6.11	6.39	6.59	6.70	6.72
70	0.88	0.92	0.99	1.13	1.32	1.58	1.89	2.16	2.39	2.61	2.82	3.02	3.22	3.37	3.49	3.60	3.67	3.71	3.71
80	0.88	0.90	0.93	0.97	1.04	1.13	1.25	1.35	1.43	1.52	1.60	1.67	1.73	1.77	1.79	1.79	1.79	1.77	1.75
90	0.88	0.89	0.90	0.91	0.92	0.92	0.93	0.92	0.91	0.90	0.89	0.88	0.87	0.88	0.88	0.89	0.89	0.90	0.90
100	0.88	0.87	0.87	0.86	0.86	0.85	0.84	0.82	0.80	0.79	0.77	0.75	0.74	0.74	0.75	0.75	0.76	0.76	0.77
110	0.88	0.86	0.84	0.82	0.80	0.79	0.78	0.77	0.76	0.75	0.74	0.74	0.74	0.74	0.74	0.74	0.74	0.74	0.73
120	0.88	0.84	0.81	0.79	0.77	0.76	0.75	0.75	0.74	0.75	0.76	0.78	0.81	0.83	0.84	0.87	0.87	0.88	0.87
130	0.88	0.84	0.78	0.76	0.75	0.75	0.74	0.74	0.75	0.80	0.86	0.94	1.02	1.10	1.18	1.23	1.27	1.29	1.30
140	0.88	0.82	0.78	0.75	0.74	0.74	0.75	0.78	0.84	0.95	1.07	1.22	1.36	1.49	1.61	1.68	1.73	1.75	1.76
150	0.88	0.81	0.76	0.74	0.74	0.75	0.78	0.87	0.99	1.14	1.32	1.51	1.67	1.79	1.89	1.96	1.99	2.00	2.00
160	0.88	0.81	0.74	0.74	0.74	0.77	0.83	0.95	1.12	1.33	1.53	1.70	1.82	1.91	1.99	2.04	2.07	2.08	2.10
170	0.88	0.80	0.74	0.74	0.75	0.78	0.87	1.02	1.22	1.45	1.65	1.80	1.89	1.93	1.95	1.97	1.99	1.97	2.05
180	0.88	0.80	0.74	0.73	0.75	0.79	0.89	1.04	1.26	1.49	1.69	1.83	1.89	1.89	1.89	1.88	1.86	1.83	1.82

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-05-17

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Medusa-510mm-RGBW GREEN-20D-ReV1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 20 DEG	DIM.: 510mm	SERIAL No.: IES001031-G
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	1.65	1.57	1.45	1.31	1.14	0.95	0.77	0.59	0.44	0.33	0.31	0.31	0.32	0.32	0.32	0.31	0.27	0.19
-170	1.64	1.57	1.47	1.33	1.14	0.94	0.76	0.59	0.44	0.34	0.31	0.31	0.32	0.33	0.32	0.31	0.28	0.19
-160	1.39	1.32	1.22	1.11	0.97	0.82	0.66	0.51	0.40	0.33	0.32	0.32	0.32	0.33	0.32	0.32	0.28	0.19
-150	0.99	0.94	0.86	0.78	0.68	0.59	0.49	0.42	0.35	0.32	0.31	0.32	0.32	0.33	0.32	0.31	0.28	0.19
-140	0.59	0.57	0.52	0.47	0.42	0.38	0.35	0.33	0.32	0.32	0.32	0.32	0.33	0.33	0.33	0.31	0.27	0.19
-130	0.34	0.32	0.31	0.30	0.30	0.31	0.31	0.32	0.32	0.32	0.32	0.34	0.33	0.33	0.33	0.30	0.27	0.19
-120	0.29	0.30	0.30	0.31	0.32	0.33	0.33	0.33	0.33	0.34	0.34	0.34	0.34	0.34	0.33	0.32	0.29	0.26
-110	0.31	0.31	0.32	0.33	0.33	0.34	0.34	0.34	0.34	0.34	0.34	0.35	0.34	0.33	0.33	0.30	0.28	0.24
-100	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.31	0.32	0.33	0.33	0.33	0.31	0.30	0.28	0.25	0.22	0.19
-90	0.29	0.29	0.30	0.30	0.31	0.31	0.31	0.31	0.30	0.30	0.30	0.30	0.28	0.26	0.25	0.23	0.21	0.19
-80	1.26	1.23	1.20	1.15	1.10	1.04	0.97	0.90	0.82	0.73	0.64	0.55	0.43	0.33	0.27	0.23	0.21	0.19
-70	2.87	2.78	2.67	2.54	2.38	2.21	2.02	1.83	1.64	1.44	1.25	1.02	0.74	0.52	0.37	0.26	0.21	0.19
-60	5.69	5.45	5.14	4.77	4.36	3.95	3.54	3.11	2.70	2.31	1.95	1.46	1.02	0.68	0.43	0.30	0.21	0.19
-50	11.7	11.0	10.1	9.03	7.94	6.84	5.84	4.92	4.11	3.40	2.73	2.00	1.31	0.79	0.48	0.30	0.22	0.19
-40	26.0	23.8	20.9	17.8	14.8	12.1	9.67	7.69	6.06	4.74	3.61	2.64	1.71	0.91	0.50	0.29	0.22	0.19
-30	64.3	56.1	46.1	36.4	27.9	21.0	15.6	11.5	8.56	6.41	4.70	3.25	2.11	1.14	0.46	0.27	0.22	0.19
-20	177	144	106	74.5	50.9	34.5	23.5	16.2	11.4	8.09	5.82	3.95	2.40	1.27	0.38	0.24	0.21	0.19
-10	501	350	218	133	80.3	49.4	31.1	20.3	13.6	9.34	6.53	4.34	2.62	1.34	0.33	0.19	0.21	0.19
0	801	514	292	164	93.0	55.2	33.9	21.6	14.3	9.73	6.76	4.52	2.54	1.23	0.25	0.14	0.20	0.19
10	336	233	154	103	68.9	45.3	29.7	19.8	13.5	9.52	6.76	4.52	2.76	1.45	0.41	0.23	0.23	0.19
20	125	97.5	75.0	56.9	42.5	30.9	22.1	15.8	11.5	8.52	6.29	4.30	2.68	1.48	0.53	0.32	0.26	0.19
30	51.0	44.0	36.4	30.5	24.8	19.5	15.2	11.8	9.26	7.16	5.33	3.75	2.51	1.46	0.68	0.40	0.28	0.19
40	23.8	21.9	19.5	17.0	14.6	12.3	10.3	8.52	7.08	5.65	4.37	3.26	2.21	1.30	0.76	0.45	0.30	0.19
50	12.0	11.4	10.6	9.67	8.70	7.76	6.83	5.91	5.06	4.32	3.57	2.73	1.89	1.23	0.78	0.48	0.32	0.19
60	6.59	6.38	6.10	5.75	5.36	4.92	4.47	4.02	3.59	3.21	2.85	2.23	1.62	1.13	0.75	0.51	0.33	0.19
70	3.67	3.59	3.49	3.36	3.21	3.06	2.86	2.67	2.47	2.26	2.05	1.75	1.32	0.96	0.70	0.49	0.34	0.19
80	1.77	1.79	1.79	1.78	1.76	1.73	1.66	1.58	1.50	1.41	1.34	1.25	1.02	0.82	0.65	0.49	0.34	0.19
90	0.92	0.94	0.96	0.99	1.01	1.03	1.03	1.04	1.05	1.05	1.06	1.07	0.92	0.78	0.63	0.49	0.34	0.19
100	0.80	0.83	0.86	0.89	0.92	0.94	0.96	0.97	0.98	0.99	1.01	1.01	0.89	0.77	0.64	0.49	0.35	0.19
110	0.77	0.81	0.84	0.87	0.90	0.92	0.93	0.95	0.96	0.96	0.99	0.97	0.86	0.74	0.62	0.50	0.35	0.19
120	0.93	0.97	1.02	1.05	1.07	1.05	1.02	1.00	0.99	1.00	0.99	0.90	0.80	0.72	0.60	0.49	0.36	0.19
130	1.35	1.38	1.40	1.41	1.38	1.28	1.17	1.08	1.03	1.01	0.97	0.87	0.75	0.66	0.58	0.47	0.36	0.19
140	1.78	1.79	1.79	1.77	1.67	1.54	1.39	1.25	1.11	0.99	0.88	0.79	0.71	0.61	0.54	0.45	0.35	0.19
150	1.99	1.99	1.99	1.94	1.84	1.72	1.57	1.41	1.15	0.93	0.78	0.69	0.62	0.56	0.48	0.42	0.33	0.19
160	2.05	2.01	1.97	1.92	1.86	1.79	1.55	1.27	1.02	0.80	0.66	0.58	0.53	0.49	0.43	0.39	0.31	0.19
170	1.88	1.89	1.89	1.78	1.62	1.42	1.21	0.99	0.78	0.60	0.50	0.45	0.43	0.41	0.37	0.35	0.30	0.19
180	1.65	1.57	1.45	1.31	1.14	0.95	0.77	0.59	0.44	0.33	0.31	0.31	0.32	0.32	0.32	0.31	0.27	0.19

H_b Range: -90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-05-17

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks: