

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	4346.7 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	47.3V x 46.7H
	At 50% of Imax	20.0V x 19.8H
	At 90% of Imax	7.1V x 7.0H

Beam Flux	Total	1000.5 lumens per klm.
	To 10% of Imax	680.5 lumens per klm.
	To 50% of Imax	278.3 lumens per klm.
	To 90% of Imax	47.8 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-17

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: Medusa-510mm-RGBW RED-20D-ReV1	TYPE: RGBW-RED	WEIGHT:
SPEC.: 20 DEG	DIM.: 510mm	SERIAL No.: IES001031-R
MFR.:	SUR.:	Shielding Angle:

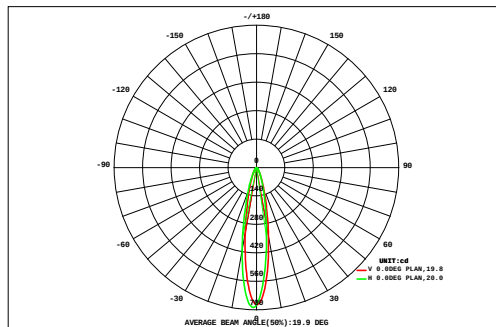

DATA OF LAMP		Eff: 21.10lm/W	
MODEL		Imax(cd)	687.7
NOMINAL POWER(W)	7.5	AVAILABILITY(%)	67.7
RATED VOLTAGE(V)	48	Avai. FLUX(lm)	107.1
NOMINAL FLUX(lm)	158.2	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	158.2
TEST VOLTAGE(V)	48	q @50%(H,V)	20, 20DEG

		AREA FLUX DIAGRAM															UNIT:lm				F t	F a
		0.03	0.04	0.04	0.05	0.07	0.08	0.09	0.09	0.10	0.09	0.09	0.08	0.07	0.06	0.05	0.04	0.03	0.02	1.12	0.00	
VERTICAL (DEG)	45	0.03	0.04	0.06	0.07	0.09	0.11	0.12	0.13	0.14	0.14	0.13	0.11	0.10	0.08	0.06	0.05	0.04	0.03	1.52	0.00	
	40	0.04	0.05	0.07	0.09	0.12	0.15	0.18	0.20	0.21	0.20	0.18	0.16	0.13	0.11	0.08	0.06	0.05	0.03	2.11	0.00	
	35	0.04	0.06	0.09	0.12	0.16	0.21	0.26	0.30	0.32	0.31	0.27	0.22	0.18	0.14	0.11	0.08	0.05	0.04	2.97	0.00	
	30	0.05	0.08	0.11	0.16	0.22	0.30	0.39	0.47	0.51	0.49	0.42	0.33	0.25	0.19	0.13	0.09	0.06	0.04	4.29	0.62	
	25	0.06	0.09	0.13	0.20	0.29	0.42	0.59	0.77	0.87	0.83	0.66	0.49	0.36	0.25	0.17	0.11	0.07	0.05	6.42	3.86	
	20	0.07	0.10	0.16	0.24	0.37	0.58	0.90	1.30	1.58	1.48	1.10	0.76	0.50	0.32	0.21	0.13	0.08	0.05	9.94	7.88	
	15	0.07	0.11	0.18	0.28	0.46	0.77	1.31	2.14	2.86	2.59	1.80	1.13	0.69	0.42	0.25	0.15	0.09	0.06	15.4	13.6	
	10	0.08	0.12	0.19	0.31	0.52	0.91	1.69	3.01	4.32	3.88	2.78	1.66	0.91	0.50	0.28	0.16	0.10	0.06	21.4	19.8	
	5	0.08	0.12	0.19	0.31	0.54	0.97	1.83	3.30	4.61	4.72	3.32	1.87	0.98	0.52	0.29	0.16	0.10	0.06	24.0	22.3	
	0	0.07	0.11	0.18	0.30	0.51	0.91	1.62	2.73	3.71	3.64	2.62	1.56	0.86	0.48	0.27	0.16	0.09	0.06	19.9	18.3	
	-5	0.07	0.10	0.16	0.27	0.44	0.73	1.18	1.78	2.27	2.22	1.68	1.10	0.67	0.40	0.23	0.14	0.09	0.05	13.6	11.8	
	-10	0.06	0.09	0.14	0.22	0.34	0.52	0.77	1.05	1.24	1.22	0.99	0.71	0.47	0.30	0.19	0.12	0.08	0.05	8.54	6.51	
	-15	0.05	0.08	0.11	0.17	0.25	0.35	0.48	0.61	0.69	0.68	0.58	0.45	0.32	0.22	0.15	0.10	0.06	0.04	5.39	2.58	
	-20	0.04	0.06	0.09	0.13	0.18	0.24	0.30	0.36	0.40	0.39	0.35	0.28	0.22	0.16	0.11	0.08	0.05	0.04	3.48	0.00	
	-25	0.04	0.05	0.07	0.09	0.13	0.16	0.19	0.22	0.24	0.24	0.21	0.18	0.15	0.11	0.08	0.06	0.04	0.03	2.30	0.00	
	-30	0.03	0.04	0.05	0.07	0.09	0.11	0.13	0.14	0.15	0.15	0.14	0.12	0.10	0.08	0.06	0.05	0.03	0.02	1.57	0.00	
-35	0.02	0.03	0.04	0.05	0.06	0.08	0.09	0.09	0.10	0.10	0.09	0.08	0.07	0.06	0.05	0.04	0.03	0.02	1.09	0.00		
-40																						
-45																						
		-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45				
F t	0.92	1.38	2.07	3.13	4.83	7.59	12.1	18.7	24.3	23.4	17.4	11.3	7.02	4.39	2.78	1.78	1.16	0.76	145	---		
F a	0.00	0.00	0.00	0.00	1.34	5.21	10.0	16.7	22.4	21.4	15.4	9.10	4.54	1.04	0.00	0.00	0.00	0.00	---	107		

one-half-peak spread: U:10.2,D:10.0 , L:9.8,R:10.2


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-05-17

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: Medusa-510mm-RGBW RED-20D-Rev1	TYPE: RGBW-RED	WEIGHT:
SPEC.: 20 DEG	DIM.: 510mm	SERIAL No.: IES001031-R
MFR.:	SUR.:	Shielding Angle:

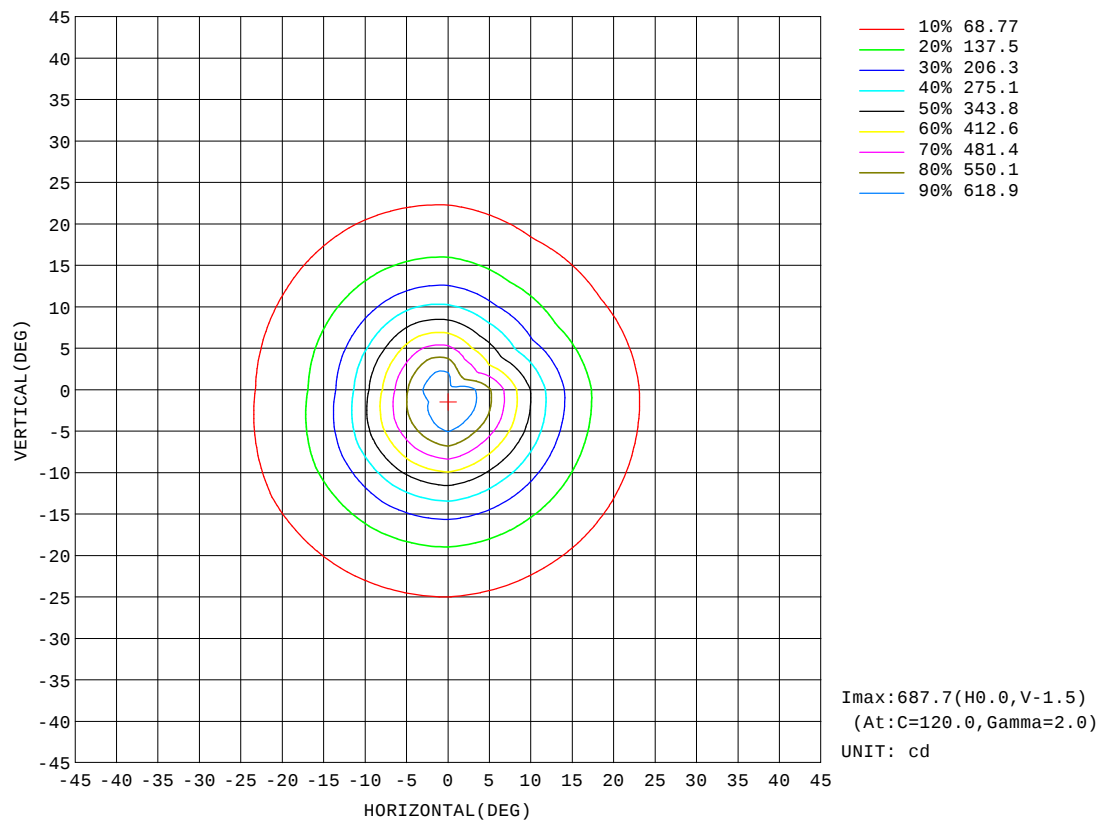


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-17

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME: Medusa-510mm-RGBW RED-20D-Rev1	TYPE: RGBW-RED	WEIGHT:
SPEC.: 20 DEG	DIM.: 510mm	SERIAL No.: IES001031-R
MFR.:	SUR.:	Shielding Angle:

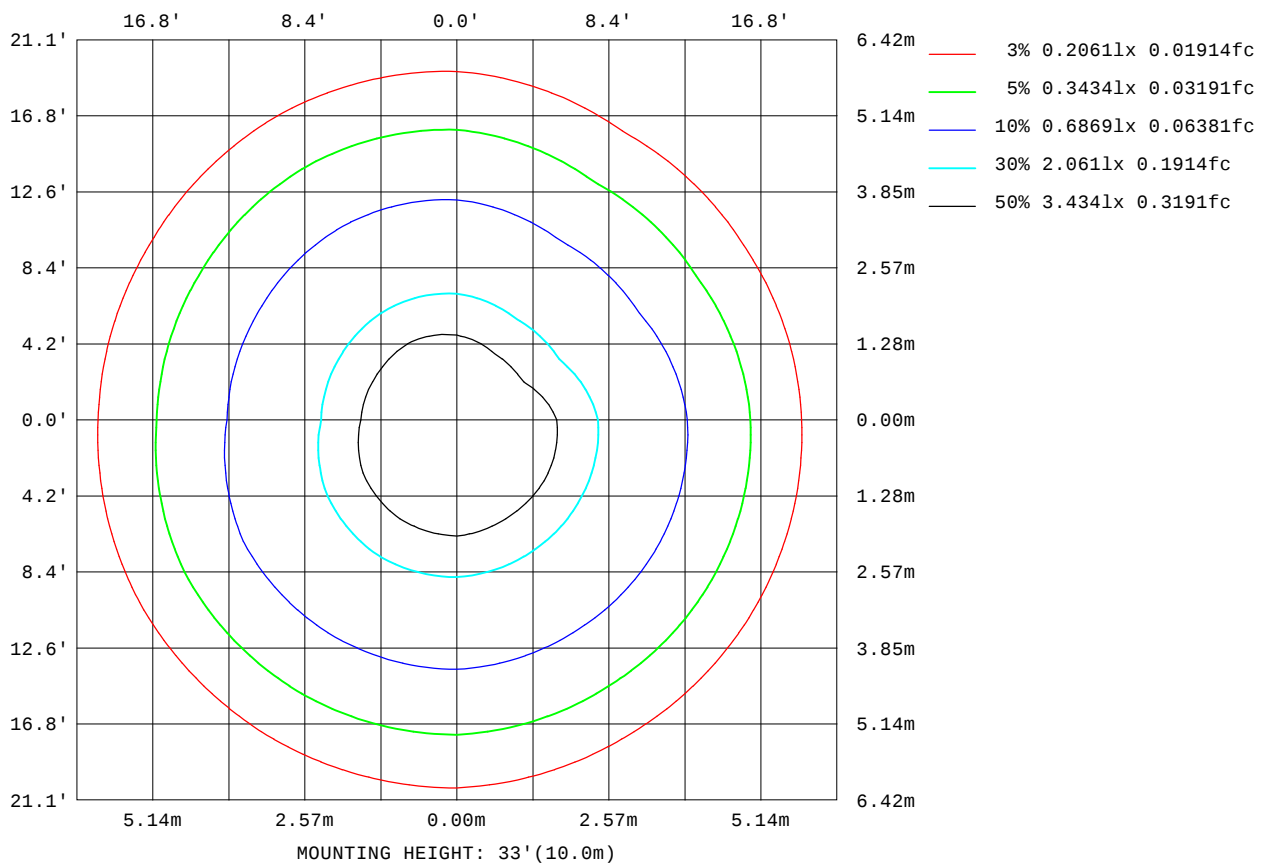

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-17

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

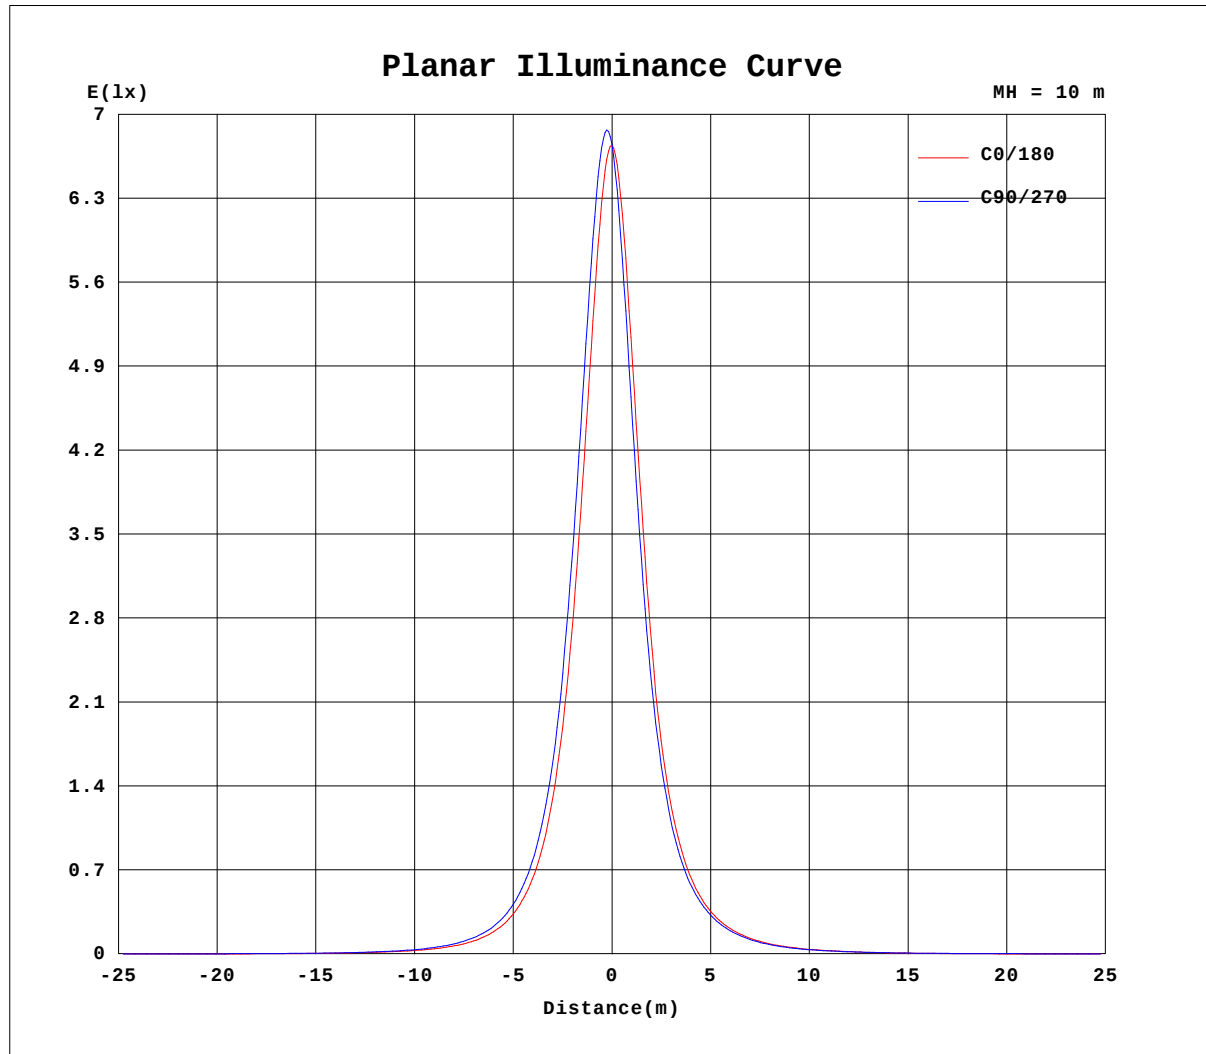


H(b) Range: -90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-17

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME: Medusa-510mm-RGBW RED-20D-Rev1	TYPE: RGBW-RED	WEIGHT:
SPEC.: 20 DEG	DIM.: 510mm	SERIAL No.: IES001031-R
MFR.:	SUR.:	Shielding Angle:

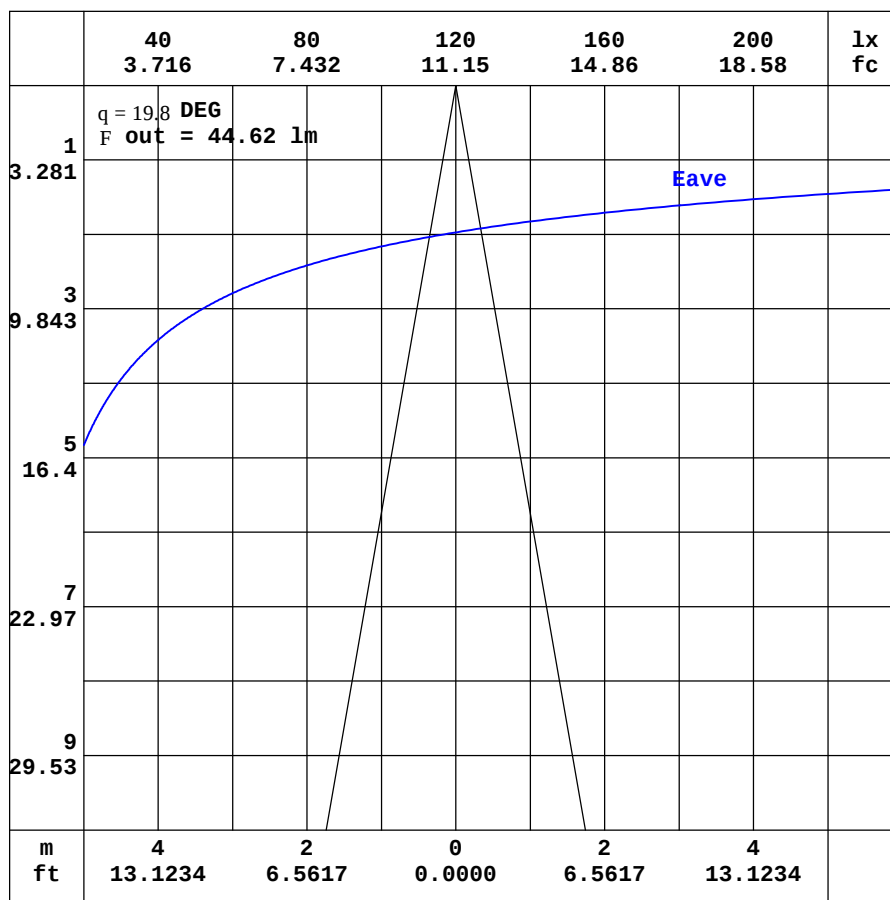

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-17

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Medusa-510mm-RGBW RED-20D-ReV1	TYPE: RGBW-RED	WEIGHT:
SPEC.: 20 DEG	DIM.: 510mm	SERIAL No.: IES001031-R
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.50	0.46	0.42	0.42	0.44	0.47	0.53	0.64	0.78	0.94	1.08	1.16	1.17	1.17	1.17	1.17	1.15	1.14	1.13
-170	0.50	0.47	0.43	0.43	0.45	0.46	0.49	0.53	0.61	0.69	0.76	0.80	0.82	0.82	0.83	0.85	0.91	0.96	1.11
-160	0.50	0.47	0.44	0.45	0.46	0.47	0.46	0.44	0.45	0.45	0.45	0.44	0.43	0.52	0.61	0.69	0.76	0.85	0.92
-150	0.50	0.47	0.44	0.46	0.47	0.48	0.45	0.41	0.35	0.28	0.23	0.27	0.32	0.36	0.41	0.45	0.53	0.59	0.64
-140	0.50	0.47	0.44	0.46	0.48	0.50	0.49	0.43	0.36	0.29	0.29	0.31	0.31	0.32	0.34	0.33	0.34	0.35	0.36
-130	0.50	0.48	0.45	0.47	0.49	0.51	0.53	0.52	0.48	0.47	0.45	0.44	0.45	0.47	0.41	0.34	0.28	0.23	0.19
-120	0.50	0.48	0.47	0.46	0.49	0.52	0.54	0.55	0.57	0.58	0.58	0.59	0.61	0.61	0.51	0.42	0.32	0.24	0.15
-110	0.50	0.49	0.47	0.47	0.48	0.50	0.53	0.55	0.57	0.59	0.60	0.62	0.64	0.58	0.50	0.42	0.33	0.25	0.17
-100	0.50	0.49	0.48	0.47	0.47	0.47	0.49	0.51	0.53	0.55	0.56	0.58	0.60	0.54	0.47	0.40	0.33	0.26	0.19
-90	0.50	0.49	0.48	0.47	0.46	0.45	0.44	0.47	0.50	0.53	0.56	0.60	0.63	0.55	0.47	0.40	0.32	0.24	0.17
-80	0.50	0.51	0.50	0.52	0.54	0.57	0.61	0.69	0.77	0.84	0.92	0.99	1.07	1.03	0.98	0.92	0.86	0.79	0.72
-70	0.50	0.51	0.54	0.60	0.68	0.78	0.91	1.05	1.20	1.34	1.49	1.64	1.77	1.82	1.83	1.82	1.80	1.75	1.69
-60	0.50	0.54	0.59	0.68	0.82	0.99	1.21	1.47	1.72	1.99	2.27	2.57	2.86	3.10	3.24	3.35	3.42	3.44	3.40
-50	0.50	0.55	0.63	0.75	0.94	1.18	1.53	1.97	2.41	2.90	3.45	4.05	4.70	5.37	5.93	6.42	6.81	7.05	7.10
-40	0.50	0.56	0.66	0.81	1.02	1.40	1.96	2.60	3.31	4.19	5.28	6.58	8.12	9.81	11.6	13.3	14.6	15.6	15.9
-30	0.50	0.57	0.68	0.84	1.07	1.68	2.43	3.35	4.53	6.01	7.93	10.6	14.1	18.5	23.7	29.5	34.9	39.0	40.5
-20	0.50	0.58	0.68	0.84	1.17	1.91	2.95	4.19	5.93	8.32	11.5	16.3	23.5	34.0	49.2	69.6	93.3	114	122
-10	0.50	0.58	0.68	0.82	1.22	2.09	3.21	4.82	7.04	10.3	14.8	21.9	33.4	53.0	87.8	147	239	353	410
0	0.50	0.59	0.67	0.78	1.21	2.08	3.36	5.05	7.86	11.2	16.2	23.9	36.5	57.7	96.7	172	324	542	674
10	0.50	0.59	0.70	0.85	1.28	2.18	3.33	4.98	7.13	10.3	14.7	21.3	31.4	47.3	73.3	116	182	259	282
20	0.50	0.58	0.71	0.90	1.27	2.08	3.19	4.49	6.27	8.36	11.7	16.0	22.0	30.5	41.7	56.0	71.7	83.6	86.9
30	0.50	0.58	0.72	0.92	1.21	1.91	2.75	3.77	5.05	6.54	7.99	10.9	14.0	17.7	22.0	26.5	30.3	32.9	33.5
40	0.50	0.57	0.70	0.90	1.18	1.65	2.32	3.08	3.92	4.85	5.91	7.03	8.34	10.0	11.6	13.1	14.2	14.9	15.1
50	0.50	0.56	0.68	0.85	1.10	1.43	1.89	2.45	2.96	3.45	3.99	4.58	5.21	5.85	6.42	6.90	7.28	7.48	7.51
60	0.50	0.56	0.63	0.77	0.96	1.21	1.52	1.86	2.11	2.37	2.65	2.93	3.22	3.48	3.69	3.87	4.00	4.07	4.09
70	0.50	0.53	0.59	0.67	0.79	0.95	1.14	1.30	1.43	1.56	1.68	1.80	1.91	2.01	2.09	2.16	2.21	2.24	2.25
80	0.50	0.53	0.55	0.58	0.62	0.68	0.75	0.81	0.86	0.91	0.95	0.99	1.03	1.05	1.07	1.08	1.09	1.09	1.08
90	0.50	0.51	0.52	0.53	0.54	0.55	0.56	0.55	0.54	0.53	0.53	0.52	0.51	0.52	0.52	0.53	0.54	0.55	0.55
100	0.50	0.51	0.51	0.51	0.51	0.51	0.51	0.49	0.48	0.46	0.45	0.44	0.43	0.44	0.44	0.44	0.44	0.45	0.45
110	0.50	0.50	0.49	0.48	0.47	0.47	0.46	0.45	0.45	0.44	0.44	0.44	0.43	0.44	0.44	0.44	0.43	0.43	0.43
120	0.50	0.49	0.48	0.45	0.45	0.44	0.44	0.44	0.44	0.44	0.45	0.46	0.47	0.49	0.50	0.50	0.51	0.51	0.51
130	0.50	0.49	0.45	0.44	0.44	0.44	0.44	0.44	0.44	0.46	0.51	0.56	0.62	0.68	0.72	0.76	0.78	0.80	0.80
140	0.50	0.48	0.44	0.43	0.43	0.43	0.44	0.45	0.49	0.56	0.64	0.75	0.84	0.94	1.02	1.07	1.10	1.11	1.11
150	0.50	0.47	0.43	0.43	0.43	0.44	0.46	0.51	0.59	0.69	0.81	0.94	1.05	1.14	1.21	1.25	1.27	1.28	1.28
160	0.50	0.47	0.43	0.43	0.43	0.45	0.49	0.57	0.68	0.82	0.96	1.07	1.15	1.22	1.26	1.29	1.31	1.33	1.35
170	0.50	0.47	0.43	0.43	0.43	0.46	0.51	0.61	0.75	0.90	1.04	1.14	1.19	1.21	1.23	1.25	1.26	1.25	1.32
180	0.50	0.46	0.42	0.42	0.44	0.47	0.53	0.64	0.78	0.94	1.08	1.16	1.17	1.17	1.17	1.17	1.15	1.14	1.16

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-05-17

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Medusa-510mm-RGBW RED-20D-ReV1	TYPE: RGBW-RED	WEIGHT:
SPEC.: 20 DEG	DIM.: 510mm	SERIAL No.: IES001031-R
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.03	0.98	0.91	0.81	0.70	0.56	0.44	0.33	0.23	0.17	0.17	0.17	0.19	0.19	0.19	0.19	0.15	0.09	
-170	1.04	1.00	0.94	0.84	0.71	0.57	0.45	0.33	0.23	0.18	0.17	0.17	0.19	0.19	0.19	0.19	0.15	0.09	
-160	0.89	0.84	0.76	0.69	0.59	0.50	0.39	0.29	0.21	0.18	0.17	0.17	0.19	0.19	0.19	0.19	0.15	0.09	
-150	0.62	0.58	0.51	0.46	0.39	0.33	0.28	0.23	0.19	0.18	0.17	0.18	0.18	0.19	0.20	0.19	0.15	0.09	
-140	0.34	0.32	0.28	0.24	0.21	0.20	0.19	0.18	0.17	0.17	0.17	0.18	0.19	0.19	0.20	0.17	0.15	0.09	
-130	0.18	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.18	0.17	0.17	0.19	0.19	0.20	0.19	0.17	0.15	0.09	
-120	0.16	0.16	0.17	0.17	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.20	0.19	0.18	0.16	0.14	0.09	
-110	0.17	0.18	0.18	0.19	0.20	0.20	0.20	0.19	0.19	0.20	0.20	0.20	0.20	0.19	0.18	0.17	0.16	0.13	0.09
-100	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.20	0.19	0.17	0.16	0.14	0.12	0.09	
-90	0.17	0.17	0.18	0.18	0.19	0.19	0.19	0.18	0.18	0.18	0.18	0.18	0.16	0.15	0.14	0.12	0.11	0.09	
-80	0.71	0.70	0.68	0.66	0.63	0.60	0.56	0.51	0.46	0.41	0.35	0.29	0.22	0.17	0.13	0.11	0.10	0.09	
-70	1.67	1.62	1.56	1.48	1.39	1.29	1.18	1.06	0.94	0.82	0.71	0.57	0.40	0.28	0.18	0.13	0.10	0.09	
-60	3.32	3.19	3.01	2.79	2.56	2.31	2.06	1.81	1.57	1.34	1.11	0.82	0.57	0.37	0.23	0.14	0.10	0.09	
-50	6.86	6.45	5.91	5.29	4.64	4.02	3.43	2.88	2.39	1.97	1.58	1.15	0.74	0.44	0.26	0.15	0.10	0.09	
-40	15.2	13.9	12.2	10.4	8.71	7.12	5.70	4.52	3.55	2.77	2.11	1.53	0.97	0.51	0.27	0.15	0.10	0.09	
-30	37.9	33.0	27.1	21.3	16.4	12.4	9.19	6.83	5.07	3.77	2.75	1.89	1.23	0.64	0.25	0.14	0.10	0.09	
-20	110	87.0	63.7	44.3	30.0	20.3	13.9	9.59	6.74	4.77	3.44	2.32	1.40	0.71	0.21	0.12	0.09	0.09	
-10	336	226	136	80.5	47.9	29.2	18.4	12.0	8.07	5.52	3.87	2.57	1.53	0.77	0.17	0.09	0.09	0.09	
0	557	341	184	98.7	55.5	32.6	20.0	12.8	8.48	5.75	4.01	2.65	1.49	0.71	0.12	0.06	0.08	0.09	
10	222	154	98.7	64.4	42.0	27.2	17.7	11.9	8.18	5.72	4.07	2.72	1.65	0.85	0.23	0.12	0.10	0.09	
20	76.2	60.2	46.9	35.5	26.1	18.8	13.4	9.68	7.07	5.21	3.81	2.61	1.63	0.88	0.32	0.18	0.12	0.09	
30	31.2	27.4	23.1	19.2	15.4	12.1	9.40	7.37	5.76	4.43	3.25	2.30	1.54	0.87	0.41	0.23	0.14	0.09	
40	14.5	13.4	12.0	10.5	8.95	7.57	6.37	5.32	4.37	3.50	2.72	2.03	1.36	0.79	0.46	0.26	0.16	0.09	
50	7.32	6.96	6.46	5.91	5.32	4.75	4.18	3.64	3.15	2.71	2.26	1.70	1.17	0.76	0.48	0.28	0.17	0.09	
60	4.02	3.89	3.72	3.51	3.28	3.02	2.75	2.49	2.24	2.01	1.78	1.39	1.01	0.70	0.46	0.29	0.18	0.09	
70	2.23	2.18	2.12	2.04	1.96	1.86	1.76	1.64	1.52	1.40	1.28	1.10	0.83	0.60	0.43	0.29	0.18	0.09	
80	1.09	1.10	1.10	1.09	1.08	1.06	1.03	0.99	0.94	0.90	0.85	0.81	0.65	0.52	0.40	0.29	0.19	0.09	
90	0.57	0.59	0.60	0.62	0.63	0.65	0.66	0.66	0.67	0.68	0.68	0.69	0.59	0.49	0.39	0.29	0.19	0.09	
100	0.48	0.51	0.54	0.57	0.60	0.62	0.63	0.63	0.64	0.64	0.65	0.66	0.57	0.49	0.40	0.30	0.21	0.09	
110	0.47	0.50	0.53	0.57	0.60	0.62	0.63	0.63	0.64	0.64	0.65	0.63	0.55	0.47	0.39	0.31	0.21	0.09	
120	0.56	0.60	0.64	0.68	0.70	0.69	0.67	0.65	0.65	0.64	0.64	0.59	0.53	0.46	0.37	0.30	0.21	0.09	
130	0.85	0.89	0.93	0.95	0.94	0.86	0.79	0.73	0.69	0.67	0.63	0.55	0.49	0.43	0.37	0.29	0.21	0.09	
140	1.15	1.19	1.20	1.18	1.12	1.02	0.94	0.84	0.75	0.67	0.58	0.51	0.45	0.39	0.34	0.27	0.20	0.09	
150	1.28	1.27	1.28	1.27	1.22	1.13	1.00	0.90	0.77	0.62	0.51	0.44	0.39	0.35	0.31	0.26	0.19	0.09	
160	1.32	1.29	1.26	1.24	1.19	1.15	0.98	0.79	0.63	0.52	0.42	0.37	0.33	0.30	0.27	0.24	0.18	0.09	
170	1.20	1.22	1.21	1.14	1.03	0.88	0.75	0.59	0.45	0.36	0.31	0.27	0.26	0.25	0.23	0.22	0.16	0.09	
180	1.03	0.98	0.91	0.81	0.70	0.56	0.44	0.33	0.23	0.17	0.17	0.17	0.19	0.19	0.19	0.19	0.15	0.09	

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-05-17

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks: