

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	2581.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	63.6V x 62.8H
	At 50% of Imax	27.3V x 27.1H
	At 90% of Imax	9.9V x 9.9H

Beam Flux	Total	999.9 lumens per klm.
	To 10% of Imax	752.1 lumens per klm.
	To 50% of Imax	318.7 lumens per klm.
	To 90% of Imax	57.6 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: Medusa-510mm-RGBW 3000K-25D-ReV1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 25 DEG	DIM.: 510mm	SERIAL No.: IES001033-W
MFR.:	SUR.:	Shielding Angle:

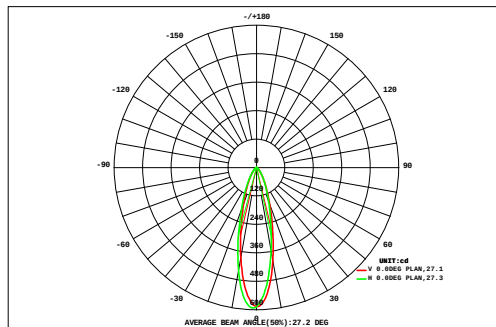

DATA OF LAMP		Eff: 30.57lm/W	
MODEL		Imax(cd)	592.0
NOMINAL POWER(W)	7.5	AVAILABILITY(%)	75.2
RATED VOLTAGE(V)	48	Avai. FLUX(lm)	172.3
NOMINAL FLUX(lm)	229.3	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	229.3
TEST VOLTAGE(V)	48	q @50%(H,V)	27, 27DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT: lm		F t	F a
	0.05	0.06	0.08	0.10	0.12	0.14	0.15	0.16	0.17	0.16	0.16	0.14	0.12	0.11	0.09	0.07	0.05	0.04	1.96	0.00
45	0.05	0.06	0.08	0.10	0.12	0.14	0.15	0.16	0.17	0.16	0.16	0.14	0.12	0.11	0.09	0.07	0.05	0.04	1.96	0.00
40	0.06	0.08	0.10	0.13	0.16	0.20	0.22	0.25	0.25	0.25	0.23	0.20	0.17	0.14	0.11	0.09	0.07	0.05	2.76	0.00
35	0.07	0.09	0.13	0.17	0.22	0.28	0.33	0.37	0.39	0.38	0.35	0.30	0.24	0.19	0.15	0.11	0.08	0.06	3.94	0.17
30	0.08	0.12	0.16	0.23	0.31	0.40	0.49	0.56	0.60	0.58	0.51	0.42	0.34	0.26	0.20	0.14	0.10	0.07	5.58	2.90
25	0.09	0.14	0.21	0.30	0.42	0.56	0.71	0.84	0.91	0.89	0.77	0.62	0.48	0.36	0.25	0.17	0.12	0.08	7.92	5.93
20	0.11	0.17	0.25	0.38	0.54	0.76	1.03	1.27	1.41	1.37	1.16	0.90	0.67	0.47	0.32	0.21	0.14	0.09	11.3	9.67
15	0.12	0.19	0.30	0.45	0.68	1.01	1.44	1.90	2.18	2.13	1.75	1.28	0.89	0.60	0.40	0.26	0.16	0.10	15.8	14.5
10	0.13	0.21	0.33	0.52	0.81	1.26	1.90	2.67	3.20	3.11	2.48	1.73	1.16	0.75	0.48	0.29	0.18	0.11	21.3	20.1
5	0.14	0.22	0.36	0.56	0.89	1.43	2.26	3.28	4.05	3.96	3.18	2.24	1.43	0.88	0.53	0.32	0.19	0.11	26.0	24.9
0	0.14	0.22	0.36	0.58	0.93	1.51	2.44	3.58	4.34	4.27	3.49	2.41	1.50	0.91	0.55	0.33	0.19	0.11	27.9	26.8
-5	0.13	0.21	0.35	0.56	0.90	1.46	2.30	3.20	3.76	3.68	3.01	2.12	1.35	0.84	0.51	0.31	0.18	0.11	25.0	23.8
-10	0.12	0.20	0.32	0.51	0.79	1.22	1.77	2.36	2.74	2.69	2.22	1.63	1.10	0.71	0.45	0.28	0.17	0.10	19.4	18.1
-15	0.11	0.17	0.27	0.42	0.63	0.91	1.26	1.59	1.79	1.76	1.51	1.16	0.83	0.56	0.37	0.23	0.14	0.09	13.8	12.4
-20	0.09	0.14	0.22	0.33	0.48	0.66	0.85	1.03	1.13	1.12	0.98	0.79	0.60	0.42	0.29	0.19	0.12	0.08	9.52	7.86
-25	0.08	0.12	0.17	0.25	0.35	0.46	0.57	0.67	0.72	0.71	0.64	0.53	0.42	0.31	0.22	0.15	0.10	0.07	6.51	4.33
-30	0.06	0.09	0.13	0.18	0.24	0.31	0.38	0.43	0.46	0.45	0.41	0.35	0.28	0.22	0.16	0.11	0.08	0.05	4.41	0.98
-35	0.05	0.07	0.10	0.13	0.17	0.21	0.25	0.28	0.29	0.29	0.26	0.23	0.19	0.15	0.11	0.09	0.06	0.04	2.97	0.00
-40	0.04	0.06	0.07	0.09	0.12	0.14	0.16	0.18	0.18	0.18	0.17	0.15	0.13	0.10	0.08	0.06	0.05	0.04	2.01	0.00
-45	0.04	0.06	0.07	0.09	0.12	0.14	0.16	0.18	0.18	0.18	0.17	0.15	0.13	0.10	0.08	0.06	0.05	0.04	2.01	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
F t	1.66	2.55	3.91	5.90	8.78	12.9	18.5	24.6	28.6	28.0	23.3	17.2	11.9	7.99	5.27	3.40	2.16	1.38	208	---
F a	0.00	0.00	0.52	3.58	6.83	11.2	17.0	23.2	27.2	26.6	21.8	15.6	10.1	5.96	2.69	0.14	0.00	0.00	---	172

one-half-peak spread: U:13.8,D:13.8 , L:14.0,R:13.4


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: Medusa-510mm-RGBW 3000K-25D-ReV1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 25 DEG	DIM.: 510mm	SERIAL No.: IES001033-W
MFR.:	SUR.:	Shielding Angle:

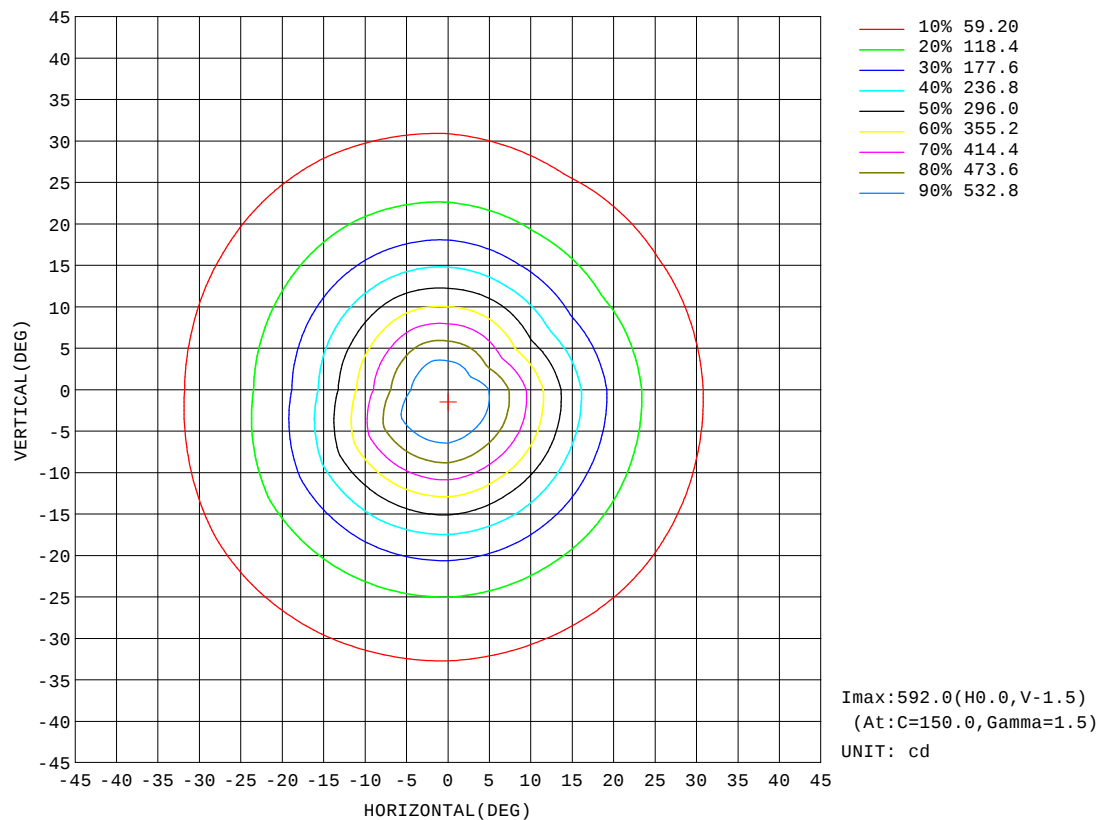


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME: Medusa-510mm-RGBW 3000K-25D-ReV1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 25 DEG	DIM.: 510mm	SERIAL No.: IES001033-W
MFR.:	SUR.:	Shielding Angle:

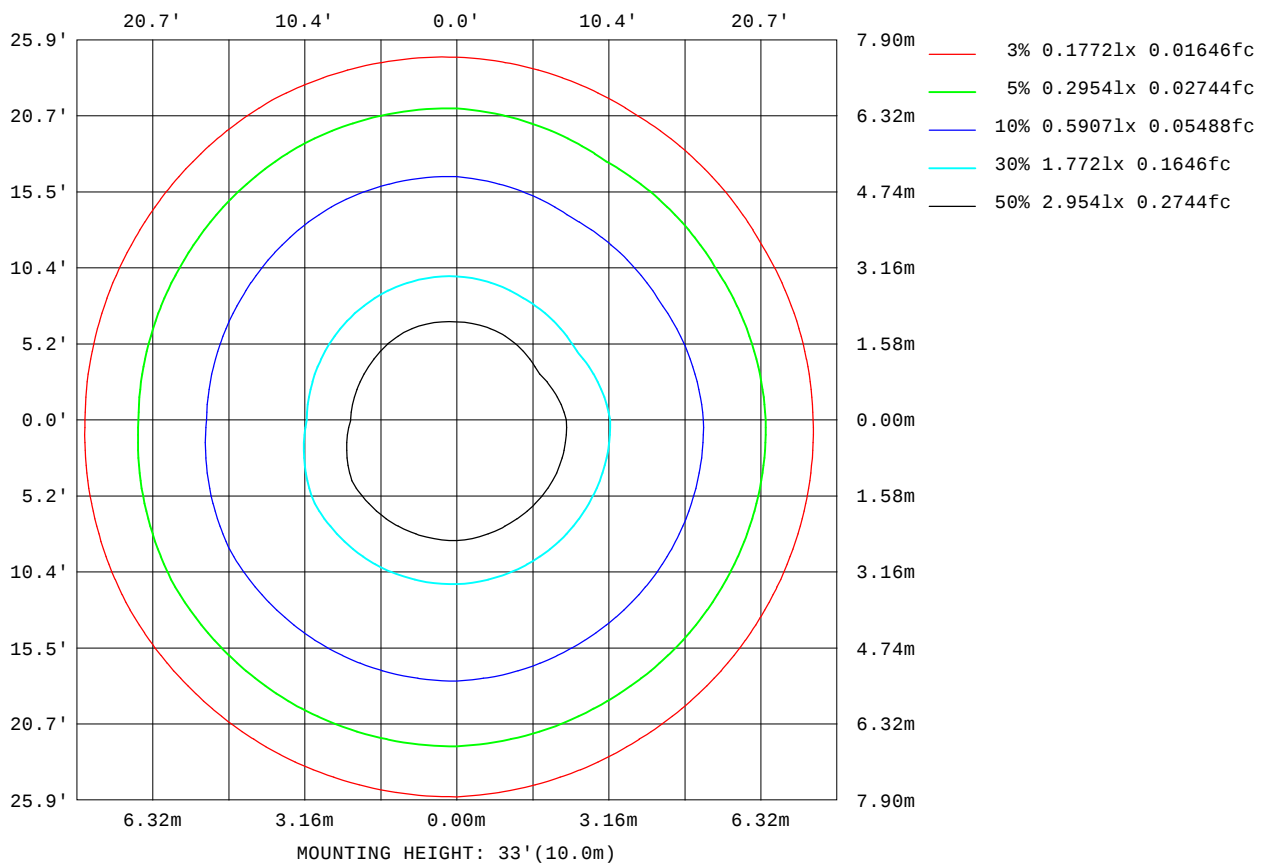

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

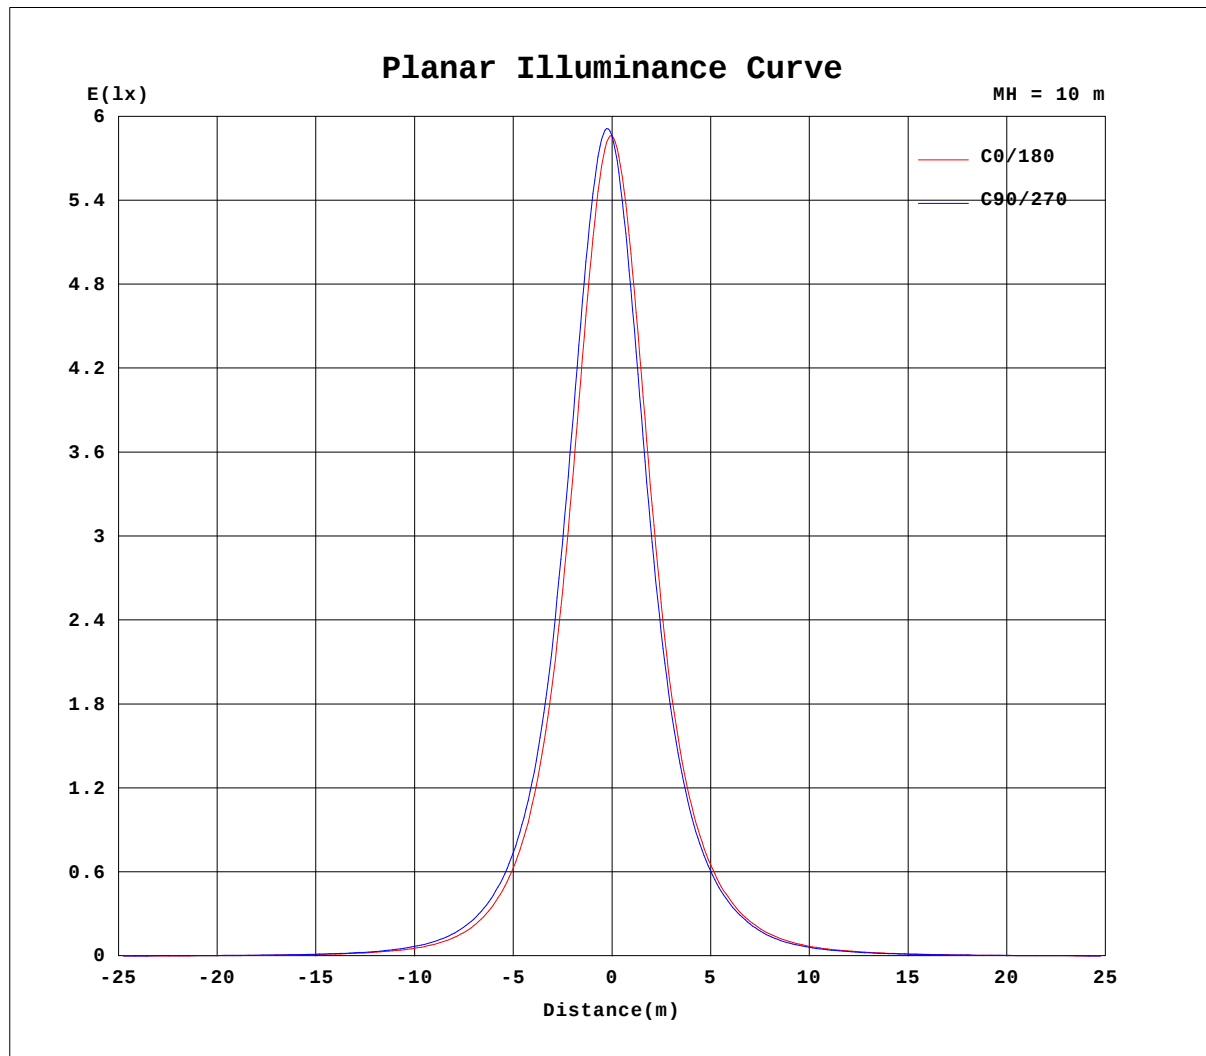


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME: Medusa-510mm-RGBW 3000K-25D-Rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 25 DEG	DIM.: 510mm	SERIAL No.: IES001033-W
MFR.:	SUR.:	Shielding Angle:

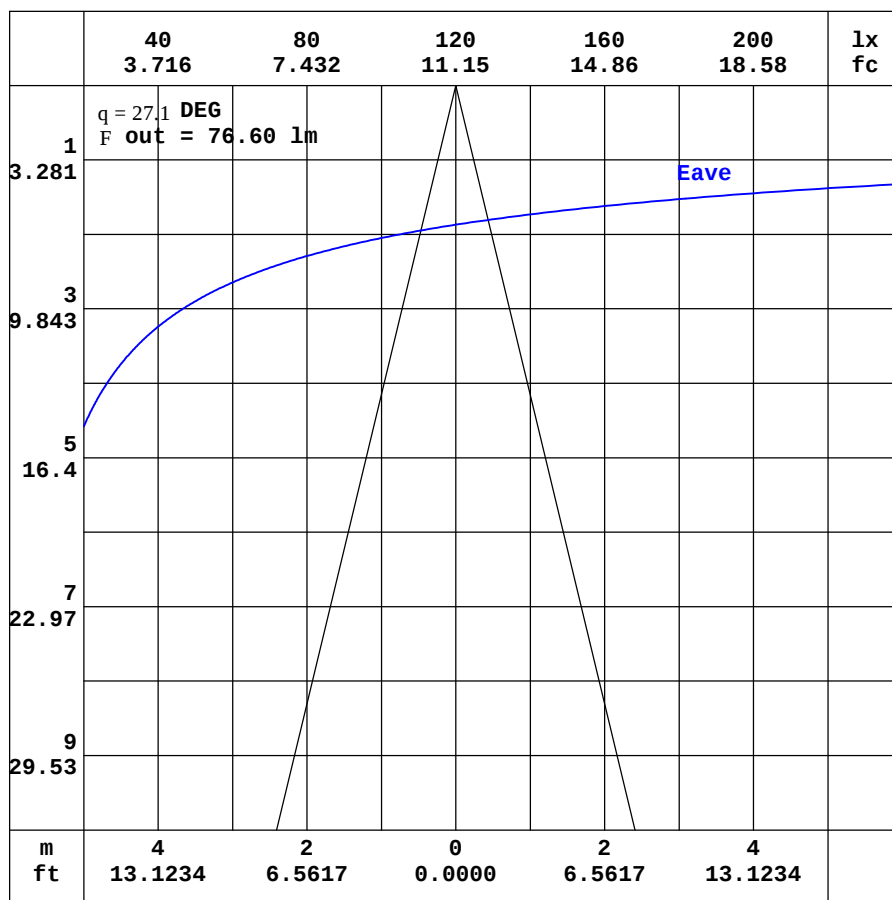

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Medusa-510mm-RGBW 3000K-25D-ReV1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:25 DEG	DIM.:510mm	SERIAL No.:IES001033-W
MFR.:	SUR.:	Shielding Angle:

Table--1
UNIT: cd

H(°)\V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.82	0.75	0.72	0.71	0.73	0.78	0.86	0.99	1.15	1.34	1.49	1.61	1.69	1.72	1.72	1.72	1.70	1.65	1.64
-170	0.82	0.74	0.69	0.68	0.68	0.70	0.75	0.82	0.91	1.01	1.09	1.15	1.19	1.21	1.20	1.23	1.32	1.39	1.51
-160	0.82	0.74	0.67	0.65	0.64	0.63	0.63	0.65	0.67	0.68	0.69	0.68	0.68	0.80	0.93	1.02	1.11	1.20	1.26
-150	0.82	0.73	0.65	0.62	0.59	0.57	0.53	0.51	0.47	0.41	0.37	0.43	0.50	0.58	0.66	0.74	0.82	0.88	0.92
-140	0.82	0.73	0.64	0.59	0.56	0.52	0.47	0.40	0.34	0.31	0.32	0.34	0.36	0.38	0.42	0.47	0.52	0.56	0.59
-130	0.82	0.72	0.63	0.58	0.53	0.48	0.44	0.37	0.34	0.32	0.33	0.33	0.34	0.35	0.35	0.35	0.35	0.35	0.36
-120	0.82	0.72	0.63	0.56	0.51	0.45	0.40	0.36	0.36	0.35	0.35	0.34	0.35	0.35	0.34	0.32	0.31	0.30	0.29
-110	0.82	0.73	0.64	0.56	0.50	0.44	0.38	0.36	0.36	0.35	0.35	0.35	0.35	0.35	0.34	0.33	0.32	0.31	0.29
-100	0.82	0.73	0.64	0.57	0.49	0.42	0.36	0.36	0.35	0.35	0.35	0.35	0.35	0.34	0.33	0.32	0.31	0.30	0.29
-90	0.82	0.74	0.66	0.58	0.49	0.41	0.33	0.34	0.35	0.36	0.37	0.37	0.38	0.36	0.34	0.32	0.30	0.28	0.26
-80	0.82	0.76	0.70	0.67	0.66	0.67	0.70	0.78	0.87	0.95	1.03	1.10	1.17	1.20	1.22	1.24	1.25	1.25	1.23
-70	0.82	0.77	0.78	0.83	0.92	1.05	1.24	1.45	1.65	1.85	2.05	2.25	2.43	2.59	2.71	2.82	2.90	2.94	2.95
-60	0.82	0.80	0.86	0.98	1.17	1.45	1.81	2.25	2.65	3.07	3.52	3.98	4.44	4.87	5.24	5.57	5.82	5.99	6.04
-50	0.82	0.83	0.95	1.12	1.40	1.81	2.50	3.22	3.95	4.78	5.72	6.78	7.95	9.15	10.3	11.3	12.1	12.7	12.8
-40	0.82	0.87	1.00	1.23	1.57	2.40	3.40	4.47	5.70	7.23	9.18	11.6	14.6	17.9	21.6	25.0	27.9	29.8	30.4
-30	0.82	0.89	1.04	1.29	1.85	3.00	4.39	6.10	8.13	10.7	14.4	19.8	27.0	36.1	46.4	57.3	66.9	73.7	75.9
-20	0.82	0.91	1.07	1.31	2.16	3.63	5.49	7.90	10.7	14.9	21.4	31.5	46.4	66.2	91.6	122	155	180	188
-10	0.82	0.92	1.08	1.29	2.35	4.02	6.34	9.19	12.8	18.5	27.5	42.1	64.2	97.8	150	229	326	409	441
0	0.82	0.93	1.07	1.23	2.39	4.16	6.83	9.89	13.9	20.0	29.8	45.2	68.4	104	160	251	385	521	586
10	0.82	0.94	1.11	1.35	2.45	4.17	6.54	9.44	13.0	18.5	27.0	40.2	59.7	87.6	128	188	264	335	354
20	0.82	0.93	1.13	1.43	2.36	3.92	5.88	8.37	11.2	15.2	21.1	29.8	41.9	58.2	78.5	102	127	144	149
30	0.82	0.93	1.14	1.46	2.12	3.40	4.93	6.77	8.93	11.5	14.9	19.6	25.7	33.2	41.8	50.5	57.8	62.5	63.6
40	0.82	0.92	1.11	1.44	1.90	2.87	4.03	5.30	6.68	8.27	10.2	12.4	15.1	18.0	21.1	23.6	25.5	26.5	26.5
50	0.82	0.90	1.07	1.35	1.75	2.31	3.17	4.08	4.92	5.80	6.76	7.82	8.96	10.1	11.0	11.7	12.2	12.3	12.2
60	0.82	0.88	1.00	1.20	1.52	1.93	2.46	3.03	3.47	3.93	4.41	4.91	5.41	5.84	6.13	6.35	6.47	6.49	6.42
70	0.82	0.86	0.93	1.05	1.22	1.49	1.81	2.07	2.28	2.48	2.69	2.90	3.12	3.31	3.44	3.53	3.57	3.58	3.56
80	0.82	0.85	0.87	0.92	0.98	1.06	1.16	1.24	1.32	1.40	1.47	1.53	1.58	1.64	1.68	1.72	1.75	1.77	1.78
90	0.82	0.83	0.84	0.85	0.86	0.87	0.87	0.87	0.86	0.85	0.84	0.83	0.82	0.83	0.83	0.84	0.84	0.85	0.85
100	0.82	0.82	0.81	0.81	0.80	0.80	0.79	0.78	0.76	0.74	0.73	0.72	0.71	0.72	0.72	0.72	0.73	0.73	0.73
110	0.82	0.81	0.79	0.77	0.75	0.75	0.75	0.73	0.72	0.72	0.71	0.71	0.71	0.72	0.72	0.72	0.72	0.71	0.71
120	0.82	0.80	0.76	0.74	0.73	0.72	0.72	0.72	0.72	0.72	0.74	0.76	0.78	0.81	0.82	0.84	0.85	0.85	0.84
130	0.82	0.78	0.74	0.73	0.72	0.72	0.72	0.73	0.74	0.78	0.84	0.90	0.97	1.04	1.09	1.14	1.16	1.18	1.19
140	0.82	0.77	0.73	0.72	0.71	0.72	0.73	0.76	0.83	0.90	1.01	1.12	1.23	1.34	1.43	1.48	1.52	1.54	1.55
150	0.82	0.77	0.72	0.71	0.72	0.73	0.76	0.84	0.93	1.05	1.19	1.34	1.47	1.57	1.66	1.73	1.75	1.77	1.78
160	0.82	0.76	0.72	0.71	0.72	0.75	0.81	0.91	1.04	1.20	1.36	1.49	1.60	1.68	1.76	1.80	1.82	1.84	1.86
170	0.82	0.75	0.72	0.71	0.72	0.76	0.85	0.96	1.12	1.30	1.45	1.58	1.67	1.73	1.75	1.77	1.78	1.76	1.83
180	0.82	0.75	0.72	0.71	0.73	0.78	0.86	0.99	1.15	1.34	1.49	1.61	1.69	1.72	1.72	1.72	1.70	1.65	1.66

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Medusa-510mm-RGBW 3000K-25D-ReV1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 25 DEG	DIM.: 510mm	SERIAL No.: IES001033-W
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	1.51	1.41	1.30	1.17	1.03	0.86	0.70	0.55	0.42	0.34	0.28	0.27	0.27	0.27	0.27	0.27	0.22	0.18
-170	1.43	1.38	1.30	1.17	1.02	0.85	0.69	0.55	0.43	0.34	0.29	0.28	0.28	0.28	0.27	0.27	0.22	0.18
-160	1.22	1.15	1.08	0.98	0.87	0.75	0.62	0.49	0.39	0.32	0.29	0.28	0.28	0.28	0.28	0.27	0.22	0.18
-150	0.90	0.85	0.78	0.71	0.64	0.55	0.48	0.41	0.35	0.31	0.30	0.29	0.29	0.28	0.28	0.26	0.22	0.18
-140	0.57	0.54	0.50	0.45	0.42	0.38	0.35	0.33	0.32	0.31	0.30	0.30	0.29	0.29	0.28	0.25	0.22	0.18
-130	0.35	0.34	0.32	0.30	0.28	0.29	0.29	0.30	0.29	0.30	0.31	0.30	0.29	0.29	0.28	0.24	0.22	0.18
-120	0.29	0.28	0.28	0.27	0.27	0.27	0.28	0.29	0.29	0.30	0.30	0.30	0.30	0.30	0.29	0.26	0.24	0.21
-110	0.29	0.28	0.28	0.28	0.27	0.27	0.28	0.28	0.29	0.30	0.30	0.30	0.30	0.29	0.27	0.25	0.23	0.20
-100	0.29	0.28	0.28	0.27	0.26	0.26	0.26	0.27	0.27	0.27	0.27	0.27	0.26	0.25	0.23	0.21	0.20	0.18
-90	0.26	0.26	0.27	0.27	0.27	0.27	0.27	0.26	0.26	0.26	0.25	0.25	0.24	0.23	0.22	0.21	0.20	0.18
-80	1.21	1.18	1.14	1.09	1.04	0.98	0.91	0.84	0.76	0.67	0.59	0.50	0.38	0.29	0.24	0.20	0.18	0.18
-70	2.88	2.79	2.67	2.52	2.35	2.17	1.98	1.79	1.60	1.40	1.20	0.97	0.69	0.47	0.32	0.22	0.18	0.18
-60	5.88	5.62	5.29	4.89	4.46	4.01	3.57	3.13	2.70	2.30	1.93	1.44	0.99	0.64	0.40	0.25	0.19	0.18
-50	12.4	11.6	10.6	9.47	8.29	7.14	6.05	5.08	4.22	3.47	2.77	2.02	1.31	0.77	0.46	0.27	0.18	0.18
-40	29.0	26.3	23.0	19.4	15.9	12.9	10.2	8.05	6.30	4.94	3.76	2.70	1.77	0.91	0.47	0.27	0.18	0.18
-30	71.7	63.2	52.4	41.4	31.5	23.3	16.9	12.3	9.05	6.75	5.07	3.50	2.28	1.16	0.45	0.25	0.17	0.18
-20	174	146	112	82.4	58.2	39.6	26.5	17.8	12.2	8.60	6.20	4.24	2.65	1.35	0.38	0.22	0.17	0.18
-10	391	302	207	136	88.9	57.0	36.0	22.8	14.9	10.1	7.02	5.00	2.86	1.44	0.33	0.17	0.16	0.18
0	531	398	262	164	102	63.9	39.6	24.6	15.8	10.5	7.32	5.22	2.97	1.43	0.24	0.12	0.15	0.18
10	319	239	167	115	79.2	52.6	34.3	22.4	14.9	10.2	7.19	5.17	2.98	1.54	0.40	0.21	0.18	0.18
20	136	112	88.6	67.4	49.6	35.4	25.1	17.5	12.4	8.96	6.57	4.56	2.90	1.55	0.51	0.29	0.20	0.18
30	59.1	51.8	43.4	35.9	28.6	22.1	16.7	12.6	9.59	7.33	5.66	3.95	2.64	1.44	0.63	0.36	0.22	0.18
40	25.6	23.8	21.5	18.7	16.0	13.2	10.8	8.76	7.13	5.79	4.44	3.25	2.25	1.25	0.70	0.40	0.25	0.18
50	12.1	11.7	10.9	10.0	9.05	7.93	6.93	5.95	5.07	4.29	3.54	2.70	1.84	1.14	0.71	0.42	0.26	0.18
60	6.35	6.19	5.96	5.68	5.33	4.88	4.44	3.94	3.52	3.13	2.74	2.12	1.51	1.03	0.66	0.42	0.28	0.18
70	3.52	3.45	3.34	3.19	3.01	2.83	2.67	2.50	2.30	2.09	1.88	1.59	1.19	0.85	0.59	0.42	0.29	0.18
80	1.76	1.73	1.69	1.64	1.58	1.51	1.45	1.39	1.32	1.24	1.16	1.07	0.88	0.70	0.55	0.42	0.29	0.18
90	0.85	0.85	0.85	0.84	0.84	0.84	0.85	0.86	0.87	0.88	0.89	0.90	0.78	0.66	0.54	0.42	0.30	0.18
100	0.74	0.74	0.75	0.75	0.76	0.76	0.77	0.78	0.79	0.80	0.81	0.82	0.72	0.63	0.52	0.42	0.31	0.18
110	0.73	0.74	0.75	0.76	0.77	0.78	0.77	0.77	0.77	0.78	0.79	0.77	0.68	0.60	0.51	0.42	0.30	0.18
120	0.86	0.88	0.88	0.88	0.88	0.86	0.83	0.81	0.79	0.78	0.78	0.73	0.65	0.57	0.49	0.40	0.29	0.18
130	1.20	1.20	1.19	1.17	1.13	1.07	1.00	0.93	0.87	0.84	0.76	0.68	0.61	0.54	0.47	0.38	0.30	0.18
140	1.56	1.56	1.54	1.51	1.43	1.34	1.24	1.13	1.02	0.89	0.74	0.63	0.56	0.50	0.44	0.37	0.28	0.18
150	1.79	1.79	1.78	1.73	1.65	1.55	1.44	1.32	1.10	0.87	0.70	0.58	0.50	0.45	0.40	0.35	0.27	0.18
160	1.86	1.86	1.84	1.82	1.75	1.67	1.44	1.19	0.97	0.76	0.61	0.51	0.44	0.40	0.36	0.32	0.26	0.18
170	1.77	1.79	1.80	1.68	1.52	1.33	1.12	0.92	0.74	0.58	0.46	0.40	0.36	0.34	0.32	0.30	0.24	0.18
180	1.51	1.41	1.30	1.17	1.03	0.86	0.70	0.55	0.42	0.34	0.28	0.27	0.27	0.27	0.27	0.27	0.22	0.18

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-05-18

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks: