

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	2592.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	63.1V x 62.3H
	At 50% of Imax	27.3V x 27.1H
	At 90% of Imax	9.8V x 9.9H

Beam Flux	Total	1000.7 lumens per klm.
	To 10% of Imax	752.6 lumens per klm.
	To 50% of Imax	323.8 lumens per klm.
	To 90% of Imax	58.4 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.1 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Medusa-510mm-RGBW ALL-25D-ReV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:25 DEG	DIM.:510mm	SERIAL No.:IES001033
MFR.:	SUR.:	Shielding Angle:

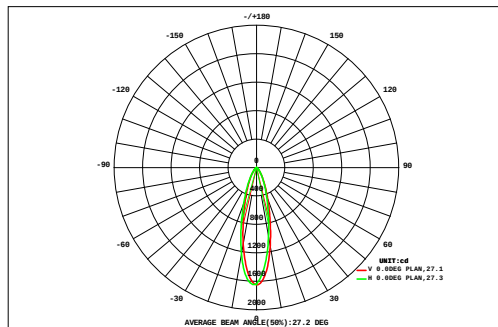

DATA OF LAMP		Eff:25.47lm/W	
MODEL		Imax(cd)	1647
NOMINAL POWER(W)	24.96	AVAILABILITY(%)	75.4
RATED VOLTAGE(V)	48	Avai. FLUX(lm)	478.9
NOMINAL FLUX(lm)	635.4	LOR(%)	100.1
LAMPS INSIDE	1	TOTAL FLUX(lm)	635.8
TEST VOLTAGE(V)	48	q @50%(H,V)	27,27DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	45	0.13	0.16	0.21	0.26	0.32	0.37	0.41	0.43	0.44	0.44	0.42	0.38	0.33	0.28	0.22	0.18	0.14	0.11	5.22	0.00	
	40	0.15	0.20	0.27	0.35	0.44	0.53	0.60	0.66	0.69	0.68	0.63	0.56	0.47	0.38	0.30	0.23	0.17	0.13	7.44	0.00	
	35	0.18	0.25	0.35	0.46	0.61	0.76	0.90	1.01	1.06	1.04	0.95	0.82	0.67	0.53	0.40	0.29	0.21	0.15	10.6	0.20	
	30	0.22	0.31	0.44	0.62	0.84	1.09	1.34	1.53	1.63	1.59	1.42	1.19	0.95	0.73	0.52	0.37	0.25	0.18	15.2	7.74	
	25	0.25	0.38	0.56	0.81	1.14	1.54	1.97	2.34	2.52	2.43	2.12	1.70	1.33	0.99	0.69	0.46	0.31	0.20	21.7	16.4	
	20	0.29	0.45	0.68	1.03	1.51	2.13	2.87	3.55	3.91	3.78	3.20	2.49	1.85	1.31	0.88	0.57	0.36	0.23	31.1	26.8	
	15	0.33	0.51	0.81	1.26	1.90	2.82	4.04	5.33	6.06	5.85	4.81	3.56	2.49	1.69	1.11	0.69	0.42	0.26	44.0	40.2	
		0.35	0.57	0.91	1.45	2.28	3.54	5.36	7.48	8.89	8.57	6.81	4.79	3.24	2.11	1.33	0.81	0.48	0.28	59.3	55.9	
		0.37	0.60	0.97	1.57	2.53	4.07	6.40	9.24	11.3	11.0	8.86	6.24	4.00	2.46	1.49	0.88	0.51	0.30	72.8	69.6	
		0.37	0.60	0.99	1.60	2.63	4.29	6.86	9.99	12.0	11.9	9.76	6.75	4.23	2.56	1.53	0.90	0.52	0.30	77.8	74.8	
		0.35	0.58	0.95	1.54	2.53	4.10	6.42	8.91	10.5	10.3	8.39	5.93	3.81	2.36	1.43	0.85	0.49	0.29	69.7	66.4	
	-15	0.33	0.53	0.86	1.38	2.21	3.40	4.97	6.62	7.68	7.51	6.21	4.57	3.09	1.99	1.24	0.75	0.45	0.27	54.0	50.6	
	-20	0.29	0.46	0.73	1.15	1.74	2.55	3.51	4.45	5.04	4.95	4.21	3.24	2.32	1.56	1.01	0.63	0.39	0.24	38.5	34.6	
	-25	0.25	0.38	0.59	0.90	1.30	1.81	2.38	2.88	3.19	3.14	2.75	2.20	1.65	1.17	0.78	0.51	0.32	0.21	26.4	21.7	
	-30	0.21	0.31	0.46	0.67	0.94	1.26	1.58	1.85	2.00	1.97	1.77	1.47	1.14	0.83	0.58	0.40	0.26	0.18	17.9	11.8	
-35	0.17	0.24	0.35	0.48	0.65	0.85	1.03	1.18	1.26	1.24	1.13	0.96	0.76	0.58	0.43	0.30	0.21	0.15	12.0	2.25		
-40	0.14	0.19	0.26	0.35	0.45	0.56	0.66	0.75	0.79	0.78	0.71	0.62	0.51	0.40	0.31	0.23	0.17	0.12	7.99	0.00		
-45	0.11	0.15	0.19	0.25	0.31	0.37	0.43	0.47	0.50	0.49	0.46	0.40	0.34	0.28	0.22	0.17	0.13	0.10	5.38	0.00		
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45		
F t	4.47	6.87	10.6	16.1	24.3	36.1	51.7	68.7	79.5	77.6	64.6	47.9	33.2	22.2	14.5	9.21	5.80	3.69	577	---		
F a	0.00	0.00	1.13	9.63	18.9	31.3	47.5	64.7	75.6	73.6	60.4	43.4	28.2	16.6	7.49	0.35	0.00	0.00	---	479		

one-half-peak spread: U:13.8,D:12.2 , L:13.6,R:13.8


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Medusa-510mm-RGBW ALL-25D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:25 DEG	DIM.:510mm	SERIAL No.:IES001033
MFR.:	SUR.:	Shielding Angle:

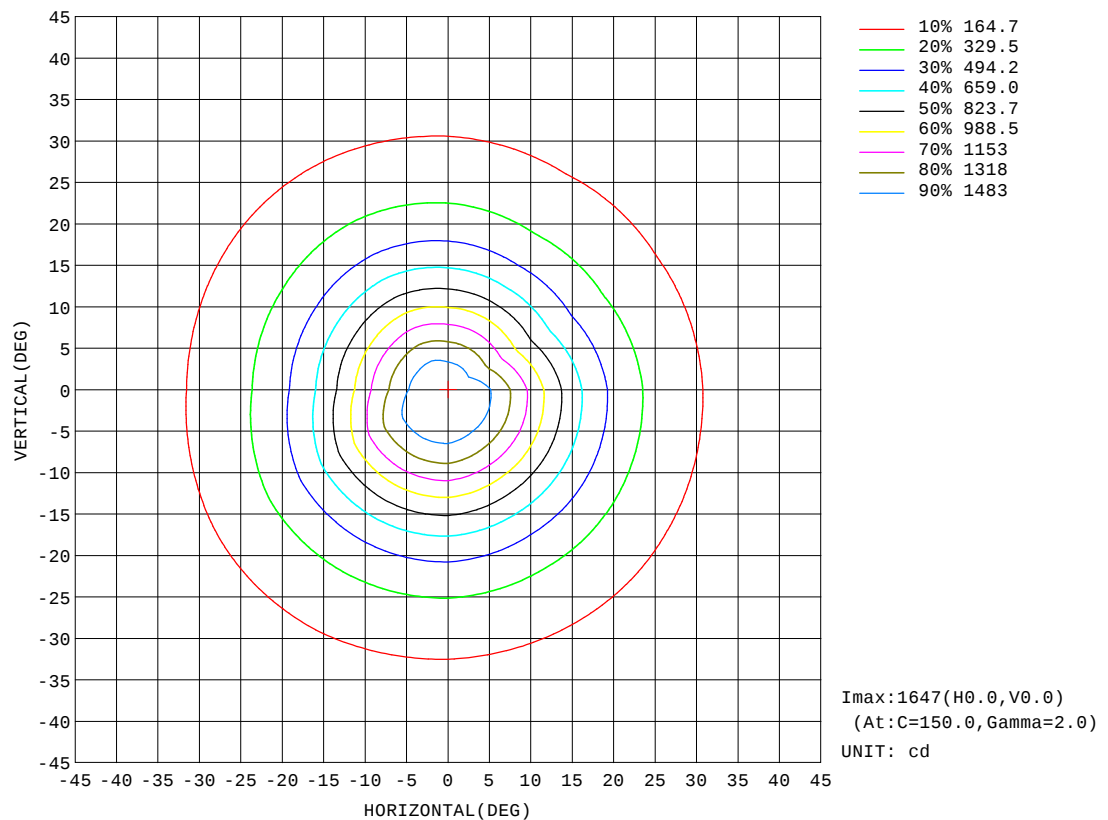


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME: Medusa-510mm-RGBW ALL-25D-Rev1	TYPE: RGBW W=3000K	WEIGHT:
SPEC.: 25 DEG	DIM.: 510mm	SERIAL No.: IES001033
MFR.:	SUR.:	Shielding Angle:

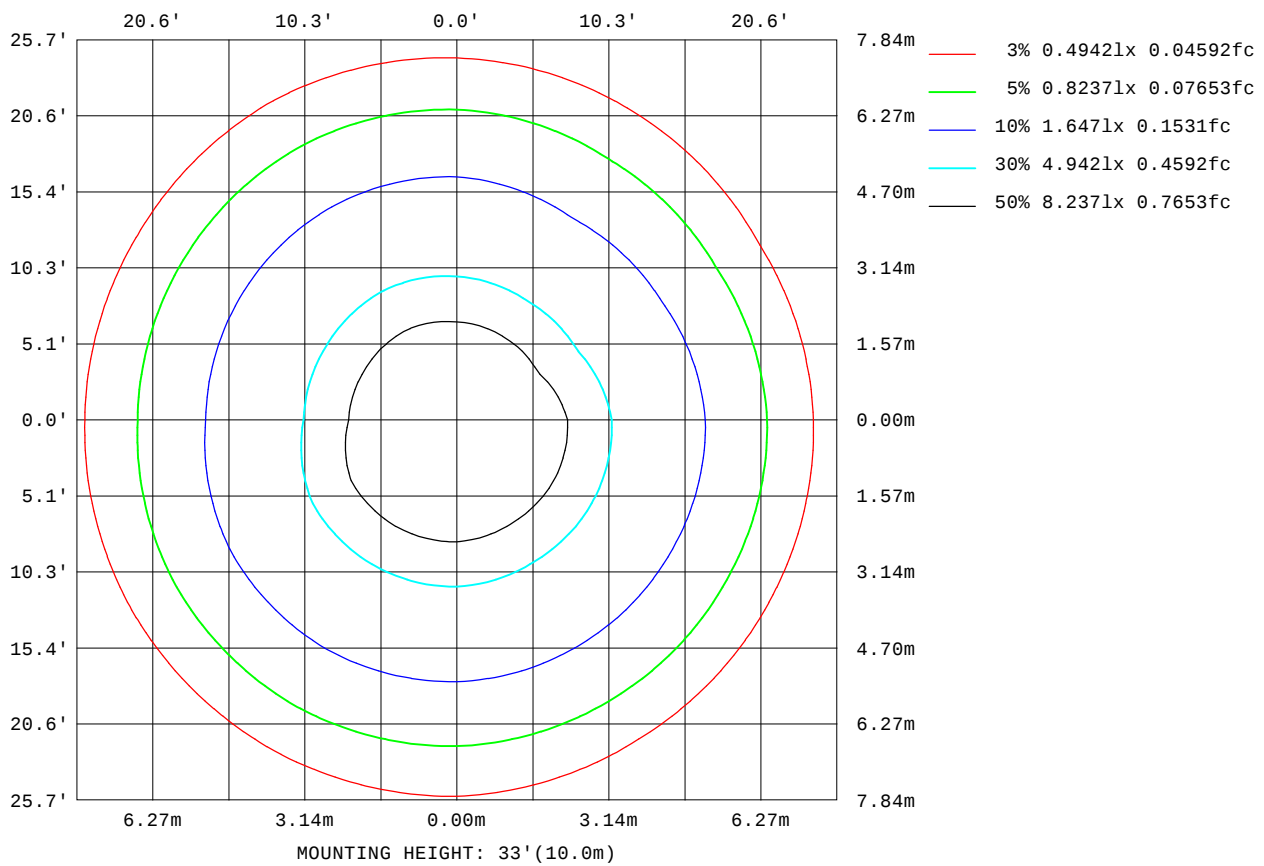

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

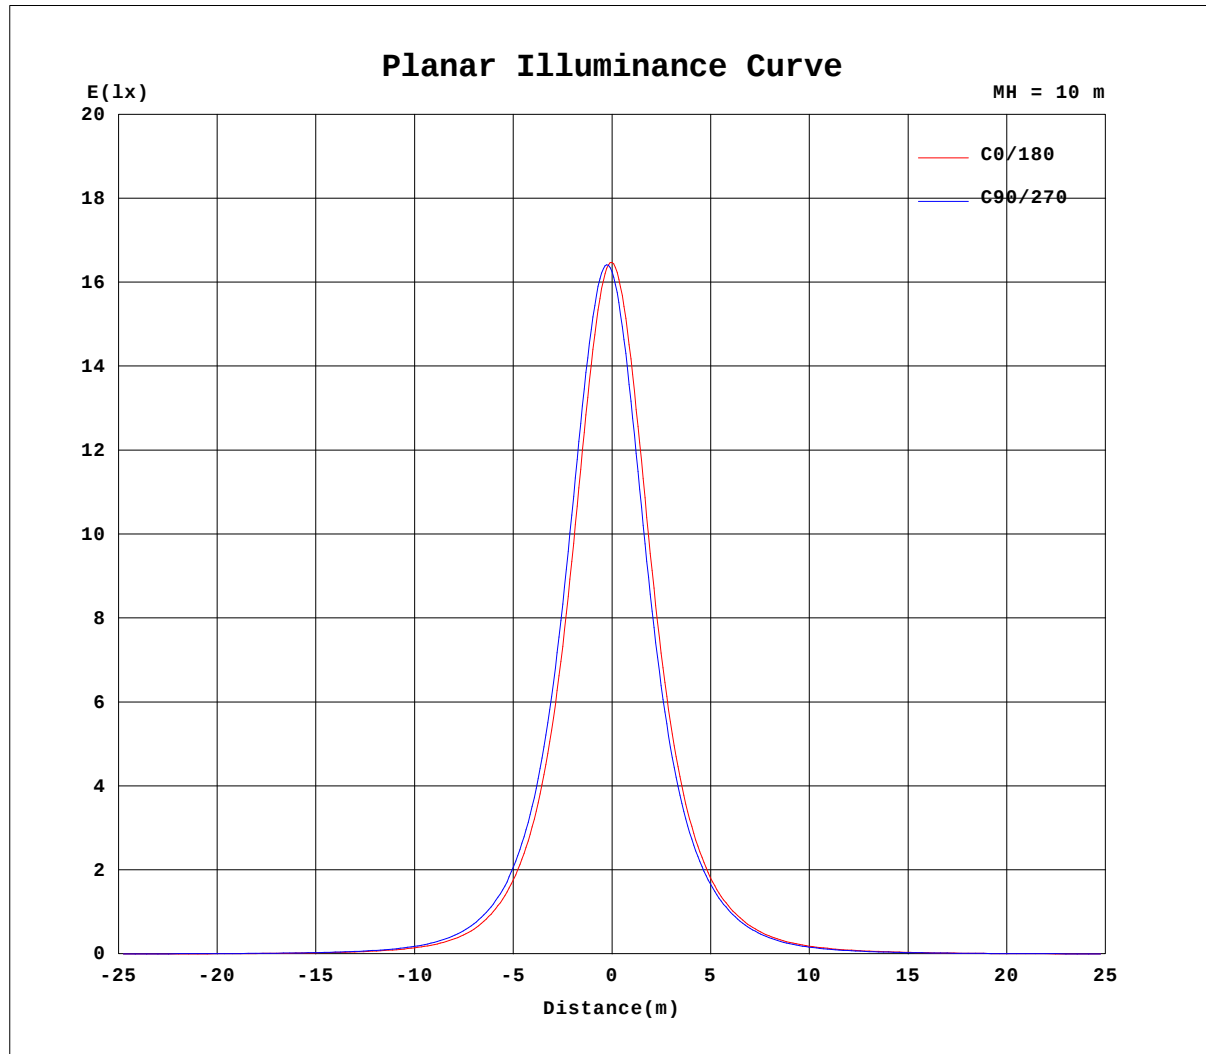


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME: Medusa-510mm-RGBW ALL-25D-Rev1	TYPE: RGBW W=3000K	WEIGHT:
SPEC.: 25 DEG	DIM.: 510mm	SERIAL No.: IES001033
MFR.:	SUR.:	Shielding Angle:

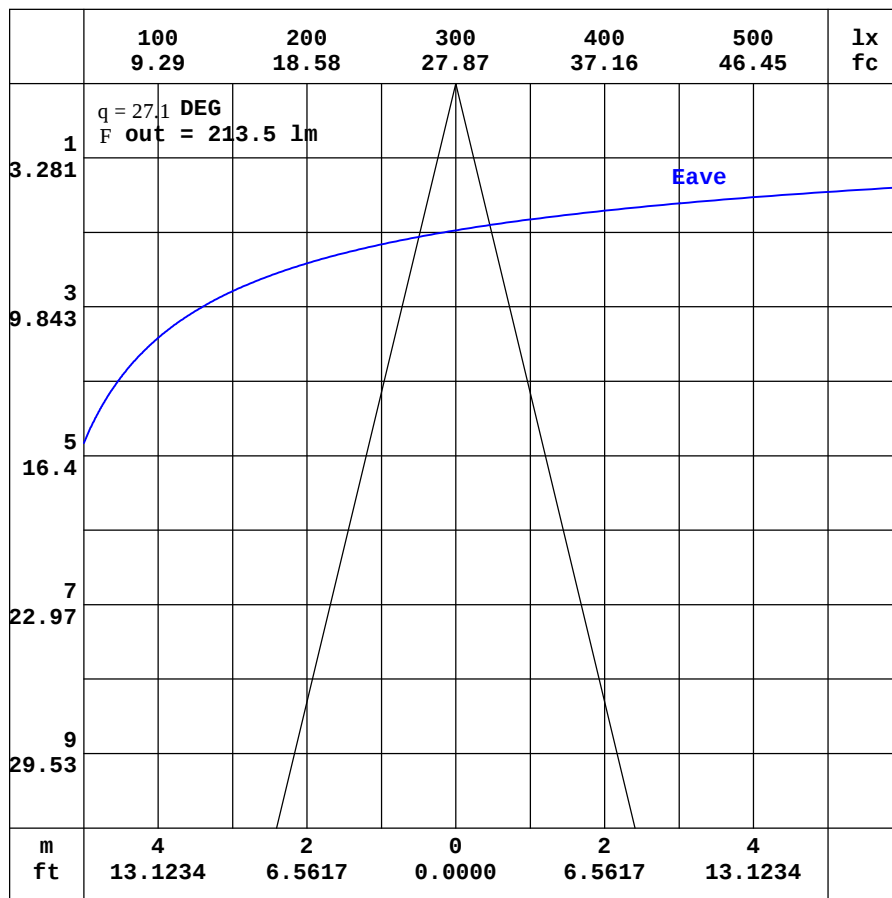

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Medusa-510mm-RGBW ALL-25D-ReV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:25 DEG	DIM.:510mm	SERIAL No.:IES001033
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.50	2.29	2.13	2.11	2.14	2.26	2.50	2.87	3.34	3.83	4.27	4.62	4.86	5.00	5.03	5.02	4.96	4.85	4.73
-170	2.50	2.26	2.08	2.03	2.02	2.08	2.20	2.40	2.65	2.92	3.15	3.32	3.42	3.46	3.43	3.50	3.78	4.01	4.30
-160	2.50	2.24	2.03	1.95	1.91	1.89	1.90	1.92	1.96	2.00	2.02	1.99	1.97	2.32	2.67	2.99	3.25	3.47	3.60
-150	2.50	2.22	2.00	1.88	1.81	1.73	1.67	1.55	1.42	1.25	1.12	1.30	1.51	1.74	1.99	2.20	2.41	2.56	2.65
-140	2.50	2.21	1.97	1.81	1.72	1.61	1.49	1.34	1.11	1.01	1.04	1.09	1.18	1.29	1.39	1.48	1.58	1.67	1.71
-130	2.50	2.20	1.95	1.76	1.64	1.53	1.39	1.23	1.15	1.11	1.09	1.10	1.13	1.16	1.15	1.13	1.12	1.11	1.09
-120	2.50	2.20	1.94	1.73	1.57	1.44	1.32	1.23	1.20	1.19	1.18	1.18	1.18	1.17	1.12	1.07	1.02	0.97	0.92
-110	2.50	2.21	1.95	1.72	1.53	1.36	1.21	1.18	1.19	1.19	1.21	1.20	1.20	1.16	1.11	1.07	1.02	0.97	0.92
-100	2.50	2.23	1.97	1.72	1.49	1.28	1.09	1.08	1.10	1.10	1.11	1.13	1.13	1.11	1.07	1.04	1.00	0.96	0.93
-90	2.50	2.25	2.01	1.76	1.51	1.26	1.01	1.04	1.07	1.10	1.13	1.16	1.19	1.14	1.09	1.05	1.00	0.95	0.90
-80	2.50	2.31	2.15	2.05	1.99	2.01	2.06	2.28	2.50	2.71	2.91	3.11	3.28	3.38	3.45	3.50	3.53	3.54	3.51
-70	2.50	2.37	2.35	2.47	2.69	3.02	3.49	4.02	4.55	5.08	5.61	6.12	6.61	7.02	7.37	7.65	7.85	7.96	7.98
-60	2.50	2.46	2.59	2.89	3.38	4.06	4.99	6.11	7.15	8.27	9.44	10.7	11.9	13.0	14.0	14.9	15.5	16.0	16.1
-50	2.50	2.53	2.81	3.28	3.97	5.02	6.80	8.61	10.5	12.7	15.2	18.0	21.1	24.4	27.4	30.2	32.4	33.8	34.2
-40	2.50	2.61	2.97	3.55	4.45	6.57	9.11	11.9	15.1	19.1	24.3	30.9	38.8	48.0	57.9	67.2	75.1	80.3	82.0
-30	2.50	2.68	3.10	3.72	5.14	8.19	11.8	16.2	21.6	28.4	38.2	52.7	72.2	96.9	126	158	184	203	208
-20	2.50	2.74	3.19	3.80	6.02	9.83	14.7	21.1	28.6	39.7	57.1	84.2	124	180	252	341	433	506	533
-10	2.50	2.78	3.23	3.76	6.56	10.9	17.0	24.7	34.2	49.3	73.9	114	174	270	421	643	908	1146	1234
0	2.50	2.81	3.23	3.64	6.75	11.3	18.3	26.6	37.2	53.7	80.5	123	188	293	456	718	1090	1468	1647
10	2.50	2.82	3.32	3.95	6.86	11.3	17.6	25.4	35.0	49.7	72.9	109	164	243	361	528	742	936	980
20	2.50	2.81	3.37	4.15	6.59	10.7	15.8	22.5	30.1	41.1	57.0	80.5	114	160	216	285	353	400	410
30	2.50	2.79	3.36	4.21	5.92	9.35	13.4	18.3	24.0	30.9	40.3	52.9	69.3	89.7	113	137	157	170	173
40	2.50	2.75	3.27	4.13	5.36	7.92	11.0	14.3	18.1	22.3	27.3	33.5	40.5	48.2	56.6	63.1	68.4	71.5	71.5
50	2.50	2.70	3.14	3.90	4.95	6.41	8.72	11.1	13.4	15.7	18.2	21.0	24.1	27.0	29.5	31.2	32.2	32.6	32.1
60	2.50	2.65	2.96	3.49	4.35	5.40	6.78	8.31	9.51	10.7	12.0	13.3	14.6	15.9	16.6	17.2	17.5	17.6	17.5
70	2.50	2.60	2.76	3.07	3.52	4.21	5.06	5.75	6.35	6.96	7.57	8.15	8.67	9.10	9.44	9.68	9.80	9.83	9.77
80	2.50	2.55	2.61	2.72	2.86	3.05	3.32	3.55	3.78	4.00	4.21	4.40	4.55	4.66	4.76	4.83	4.89	4.91	4.90
90	2.50	2.51	2.51	2.52	2.53	2.54	2.54	2.53	2.52	2.51	2.49	2.48	2.47	2.47	2.46	2.46	2.46	2.46	2.46
100	2.50	2.48	2.44	2.41	2.38	2.35	2.33	2.29	2.25	2.22	2.19	2.16	2.14	2.13	2.13	2.12	2.12	2.12	2.12
110	2.50	2.44	2.37	2.31	2.26	2.21	2.18	2.15	2.12	2.11	2.10	2.10	2.10	2.10	2.10	2.10	2.10	2.09	2.09
120	2.50	2.40	2.30	2.23	2.16	2.13	2.12	2.11	2.11	2.12	2.16	2.22	2.28	2.34	2.41	2.45	2.49	2.52	2.53
130	2.50	2.38	2.25	2.16	2.12	2.11	2.11	2.13	2.21	2.33	2.47	2.64	2.81	2.98	3.14	3.28	3.38	3.44	3.47
140	2.50	2.35	2.21	2.13	2.11	2.12	2.16	2.28	2.46	2.69	2.95	3.26	3.56	3.83	4.07	4.24	4.36	4.44	4.47
150	2.50	2.33	2.18	2.11	2.11	2.15	2.27	2.48	2.77	3.11	3.50	3.88	4.23	4.51	4.74	4.91	5.01	5.06	5.08
160	2.50	2.31	2.15	2.11	2.12	2.20	2.39	2.68	3.05	3.51	3.94	4.33	4.63	4.87	5.05	5.18	5.25	5.28	5.32
170	2.50	2.30	2.14	2.11	2.13	2.25	2.47	2.82	3.27	3.75	4.20	4.56	4.82	4.99	5.07	5.10	5.11	5.07	5.17
180	2.50	2.29	2.13	2.11	2.14	2.26	2.50	2.87	3.34	3.83	4.27	4.62	4.86	5.00	5.03	5.02	4.96	4.85	4.75

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-05-18

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Medusa-510mm-RGBW ALL-25D-ReV1	TYPE: RGBW W=3000K	WEIGHT:
SPEC.: 25 DEG	DIM.: 510mm	SERIAL No.: IES001033
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	4.39	4.13	3.83	3.49	3.07	2.63	2.17	1.75	1.40	1.13	0.96	0.93	0.93	0.92	0.92	0.91	0.82	0.67
-170	4.15	3.99	3.74	3.40	2.99	2.55	2.10	1.70	1.37	1.12	0.96	0.94	0.93	0.93	0.92	0.91	0.82	0.67
-160	3.55	3.40	3.18	2.89	2.56	2.20	1.84	1.51	1.24	1.05	0.96	0.94	0.94	0.93	0.93	0.90	0.82	0.67
-150	2.62	2.52	2.36	2.16	1.93	1.69	1.46	1.26	1.10	1.00	0.95	0.94	0.94	0.93	0.93	0.90	0.82	0.67
-140	1.70	1.65	1.56	1.44	1.34	1.22	1.12	1.04	0.99	0.96	0.95	0.95	0.94	0.94	0.93	0.89	0.81	0.67
-130	1.09	1.07	1.05	1.01	0.97	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.94	0.94	0.92	0.86	0.80	0.67
-120	0.92	0.92	0.92	0.92	0.92	0.93	0.93	0.94	0.94	0.95	0.95	0.95	0.95	0.94	0.90	0.84	0.78	0.67
-110	0.92	0.92	0.92	0.92	0.92	0.93	0.93	0.94	0.94	0.95	0.95	0.96	0.92	0.89	0.85	0.82	0.75	0.67
-100	0.92	0.92	0.91	0.90	0.89	0.88	0.88	0.89	0.89	0.89	0.89	0.89	0.86	0.83	0.80	0.77	0.72	0.67
-90	0.90	0.89	0.88	0.88	0.87	0.86	0.85	0.84	0.83	0.82	0.82	0.81	0.78	0.76	0.74	0.71	0.69	0.67
-80	3.44	3.34	3.22	3.08	2.92	2.75	2.58	2.39	2.19	1.99	1.78	1.55	1.24	1.00	0.84	0.73	0.68	0.67
-70	7.81	7.56	7.22	6.82	6.37	5.89	5.41	4.92	4.42	3.91	3.41	2.80	2.06	1.49	1.08	0.81	0.69	0.67
-60	15.7	15.0	14.1	13.1	11.9	10.8	9.62	8.47	7.36	6.30	5.33	4.03	2.82	1.91	1.28	0.90	0.70	0.67
-50	33.1	31.0	28.3	25.3	22.1	19.0	16.2	13.6	11.3	9.32	7.51	5.55	3.69	2.22	1.41	0.93	0.71	0.67
-40	78.1	71.1	62.0	52.1	42.8	34.4	27.3	21.5	16.8	13.2	10.1	7.30	4.86	2.60	1.43	0.93	0.71	0.67
-30	197	174	144	112	85.4	62.8	45.6	33.1	24.2	18.0	13.5	9.36	6.16	3.24	1.35	0.88	0.70	0.67
-20	488	405	313	228	159	108	71.7	48.0	32.8	22.9	16.5	11.3	7.10	3.72	1.16	0.77	0.68	0.67
-10	1091	842	585	385	247	157	97.8	61.6	39.9	26.8	18.6	13.3	7.66	3.95	1.09	0.64	0.65	0.67
0	1492	1117	735	460	286	178	108	66.6	42.4	28.2	19.4	13.8	7.95	3.92	0.84	0.50	0.63	0.67
10	871	661	465	325	221	145	92.5	59.6	39.5	27.1	19.2	13.7	8.04	4.24	1.27	0.74	0.70	0.67
20	373	308	244	188	137	95.2	65.8	46.1	32.8	23.9	17.5	12.2	7.85	4.26	1.51	0.97	0.77	0.67
30	162	144	121	98.8	77.0	58.4	43.8	33.2	25.6	19.9	14.9	10.6	7.24	3.99	1.83	1.15	0.83	0.67
40	69.3	64.5	58.0	50.5	42.0	34.4	28.2	23.4	19.1	15.3	11.9	9.00	6.14	3.50	2.02	1.27	0.88	0.67
50	31.5	30.2	28.2	25.9	23.2	20.6	18.1	15.7	13.5	11.7	9.85	7.36	5.05	3.20	2.06	1.32	0.92	0.67
60	17.2	16.6	15.9	15.0	14.0	12.9	11.8	10.7	9.64	8.54	7.47	5.80	4.18	2.91	1.97	1.34	0.94	0.67
70	9.65	9.45	9.17	8.82	8.40	7.96	7.47	6.94	6.37	5.80	5.21	4.42	3.34	2.45	1.80	1.32	0.96	0.67
80	4.87	4.82	4.74	4.63	4.50	4.35	4.16	3.95	3.73	3.51	3.29	3.06	2.53	2.07	1.66	1.31	0.97	0.67
90	2.47	2.49	2.50	2.52	2.53	2.55	2.55	2.55	2.56	2.56	2.56	2.56	2.24	1.93	1.61	1.30	0.98	0.67
100	2.15	2.17	2.20	2.23	2.25	2.28	2.29	2.30	2.32	2.34	2.37	2.37	2.13	1.87	1.60	1.31	1.00	0.67
110	2.13	2.17	2.21	2.24	2.27	2.28	2.27	2.27	2.27	2.27	2.28	2.23	2.01	1.79	1.56	1.31	1.01	0.67
120	2.57	2.59	2.60	2.59	2.58	2.52	2.45	2.39	2.33	2.28	2.27	2.12	1.91	1.72	1.51	1.27	1.01	0.67
130	3.51	3.50	3.46	3.38	3.27	3.10	2.92	2.75	2.59	2.46	2.27	2.00	1.81	1.62	1.44	1.23	1.01	0.67
140	4.50	4.48	4.42	4.31	4.10	3.86	3.59	3.30	3.02	2.66	2.23	1.91	1.68	1.51	1.36	1.19	0.98	0.67
150	5.11	5.12	5.07	4.93	4.72	4.46	4.16	3.83	3.20	2.58	2.12	1.78	1.55	1.39	1.26	1.13	0.94	0.67
160	5.33	5.36	5.31	5.18	5.04	4.81	4.17	3.50	2.86	2.30	1.86	1.57	1.38	1.24	1.16	1.06	0.91	0.67
170	5.08	5.08	5.12	4.87	4.42	3.90	3.32	2.75	2.24	1.79	1.46	1.28	1.17	1.09	1.04	0.98	0.86	0.67
180	4.39	4.13	3.83	3.49	3.07	2.63	2.17	1.75	1.40	1.13	0.96	0.93	0.93	0.92	0.92	0.91	0.82	0.67

H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks: