

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	2825.4 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	60.3V x 59.6H
	At 50% of Imax	26.3V x 26.1H
	At 90% of Imax	9.6V x 9.6H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	749.4 lumens per klm.
	To 50% of Imax	328.6 lumens per klm.
	To 90% of Imax	58.8 lumens per klm.

Upward LOR	2.0 %
Downward LOR	98.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: Medusa-510mm-RGBW RED-25D-ReV1	TYPE: RGBW-RED	WEIGHT:
SPEC.: 25 DEG	DIM.: 510mm	SERIAL No.: IES001033-R
MFR.:	SUR.:	Shielding Angle:

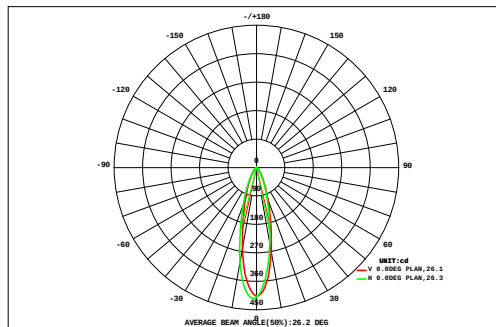

DATA OF LAMP		Eff: 19.66lm/W	
MODEL		Imax(cd)	416.8
NOMINAL POWER(W)	7.5	AVAILABILITY(%)	74.8
RATED VOLTAGE(V)	48	Avai. FLUX(lm)	110.4
NOMINAL FLUX(lm)	147.5	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	147.5
TEST VOLTAGE(V)	48	q @50%(H, V)	26, 26DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT: lm		F t	F a
	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.10	0.10	0.10	0.09	0.08	0.07	0.06	0.05	0.04	0.03	0.02	1.16	0.00
45	0.03	0.04	0.06	0.08	0.10	0.12	0.13	0.14	0.15	0.15	0.14	0.12	0.10	0.09	0.07	0.05	0.04	0.03	1.63	0.00
40	0.04	0.06	0.08	0.10	0.13	0.17	0.20	0.22	0.24	0.23	0.21	0.18	0.15	0.12	0.09	0.07	0.05	0.03	2.35	0.00
35	0.05	0.07	0.10	0.14	0.18	0.24	0.30	0.34	0.37	0.36	0.32	0.26	0.21	0.16	0.12	0.08	0.06	0.04	3.38	1.18
30	0.05	0.08	0.12	0.18	0.25	0.34	0.44	0.53	0.58	0.56	0.49	0.39	0.30	0.22	0.15	0.11	0.07	0.05	4.91	3.45
25	0.06	0.10	0.15	0.23	0.33	0.48	0.65	0.82	0.92	0.90	0.76	0.58	0.43	0.30	0.20	0.13	0.08	0.05	7.17	6.01
20	0.07	0.11	0.18	0.28	0.42	0.64	0.94	1.26	1.47	1.43	1.17	0.85	0.58	0.38	0.25	0.15	0.09	0.06	10.3	9.33
15	0.08	0.12	0.20	0.32	0.51	0.81	1.27	1.81	2.20	2.14	1.69	1.16	0.75	0.48	0.30	0.18	0.10	0.06	14.2	13.3
10	0.08	0.13	0.21	0.35	0.57	0.94	1.51	2.25	2.81	2.77	2.20	1.50	0.93	0.56	0.33	0.19	0.11	0.06	17.5	16.6
5	0.08	0.13	0.22	0.36	0.59	1.00	1.64	2.48	3.04	2.96	2.38	1.60	0.98	0.58	0.34	0.19	0.11	0.06	18.7	17.9
0	0.08	0.13	0.21	0.35	0.58	0.96	1.56	2.22	2.62	2.54	2.03	1.40	0.88	0.53	0.31	0.18	0.11	0.06	16.7	15.9
-5	0.07	0.11	0.19	0.31	0.50	0.80	1.19	1.60	1.86	1.81	1.48	1.07	0.70	0.44	0.27	0.16	0.10	0.06	12.7	11.8
-10	0.06	0.10	0.16	0.26	0.40	0.58	0.82	1.05	1.18	1.16	0.98	0.74	0.52	0.35	0.22	0.14	0.08	0.05	8.85	7.83
-15	0.05	0.08	0.13	0.20	0.29	0.41	0.54	0.66	0.73	0.71	0.62	0.49	0.37	0.26	0.17	0.11	0.07	0.04	5.93	4.67
-20	0.04	0.07	0.10	0.15	0.21	0.28	0.35	0.41	0.45	0.44	0.39	0.32	0.25	0.18	0.13	0.09	0.06	0.04	3.95	2.28
-25	0.04	0.05	0.08	0.11	0.14	0.18	0.23	0.26	0.28	0.27	0.25	0.21	0.17	0.13	0.09	0.06	0.05	0.03	2.61	0.16
-30	0.03	0.04	0.06	0.08	0.10	0.12	0.14	0.16	0.17	0.17	0.15	0.13	0.11	0.09	0.07	0.05	0.04	0.03	1.73	0.00
-35	0.02	0.03	0.04	0.05	0.07	0.08	0.09	0.10	0.11	0.11	0.10	0.09	0.07	0.06	0.05	0.04	0.03	0.02	1.16	0.00
-40	0.02	0.03	0.04	0.05	0.07	0.08	0.09	0.10	0.11	0.11	0.10	0.09	0.07	0.06	0.05	0.04	0.03	0.02	1.16	0.00
-45	0.02	0.03	0.04	0.05	0.07	0.08	0.09	0.10	0.11	0.11	0.10	0.09	0.07	0.06	0.05	0.04	0.03	0.02	1.16	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
F t	0.96	1.49	2.31	3.56	5.44	8.23	12.1	16.4	19.3	18.8	15.5	11.2	7.57	4.97	3.20	2.02	1.27	0.80	135	---
F a	0.00	0.00	0.00	1.72	4.03	7.00	11.0	15.4	18.2	17.8	14.4	10.00	6.27	3.49	1.17	0.00	0.00	0.00	---	110

one-half-peak spread: U:13.1, D:13.4 , L:13.4, R:12.9


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: Medusa-510mm-RGBW RED-25D-Rev1	TYPE: RGBW-RED	WEIGHT:
SPEC.: 25 DEG	DIM.: 510mm	SERIAL No.: IES001033-R
MFR.:	SUR.:	Shielding Angle:

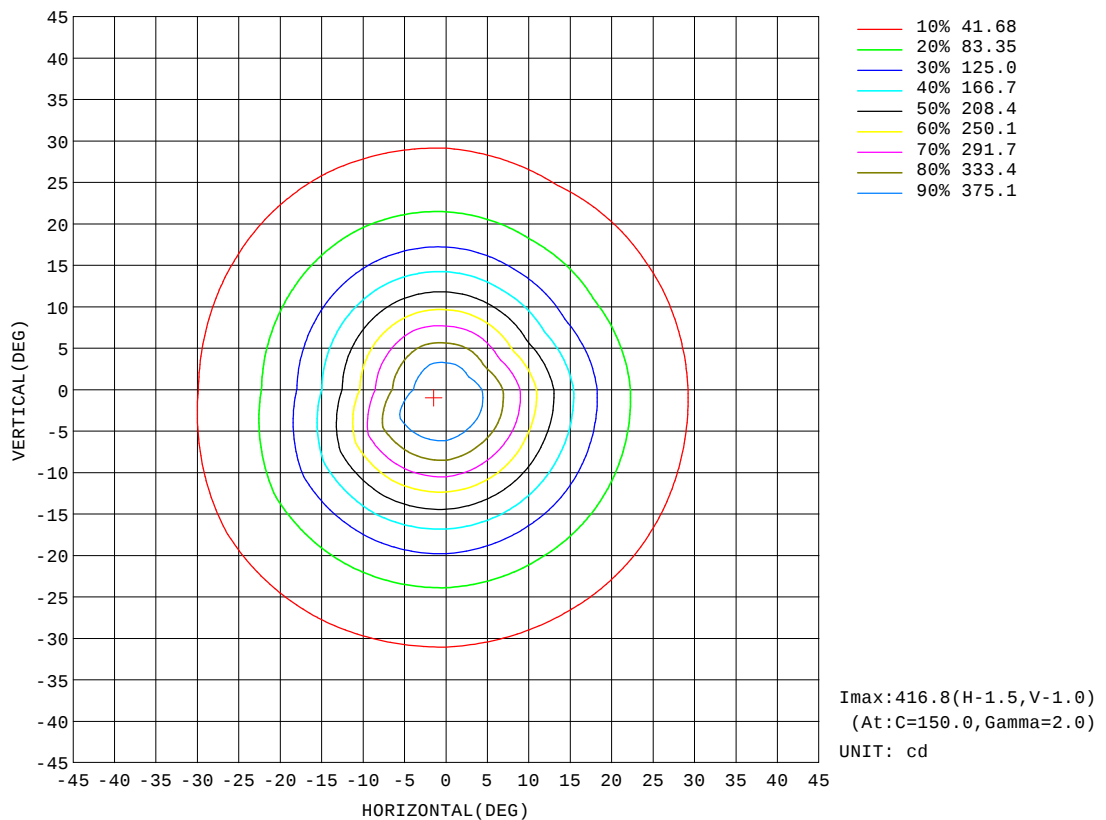


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME: Medusa-510mm-RGBW RED-25D-Rev1	TYPE: RGBW-RED	WEIGHT:
SPEC.: 25 DEG	DIM.: 510mm	SERIAL No.: IES001033-R
MFR.:	SUR.:	Shielding Angle:

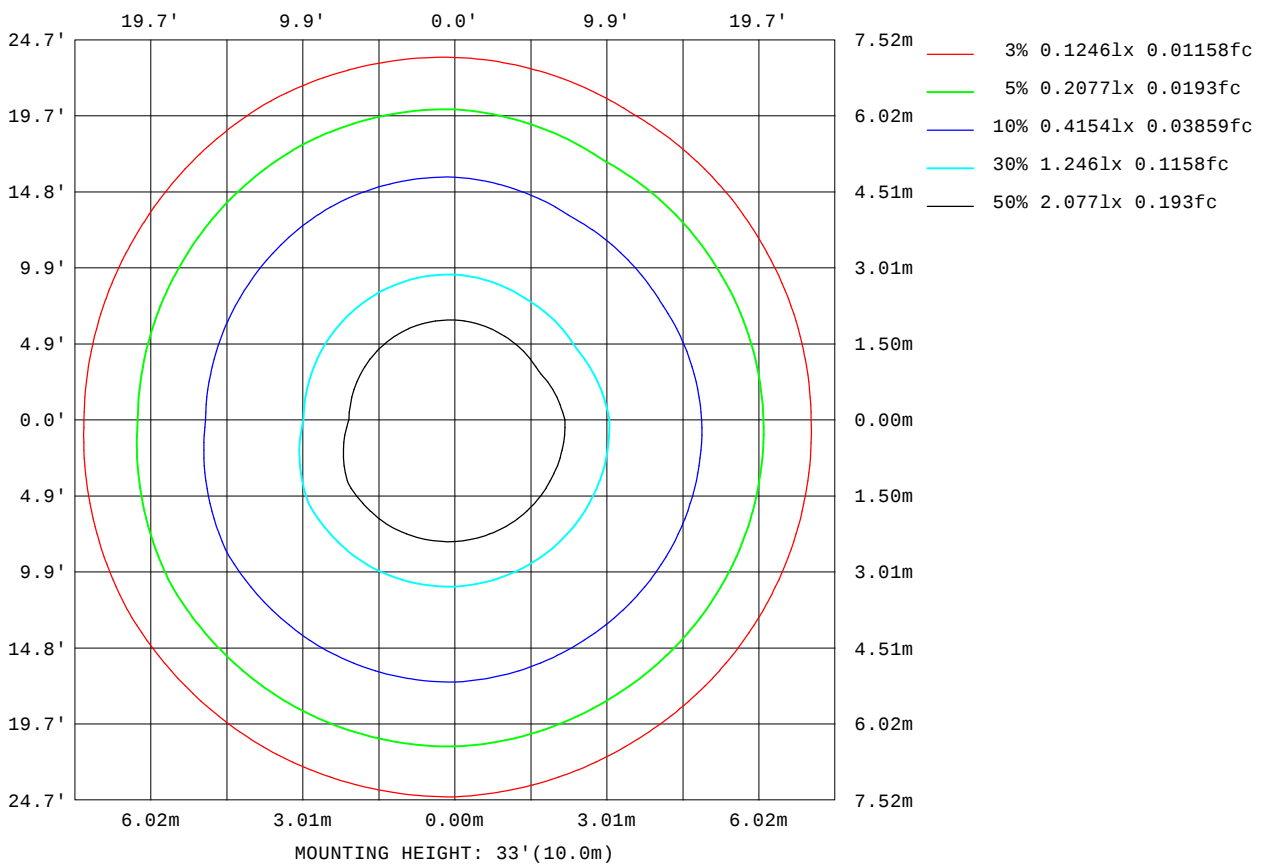

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

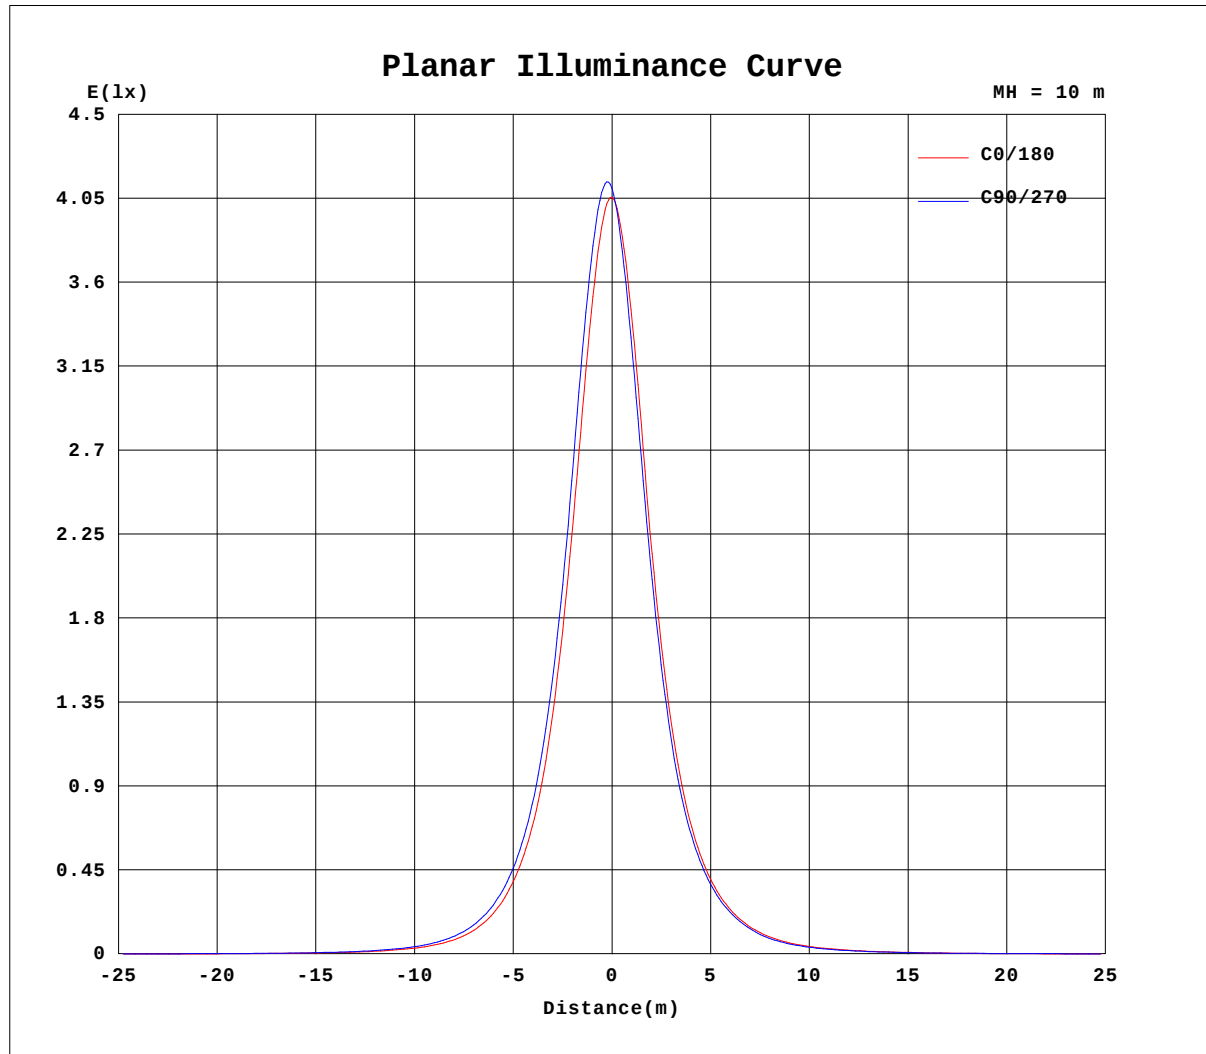


H(b) Range: -90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME: Medusa-510mm-RGBW RED-25D-Rev1	TYPE: RGBW-RED	WEIGHT:
SPEC.: 25 DEG	DIM.: 510mm	SERIAL No.: IES001033-R
MFR.:	SUR.:	Shielding Angle:

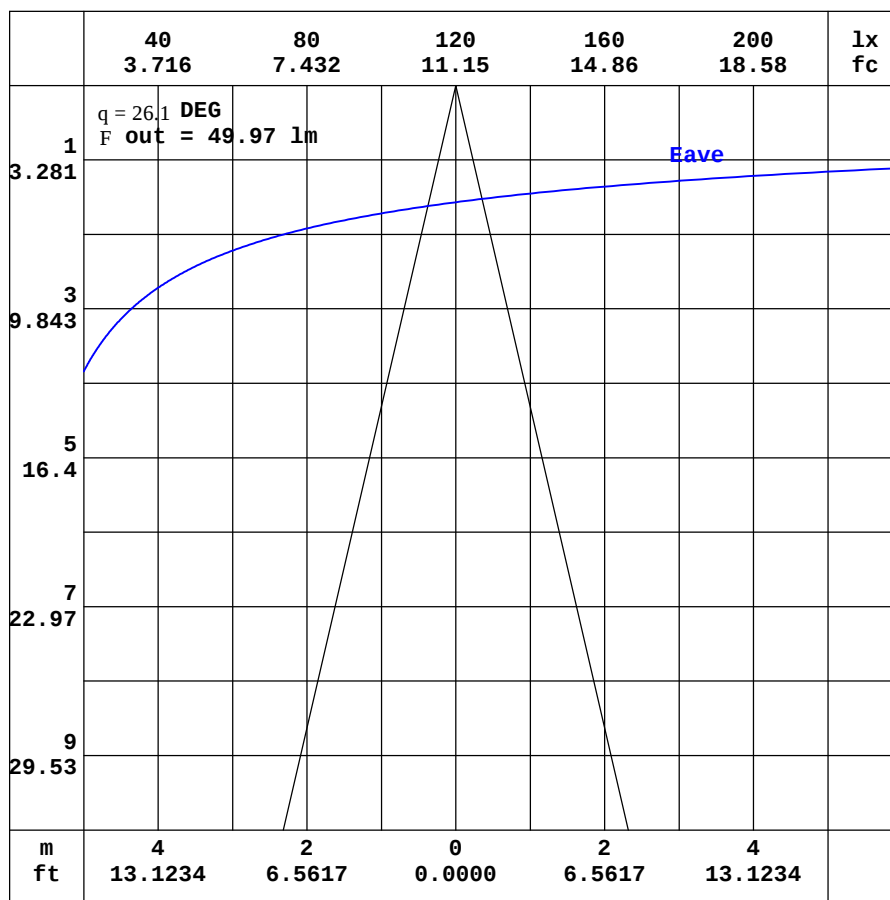

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Medusa-510mm-RGBW RED-25D-ReV1	TYPE: RGBW-RED	WEIGHT:
SPEC.: 25 DEG	DIM.: 510mm	SERIAL No.: IES001033-R
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.48	0.42	0.41	0.41	0.42	0.46	0.51	0.60	0.71	0.83	0.95	1.03	1.08	1.08	1.08	1.08	1.06	1.04	1.05
-170	0.48	0.42	0.40	0.39	0.39	0.41	0.44	0.49	0.55	0.62	0.68	0.72	0.75	0.76	0.77	0.80	0.86	0.89	0.98
-160	0.48	0.41	0.39	0.37	0.37	0.37	0.36	0.38	0.39	0.41	0.42	0.42	0.42	0.50	0.58	0.64	0.71	0.77	0.81
-150	0.48	0.41	0.38	0.36	0.34	0.33	0.30	0.28	0.26	0.23	0.20	0.24	0.29	0.34	0.39	0.44	0.50	0.55	0.58
-140	0.48	0.41	0.37	0.34	0.32	0.30	0.27	0.22	0.18	0.16	0.17	0.19	0.20	0.21	0.22	0.26	0.30	0.33	0.35
-130	0.48	0.41	0.36	0.33	0.30	0.27	0.24	0.21	0.17	0.17	0.18	0.19	0.19	0.20	0.19	0.19	0.19	0.19	0.19
-120	0.48	0.41	0.36	0.32	0.29	0.25	0.22	0.20	0.20	0.20	0.20	0.20	0.21	0.21	0.20	0.19	0.18	0.17	0.15
-110	0.48	0.41	0.36	0.32	0.28	0.24	0.21	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.19	0.18	0.17	0.16	0.15
-100	0.48	0.42	0.37	0.32	0.28	0.24	0.20	0.20	0.20	0.20	0.20	0.19	0.19	0.19	0.18	0.17	0.17	0.16	0.15
-90	0.48	0.43	0.38	0.33	0.28	0.23	0.18	0.19	0.20	0.20	0.21	0.22	0.22	0.21	0.20	0.18	0.17	0.16	0.14
-80	0.48	0.43	0.40	0.38	0.36	0.37	0.37	0.43	0.48	0.53	0.58	0.63	0.67	0.69	0.70	0.70	0.70	0.70	0.68
-70	0.48	0.44	0.44	0.47	0.51	0.59	0.69	0.81	0.94	1.05	1.17	1.29	1.40	1.49	1.55	1.60	1.64	1.66	1.66
-60	0.48	0.47	0.50	0.56	0.67	0.82	1.02	1.27	1.49	1.74	2.00	2.27	2.54	2.79	2.99	3.17	3.30	3.38	3.40
-50	0.48	0.48	0.54	0.65	0.81	1.03	1.41	1.81	2.23	2.71	3.25	3.85	4.52	5.21	5.86	6.47	6.95	7.24	7.32
-40	0.48	0.50	0.58	0.71	0.91	1.36	1.92	2.53	3.22	4.10	5.24	6.67	8.37	10.3	12.5	14.5	16.2	17.4	17.7
-30	0.48	0.51	0.62	0.76	1.06	1.71	2.51	3.46	4.63	6.13	8.25	11.4	15.7	21.2	27.6	34.5	40.6	44.9	46.2
-20	0.48	0.53	0.64	0.77	1.25	2.09	3.11	4.51	6.14	8.55	12.4	18.4	27.6	40.3	57.1	77.9	99.8	117	123
-10	0.48	0.54	0.64	0.76	1.38	2.31	3.62	5.28	7.37	10.6	16.0	24.8	38.7	61.1	97.5	153	221	283	304
0	0.48	0.55	0.63	0.73	1.41	2.40	3.86	5.68	7.97	11.5	17.3	26.5	41.2	64.6	103	166	259	359	406
10	0.48	0.55	0.66	0.81	1.45	2.42	3.76	5.45	7.53	10.7	15.7	23.6	35.7	54.0	81.5	122	176	226	242
20	0.48	0.55	0.69	0.85	1.39	2.29	3.38	4.85	6.50	8.87	12.3	17.5	24.8	34.9	48.0	63.7	80.2	92.0	95.4
30	0.48	0.54	0.69	0.88	1.25	1.99	2.89	3.93	5.19	6.70	8.76	11.5	15.1	19.6	24.7	30.2	34.7	37.8	38.5
40	0.48	0.53	0.65	0.85	1.14	1.70	2.37	3.11	3.92	4.83	5.95	7.29	8.83	10.5	12.4	13.8	15.0	15.7	15.7
50	0.48	0.53	0.63	0.81	1.05	1.38	1.88	2.42	2.91	3.42	3.97	4.58	5.27	5.91	6.48	6.89	7.13	7.24	7.18
60	0.48	0.52	0.59	0.71	0.91	1.16	1.47	1.81	2.07	2.33	2.61	2.91	3.19	3.47	3.63	3.75	3.84	3.87	3.83
70	0.48	0.50	0.55	0.63	0.73	0.89	1.09	1.24	1.36	1.48	1.60	1.72	1.84	1.97	2.06	2.12	2.16	2.17	2.17
80	0.48	0.49	0.51	0.54	0.58	0.64	0.70	0.75	0.80	0.84	0.88	0.92	0.94	0.98	1.01	1.03	1.06	1.07	1.08
90	0.48	0.49	0.49	0.50	0.51	0.52	0.53	0.52	0.51	0.50	0.50	0.49	0.48	0.49	0.50	0.50	0.51	0.52	0.52
100	0.48	0.48	0.47	0.47	0.47	0.47	0.47	0.46	0.45	0.44	0.43	0.42	0.42	0.42	0.42	0.43	0.43	0.44	0.44
110	0.48	0.46	0.45	0.45	0.44	0.44	0.45	0.43	0.43	0.42	0.42	0.42	0.42	0.42	0.42	0.42	0.42	0.42	0.42
120	0.48	0.46	0.44	0.43	0.43	0.43	0.43	0.42	0.42	0.42	0.43	0.44	0.46	0.48	0.49	0.50	0.50	0.50	0.50
130	0.48	0.45	0.43	0.43	0.42	0.42	0.42	0.42	0.42	0.45	0.49	0.54	0.59	0.64	0.68	0.70	0.72	0.73	0.73
140	0.48	0.44	0.42	0.42	0.42	0.42	0.42	0.43	0.48	0.53	0.61	0.69	0.77	0.85	0.91	0.95	0.97	0.98	0.99
150	0.48	0.43	0.42	0.41	0.42	0.43	0.44	0.49	0.55	0.63	0.72	0.83	0.93	1.00	1.07	1.11	1.13	1.14	1.14
160	0.48	0.43	0.41	0.41	0.42	0.44	0.47	0.54	0.64	0.74	0.85	0.93	1.01	1.08	1.13	1.16	1.18	1.20	1.22
170	0.48	0.43	0.41	0.41	0.42	0.45	0.50	0.58	0.69	0.81	0.92	1.00	1.07	1.09	1.12	1.14	1.14	1.13	1.19
180	0.48	0.42	0.41	0.41	0.42	0.46	0.51	0.60	0.71	0.83	0.95	1.03	1.08	1.08	1.08	1.08	1.06	1.04	1.08

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Medusa-510mm-RGBW RED-25D-ReV1	TYPE: RGBW-RED	WEIGHT:
SPEC.: 25 DEG	DIM.: 510mm	SERIAL No.: IES001033-R
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.94	0.88	0.81	0.72	0.63	0.52	0.41	0.31	0.23	0.16	0.13	0.13	0.13	0.13	0.14	0.13	0.12	0.06
-170	0.92	0.88	0.83	0.74	0.63	0.53	0.41	0.31	0.23	0.17	0.14	0.14	0.13	0.13	0.14	0.13	0.12	0.06
-160	0.79	0.73	0.68	0.61	0.54	0.46	0.36	0.28	0.22	0.17	0.15	0.14	0.14	0.14	0.14	0.13	0.12	0.06
-150	0.56	0.52	0.48	0.43	0.37	0.32	0.27	0.23	0.19	0.16	0.15	0.15	0.14	0.14	0.14	0.13	0.12	0.06
-140	0.34	0.31	0.28	0.24	0.22	0.21	0.18	0.17	0.17	0.16	0.15	0.15	0.15	0.14	0.14	0.13	0.12	0.06
-130	0.18	0.17	0.16	0.15	0.15	0.15	0.15	0.15	0.15	0.16	0.16	0.15	0.15	0.14	0.14	0.13	0.12	0.06
-120	0.15	0.15	0.15	0.15	0.14	0.15	0.15	0.15	0.15	0.16	0.16	0.15	0.15	0.15	0.14	0.13	0.10	0.06
-110	0.15	0.15	0.15	0.15	0.15	0.14	0.15	0.15	0.15	0.15	0.16	0.16	0.15	0.14	0.14	0.13	0.09	0.06
-100	0.15	0.15	0.15	0.14	0.14	0.14	0.14	0.15	0.15	0.15	0.15	0.16	0.15	0.14	0.12	0.10	0.08	0.06
-90	0.14	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.14	0.14	0.14	0.14	0.13	0.11	0.10	0.09	0.08	0.06
-80	0.68	0.66	0.64	0.62	0.59	0.56	0.51	0.47	0.41	0.36	0.31	0.26	0.19	0.14	0.10	0.09	0.08	0.06
-70	1.63	1.58	1.51	1.44	1.34	1.24	1.13	1.01	0.90	0.78	0.66	0.53	0.37	0.24	0.16	0.10	0.07	0.06
-60	3.32	3.18	2.99	2.77	2.53	2.28	2.03	1.77	1.52	1.29	1.08	0.79	0.54	0.34	0.21	0.12	0.07	0.06
-50	7.08	6.64	6.05	5.39	4.70	4.04	3.43	2.87	2.37	1.94	1.54	1.12	0.73	0.41	0.24	0.13	0.08	0.06
-40	16.9	15.3	13.4	11.2	9.20	7.39	5.83	4.56	3.56	2.77	2.10	1.50	0.99	0.50	0.25	0.14	0.08	0.06
-30	43.5	38.1	31.3	24.5	18.5	13.5	9.78	7.06	5.15	3.79	2.83	1.95	1.27	0.64	0.23	0.12	0.07	0.06
-20	112	92.1	70.3	50.8	35.0	23.4	15.5	10.3	6.99	4.85	3.45	2.37	1.47	0.75	0.20	0.10	0.07	0.06
-10	266	200	136	87.0	54.9	34.2	21.1	13.2	8.51	5.67	3.91	2.76	1.57	0.80	0.18	0.08	0.06	0.06
0	365	269	173	104	63.4	38.5	23.3	14.2	9.01	5.93	4.06	2.87	1.64	0.79	0.12	0.05	0.06	0.06
10	215	161	109	74.4	49.7	32.2	20.5	13.1	8.57	5.80	4.06	2.90	1.67	0.88	0.23	0.11	0.08	0.06
20	87.3	72.1	56.3	42.3	30.8	21.7	15.0	10.3	7.21	5.15	3.79	2.63	1.66	0.90	0.29	0.16	0.09	0.06
30	35.9	31.6	26.4	21.7	17.3	13.2	9.90	7.43	5.63	4.32	3.30	2.31	1.56	0.85	0.37	0.20	0.11	0.06
40	15.2	14.2	12.8	11.3	9.53	7.86	6.37	5.16	4.27	3.45	2.65	1.93	1.34	0.75	0.41	0.23	0.12	0.06
50	7.10	6.84	6.42	5.87	5.28	4.65	4.09	3.55	3.04	2.59	2.16	1.63	1.11	0.69	0.42	0.24	0.13	0.06
60	3.78	3.68	3.54	3.35	3.15	2.90	2.62	2.35	2.11	1.89	1.67	1.29	0.91	0.62	0.40	0.23	0.14	0.06
70	2.13	2.08	2.00	1.91	1.80	1.70	1.61	1.51	1.39	1.27	1.15	0.97	0.72	0.51	0.35	0.23	0.14	0.06
80	1.07	1.04	1.02	0.98	0.95	0.90	0.87	0.84	0.79	0.75	0.71	0.65	0.53	0.42	0.32	0.23	0.14	0.06
90	0.52	0.51	0.51	0.50	0.50	0.49	0.50	0.51	0.52	0.53	0.54	0.55	0.47	0.38	0.30	0.22	0.14	0.06
100	0.44	0.45	0.45	0.45	0.45	0.46	0.46	0.46	0.47	0.48	0.48	0.49	0.43	0.37	0.30	0.23	0.15	0.06
110	0.43	0.44	0.45	0.45	0.46	0.46	0.46	0.46	0.46	0.46	0.46	0.45	0.40	0.35	0.30	0.24	0.15	0.06
120	0.51	0.52	0.53	0.53	0.53	0.51	0.50	0.47	0.46	0.45	0.46	0.42	0.37	0.33	0.28	0.23	0.16	0.06
130	0.74	0.75	0.74	0.73	0.70	0.66	0.61	0.56	0.51	0.48	0.43	0.39	0.34	0.30	0.26	0.22	0.16	0.06
140	1.00	1.00	0.99	0.97	0.91	0.85	0.77	0.69	0.62	0.53	0.43	0.35	0.31	0.27	0.24	0.20	0.16	0.06
150	1.16	1.16	1.16	1.12	1.06	1.00	0.92	0.82	0.66	0.52	0.40	0.32	0.27	0.24	0.21	0.18	0.15	0.06
160	1.21	1.21	1.20	1.17	1.14	1.08	0.92	0.75	0.59	0.45	0.35	0.28	0.23	0.21	0.19	0.16	0.14	0.06
170	1.14	1.16	1.16	1.08	0.97	0.85	0.70	0.56	0.43	0.32	0.25	0.21	0.19	0.17	0.16	0.15	0.13	0.06
180	0.94	0.88	0.81	0.72	0.63	0.52	0.41	0.31	0.23	0.16	0.13	0.13	0.13	0.13	0.14	0.13	0.12	0.06

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-05-18

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks: