

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2064.8 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	69.5V x 69.1H
	At 50% of Imax	33.2V x 33.1H
	At 90% of Imax	12.4V x 12.3H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	787.0 lumens per klm.
	To 50% of Imax	379.1 lumens per klm.
	To 90% of Imax	71.9 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: Medusa-510mm-RGBW ALL-35D-ReV1	TYPE: RGBW W=3000K	WEIGHT:
SPEC.: 35 DEG	DIM.: 510mm	SERIAL No.: IES001036
MFR.:	SUR.:	Shielding Angle:

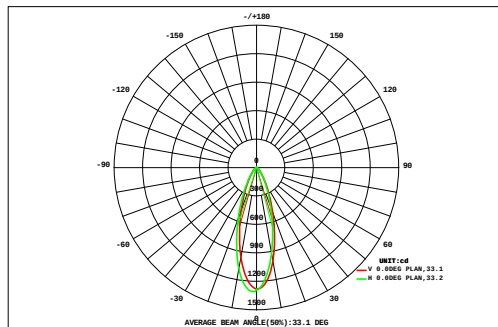

DATA OF LAMP		Eff: 25.40lm/W	
MODEL		Imax(cd)	1309
NOMINAL POWER(W)	24.96	AVAILABILITY(%)	78.5
RATED VOLTAGE(V)	48	Avai. FLUX(lm)	497.7
NOMINAL FLUX(lm)	634	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	634.0
TEST VOLTAGE(V)	48	q @50%(H, V)	33, 33DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	45	40	35	30	25	20	15	10	5	0	5	10	15	20	25	30	35	40	45			
	0.13	0.16	0.21	0.26	0.31	0.37	0.42	0.45	0.47	0.47	0.45	0.41	0.36	0.31	0.25	0.20	0.16	0.12	5.51	0.00		
	0.15	0.20	0.27	0.34	0.43	0.52	0.61	0.67	0.71	0.71	0.67	0.60	0.51	0.42	0.33	0.26	0.20	0.15	7.74	0.00		
	0.18	0.25	0.34	0.46	0.60	0.75	0.90	1.02	1.09	1.09	1.01	0.88	0.73	0.58	0.44	0.33	0.24	0.17	11.1	3.34		
	0.22	0.31	0.44	0.61	0.83	1.09	1.35	1.58	1.71	1.70	1.56	1.32	1.06	0.80	0.59	0.42	0.29	0.20	16.1	11.3		
	0.25	0.37	0.55	0.80	1.14	1.56	2.03	2.44	2.67	2.66	2.41	1.98	1.52	1.10	0.77	0.52	0.35	0.24	23.4	19.7		
	0.29	0.44	0.68	1.03	1.53	2.19	2.94	3.63	4.05	4.05	3.61	2.90	2.13	1.47	0.99	0.65	0.42	0.27	33.3	30.3		
	0.33	0.51	0.81	1.27	1.96	2.91	4.04	5.13	5.83	5.84	5.13	3.98	2.82	1.90	1.24	0.78	0.48	0.30	45.3	42.7		
	0.35	0.57	0.92	1.49	2.37	3.61	5.13	6.66	7.70	7.75	6.66	5.07	3.58	2.36	1.48	0.90	0.54	0.32	57.5	55.2		
	0.37	0.60	0.99	1.63	2.65	4.11	5.95	7.79	9.06	9.16	7.90	6.09	4.24	2.72	1.66	0.98	0.57	0.34	66.8	64.6		
	0.37	0.61	1.01	1.68	2.77	4.34	6.34	8.39	9.68	9.50	8.32	6.41	4.42	2.82	1.70	1.00	0.58	0.34	70.3	68.1		
	0.36	0.59	0.98	1.63	2.69	4.22	6.10	7.82	8.84	8.67	7.52	5.85	4.08	2.63	1.60	0.95	0.55	0.33	65.4	63.2		
	0.33	0.54	0.89	1.46	2.38	3.60	5.00	6.31	7.10	7.00	6.06	4.76	3.40	2.24	1.39	0.84	0.51	0.30	54.1	51.7		
	0.30	0.47	0.76	1.21	1.88	2.75	3.72	4.60	5.14	5.08	4.44	3.54	2.59	1.76	1.14	0.71	0.44	0.27	40.8	38.1		
	0.26	0.40	0.62	0.94	1.39	1.96	2.58	3.13	3.46	3.42	3.03	2.46	1.86	1.31	0.88	0.58	0.37	0.24	28.9	25.7		
	0.21	0.32	0.48	0.70	0.99	1.34	1.71	2.02	2.21	2.19	1.97	1.64	1.28	0.94	0.66	0.45	0.30	0.20	19.6	15.7		
	0.17	0.25	0.36	0.51	0.69	0.90	1.11	1.28	1.38	1.37	1.25	1.07	0.86	0.66	0.48	0.34	0.24	0.16	13.1	7.51		
	0.14	0.20	0.27	0.37	0.48	0.60	0.71	0.80	0.86	0.85	0.79	0.69	0.57	0.46	0.35	0.26	0.19	0.13	8.72	0.45		
	0.11	0.15	0.20	0.26	0.33	0.40	0.46	0.52	0.55	0.54	0.51	0.45	0.39	0.32	0.25	0.19	0.15	0.11	5.89	0.00		
-45 -40 -35 -30 -25 -20 -15 -10 HORIZONTAL (DEG) 10 15 20 25 30 35 40 45																						
F t	4.53	6.96	10.8	16.7	25.4	37.2	51.1	64.2	72.5	72.1	63.3	50.1	36.4	24.8	16.2	10.4	6.58	4.19	573	---		
F a	0.00	0.00	4.38	12.2	21.7	33.9	48.1	61.4	69.8	69.4	60.4	47.0	33.0	20.9	11.6	3.85	0.00	0.00	---	498		

one-half-peak spread: U:16.8,D:16.6 , L:16.9,R:16.5


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Medusa-510mm-RGBW ALL-35D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:35 DEG	DIM.:510mm	SERIAL No.:IES001036
MFR.:	SUR.:	Shielding Angle:

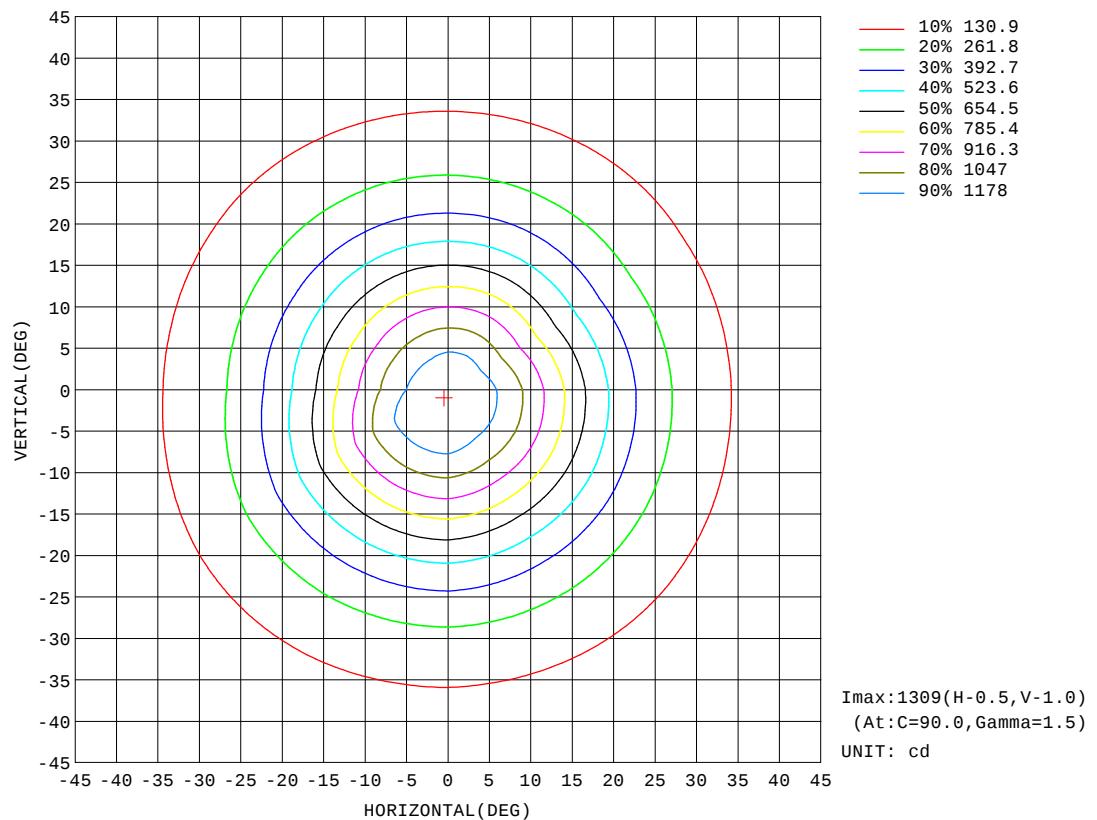


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME: Medusa-510mm-RGBW ALL-35D-Rev1	TYPE: RGBW W=3000K	WEIGHT:
SPEC.: 35 DEG	DIM.: 510mm	SERIAL No.: IES001036
MFR.:	SUR.:	Shielding Angle:

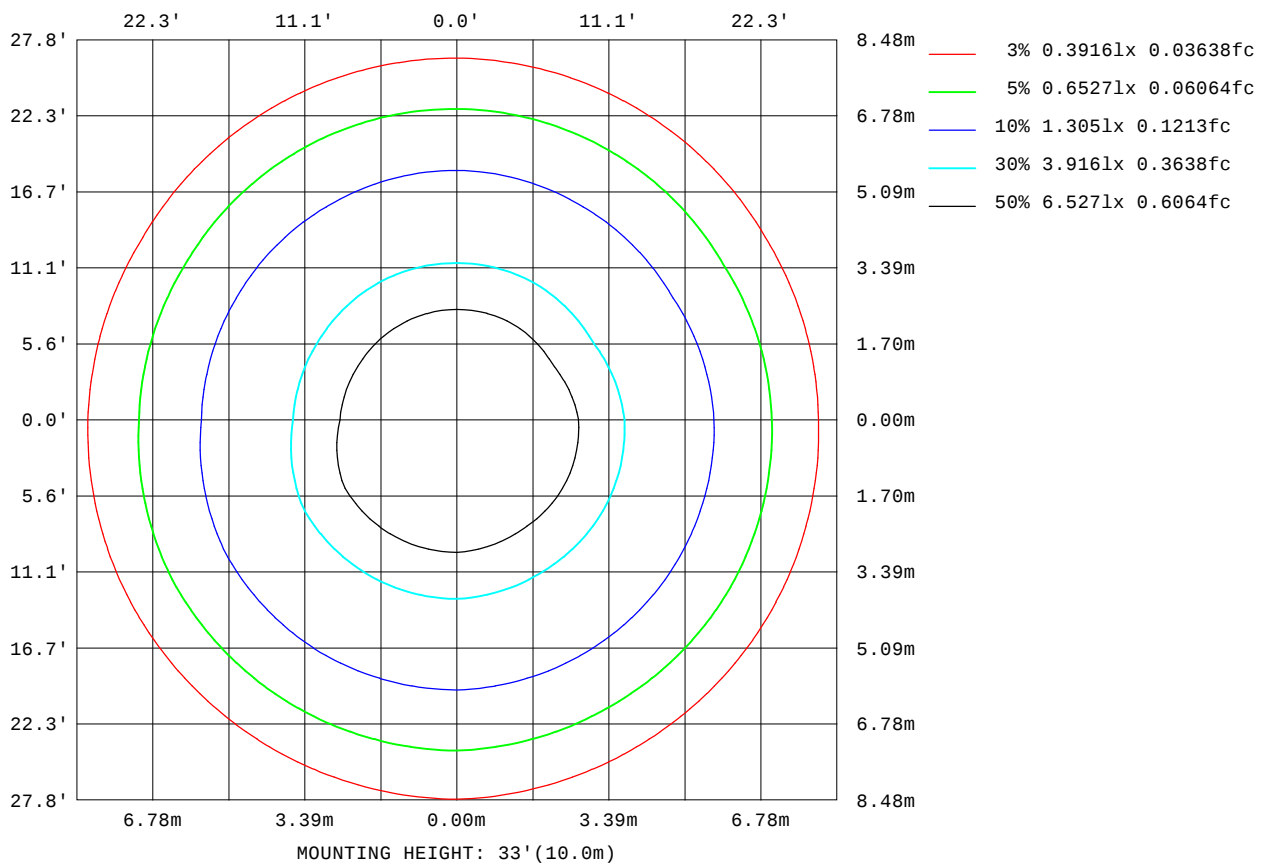

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

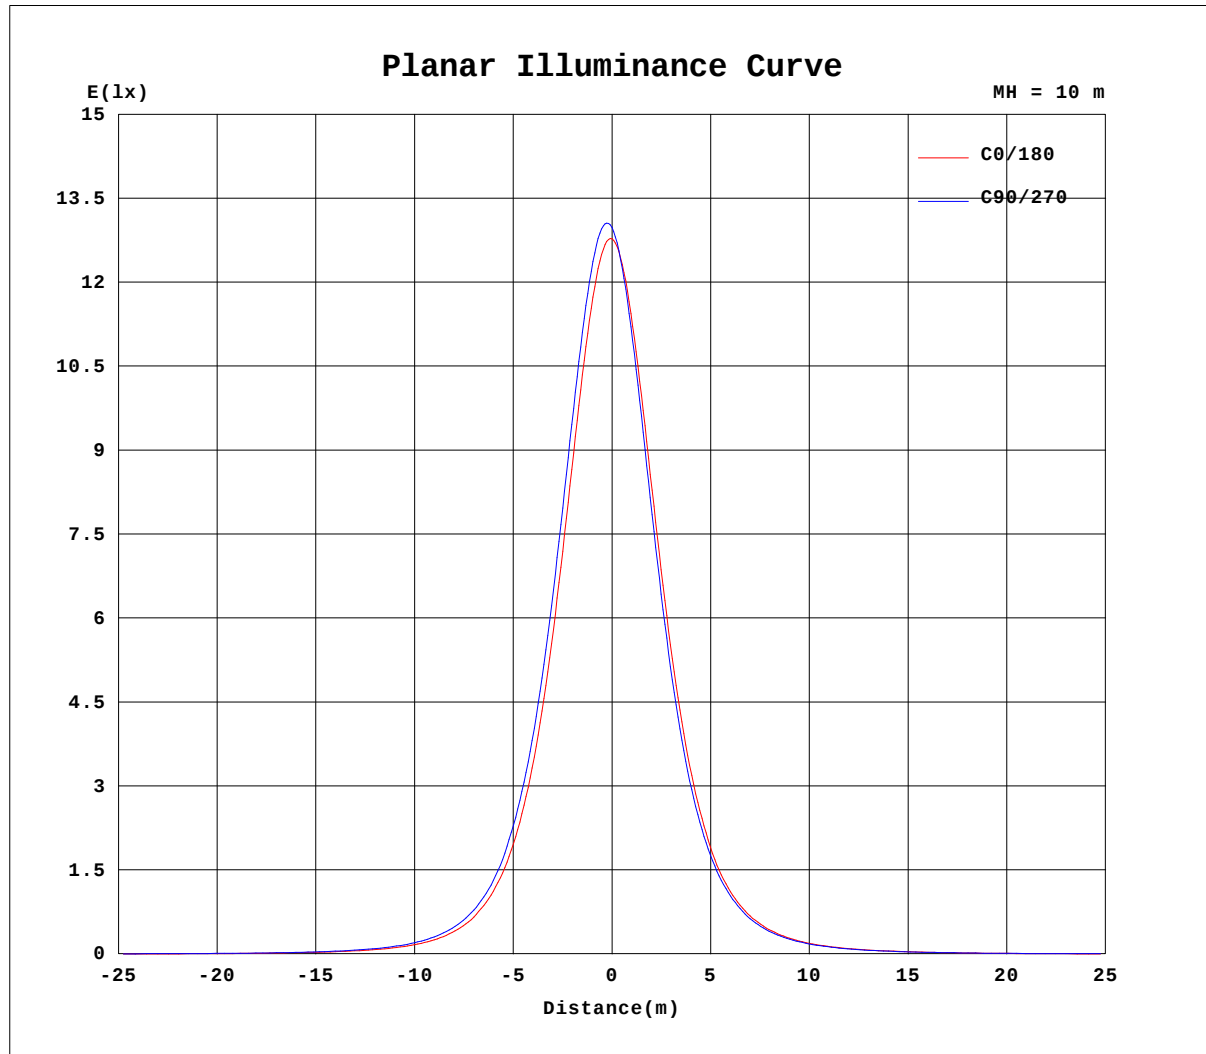


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME: Medusa-510mm-RGBW ALL-35D-Rev1	TYPE: RGBW W=3000K	WEIGHT:
SPEC.: 35 DEG	DIM.: 510mm	SERIAL No.: IES001036
MFR.:	SUR.:	Shielding Angle:

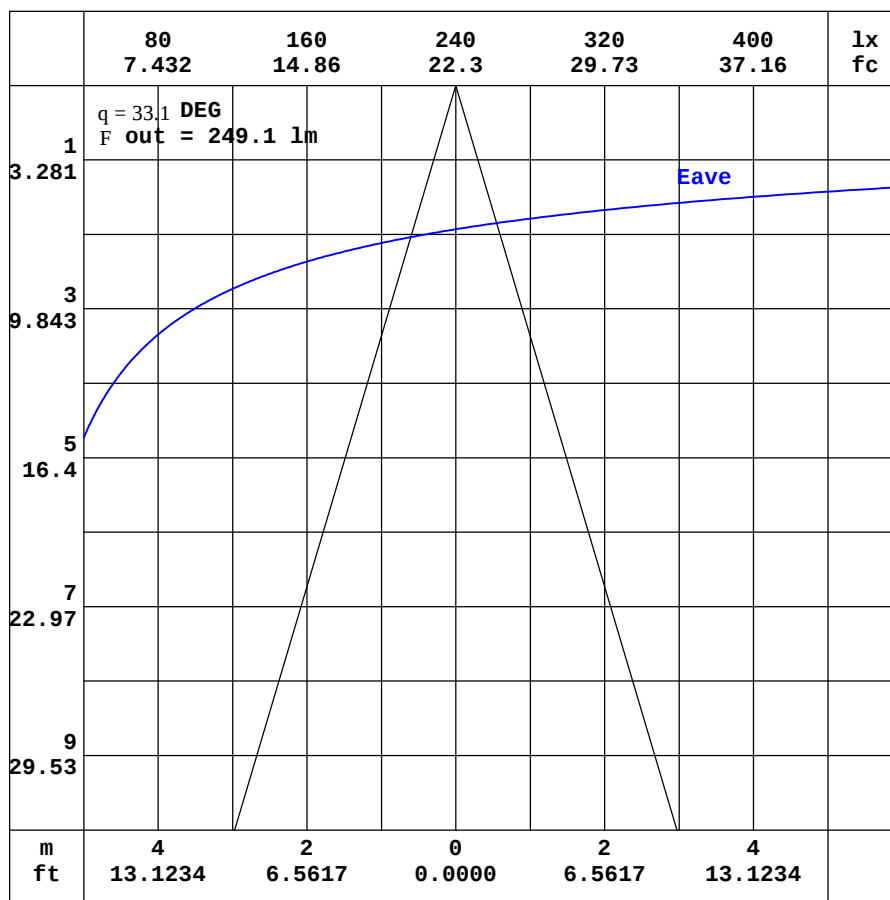

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Medusa-510mm-RGBW ALL-35D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:35 DEG	DIM.:510mm	SERIAL No.:IES001036
MFR.:	SUR.:	Shielding Angle:

Table--1
UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.46	2.27	2.13	2.12	2.17	2.31	2.56	2.89	3.32	3.75	4.16	4.49	4.75	4.90	4.93	4.91	4.85	4.77	4.68
-170	2.46	2.23	2.06	2.02	2.02	2.09	2.22	2.43	2.66	2.91	3.12	3.29	3.40	3.46	3.45	3.52	3.79	4.01	4.20
-160	2.46	2.20	2.00	1.91	1.87	1.86	1.89	1.95	2.00	2.04	2.06	2.04	2.04	2.38	2.72	3.02	3.26	3.43	3.51
-150	2.46	2.17	1.94	1.82	1.72	1.65	1.59	1.53	1.44	1.31	1.20	1.38	1.59	1.83	2.06	2.27	2.44	2.56	2.61
-140	2.46	2.15	1.91	1.73	1.60	1.48	1.36	1.22	1.05	0.99	1.03	1.09	1.19	1.31	1.42	1.54	1.64	1.71	1.74
-130	2.46	2.14	1.87	1.66	1.50	1.35	1.19	1.02	0.95	0.94	0.94	0.95	0.96	0.99	1.03	1.07	1.11	1.14	1.15
-120	2.46	2.14	1.85	1.62	1.41	1.24	1.07	0.94	0.94	0.93	0.92	0.91	0.90	0.90	0.90	0.91	0.92	0.93	0.93
-110	2.46	2.15	1.85	1.58	1.35	1.14	0.95	0.90	0.91	0.90	0.90	0.90	0.89	0.89	0.90	0.90	0.91	0.91	0.91
-100	2.46	2.16	1.87	1.58	1.32	1.08	0.84	0.83	0.83	0.82	0.83	0.82	0.82	0.84	0.84	0.85	0.86	0.86	0.87
-90	2.46	2.18	1.90	1.62	1.34	1.06	0.78	0.80	0.82	0.83	0.85	0.87	0.89	0.89	0.88	0.88	0.88	0.88	0.87
-80	2.46	2.23	2.03	1.89	1.81	1.79	1.80	2.03	2.26	2.48	2.69	2.89	3.08	3.23	3.36	3.48	3.57	3.63	3.67
-70	2.46	2.29	2.24	2.32	2.52	2.85	3.31	3.85	4.40	4.94	5.49	6.03	6.55	7.06	7.49	7.86	8.14	8.33	8.43
-60	2.46	2.37	2.48	2.76	3.24	3.93	4.87	6.01	7.12	8.30	9.55	10.9	12.2	13.4	14.6	15.7	16.5	17.1	17.4
-50	2.46	2.45	2.70	3.15	3.87	4.92	6.76	8.63	10.6	12.9	15.6	18.6	21.9	25.4	29.0	32.2	34.9	36.8	37.7
-40	2.46	2.55	2.88	3.45	4.37	6.54	9.12	12.0	15.3	19.5	25.1	32.2	40.7	50.6	61.3	71.8	80.9	87.4	90.0
-30	2.46	2.62	3.02	3.66	5.06	8.13	11.7	16.4	22.1	29.2	39.6	55.0	75.5	102	134	168	199	221	230
-20	2.46	2.68	3.10	3.74	5.97	9.68	15.0	21.1	29.2	40.9	58.9	87.2	130	191	274	370	465	538	566
-10	2.46	2.73	3.14	3.71	6.50	10.8	16.9	25.3	35.1	50.6	75.5	116	182	290	449	652	859	1019	1080
0	2.46	2.77	3.14	3.60	6.67	11.0	18.6	27.3	37.8	54.4	81.3	124	193	308	475	701	958	1179	1278
10	2.46	2.77	3.24	3.89	6.78	11.2	17.4	25.9	35.5	50.2	73.0	109	166	251	374	532	707	852	914
20	2.46	2.76	3.29	4.08	6.51	10.5	16.0	22.3	30.3	41.1	56.8	79.7	112	160	220	293	365	419	438
30	2.46	2.74	3.28	4.14	5.81	9.22	13.1	18.2	24.0	30.8	40.0	52.5	68.5	88.4	111	136	158	175	180
40	2.46	2.70	3.21	4.03	5.27	7.81	10.8	14.2	18.0	22.1	27.1	33.2	40.1	47.8	56.0	63.8	70.2	74.5	75.9
50	2.46	2.65	3.07	3.79	4.85	6.28	8.58	11.0	13.2	15.5	18.1	20.8	23.8	26.8	29.6	32.1	34.1	35.3	35.7
60	2.46	2.59	2.90	3.42	4.21	5.27	6.63	8.14	9.33	10.5	11.8	13.1	14.4	15.6	16.6	17.5	18.2	18.6	18.7
70	2.46	2.54	2.71	3.00	3.44	4.09	4.89	5.60	6.21	6.81	7.39	7.96	8.48	8.93	9.31	9.63	9.87	10.0	10.1
80	2.46	2.50	2.56	2.65	2.79	2.97	3.22	3.44	3.67	3.90	4.11	4.30	4.47	4.61	4.74	4.83	4.90	4.94	4.94
90	2.46	2.47	2.47	2.48	2.49	2.49	2.50	2.49	2.48	2.46	2.45	2.44	2.43	2.43	2.44	2.44	2.45	2.46	2.46
100	2.46	2.44	2.41	2.38	2.35	2.32	2.29	2.27	2.23	2.20	2.17	2.15	2.13	2.13	2.13	2.14	2.14	2.15	2.16
110	2.46	2.41	2.34	2.28	2.24	2.20	2.18	2.15	2.13	2.12	2.12	2.12	2.12	2.12	2.13	2.13	2.14	2.14	2.14
120	2.46	2.37	2.28	2.22	2.16	2.14	2.13	2.13	2.13	2.16	2.21	2.27	2.34	2.41	2.46	2.52	2.56	2.59	2.60
130	2.46	2.34	2.23	2.16	2.13	2.13	2.13	2.17	2.26	2.38	2.53	2.69	2.86	3.02	3.17	3.29	3.38	3.45	3.47
140	2.46	2.31	2.21	2.13	2.13	2.14	2.21	2.33	2.51	2.74	2.99	3.26	3.53	3.78	3.99	4.15	4.28	4.36	4.39
150	2.46	2.30	2.17	2.13	2.13	2.18	2.32	2.54	2.81	3.13	3.47	3.81	4.13	4.40	4.61	4.79	4.90	4.97	5.01
160	2.46	2.28	2.15	2.12	2.15	2.24	2.44	2.72	3.08	3.47	3.86	4.21	4.49	4.72	4.90	5.02	5.09	5.14	5.20
170	2.46	2.27	2.13	2.12	2.16	2.29	2.52	2.85	3.26	3.69	4.09	4.43	4.69	4.86	4.93	4.94	4.94	4.91	5.07
180	2.46	2.27	2.13	2.12	2.17	2.31	2.56	2.89	3.32	3.75	4.16	4.49	4.75	4.90	4.93	4.91	4.85	4.77	4.73

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Medusa-510mm-RGBW ALL-35D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:35 DEG	DIM.:510mm	SERIAL No.:IES001036
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	4.33	4.04	3.74	3.40	3.01	2.59	2.14	1.74	1.41	1.16	1.00	0.91	0.90	0.88	0.87	0.84	0.77	0.63	
-170	3.98	3.83	3.60	3.28	2.89	2.48	2.07	1.70	1.39	1.15	1.00	0.93	0.90	0.89	0.87	0.85	0.77	0.63	
-160	3.42	3.26	3.05	2.79	2.48	2.15	1.82	1.52	1.28	1.10	0.98	0.93	0.91	0.90	0.87	0.85	0.78	0.63	
-150	2.57	2.46	2.29	2.10	1.89	1.68	1.47	1.30	1.14	1.03	0.96	0.93	0.91	0.90	0.87	0.85	0.78	0.63	
-140	1.72	1.66	1.57	1.45	1.34	1.24	1.15	1.07	1.01	0.97	0.94	0.93	0.92	0.90	0.87	0.84	0.77	0.63	
-130	1.14	1.12	1.08	1.04	1.00	0.98	0.96	0.95	0.94	0.95	0.95	0.93	0.92	0.89	0.87	0.81	0.76	0.63	
-120	0.93	0.92	0.91	0.90	0.89	0.89	0.90	0.92	0.93	0.93	0.94	0.92	0.90	0.88	0.84	0.79	0.73	0.63	
-110	0.90	0.90	0.89	0.89	0.89	0.88	0.89	0.90	0.91	0.91	0.91	0.90	0.87	0.84	0.80	0.77	0.71	0.63	
-100	0.87	0.86	0.85	0.84	0.83	0.82	0.83	0.83	0.83	0.83	0.83	0.83	0.81	0.79	0.76	0.72	0.68	0.63	
-90	0.87	0.87	0.86	0.86	0.86	0.85	0.84	0.83	0.81	0.80	0.78	0.77	0.75	0.72	0.70	0.68	0.65	0.63	
-80	3.61	3.53	3.42	3.28	3.13	2.96	2.77	2.56	2.34	2.12	1.88	1.64	1.31	1.05	0.85	0.73	0.66	0.63	
-70	8.29	8.07	7.76	7.37	6.90	6.38	5.85	5.30	4.74	4.19	3.64	2.98	2.19	1.56	1.11	0.83	0.68	0.63	
-60	17.0	16.4	15.5	14.3	13.1	11.8	10.5	9.21	7.98	6.81	5.73	4.32	3.00	2.03	1.34	0.91	0.69	0.63	
-50	36.6	34.5	31.6	28.3	24.8	21.3	18.0	15.1	12.4	10.2	8.09	5.97	3.96	2.36	1.48	0.95	0.70	0.63	
-40	86.5	79.3	69.7	59.1	48.7	39.1	30.9	24.1	18.7	14.6	11.0	7.81	5.21	2.82	1.52	0.95	0.70	0.63	
-30	218	193	161	127	96.4	71.5	52.1	37.7	27.3	19.9	14.7	10.1	6.51	3.43	1.42	0.90	0.69	0.63	
-20	526	445	351	257	179	122	81.6	54.7	37.1	25.5	18.0	12.2	7.53	3.99	1.24	0.80	0.66	0.63	
-10	986	820	618	427	279	175	110	69.8	45.1	29.9	20.3	14.2	8.28	4.24	1.21	0.66	0.63	0.63	
0	1206	998	736	498	317	197	120	74.9	47.7	31.2	21.0	14.6	8.47	4.13	0.96	0.50	0.60	0.63	
10	857	702	519	366	247	162	104	67.9	44.9	30.3	20.9	14.7	8.67	4.52	1.39	0.75	0.68	0.63	
20	416	361	286	212	153	107	75.8	53.2	37.4	26.6	19.1	13.2	8.30	4.52	1.58	0.98	0.75	0.63	
30	173	156	133	108	85.4	65.9	50.3	38.3	28.9	21.8	16.4	11.5	7.57	4.17	1.90	1.17	0.81	0.63	
40	74.0	69.3	62.5	54.6	46.5	38.8	32.0	26.1	21.2	17.0	13.1	9.50	6.47	3.70	2.09	1.28	0.86	0.63	
50	35.2	33.8	31.6	29.0	26.1	23.1	20.2	17.4	14.9	12.7	10.4	7.77	5.29	3.32	2.12	1.32	0.90	0.63	
60	18.5	18.0	17.3	16.3	15.2	14.0	12.7	11.4	10.2	9.00	7.83	6.06	4.33	2.99	1.99	1.32	0.92	0.63	
70	9.98	9.80	9.53	9.19	8.77	8.30	7.77	7.19	6.60	5.99	5.38	4.56	3.41	2.48	1.78	1.31	0.94	0.63	
80	4.92	4.87	4.78	4.67	4.53	4.37	4.19	3.98	3.76	3.53	3.30	3.05	2.51	2.05	1.63	1.27	0.95	0.63	
90	2.46	2.45	2.45	2.45	2.45	2.44	2.45	2.46	2.47	2.48	2.49	2.50	2.19	1.88	1.56	1.25	0.94	0.63	
100	2.16	2.15	2.15	2.15	2.15	2.16	2.18	2.20	2.23	2.25	2.28	2.28	2.05	1.81	1.55	1.26	0.95	0.63	
110	2.15	2.15	2.16	2.16	2.16	2.16	2.15	2.15	2.15	2.16	2.18	2.13	1.93	1.72	1.49	1.26	0.96	0.63	
120	2.60	2.59	2.56	2.52	2.47	2.40	2.33	2.26	2.21	2.17	2.16	2.01	1.82	1.64	1.44	1.21	0.97	0.63	
130	3.47	3.43	3.35	3.25	3.12	2.96	2.79	2.62	2.46	2.33	2.15	1.90	1.72	1.53	1.37	1.17	0.96	0.63	
140	4.39	4.34	4.24	4.10	3.89	3.66	3.40	3.12	2.85	2.51	2.12	1.81	1.59	1.44	1.28	1.13	0.93	0.63	
150	5.00	4.97	4.89	4.73	4.52	4.26	3.96	3.62	3.02	2.46	2.01	1.69	1.47	1.32	1.18	1.07	0.90	0.63	
160	5.17	5.17	5.12	5.00	4.84	4.61	4.01	3.35	2.74	2.22	1.79	1.51	1.31	1.18	1.08	1.00	0.86	0.63	
170	4.97	5.01	5.04	4.75	4.28	3.77	3.22	2.68	2.18	1.76	1.44	1.24	1.11	1.04	0.98	0.92	0.82	0.63	
180	4.33	4.04	3.74	3.40	3.01	2.59	2.14	1.74	1.41	1.16	1.00	0.91	0.90	0.88	0.87	0.84	0.77	0.63	

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: