

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2076.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	70.3V x 69.8H
	At 50% of Imax	33.4V x 33.4H
	At 90% of Imax	12.5V x 12.4H
Beam Flux	Total	999.9 lumens per klm.
	To 10% of Imax	789.4 lumens per klm.
	To 50% of Imax	382.2 lumens per klm.
	To 90% of Imax	71.2 lumens per klm.
Upward LOR		2.1 %
Downward LOR		97.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: Medusa-510mm-RGBW GREEN-35D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 35 DEG	DIM.: 510mm	SERIAL No.: IES001036-G
MFR.:	SUR.:	Shielding Angle:

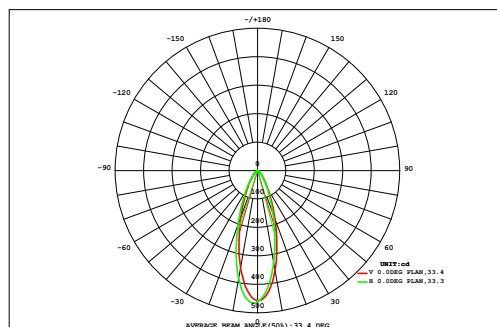

DATA OF LAMP		Eff: 30.80lm/W	
MODEL		Imax (cd)	479.7
NOMINAL POWER (W)	7.5	AVAILABILITY (%)	78.6
RATED VOLTAGE (V)	48	Avai. FLUX (lm)	181.5
NOMINAL FLUX (lm)	231	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	231.0
TEST VOLTAGE (V)	48	q @50% (H,V)	33,33DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT: lm		F t	F a
	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.08	0.08	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.87	0.00
72	0.01	0.02	0.04	0.06	0.08	0.10	0.11	0.13	0.14	0.13	0.13	0.11	0.09	0.07	0.05	0.04	0.02	0.01	1.34	0.00
64	0.01	0.03	0.05	0.08	0.11	0.15	0.18	0.21	0.23	0.22	0.21	0.18	0.14	0.11	0.07	0.05	0.03	0.01	2.06	0.00
56	0.02	0.04	0.07	0.10	0.16	0.23	0.30	0.37	0.40	0.40	0.36	0.29	0.22	0.15	0.10	0.06	0.03	0.01	3.29	0.00
48	0.02	0.04	0.08	0.14	0.23	0.35	0.52	0.67	0.77	0.76	0.65	0.49	0.34	0.22	0.13	0.08	0.04	0.01	5.55	0.41
40	0.02	0.05	0.10	0.18	0.32	0.56	0.90	1.29	1.54	1.52	1.24	0.86	0.53	0.31	0.17	0.09	0.04	0.02	9.74	6.44
32	0.02	0.06	0.12	0.23	0.45	0.85	1.53	2.40	3.05	3.02	2.33	1.46	0.80	0.42	0.21	0.10	0.05	0.02	17.1	14.7
24	0.02	0.06	0.14	0.28	0.57	1.19	2.35	4.03	5.43	5.43	3.95	2.27	1.15	0.54	0.25	0.12	0.05	0.02	27.8	25.8
	0.02	0.07	0.15	0.31	0.66	1.44	3.03	5.51	7.74	7.84	5.55	3.08	1.45	0.63	0.27	0.12	0.05	0.02	37.9	36.1
	0.02	0.07	0.15	0.31	0.68	1.52	3.27	6.12	8.56	8.21	5.90	3.24	1.50	0.64	0.27	0.12	0.05	0.02	40.6	38.8
	0.02	0.06	0.13	0.28	0.61	1.36	2.83	4.97	6.58	6.33	4.58	2.61	1.27	0.57	0.25	0.11	0.05	0.02	32.6	30.7
	0.02	0.05	0.12	0.23	0.48	0.99	1.87	3.03	3.85	3.74	2.82	1.72	0.91	0.44	0.21	0.10	0.04	0.01	20.6	18.5
-24	0.02	0.05	0.09	0.18	0.34	0.63	1.07	1.58	1.94	1.90	1.50	1.00	0.58	0.32	0.16	0.08	0.04	0.01	11.5	8.68
-32	0.01	0.04	0.07	0.13	0.23	0.38	0.58	0.79	0.92	0.91	0.76	0.54	0.35	0.21	0.12	0.07	0.03	0.01	6.15	1.44
-40	0.01	0.03	0.05	0.09	0.15	0.22	0.31	0.39	0.45	0.44	0.38	0.30	0.21	0.14	0.09	0.05	0.03	0.01	3.36	0.00
-48	0.01	0.02	0.04	0.06	0.10	0.13	0.17	0.21	0.23	0.23	0.20	0.17	0.13	0.09	0.06	0.04	0.02	0.01	1.92	0.00
-56	0.01	0.02	0.03	0.04	0.06	0.08	0.10	0.12	0.12	0.12	0.11	0.10	0.08	0.06	0.04	0.03	0.02	0.01	1.14	0.00
-64	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.07	0.07	0.06	0.06	0.05	0.04	0.03	0.02	0.01	0.00	0.69	0.00
-72	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.07	0.07	0.06	0.06	0.05	0.04	0.03	0.02	0.01	0.00	0.69	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
F t	0.29	0.73	1.48	2.77	5.30	10.3	19.2	32.0	42.1	41.4	30.8	18.5	9.86	5.01	2.54	1.30	0.62	0.21	224	---
F a	0.00	0.00	0.00	0.00	0.67	6.85	16.3	29.2	39.4	38.6	28.0	15.5	6.37	0.48	0.00	0.00	0.00	0.00	---	181


one-half-peak spread: U:16.7,D:16.9 , L:17.0,NEMA Beam Type: Type 4 x 5 (H x V)

H (h) Range: -90 - 90DEG
H (h) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-18

V (B) Range: -180 - 180DEG
V (B) Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Medusa-510mm-RGBW GREEN-35D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:35 DEG	DIM.:510mm	SERIAL No.:IES001036-G
MFR.:	SUR.:	Shielding Angle:

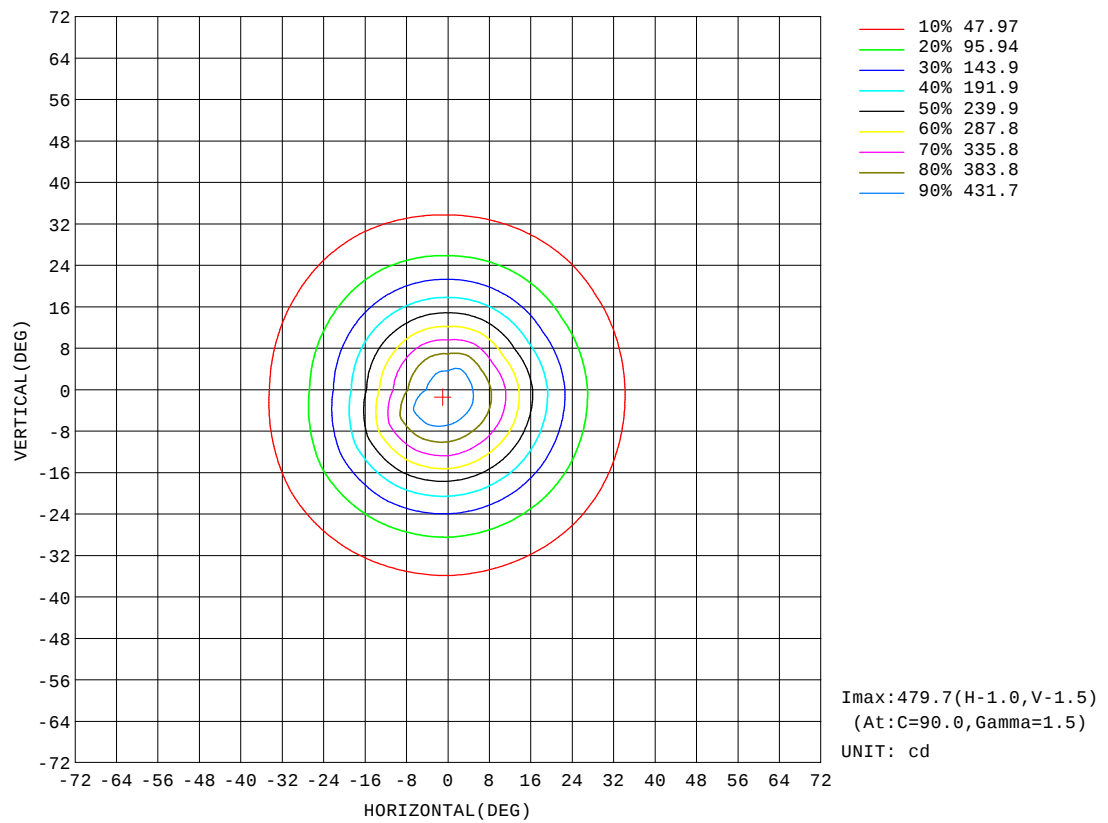


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME: Medusa-510mm-RGBW GREEN-35D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 35 DEG	DIM.: 510mm	SERIAL No.: IES001036-G
MFR.:	SUR.:	Shielding Angle:

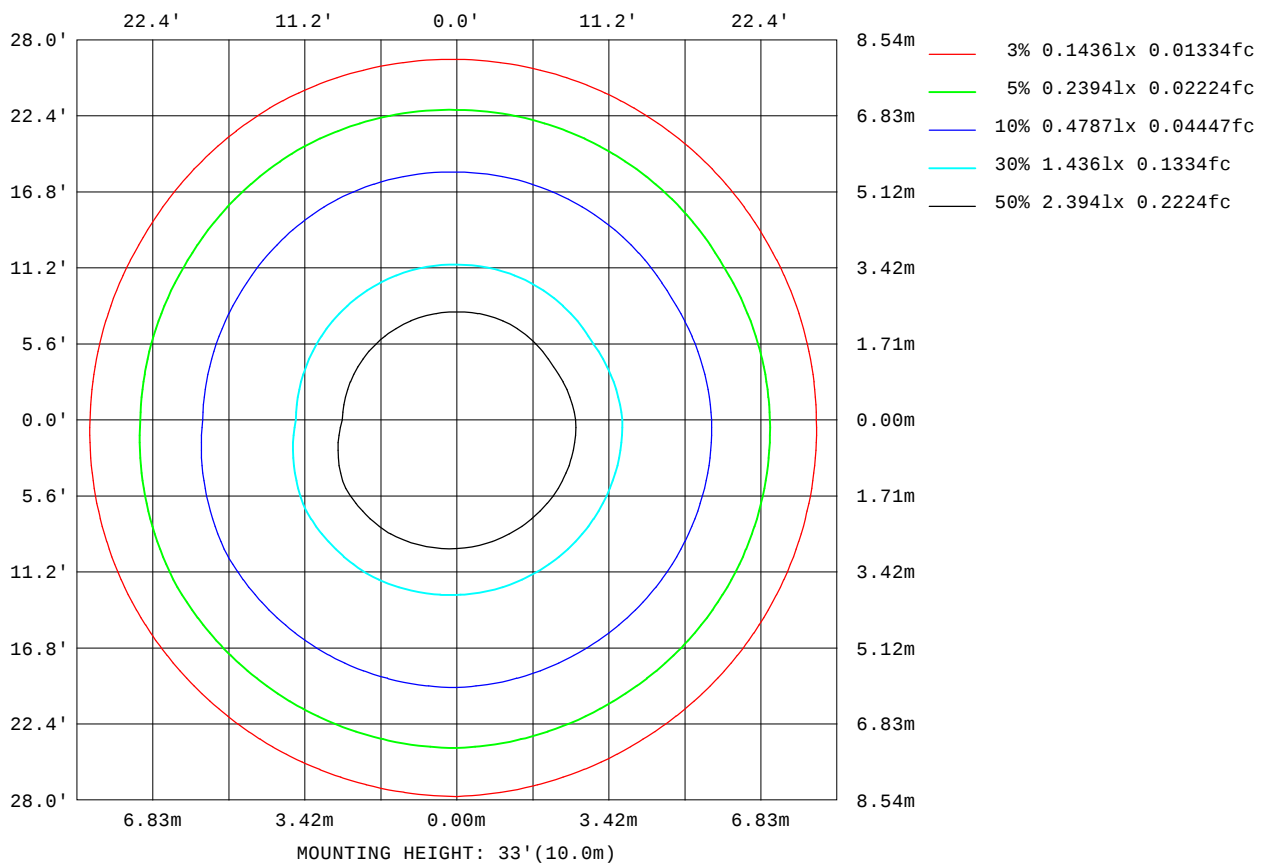

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

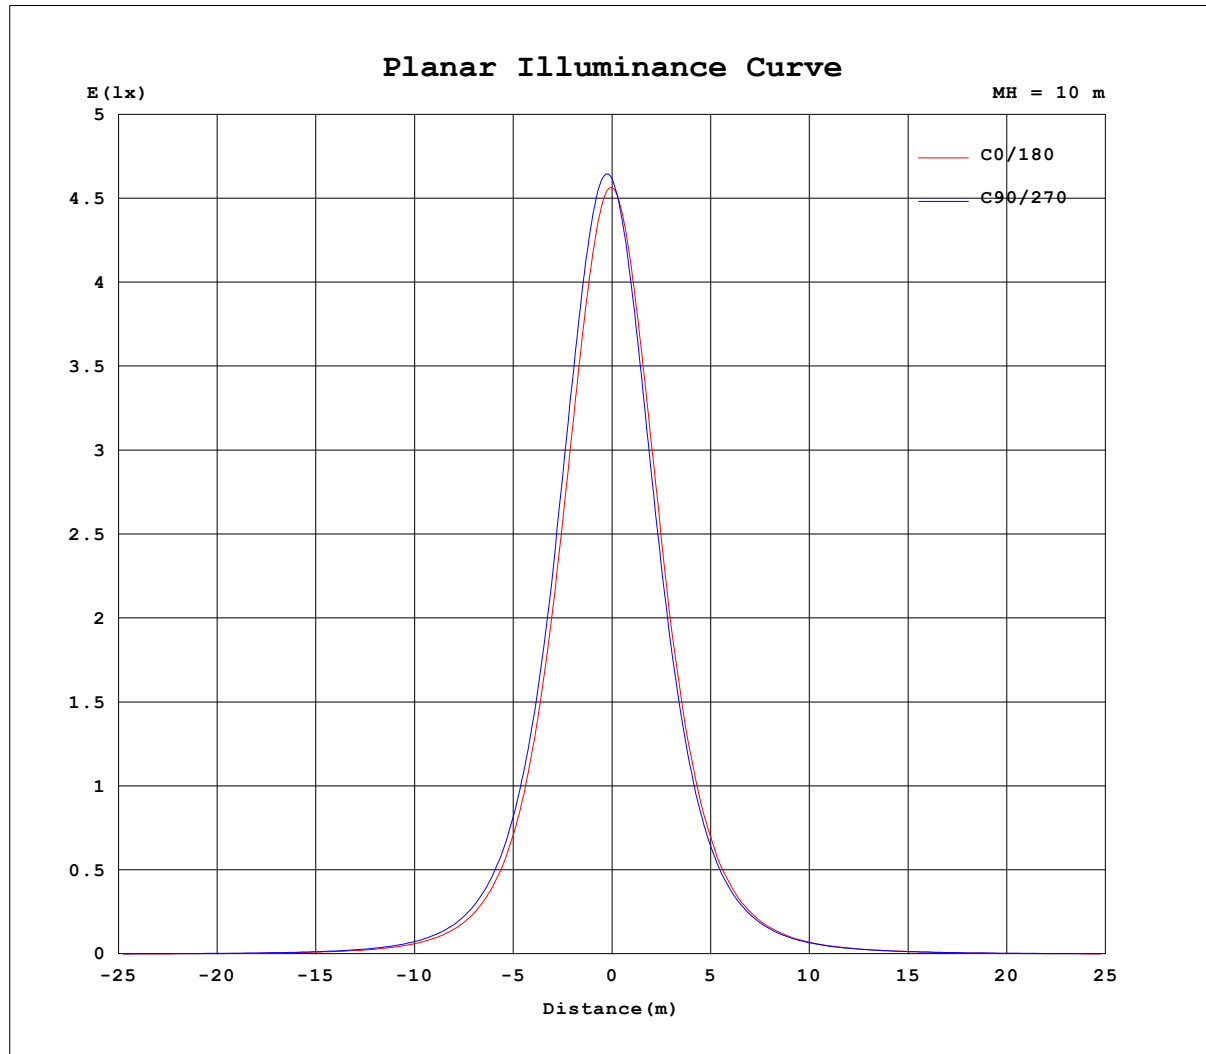


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME: Medusa-510mm-RGBW GREEN-35D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 35 DEG	DIM.: 510mm	SERIAL No.: IES001036-G
MFR.:	SUR.:	Shielding Angle:

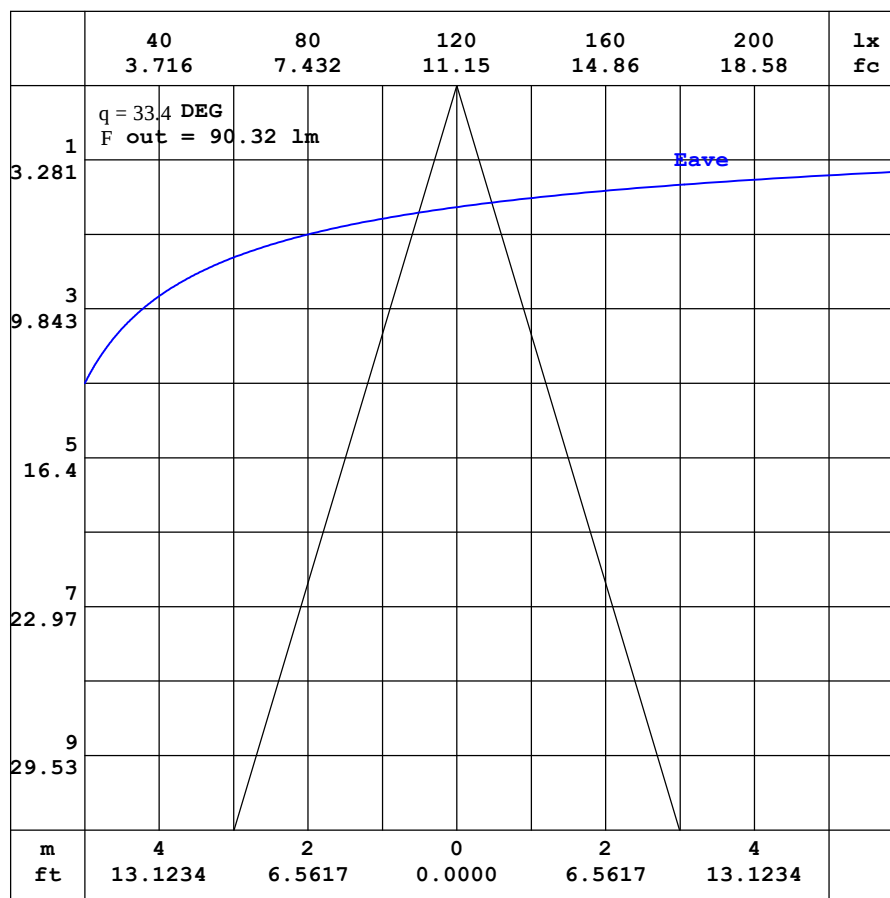

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Medusa-510mm-RGBW GREEN-35D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 35 DEG	DIM.: 510mm	SERIAL No.: IES001036-G
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.81	0.75	0.72	0.72	0.74	0.79	0.88	1.01	1.15	1.31	1.45	1.58	1.67	1.71	1.71	1.70	1.66	1.64	1.64
-170	0.81	0.73	0.69	0.68	0.69	0.71	0.76	0.83	0.92	1.01	1.09	1.15	1.19	1.21	1.21	1.24	1.34	1.40	1.47
-160	0.81	0.72	0.67	0.65	0.63	0.63	0.64	0.66	0.68	0.70	0.71	0.70	0.70	0.82	0.94	1.04	1.12	1.19	1.22
-150	0.81	0.72	0.65	0.61	0.58	0.55	0.53	0.51	0.48	0.44	0.40	0.46	0.53	0.61	0.69	0.76	0.83	0.88	0.90
-140	0.81	0.71	0.62	0.58	0.53	0.49	0.45	0.40	0.34	0.31	0.32	0.34	0.37	0.41	0.44	0.50	0.54	0.57	0.59
-130	0.81	0.70	0.61	0.55	0.50	0.44	0.38	0.32	0.29	0.29	0.29	0.29	0.28	0.29	0.30	0.33	0.34	0.36	0.37
-120	0.81	0.70	0.60	0.52	0.46	0.40	0.34	0.29	0.29	0.28	0.28	0.27	0.27	0.26	0.27	0.27	0.28	0.28	0.28
-110	0.81	0.70	0.60	0.51	0.43	0.36	0.30	0.28	0.27	0.27	0.26	0.25	0.25	0.25	0.26	0.27	0.27	0.27	0.27
-100	0.81	0.71	0.61	0.51	0.42	0.33	0.25	0.25	0.25	0.24	0.24	0.24	0.23	0.23	0.24	0.24	0.25	0.25	0.25
-90	0.81	0.71	0.62	0.52	0.42	0.32	0.23	0.23	0.24	0.25	0.26	0.27	0.28	0.27	0.26	0.25	0.25	0.24	0.23
-80	0.81	0.73	0.66	0.61	0.58	0.58	0.59	0.68	0.78	0.87	0.96	1.04	1.12	1.17	1.21	1.24	1.27	1.29	1.29
-70	0.81	0.76	0.74	0.77	0.85	0.98	1.16	1.38	1.58	1.80	2.01	2.22	2.42	2.59	2.75	2.88	2.98	3.04	3.08
-60	0.81	0.78	0.83	0.94	1.13	1.39	1.75	2.19	2.60	3.05	3.52	4.00	4.49	4.95	5.38	5.77	6.07	6.28	6.38
-50	0.81	0.81	0.90	1.09	1.35	1.76	2.44	3.18	3.93	4.77	5.76	6.88	8.13	9.43	10.7	11.9	12.9	13.5	13.8
-40	0.81	0.84	0.97	1.19	1.54	2.34	3.34	4.42	5.68	7.26	9.31	11.9	15.1	18.8	22.7	26.5	29.8	32.1	33.0
-30	0.81	0.87	1.02	1.26	1.80	2.95	4.28	6.05	8.14	10.8	14.7	20.4	28.0	37.7	49.2	61.7	72.9	80.8	83.6
-20	0.81	0.89	1.06	1.29	2.10	3.50	5.49	7.89	10.8	15.1	21.9	32.4	48.5	71.1	101	137	172	195	201
-10	0.81	0.91	1.07	1.27	2.30	3.87	6.22	9.23	12.9	18.7	28.0	43.1	67.7	106	164	240	318	374	386
0	0.81	0.92	1.07	1.22	2.39	3.94	6.75	9.89	13.9	20.1	30.0	45.9	71.5	111	171	252	346	423	456
10	0.81	0.93	1.11	1.34	2.41	4.02	6.41	9.45	13.0	18.5	27.1	40.5	61.3	92.8	139	198	259	312	327
20	0.81	0.92	1.13	1.42	2.31	3.79	5.87	8.33	11.2	15.2	21.2	29.8	42.1	59.5	82.2	109	135	154	160
30	0.81	0.92	1.13	1.44	2.09	3.36	4.82	6.70	8.89	11.4	14.9	19.6	25.7	33.4	42.2	51.6	59.6	64.9	66.2
40	0.81	0.90	1.10	1.42	1.88	2.82	3.98	5.24	6.63	8.21	10.1	12.4	15.0	18.0	21.2	24.0	26.3	27.8	28.2
50	0.81	0.89	1.05	1.34	1.73	2.29	3.13	4.05	4.88	5.75	6.71	7.76	8.89	9.98	11.1	12.0	12.7	13.1	13.2
60	0.81	0.87	0.99	1.20	1.51	1.91	2.43	3.00	3.44	3.89	4.38	4.86	5.34	5.83	6.18	6.49	6.74	6.88	6.91
70	0.81	0.85	0.92	1.04	1.22	1.47	1.78	2.04	2.27	2.50	2.72	2.92	3.12	3.30	3.45	3.56	3.64	3.69	3.70
80	0.81	0.84	0.87	0.91	0.97	1.04	1.15	1.23	1.32	1.40	1.47	1.54	1.61	1.67	1.72	1.75	1.78	1.79	1.79
90	0.81	0.82	0.83	0.84	0.85	0.86	0.87	0.86	0.85	0.84	0.83	0.82	0.81	0.81	0.82	0.83	0.84	0.84	0.85
100	0.81	0.81	0.81	0.80	0.80	0.80	0.79	0.78	0.76	0.75	0.74	0.73	0.72	0.72	0.73	0.73	0.73	0.74	0.74
110	0.81	0.80	0.78	0.77	0.76	0.75	0.75	0.74	0.73	0.73	0.73	0.72	0.73	0.73	0.73	0.73	0.73	0.73	0.72
120	0.81	0.79	0.76	0.74	0.74	0.74	0.73	0.73	0.73	0.73	0.75	0.78	0.81	0.83	0.84	0.85	0.87	0.87	0.87
130	0.81	0.78	0.74	0.73	0.73	0.73	0.73	0.73	0.75	0.80	0.86	0.92	0.99	1.05	1.10	1.13	1.16	1.18	1.18
140	0.81	0.77	0.73	0.73	0.73	0.73	0.74	0.78	0.84	0.92	1.02	1.12	1.22	1.32	1.40	1.45	1.49	1.51	1.52
150	0.81	0.76	0.73	0.73	0.73	0.74	0.78	0.86	0.95	1.06	1.18	1.31	1.43	1.53	1.62	1.69	1.71	1.73	1.73
160	0.81	0.76	0.73	0.72	0.73	0.76	0.83	0.93	1.06	1.19	1.33	1.45	1.56	1.65	1.71	1.75	1.77	1.79	1.81
170	0.81	0.75	0.72	0.72	0.74	0.78	0.86	0.98	1.12	1.28	1.42	1.54	1.64	1.69	1.71	1.72	1.72	1.73	1.78
180	0.81	0.75	0.72	0.72	0.74	0.79	0.88	1.01	1.15	1.31	1.45	1.58	1.67	1.71	1.71	1.70	1.66	1.64	1.67

H_b Range:-90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-05-18

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Medusa-510mm-RGBW GREEN-35D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 35 DEG	DIM.: 510mm	SERIAL No.: IES001036-G
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.48	1.37	1.27	1.14	1.01	0.85	0.70	0.55	0.44	0.34	0.28	0.27	0.25	0.24	0.23	0.22	0.20	0.14	
-170	1.38	1.33	1.25	1.14	0.99	0.84	0.69	0.56	0.44	0.35	0.29	0.27	0.25	0.24	0.23	0.22	0.20	0.14	
-160	1.18	1.11	1.05	0.95	0.85	0.74	0.61	0.50	0.41	0.34	0.30	0.27	0.26	0.25	0.24	0.22	0.20	0.14	
-150	0.88	0.83	0.77	0.70	0.63	0.56	0.49	0.43	0.37	0.32	0.29	0.27	0.26	0.25	0.24	0.23	0.20	0.14	
-140	0.57	0.54	0.51	0.47	0.43	0.39	0.36	0.34	0.32	0.30	0.29	0.28	0.27	0.26	0.24	0.22	0.20	0.14	
-130	0.36	0.35	0.33	0.31	0.29	0.29	0.29	0.29	0.29	0.29	0.29	0.28	0.27	0.25	0.24	0.22	0.20	0.14	
-120	0.28	0.28	0.27	0.27	0.25	0.26	0.26	0.27	0.27	0.28	0.28	0.27	0.26	0.25	0.23	0.21	0.19	0.14	
-110	0.27	0.26	0.26	0.25	0.24	0.24	0.25	0.25	0.26	0.26	0.27	0.27	0.26	0.24	0.22	0.21	0.17	0.14	
-100	0.25	0.24	0.24	0.24	0.23	0.23	0.23	0.24	0.24	0.25	0.25	0.25	0.23	0.22	0.21	0.18	0.16	0.14	
-90	0.23	0.24	0.24	0.25	0.25	0.25	0.25	0.24	0.24	0.23	0.23	0.22	0.21	0.19	0.18	0.17	0.15	0.14	
-80	1.27	1.24	1.21	1.16	1.10	1.04	0.97	0.88	0.80	0.71	0.61	0.51	0.39	0.29	0.22	0.18	0.15	0.14	
-70	3.02	2.94	2.82	2.68	2.51	2.32	2.12	1.91	1.69	1.48	1.27	1.02	0.72	0.49	0.32	0.21	0.16	0.14	
-60	6.24	5.98	5.64	5.23	4.77	4.30	3.83	3.35	2.89	2.45	2.04	1.52	1.04	0.67	0.41	0.25	0.16	0.14	
-50	13.4	12.6	11.6	10.3	9.04	7.78	6.56	5.47	4.52	3.70	2.93	2.14	1.40	0.81	0.47	0.27	0.17	0.14	
-40	31.6	29.0	25.5	21.5	17.7	14.3	11.3	8.80	6.85	5.31	3.98	2.83	1.87	0.97	0.49	0.27	0.17	0.14	
-30	79.1	69.9	58.1	46.0	35.2	26.1	19.0	13.8	9.96	7.29	5.35	3.64	2.37	1.22	0.46	0.25	0.17	0.14	
-20	188	160	126	92.7	65.2	44.4	29.9	20.0	13.6	9.34	6.54	4.42	2.74	1.41	0.40	0.22	0.16	0.14	
-10	354	294	219	153	100	64.0	40.3	25.6	16.6	10.9	7.44	5.14	2.95	1.50	0.37	0.17	0.15	0.14	
0	429	356	264	180	115	71.7	44.3	27.6	17.5	11.4	7.72	5.29	3.04	1.49	0.27	0.12	0.14	0.14	
10	314	256	191	135	90.6	59.4	38.5	25.1	16.6	11.1	7.67	5.33	3.10	1.60	0.44	0.21	0.17	0.14	
20	152	132	105	78.5	56.5	39.9	28.1	19.7	13.8	9.81	6.99	4.81	3.03	1.62	0.53	0.29	0.20	0.14	
30	63.9	57.8	49.2	40.1	31.7	24.5	18.7	14.2	10.7	8.05	6.01	4.19	2.77	1.51	0.65	0.36	0.22	0.14	
40	27.5	25.8	23.2	20.3	17.3	14.4	11.9	9.67	7.83	6.27	4.81	3.48	2.36	1.32	0.72	0.40	0.24	0.14	
50	13.0	12.5	11.7	10.7	9.68	8.54	7.48	6.43	5.51	4.66	3.81	2.84	1.94	1.19	0.73	0.42	0.25	0.14	
60	6.83	6.64	6.38	6.05	5.64	5.16	4.70	4.21	3.74	3.30	2.88	2.22	1.57	1.06	0.68	0.42	0.25	0.14	
70	3.67	3.61	3.51	3.38	3.21	3.02	2.84	2.64	2.41	2.18	1.96	1.65	1.21	0.86	0.59	0.40	0.26	0.14	
80	1.78	1.76	1.72	1.68	1.62	1.55	1.48	1.42	1.34	1.26	1.17	1.08	0.88	0.69	0.53	0.39	0.26	0.14	
90	0.85	0.85	0.84	0.84	0.84	0.83	0.84	0.85	0.86	0.86	0.87	0.88	0.76	0.63	0.51	0.39	0.26	0.14	
100	0.74	0.74	0.74	0.74	0.74	0.74	0.75	0.75	0.76	0.77	0.79	0.80	0.71	0.61	0.50	0.39	0.27	0.14	
110	0.73	0.74	0.74	0.75	0.75	0.75	0.74	0.74	0.75	0.75	0.76	0.74	0.66	0.57	0.48	0.39	0.27	0.14	
120	0.88	0.89	0.88	0.88	0.86	0.84	0.80	0.78	0.76	0.75	0.74	0.69	0.61	0.54	0.46	0.37	0.28	0.14	
130	1.19	1.19	1.17	1.15	1.11	1.04	0.97	0.90	0.84	0.79	0.72	0.64	0.57	0.50	0.43	0.36	0.28	0.14	
140	1.53	1.52	1.50	1.47	1.39	1.29	1.19	1.08	0.98	0.85	0.70	0.59	0.52	0.46	0.40	0.34	0.26	0.14	
150	1.75	1.76	1.75	1.69	1.61	1.51	1.39	1.27	1.05	0.83	0.67	0.55	0.46	0.41	0.36	0.31	0.25	0.14	
160	1.81	1.81	1.80	1.77	1.72	1.64	1.40	1.16	0.94	0.74	0.59	0.48	0.40	0.36	0.32	0.28	0.23	0.14	
170	1.75	1.79	1.79	1.68	1.50	1.31	1.10	0.91	0.72	0.57	0.45	0.38	0.33	0.30	0.27	0.25	0.22	0.14	
180	1.48	1.37	1.27	1.14	1.01	0.85	0.70	0.55	0.44	0.34	0.28	0.27	0.25	0.24	0.23	0.22	0.20	0.14	

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-05-18

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks: