

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1616.3 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	78.3V x 77.5H
	At 50% of Imax	39.2V x 39.0H
	At 90% of Imax	15.5V x 15.3H
Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	815.9 lumens per klm.
	To 50% of Imax	423.9 lumens per klm.
	To 90% of Imax	88.1 lumens per klm.
	Upward LOR	2.2 %
	Downward LOR	97.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-20

V(θ) Range:-180 - 180DEG
V(θ) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Medusa-510mm-RGBW 3000K-40D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:40 DEG	DIM.:510mm	SERIAL No.:IES001044-W
MFR.:	SUR.:	Shielding Angle:

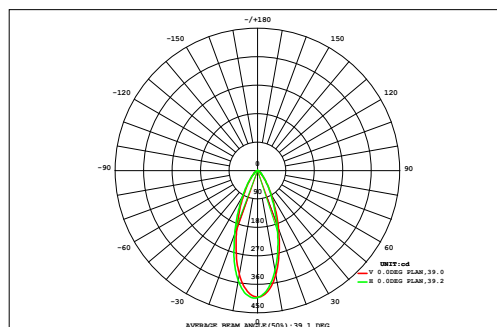

DATA OF LAMP		Eff:33.26lm/W	
MODEL		Imax(cd)	403.1
NOMINAL POWER(W)	7.5	AVAILABILITY(%)	81.5
RATED VOLTAGE(V)	48	Avai. FLUX(lm)	203.4
NOMINAL FLUX(lm)	249.4	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	249.4
TEST VOLTAGE(V)	48	q @50%(H,V)	39,39DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.01	0.02	0.03	0.05	0.06	0.08	0.09	0.10	0.10	0.10	0.09	0.08	0.07	0.06	0.05	0.03	0.02	0.01	1.05	0.00
72	0.01	0.02	0.03	0.05	0.06	0.08	0.09	0.10	0.10	0.10	0.09	0.08	0.07	0.06	0.05	0.03	0.02	0.01	1.05	0.00
64	0.01	0.03	0.05	0.07	0.09	0.12	0.14	0.15	0.16	0.16	0.15	0.13	0.11	0.09	0.06	0.04	0.03	0.01	1.61	0.00
56	0.02	0.04	0.06	0.09	0.13	0.18	0.22	0.25	0.27	0.27	0.25	0.21	0.17	0.12	0.09	0.06	0.03	0.01	2.47	0.00
48	0.02	0.04	0.08	0.13	0.19	0.27	0.37	0.45	0.50	0.49	0.44	0.35	0.26	0.18	0.12	0.07	0.04	0.01	4.01	0.00
40	0.02	0.05	0.10	0.17	0.28	0.44	0.65	0.84	0.96	0.95	0.81	0.61	0.41	0.26	0.16	0.09	0.04	0.02	6.85	2.94
32	0.02	0.06	0.12	0.22	0.40	0.70	1.13	1.58	1.86	1.83	1.50	1.05	0.65	0.37	0.20	0.11	0.05	0.02	11.9	9.56
24	0.03	0.07	0.14	0.28	0.56	1.06	1.86	2.81	3.45	3.38	2.65	1.72	0.97	0.51	0.26	0.12	0.06	0.02	19.9	18.1
	0.03	0.07	0.16	0.34	0.71	1.46	2.75	4.36	5.53	5.40	4.10	2.54	1.37	0.67	0.31	0.14	0.06	0.02	30.0	28.4
	0.03	0.08	0.17	0.38	0.82	1.75	3.41	5.56	7.14	7.00	5.38	3.34	1.70	0.78	0.34	0.15	0.06	0.02	38.1	36.7
	0.03	0.08	0.17	0.38	0.84	1.82	3.58	5.88	7.44	7.33	5.70	3.49	1.76	0.79	0.34	0.15	0.06	0.02	39.9	38.4
	0.03	0.07	0.16	0.35	0.76	1.63	3.13	4.95	6.18	6.04	4.65	2.88	1.50	0.70	0.31	0.14	0.06	0.02	33.6	32.1
	0.02	0.06	0.14	0.29	0.61	1.22	2.17	3.29	4.05	3.96	3.11	1.99	1.10	0.55	0.26	0.12	0.05	0.02	23.0	21.3
-24	0.02	0.05	0.11	0.22	0.43	0.78	1.29	1.85	2.23	2.19	1.76	1.20	0.72	0.39	0.20	0.10	0.04	0.02	13.6	11.5
-32	0.02	0.04	0.09	0.16	0.28	0.47	0.71	0.96	1.12	1.10	0.92	0.67	0.43	0.26	0.14	0.08	0.04	0.01	7.48	4.30
-40	0.02	0.04	0.07	0.11	0.18	0.27	0.38	0.48	0.55	0.54	0.47	0.36	0.25	0.17	0.10	0.06	0.03	0.01	4.07	0.00
-48	0.01	0.03	0.05	0.08	0.11	0.16	0.21	0.25	0.27	0.27	0.24	0.20	0.15	0.11	0.07	0.05	0.02	0.01	2.29	0.00
-56	0.01	0.02	0.04	0.05	0.08	0.10	0.12	0.14	0.15	0.15	0.13	0.11	0.09	0.07	0.05	0.03	0.02	0.01	1.37	0.00
-64	0.01	0.02	0.02	0.04	0.05	0.06	0.07	0.08	0.08	0.08	0.08	0.07	0.06	0.05	0.03	0.02	0.01	0.01	0.83	0.00
-72	0.01	0.02	0.02	0.04	0.05	0.06	0.07	0.08	0.08	0.08	0.08	0.07	0.06	0.05	0.03	0.02	0.01	0.01	0.83	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
F t	0.35	0.87	1.77	3.39	6.58	12.6	22.2	34.0	42.0	41.2	32.4	21.0	11.8	6.11	3.08	1.55	0.73	0.25	242	---
F a	0.00	0.00	0.00	0.00	3.09	9.90	19.8	31.7	39.7	39.0	30.1	18.6	9.07	2.42	0.00	0.00	0.00	0.00	---	203

one-half-peak spread: U:19.4,D:20.1 , L:19.6,R:19.7


NEMA Beam Type: Type 5

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Medusa-510mm-RGBW 3000K-40D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:40 DEG	DIM.:510mm	SERIAL No.:IES001044-W
MFR.:	SUR.:	Shielding Angle:

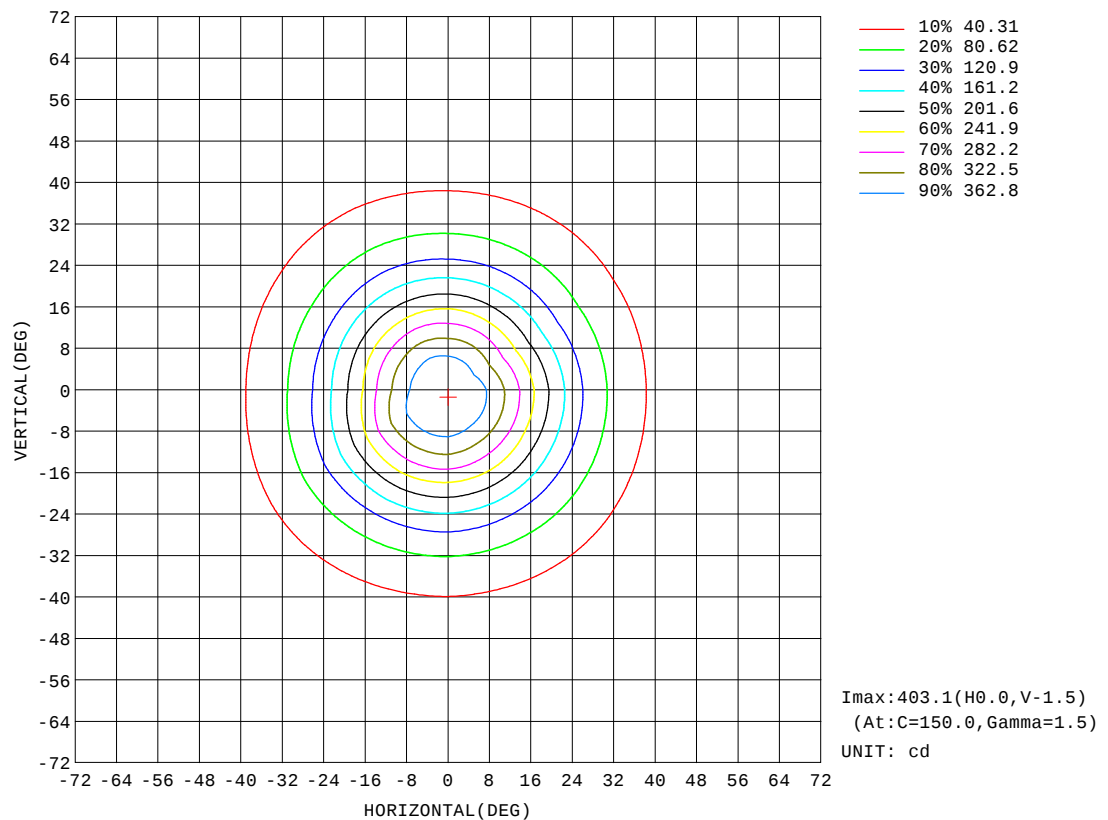


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME: Medusa-510mm-RGBW 3000K-40D-Rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 40 DEG	DIM.: 510mm	SERIAL No.: IES001044-W
MFR.:	SUR.:	Shielding Angle:

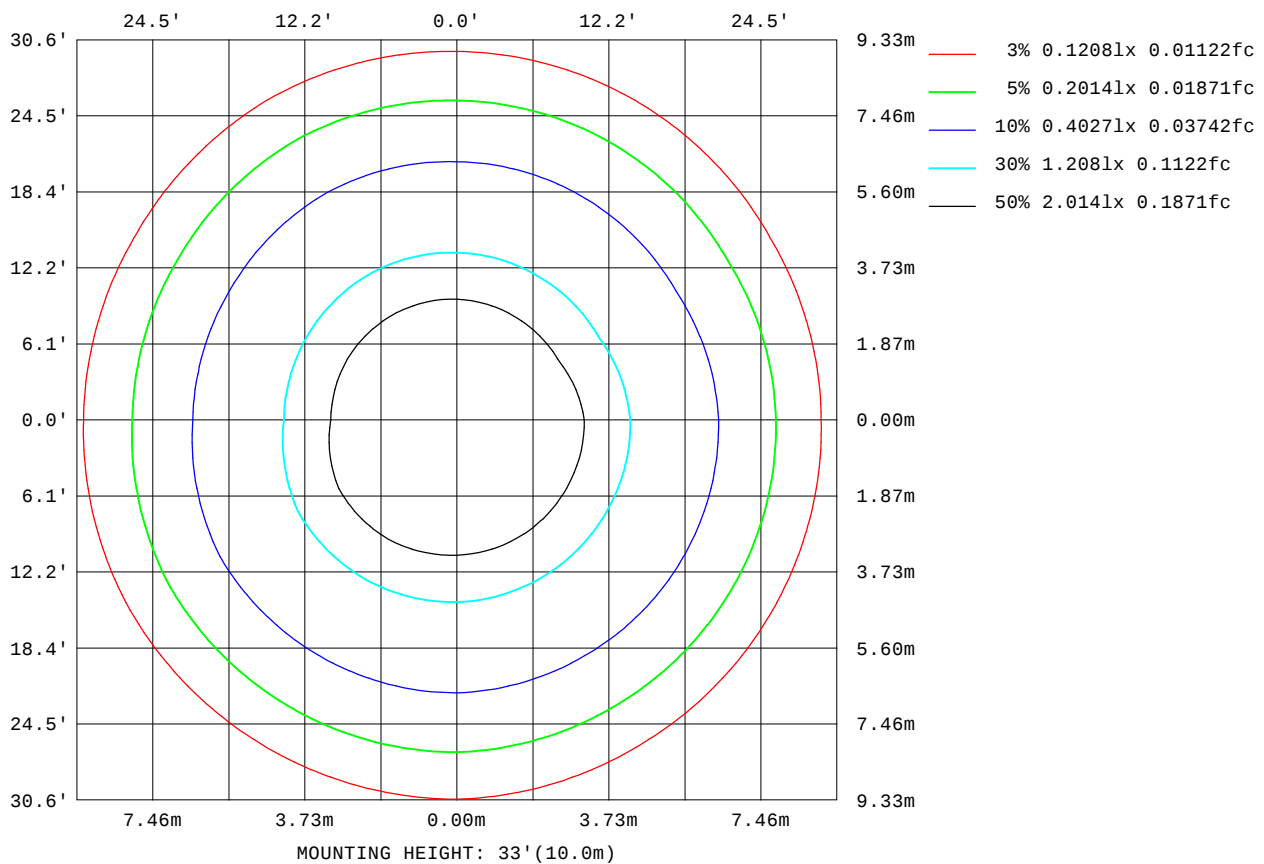

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-20

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

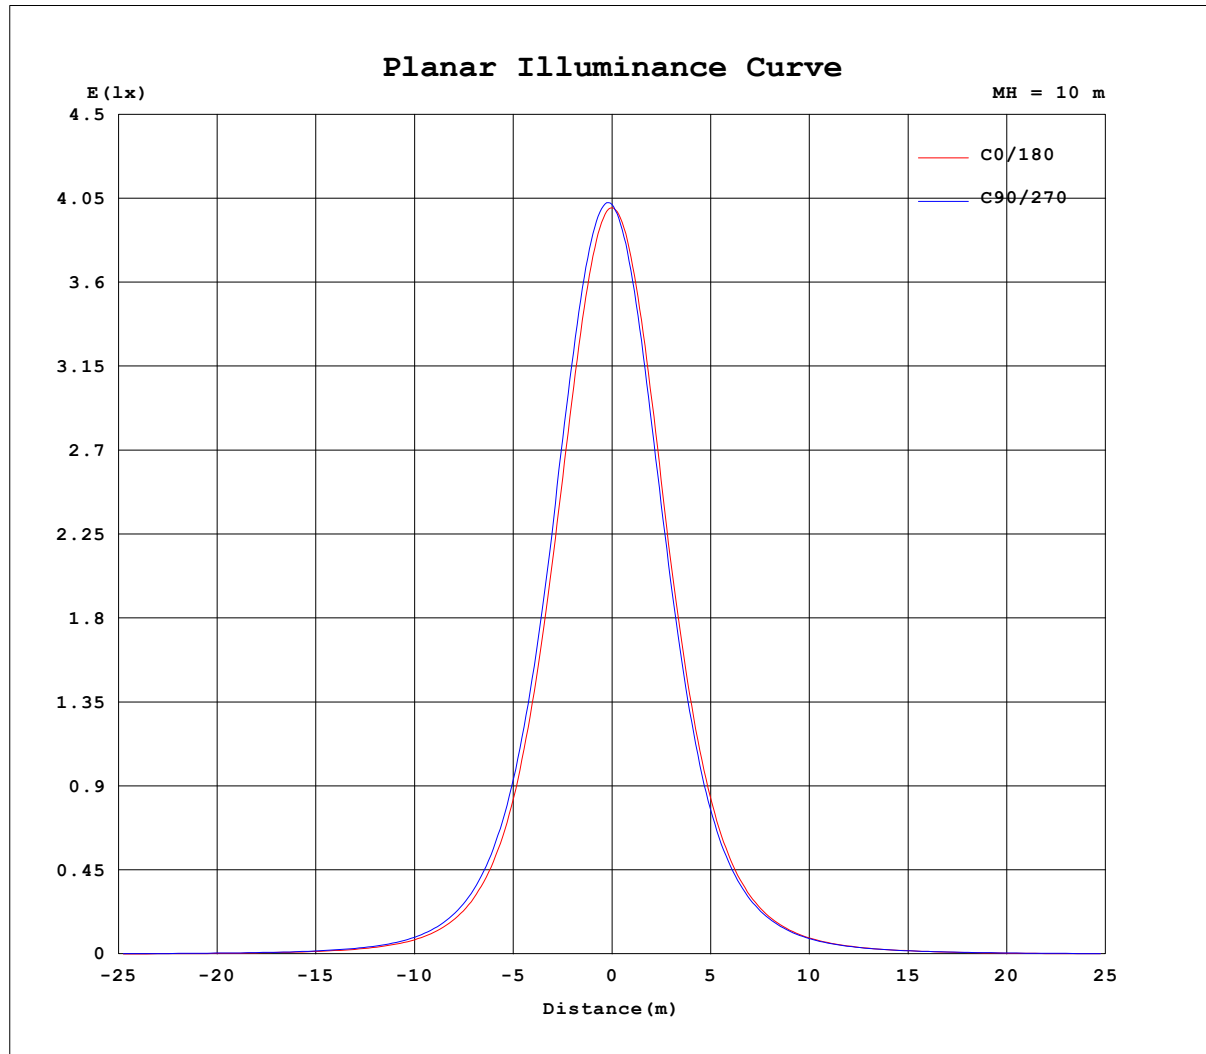


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME: Medusa-510mm-RGBW 3000K-40D-Rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 40 DEG	DIM.: 510mm	SERIAL No.: IES001044-W
MFR.:	SUR.:	Shielding Angle:

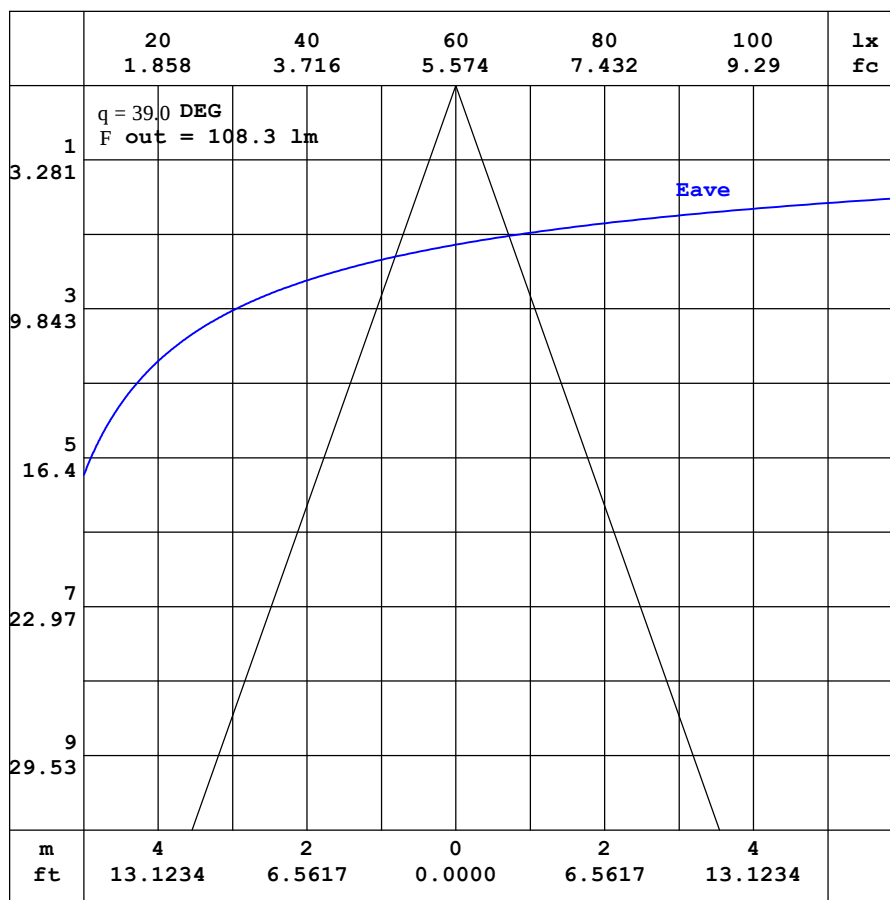

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-20

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Medusa-510mm-RGBW 3000K-40D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:40 DEG	DIM.:510mm	SERIAL No.:IES001044-W
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.93	0.85	0.83	0.83	0.87	0.92	1.01	1.13	1.28	1.44	1.58	1.71	1.81	1.86	1.85	1.85	1.82	1.80	1.78
-170	0.93	0.84	0.80	0.79	0.80	0.83	0.88	0.95	1.03	1.12	1.19	1.25	1.29	1.30	1.29	1.31	1.41	1.48	1.58
-160	0.93	0.83	0.77	0.74	0.73	0.73	0.74	0.76	0.77	0.79	0.79	0.79	0.77	0.89	1.00	1.11	1.19	1.26	1.31
-150	0.93	0.82	0.74	0.70	0.67	0.64	0.61	0.59	0.56	0.50	0.46	0.53	0.61	0.69	0.76	0.84	0.90	0.96	0.99
-140	0.93	0.81	0.72	0.66	0.61	0.56	0.51	0.46	0.40	0.38	0.38	0.41	0.45	0.49	0.53	0.58	0.62	0.65	0.68
-130	0.93	0.80	0.70	0.63	0.56	0.50	0.43	0.37	0.33	0.33	0.34	0.34	0.35	0.35	0.37	0.40	0.42	0.44	0.45
-120	0.93	0.81	0.69	0.60	0.52	0.45	0.37	0.32	0.32	0.31	0.31	0.30	0.30	0.30	0.31	0.32	0.33	0.34	0.35
-110	0.93	0.81	0.69	0.58	0.49	0.41	0.33	0.31	0.30	0.30	0.29	0.29	0.28	0.28	0.29	0.29	0.30	0.31	0.31
-100	0.93	0.82	0.70	0.59	0.48	0.37	0.28	0.28	0.28	0.27	0.27	0.27	0.26	0.27	0.28	0.28	0.29	0.29	0.29
-90	0.93	0.82	0.71	0.60	0.49	0.38	0.27	0.27	0.28	0.29	0.30	0.31	0.32	0.31	0.30	0.30	0.29	0.28	0.27
-80	0.93	0.83	0.77	0.73	0.71	0.73	0.77	0.88	0.98	1.08	1.18	1.28	1.36	1.42	1.47	1.51	1.55	1.56	1.57
-70	0.93	0.87	0.86	0.92	1.04	1.22	1.45	1.71	1.97	2.21	2.46	2.70	2.93	3.14	3.32	3.47	3.59	3.67	3.71
-60	0.93	0.91	0.97	1.12	1.36	1.70	2.16	2.69	3.19	3.73	4.28	4.85	5.42	5.95	6.43	6.86	7.20	7.44	7.54
-50	0.93	0.94	1.06	1.29	1.63	2.14	3.01	3.91	4.77	5.76	6.92	8.24	9.73	11.3	12.9	14.3	15.5	16.2	16.5
-40	0.93	0.97	1.13	1.41	1.84	2.87	4.08	5.33	6.85	8.75	11.4	14.6	18.6	23.1	27.9	32.6	36.5	39.2	40.1
-30	0.93	1.00	1.18	1.48	2.20	3.59	5.22	7.26	9.78	13.3	18.4	25.6	35.1	46.8	60.0	74.0	86.4	95.1	98.0
-20	0.93	1.03	1.22	1.51	2.58	4.30	6.41	9.33	13.0	18.6	27.4	40.8	60.4	86.0	117	153	185	207	213
-10	0.93	1.04	1.22	1.47	2.80	4.70	7.49	10.9	15.5	23.0	34.9	53.7	82.7	125	181	245	304	341	353
0	0.93	1.05	1.21	1.39	2.82	4.88	7.94	11.6	16.6	24.5	37.1	56.8	87.5	132	193	263	334	383	400
10	0.93	1.06	1.27	1.55	2.91	4.87	7.70	11.1	15.6	22.7	33.6	50.5	75.8	112	161	217	271	312	320
20	0.93	1.06	1.30	1.65	2.80	4.62	6.83	9.81	13.3	18.5	26.1	37.2	52.7	73.9	100	130	157	175	181
30	0.93	1.05	1.30	1.69	2.52	4.03	5.82	7.97	10.5	13.7	18.2	24.3	32.2	41.9	52.9	64.5	73.8	79.9	81.3
40	0.93	1.04	1.28	1.66	2.22	3.40	4.77	6.24	7.89	9.80	12.1	15.0	18.4	22.2	26.4	29.9	33.0	34.8	35.2
50	0.93	1.02	1.23	1.57	2.06	2.73	3.76	4.85	5.84	6.89	8.03	9.29	10.7	12.0	13.4	14.6	15.4	15.9	16.0
60	0.93	1.00	1.15	1.41	1.79	2.29	2.92	3.62	4.14	4.69	5.29	5.88	6.50	7.09	7.48	7.85	8.13	8.28	8.30
70	0.93	0.97	1.06	1.22	1.45	1.76	2.15	2.47	2.76	3.04	3.31	3.56	3.81	4.03	4.21	4.34	4.43	4.47	4.48
80	0.93	0.95	0.99	1.05	1.13	1.24	1.39	1.50	1.61	1.71	1.80	1.90	1.99	2.06	2.10	2.14	2.17	2.17	2.17
90	0.93	0.94	0.95	0.96	0.97	0.98	0.99	0.98	0.98	0.97	0.96	0.95	0.94	0.95	0.95	0.96	0.96	0.97	0.97
100	0.93	0.93	0.93	0.93	0.91	0.91	0.91	0.90	0.88	0.87	0.86	0.85	0.84	0.84	0.84	0.84	0.84	0.84	0.84
110	0.93	0.92	0.89	0.88	0.87	0.87	0.86	0.86	0.85	0.84	0.84	0.84	0.85	0.85	0.85	0.84	0.84	0.83	0.82
120	0.93	0.91	0.87	0.86	0.85	0.85	0.85	0.84	0.85	0.85	0.87	0.90	0.93	0.95	0.97	0.99	1.00	1.00	0.99
130	0.93	0.89	0.86	0.85	0.84	0.84	0.85	0.85	0.88	0.93	0.99	1.05	1.11	1.18	1.23	1.26	1.29	1.30	1.30
140	0.93	0.88	0.85	0.84	0.84	0.85	0.86	0.91	0.97	1.05	1.14	1.24	1.34	1.44	1.52	1.57	1.60	1.62	1.62
150	0.93	0.87	0.84	0.84	0.84	0.86	0.91	0.99	1.08	1.19	1.31	1.43	1.55	1.65	1.74	1.81	1.85	1.86	1.87
160	0.93	0.86	0.84	0.84	0.85	0.88	0.96	1.06	1.18	1.32	1.45	1.57	1.67	1.77	1.84	1.88	1.90	1.91	1.92
170	0.93	0.86	0.84	0.83	0.86	0.91	1.00	1.11	1.25	1.40	1.54	1.67	1.77	1.83	1.85	1.86	1.87	1.86	1.93
180	0.93	0.85	0.83	0.83	0.87	0.92	1.01	1.13	1.28	1.44	1.58	1.71	1.81	1.86	1.85	1.85	1.82	1.80	1.79

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-05-20

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Medusa-510mm-RGBW 3000K-40D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:40 DEG	DIM.:510mm	SERIAL No.:IES001044-W
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.62	1.51	1.38	1.25	1.10	0.95	0.78	0.64	0.51	0.41	0.35	0.32	0.29	0.27	0.27	0.27	0.23	0.19	
-170	1.49	1.44	1.36	1.23	1.08	0.93	0.78	0.64	0.51	0.42	0.36	0.32	0.30	0.28	0.27	0.27	0.23	0.19	
-160	1.28	1.20	1.14	1.05	0.94	0.83	0.70	0.58	0.48	0.41	0.36	0.32	0.30	0.29	0.28	0.27	0.23	0.19	
-150	0.97	0.93	0.86	0.80	0.72	0.65	0.57	0.50	0.44	0.39	0.35	0.32	0.31	0.29	0.28	0.27	0.23	0.19	
-140	0.66	0.64	0.60	0.56	0.51	0.47	0.44	0.40	0.38	0.36	0.34	0.32	0.31	0.29	0.28	0.26	0.23	0.19	
-130	0.44	0.43	0.41	0.38	0.36	0.35	0.36	0.34	0.34	0.34	0.33	0.32	0.31	0.29	0.28	0.25	0.23	0.19	
-120	0.34	0.33	0.32	0.31	0.30	0.30	0.31	0.31	0.32	0.32	0.32	0.32	0.30	0.29	0.27	0.25	0.22	0.19	
-110	0.31	0.30	0.30	0.29	0.28	0.28	0.28	0.29	0.30	0.31	0.31	0.31	0.29	0.27	0.26	0.24	0.21	0.19	
-100	0.29	0.28	0.28	0.28	0.28	0.27	0.27	0.28	0.28	0.28	0.28	0.28	0.27	0.26	0.24	0.22	0.20	0.19	
-90	0.27	0.27	0.28	0.28	0.28	0.28	0.28	0.27	0.27	0.26	0.26	0.25	0.24	0.23	0.22	0.21	0.20	0.19	
-80	1.55	1.51	1.46	1.40	1.34	1.26	1.16	1.06	0.95	0.84	0.73	0.60	0.45	0.34	0.27	0.22	0.20	0.19	
-70	3.65	3.54	3.40	3.22	3.02	2.80	2.56	2.32	2.06	1.81	1.56	1.25	0.88	0.59	0.38	0.26	0.21	0.19	
-60	7.37	7.06	6.67	6.18	5.67	5.13	4.58	4.02	3.48	2.97	2.50	1.86	1.27	0.83	0.50	0.30	0.22	0.19	
-50	16.0	15.1	13.8	12.3	10.7	9.18	7.77	6.48	5.38	4.43	3.54	2.59	1.69	0.99	0.58	0.32	0.21	0.19	
-40	38.6	35.4	31.1	26.3	21.6	17.2	13.6	10.5	8.11	6.29	4.74	3.39	2.25	1.17	0.61	0.33	0.21	0.19	
-30	93.3	83.1	69.9	56.0	43.1	32.1	23.3	16.7	12.0	8.66	6.36	4.34	2.82	1.48	0.57	0.31	0.21	0.19	
-20	201	176	143	108	77.9	54.2	36.8	24.7	16.6	11.3	7.85	5.23	3.20	1.69	0.48	0.27	0.20	0.19	
-10	331	287	228	168	116	76.9	49.6	31.8	20.4	13.3	8.93	6.10	3.42	1.79	0.41	0.22	0.18	0.19	
0	383	334	266	194	132	86.1	54.7	34.4	21.8	14.0	9.31	6.37	3.49	1.73	0.30	0.15	0.17	0.19	
10	303	256	201	150	106	71.6	47.3	30.9	20.3	13.5	9.17	6.31	3.58	1.90	0.48	0.26	0.20	0.19	
20	171	149	121	92.9	68.2	48.5	34.3	23.9	16.6	11.7	8.34	5.65	3.52	1.91	0.62	0.35	0.23	0.19	
30	78.2	70.7	60.5	49.5	39.0	29.8	22.5	16.9	12.6	9.48	7.08	4.93	3.26	1.80	0.77	0.42	0.26	0.19	
40	34.2	31.8	28.6	24.8	20.9	17.2	14.1	11.4	9.20	7.34	5.63	4.09	2.78	1.54	0.85	0.46	0.29	0.19	
50	15.8	15.1	14.0	12.8	11.5	10.1	8.82	7.58	6.48	5.48	4.48	3.34	2.26	1.40	0.84	0.48	0.30	0.19	
60	8.20	7.98	7.64	7.22	6.72	6.16	5.56	4.98	4.42	3.89	3.39	2.59	1.83	1.22	0.77	0.47	0.32	0.19	
70	4.43	4.34	4.21	4.04	3.84	3.62	3.38	3.12	2.84	2.57	2.28	1.90	1.39	0.98	0.67	0.47	0.32	0.19	
80	2.15	2.11	2.06	2.01	1.94	1.85	1.76	1.65	1.55	1.44	1.33	1.22	0.99	0.79	0.62	0.46	0.32	0.19	
90	0.97	0.96	0.95	0.94	0.94	0.93	0.94	0.94	0.95	0.96	0.97	0.97	0.84	0.71	0.58	0.45	0.32	0.19	
100	0.84	0.84	0.84	0.83	0.83	0.83	0.84	0.85	0.86	0.87	0.89	0.89	0.79	0.68	0.56	0.44	0.32	0.19	
110	0.83	0.84	0.85	0.85	0.85	0.85	0.85	0.85	0.86	0.85	0.85	0.83	0.74	0.64	0.55	0.44	0.31	0.19	
120	1.00	1.01	1.00	0.99	0.97	0.94	0.91	0.89	0.86	0.85	0.85	0.78	0.70	0.61	0.52	0.42	0.31	0.19	
130	1.30	1.30	1.27	1.25	1.21	1.15	1.08	1.02	0.95	0.90	0.82	0.73	0.65	0.57	0.50	0.40	0.31	0.19	
140	1.63	1.62	1.59	1.55	1.47	1.38	1.29	1.19	1.09	0.96	0.80	0.68	0.59	0.52	0.46	0.38	0.30	0.19	
150	1.87	1.86	1.83	1.77	1.69	1.59	1.48	1.36	1.14	0.94	0.76	0.63	0.53	0.47	0.41	0.36	0.28	0.19	
160	1.91	1.91	1.90	1.87	1.80	1.71	1.49	1.24	1.02	0.82	0.67	0.55	0.46	0.41	0.37	0.34	0.27	0.19	
170	1.87	1.87	1.88	1.77	1.60	1.40	1.20	0.99	0.80	0.65	0.53	0.44	0.38	0.34	0.32	0.30	0.25	0.19	
180	1.62	1.51	1.38	1.25	1.10	0.95	0.78	0.64	0.51	0.41	0.35	0.32	0.29	0.27	0.27	0.27	0.23	0.19	

H_b Range:-90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-05-20

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: