

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1561.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	80.3V x 79.5H
	At 50% of Imax	40.4V x 40.1H
	At 90% of Imax	15.9V x 15.9H
Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	831.8 lumens per klm.
	To 50% of Imax	432.9 lumens per klm.
	To 90% of Imax	87.9 lumens per klm.
Upward LOR		1.3 %
Downward LOR		98.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-20

V(β) Range:-180 - 180DEG
V(β) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Medusa-510mm-RGBW BLUE-40D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:40 DEG	DIM.:510mm	SERIAL No.:IES001044-B
MFR.:	SUR.:	Shielding Angle:

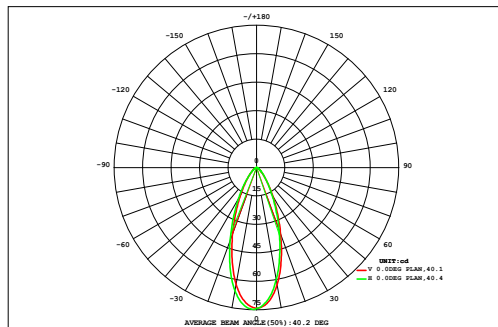

DATA OF LAMP		Eff:6.38lm/W	
MODEL		Imax(cd)	74.69
NOMINAL POWER(W)	7.5	AVAILABILITY(%)	83.1
RATED VOLTAGE(V)	48	Avai. FLUX(lm)	39.75
NOMINAL FLUX(lm)	47.84	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	47.84
TEST VOLTAGE(V)	48	q @50%(H,V)	40,40DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.20	0.00
72	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.31	0.00
64	0.00	0.01	0.01	0.02	0.03	0.03	0.04	0.05	0.05	0.05	0.04	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.49	0.00
56	0.00	0.01	0.02	0.02	0.04	0.05	0.07	0.09	0.10	0.10	0.09	0.07	0.05	0.04	0.02	0.01	0.01	0.00	0.80	0.00
48	0.00	0.01	0.02	0.03	0.06	0.09	0.13	0.17	0.19	0.19	0.16	0.12	0.08	0.05	0.03	0.02	0.01	0.00	1.37	0.71
40	0.00	0.01	0.02	0.04	0.08	0.14	0.23	0.31	0.37	0.36	0.30	0.21	0.13	0.07	0.04	0.02	0.01	0.00	2.37	1.96
32	0.00	0.01	0.03	0.06	0.11	0.21	0.37	0.55	0.67	0.65	0.52	0.34	0.19	0.10	0.05	0.03	0.01	0.00	3.92	3.59
24	0.00	0.01	0.03	0.07	0.14	0.29	0.53	0.84	1.05	1.02	0.79	0.50	0.27	0.13	0.06	0.03	0.01	0.00	5.79	5.51
16	0.00	0.02	0.03	0.08	0.16	0.35	0.66	1.05	1.33	1.31	1.02	0.64	0.34	0.16	0.07	0.03	0.01	0.00	7.26	7.00
8	0.00	0.01	0.03	0.08	0.17	0.36	0.69	1.11	1.38	1.36	1.07	0.67	0.35	0.16	0.07	0.03	0.01	0.00	7.57	7.31
0	0.00	0.01	0.03	0.07	0.15	0.32	0.61	0.94	1.16	1.13	0.89	0.56	0.30	0.14	0.06	0.03	0.01	0.00	6.43	6.16
-8	0.00	0.01	0.03	0.06	0.12	0.24	0.43	0.64	0.78	0.76	0.60	0.39	0.22	0.11	0.05	0.02	0.01	0.00	4.48	4.18
-16	0.00	0.01	0.02	0.04	0.09	0.16	0.26	0.37	0.44	0.43	0.35	0.24	0.14	0.08	0.04	0.02	0.01	0.00	2.71	2.34
-24	0.00	0.01	0.02	0.03	0.06	0.09	0.14	0.19	0.22	0.22	0.18	0.13	0.09	0.05	0.03	0.02	0.01	0.00	1.51	0.96
-32	0.00	0.01	0.01	0.02	0.04	0.05	0.08	0.10	0.11	0.11	0.09	0.07	0.05	0.03	0.02	0.01	0.01	0.00	0.82	0.03
-40	0.00	0.00	0.01	0.02	0.02	0.03	0.04	0.05	0.06	0.05	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.00	0.46	0.00
-48	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.26	0.00
-56	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.15	0.00
-64	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.15	0.00
-72	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.15	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
F t	0.06	0.16	0.35	0.68	1.32	2.50	4.36	6.54	8.00	7.87	6.26	4.12	2.35	1.23	0.62	0.31	0.14	0.04	47	---
F a	0.00	0.00	0.00	0.00	0.72	2.02	3.92	6.12	7.58	7.45	5.83	3.67	1.86	0.59	0.00	0.00	0.00	0.00	---	40

one-half-peak spread: U:20.6,D:20.1 , L:20.7,R:19.8


NEMA Beam Type: Type 5

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Medusa-510mm-RGBW BLUE-40D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:40 DEG	DIM.:510mm	SERIAL No.:IES001044-B
MFR.:	SUR.:	Shielding Angle:

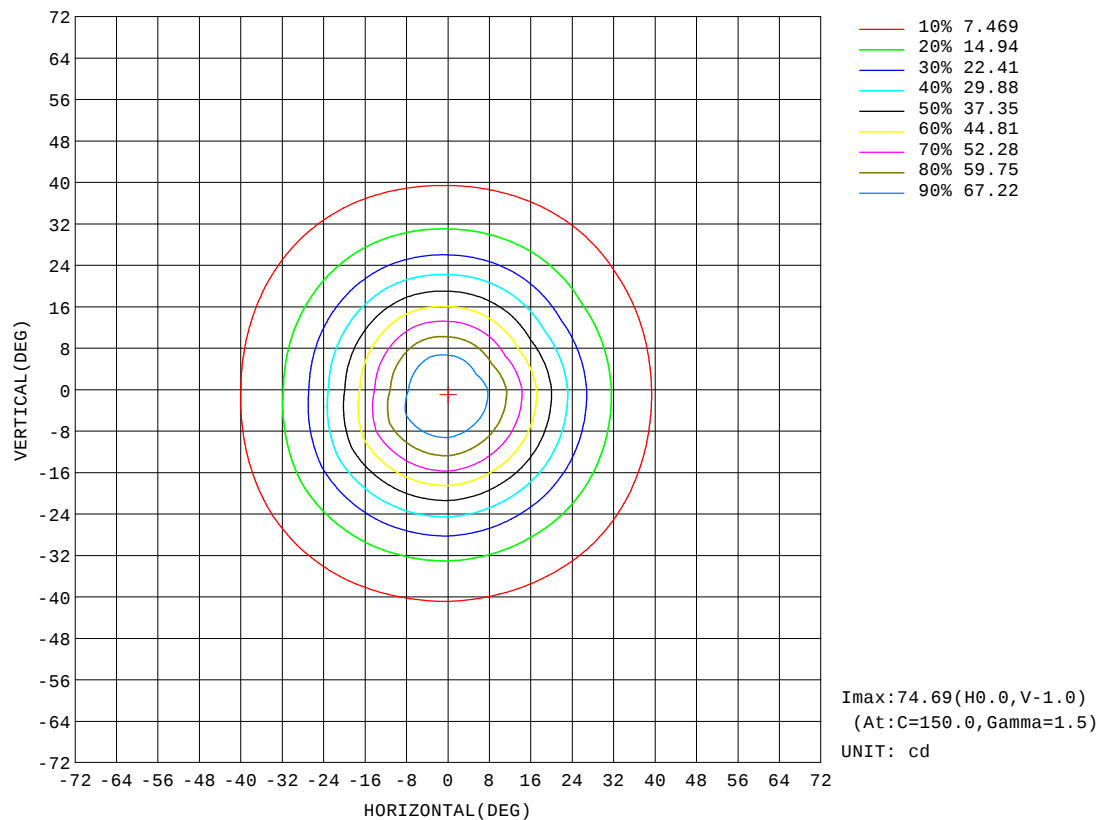


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME: Medusa-510mm-RGBW BLUE-40D-Rev1	TYPE: RGBW-BLUE	WEIGHT:
SPEC.: 40 DEG	DIM.: 510mm	SERIAL No.: IES001044-B
MFR.:	SUR.:	Shielding Angle:

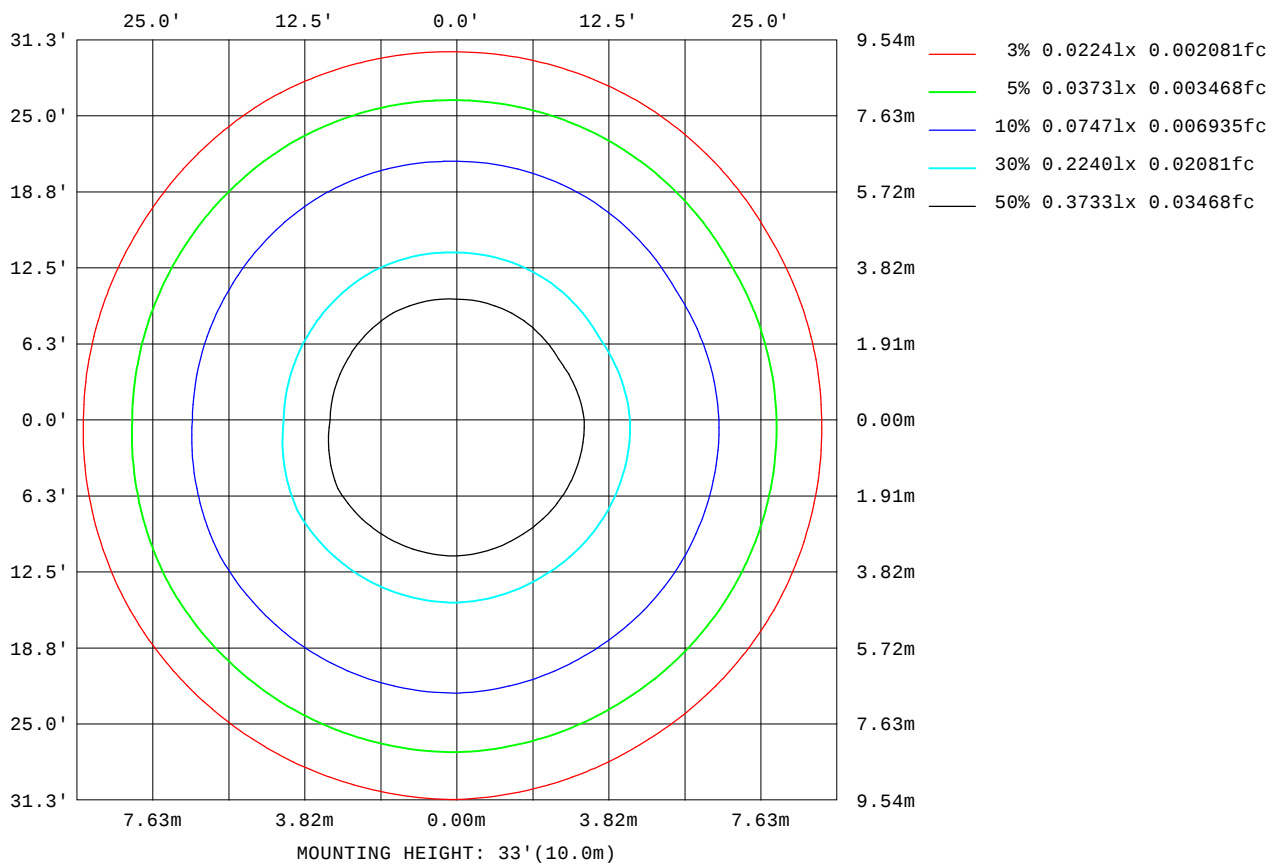

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-05-20

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

Planar Illuminance Curve

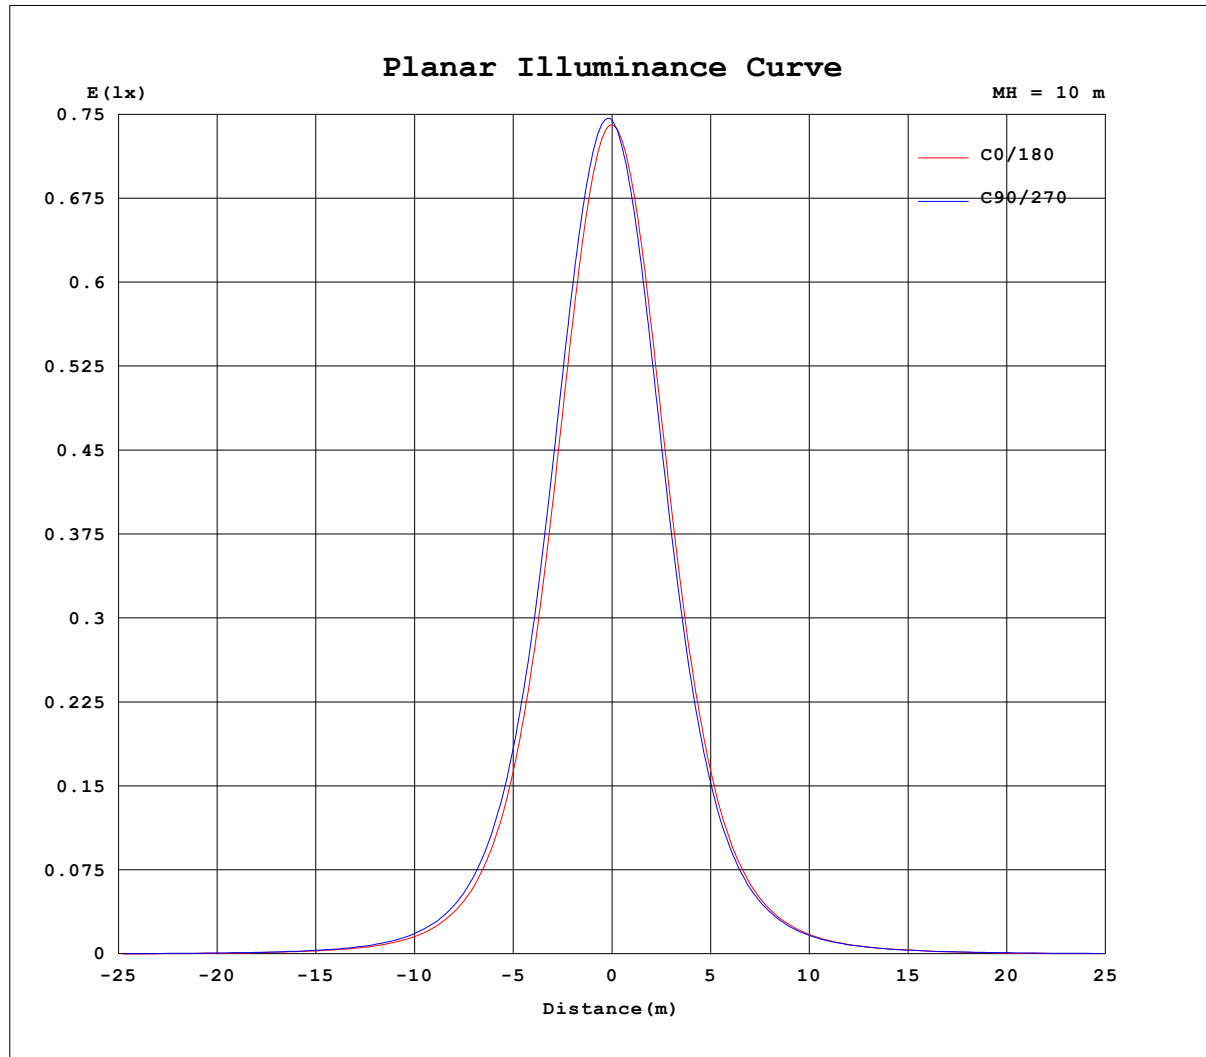

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Medusa-510mm-RGBW BLUE-40D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:40 DEG	DIM.:510mm	SERIAL No.:IES001044-B
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.11	0.10	0.10	0.10	0.11	0.12	0.14	0.16	0.19	0.22	0.25	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.25
-170	0.11	0.10	0.10	0.09	0.10	0.10	0.11	0.13	0.14	0.15	0.17	0.18	0.18	0.18	0.18	0.19	0.20	0.20	0.24
-160	0.11	0.10	0.09	0.09	0.08	0.08	0.08	0.08	0.09	0.09	0.09	0.09	0.08	0.10	0.12	0.13	0.13	0.16	0.19
-150	0.11	0.09	0.09	0.08	0.07	0.06	0.06	0.05	0.04	0.04	0.02	0.03	0.04	0.05	0.05	0.06	0.09	0.11	0.13
-140	0.11	0.09	0.08	0.07	0.06	0.05	0.03	0.02	0.01	0.00	0.01	0.01	0.01	0.01	0.00	0.02	0.04	0.05	0.07
-130	0.11	0.09	0.08	0.06	0.05	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02
-120	0.11	0.09	0.07	0.06	0.04	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.11	0.09	0.07	0.05	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.11	0.09	0.07	0.05	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.11	0.09	0.07	0.05	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.11	0.09	0.08	0.06	0.05	0.05	0.06	0.09	0.11	0.14	0.17	0.20	0.22	0.23	0.23	0.23	0.24	0.23	0.23
-70	0.11	0.10	0.09	0.10	0.12	0.15	0.20	0.26	0.32	0.38	0.44	0.50	0.55	0.59	0.63	0.65	0.66	0.67	0.68
-60	0.11	0.10	0.11	0.13	0.18	0.25	0.35	0.47	0.58	0.70	0.82	0.95	1.08	1.19	1.28	1.36	1.42	1.46	1.47
-50	0.11	0.11	0.12	0.16	0.24	0.34	0.53	0.72	0.91	1.12	1.37	1.65	1.96	2.29	2.61	2.90	3.13	3.29	3.35
-40	0.11	0.11	0.13	0.19	0.28	0.49	0.75	1.02	1.34	1.75	2.29	2.97	3.77	4.69	5.67	6.63	7.40	7.93	8.11
-30	0.11	0.12	0.14	0.20	0.35	0.64	0.98	1.41	1.95	2.68	3.74	5.21	7.10	9.44	12.1	14.9	17.2	18.9	19.5
-20	0.11	0.12	0.15	0.21	0.42	0.78	1.22	1.84	2.60	3.77	5.56	8.21	12.1	17.0	23.1	29.7	35.6	39.7	41.0
-10	0.11	0.12	0.15	0.20	0.47	0.85	1.45	2.15	3.12	4.65	7.04	10.8	16.4	24.5	35.1	47.0	57.0	63.7	65.9
0	0.11	0.13	0.14	0.19	0.48	0.89	1.52	2.30	3.34	4.95	7.46	11.4	17.3	25.9	37.1	50.1	62.4	71.0	74.1
10	0.11	0.13	0.16	0.22	0.50	0.89	1.49	2.19	3.14	4.58	6.82	10.2	15.2	22.2	31.2	41.6	51.5	58.6	60.1
20	0.11	0.13	0.17	0.25	0.48	0.85	1.31	1.94	2.66	3.72	5.29	7.56	10.7	14.8	19.9	25.5	30.8	34.1	34.9
30	0.11	0.13	0.18	0.25	0.42	0.74	1.12	1.57	2.10	2.76	3.67	4.91	6.52	8.44	10.6	12.9	14.7	15.9	16.2
40	0.11	0.13	0.17	0.26	0.38	0.62	0.91	1.22	1.57	1.95	2.43	3.01	3.70	4.48	5.30	6.04	6.63	7.00	7.09
50	0.11	0.13	0.17	0.24	0.34	0.49	0.71	0.94	1.15	1.35	1.58	1.83	2.10	2.39	2.66	2.90	3.09	3.19	3.22
60	0.11	0.13	0.16	0.21	0.29	0.40	0.54	0.69	0.79	0.90	1.01	1.13	1.24	1.35	1.44	1.53	1.59	1.63	1.65
70	0.11	0.12	0.14	0.18	0.23	0.30	0.39	0.45	0.50	0.55	0.60	0.65	0.69	0.74	0.78	0.82	0.84	0.86	0.87
80	0.11	0.12	0.13	0.15	0.17	0.20	0.23	0.25	0.27	0.28	0.29	0.30	0.31	0.33	0.35	0.36	0.38	0.39	0.39
90	0.11	0.11	0.12	0.13	0.13	0.14	0.14	0.14	0.13	0.13	0.12	0.11	0.11	0.11	0.12	0.12	0.13	0.13	0.14
100	0.11	0.12	0.12	0.12	0.12	0.13	0.13	0.12	0.12	0.12	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11
110	0.11	0.11	0.11	0.12	0.12	0.11	0.12	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.10
120	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.12	0.12	0.13	0.13	0.13	0.12	0.12	0.12	0.11
130	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.12	0.13	0.15	0.17	0.17	0.17	0.17	0.16	0.15
140	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.12	0.13	0.16	0.18	0.21	0.23	0.23	0.23	0.22	0.21
150	0.11	0.11	0.11	0.11	0.11	0.11	0.12	0.12	0.13	0.14	0.15	0.19	0.21	0.24	0.26	0.27	0.27	0.27	0.27
160	0.11	0.11	0.11	0.10	0.11	0.11	0.12	0.14	0.15	0.17	0.20	0.21	0.22	0.24	0.27	0.27	0.27	0.27	0.27
170	0.11	0.10	0.10	0.10	0.11	0.11	0.13	0.15	0.17	0.19	0.22	0.24	0.25	0.27	0.27	0.27	0.27	0.27	0.27
180	0.11	0.10	0.10	0.10	0.11	0.12	0.14	0.16	0.19	0.22	0.25	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27

H_b Range:-90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-05-20

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Medusa-510mm-RGBW BLUE-40D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:40 DEG	DIM.:510mm	SERIAL No.:IES001044-B
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.21	0.19	0.18	0.14	0.13	0.09	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.20	0.20	0.19	0.17	0.14	0.10	0.07	0.04	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.17	0.14	0.14	0.13	0.11	0.10	0.07	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.11	0.09	0.07	0.06	0.06	0.05	0.04	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.06	0.04	0.03	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.23	0.23	0.23	0.22	0.21	0.20	0.18	0.15	0.12	0.09	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.67	0.65	0.63	0.60	0.57	0.53	0.47	0.41	0.35	0.29	0.23	0.16	0.10	0.05	0.01	0.00	0.00	0.00	
-60	1.44	1.39	1.32	1.23	1.13	1.02	0.90	0.77	0.65	0.53	0.43	0.29	0.18	0.10	0.04	0.01	0.00	0.00	
-50	3.25	3.05	2.79	2.49	2.17	1.84	1.55	1.28	1.05	0.84	0.64	0.45	0.27	0.14	0.06	0.02	0.00	0.00	
-40	7.79	7.16	6.31	5.31	4.37	3.51	2.75	2.12	1.61	1.23	0.91	0.63	0.39	0.17	0.07	0.02	0.00	0.00	
-30	18.5	16.5	13.9	11.2	8.72	6.55	4.77	3.41	2.43	1.73	1.26	0.84	0.52	0.24	0.07	0.02	0.00	0.00	
-20	38.7	33.8	27.7	21.3	15.6	11.0	7.50	5.06	3.38	2.28	1.57	1.03	0.60	0.29	0.06	0.02	0.00	0.00	
-10	62.1	54.3	43.7	32.6	22.9	15.4	10.1	6.50	4.17	2.72	1.80	1.21	0.66	0.31	0.03	0.01	0.00	0.00	
0	71.1	62.6	50.4	37.3	25.8	17.1	11.0	7.02	4.43	2.86	1.88	1.28	0.67	0.31	0.01	0.00	0.00	0.00	
10	56.9	49.1	38.9	29.1	20.8	14.3	9.52	6.29	4.12	2.74	1.85	1.26	0.70	0.34	0.05	0.02	0.01	0.00	
20	33.2	29.3	24.0	18.5	13.6	9.72	6.94	4.83	3.37	2.36	1.67	1.13	0.68	0.34	0.09	0.04	0.01	0.00	
30	15.6	14.2	12.2	9.99	7.87	6.02	4.54	3.40	2.54	1.90	1.41	0.97	0.62	0.32	0.12	0.05	0.02	0.00	
40	6.91	6.45	5.78	5.03	4.23	3.47	2.82	2.27	1.83	1.46	1.11	0.79	0.52	0.26	0.14	0.06	0.02	0.00	
50	3.16	3.02	2.80	2.55	2.27	2.00	1.73	1.49	1.27	1.07	0.87	0.64	0.41	0.24	0.13	0.06	0.02	0.00	
60	1.62	1.56	1.49	1.40	1.29	1.18	1.06	0.95	0.84	0.74	0.65	0.48	0.33	0.21	0.12	0.06	0.02	0.00	
70	0.85	0.83	0.79	0.75	0.70	0.65	0.61	0.56	0.52	0.46	0.41	0.34	0.24	0.15	0.09	0.05	0.02	0.00	
80	0.38	0.37	0.35	0.33	0.31	0.28	0.28	0.26	0.24	0.23	0.21	0.19	0.15	0.11	0.08	0.05	0.02	0.00	
90	0.13	0.13	0.12	0.12	0.11	0.11	0.11	0.12	0.12	0.13	0.13	0.14	0.12	0.09	0.07	0.05	0.02	0.00	
100	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.12	0.12	0.12	0.13	0.10	0.08	0.06	0.05	0.02	0.00	
110	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.09	0.08	0.06	0.04	0.02	0.00	
120	0.12	0.12	0.12	0.13	0.13	0.13	0.12	0.11	0.11	0.11	0.11	0.10	0.08	0.07	0.05	0.04	0.02	0.00	
130	0.16	0.17	0.18	0.17	0.17	0.15	0.14	0.13	0.11	0.11	0.10	0.09	0.07	0.06	0.05	0.03	0.02	0.00	
140	0.22	0.23	0.24	0.23	0.22	0.19	0.17	0.14	0.12	0.11	0.09	0.07	0.06	0.05	0.04	0.03	0.01	0.00	
150	0.27	0.27	0.27	0.27	0.25	0.22	0.20	0.16	0.12	0.09	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.00	
160	0.27	0.27	0.27	0.27	0.26	0.23	0.18	0.14	0.10	0.07	0.05	0.04	0.03	0.03	0.02	0.01	0.01	0.00	
170	0.27	0.27	0.27	0.25	0.22	0.18	0.13	0.09	0.06	0.04	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.00	
180	0.21	0.19	0.18	0.14	0.13	0.09	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-05-20

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: