

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1603.3 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	78.6V x 77.9H
	At 50% of Imax	39.4V x 39.3H
	At 90% of Imax	15.6V x 15.4H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	816.9 lumens per klm.
	To 50% of Imax	423.2 lumens per klm.
	To 90% of Imax	85.7 lumens per klm.

Upward LOR	2.1 %
Downward LOR	97.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: Medusa-510mm-RGBW GREEN-40D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 40 DEG	DIM.: 510mm	SERIAL No.: IES001044-G
MFR.:	SUR.:	Shielding Angle:

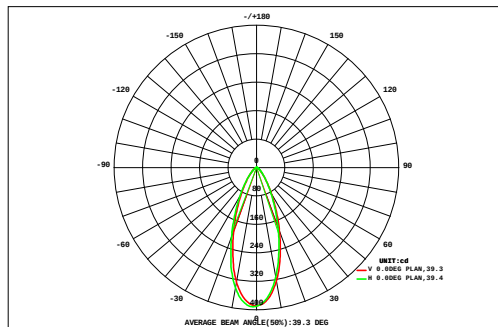

DATA OF LAMP		Eff: 32.54lm/W	
MODEL		Imax(cd)	391.2
NOMINAL POWER(W)	7.5	AVAILABILITY(%)	81.6
RATED VOLTAGE(V)	48	Avai. FLUX(lm)	199.2
NOMINAL FLUX(lm)	244	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	244.0
TEST VOLTAGE(V)	48	q @50%(H,V)	39, 39DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT: lm		F t	F a
	0.01	0.02	0.03	0.05	0.06	0.07	0.09	0.09	0.10	0.10	0.09	0.08	0.07	0.06	0.04	0.03	0.02	0.01	1.03	0.00
72	0.01	0.02	0.03	0.05	0.06	0.07	0.09	0.09	0.10	0.10	0.09	0.08	0.07	0.06	0.04	0.03	0.02	0.01	1.03	0.00
64	0.01	0.03	0.05	0.07	0.09	0.11	0.14	0.15	0.16	0.16	0.15	0.13	0.11	0.09	0.06	0.04	0.03	0.01	1.58	0.00
56	0.02	0.03	0.06	0.09	0.13	0.17	0.22	0.25	0.27	0.27	0.24	0.21	0.16	0.12	0.09	0.06	0.03	0.01	2.43	0.00
48	0.02	0.04	0.08	0.12	0.19	0.27	0.36	0.45	0.49	0.48	0.43	0.34	0.25	0.18	0.12	0.07	0.04	0.01	3.95	0.00
40	0.02	0.05	0.10	0.17	0.27	0.44	0.64	0.83	0.95	0.93	0.80	0.60	0.40	0.25	0.15	0.09	0.04	0.02	6.75	2.99
32	0.02	0.06	0.12	0.22	0.40	0.69	1.11	1.56	1.84	1.80	1.47	1.03	0.64	0.37	0.20	0.11	0.05	0.02	11.7	9.48
24	0.03	0.07	0.14	0.28	0.55	1.05	1.83	2.76	3.38	3.31	2.59	1.68	0.96	0.50	0.25	0.12	0.06	0.02	19.6	17.8
	0.03	0.07	0.16	0.34	0.71	1.45	2.71	4.28	5.40	5.27	4.00	2.49	1.34	0.65	0.30	0.14	0.06	0.02	29.4	27.9
	0.03	0.08	0.17	0.37	0.82	1.74	3.36	5.46	6.96	6.80	5.23	3.25	1.67	0.77	0.33	0.14	0.06	0.02	37.2	35.8
	0.03	0.08	0.17	0.38	0.84	1.81	3.52	5.74	7.23	7.11	5.52	3.39	1.72	0.78	0.34	0.14	0.06	0.02	38.9	37.4
	0.03	0.07	0.16	0.34	0.76	1.61	3.07	4.82	6.00	5.86	4.52	2.81	1.47	0.69	0.31	0.13	0.06	0.02	32.7	31.3
	0.02	0.06	0.14	0.28	0.60	1.20	2.13	3.22	3.94	3.85	3.03	1.95	1.08	0.54	0.25	0.12	0.05	0.02	22.5	20.9
-24	0.02	0.05	0.11	0.22	0.42	0.77	1.26	1.81	2.18	2.14	1.72	1.17	0.70	0.38	0.19	0.10	0.04	0.02	13.3	11.3
-32	0.02	0.04	0.09	0.15	0.27	0.46	0.70	0.94	1.09	1.08	0.90	0.65	0.42	0.25	0.14	0.08	0.04	0.01	7.34	4.27
-40	0.02	0.04	0.06	0.11	0.17	0.27	0.37	0.47	0.54	0.53	0.46	0.35	0.25	0.16	0.10	0.06	0.03	0.01	4.00	0.00
-48	0.01	0.03	0.05	0.08	0.11	0.16	0.20	0.24	0.27	0.27	0.24	0.19	0.15	0.11	0.07	0.05	0.02	0.01	2.24	0.00
-56	0.01	0.02	0.04	0.05	0.07	0.10	0.12	0.13	0.14	0.14	0.13	0.11	0.09	0.07	0.05	0.03	0.02	0.01	1.34	0.00
-64	0.01	0.02	0.02	0.04	0.05	0.06	0.07	0.08	0.08	0.08	0.08	0.07	0.06	0.04	0.03	0.02	0.01	0.01	0.82	0.00
-72	0.01	0.02	0.02	0.04	0.05	0.06	0.07	0.08	0.08	0.08	0.08	0.07	0.06	0.04	0.03	0.02	0.01	0.01	0.82	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
F t	0.35	0.86	1.74	3.35	6.51	12.4	21.9	33.3	41.0	40.2	31.6	20.5	11.5	6.01	3.04	1.53	0.72	0.25	237	---
F a	0.00	0.00	0.00	0.00	3.15	9.85	19.5	31.0	38.8	38.0	29.3	18.1	8.91	2.46	0.00	0.00	0.00	0.00	---	199

one-half-peak spread: U:19.5,D:20.2 , L:19.8,R:19.8


NEMA Beam Type: Type 5

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-05-20

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Medusa-510mm-RGBW GREEN-40D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:40 DEG	DIM.:510mm	SERIAL No.:IES001044-G
MFR.:	SUR.:	Shielding Angle:

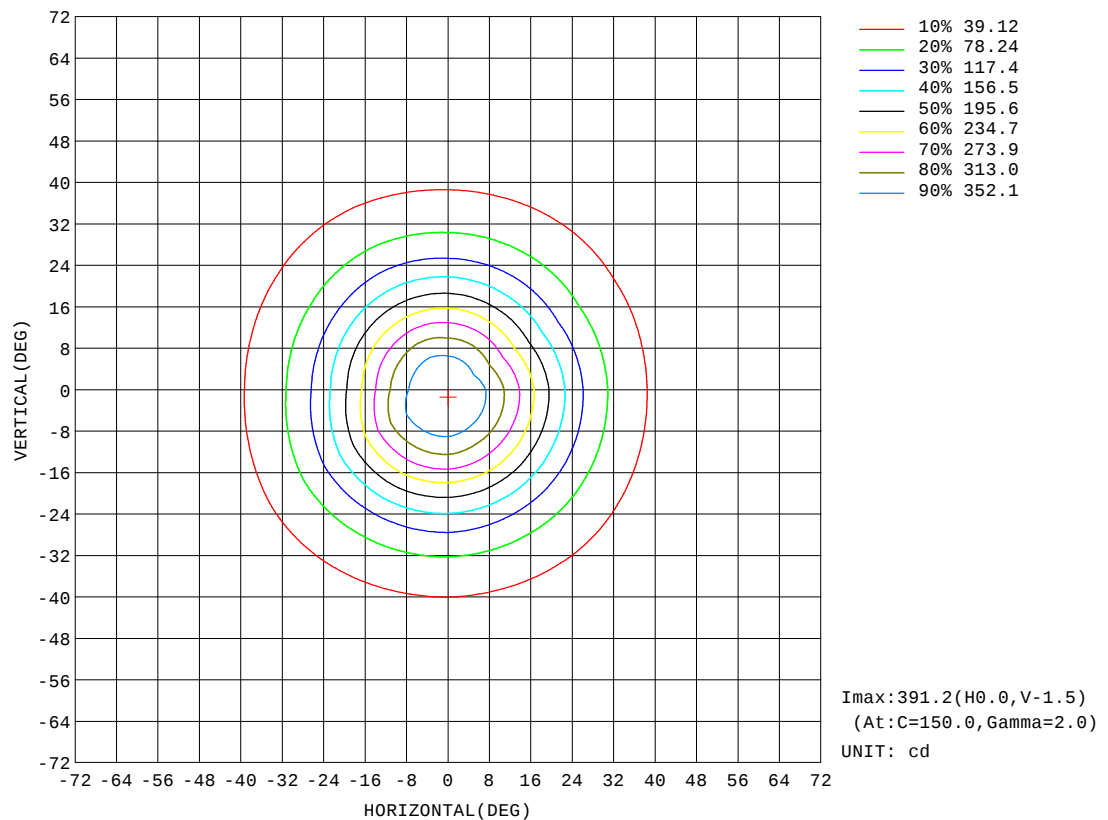


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME: Medusa-510mm-RGBW GREEN-40D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 40 DEG	DIM.: 510mm	SERIAL No.: IES001044-G
MFR.:	SUR.:	Shielding Angle:

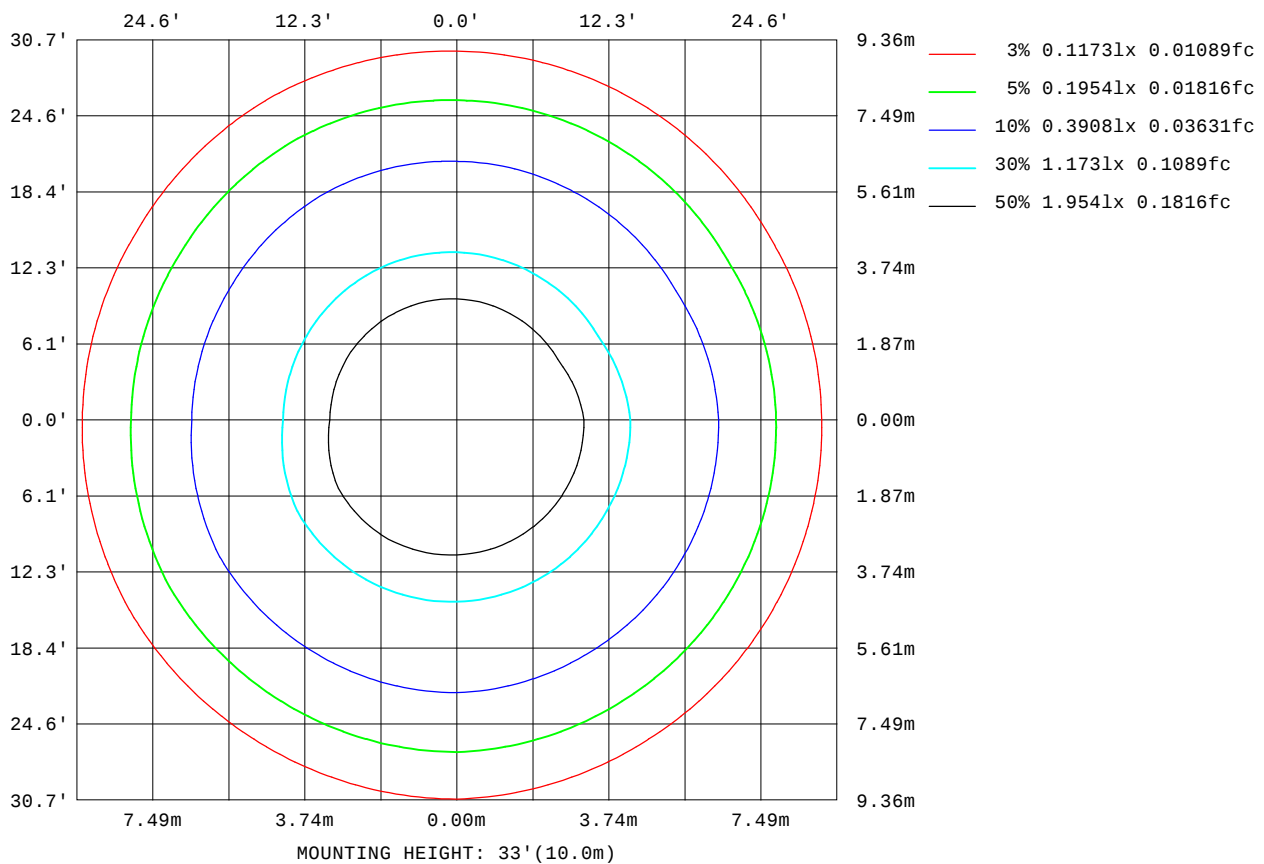

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-20

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

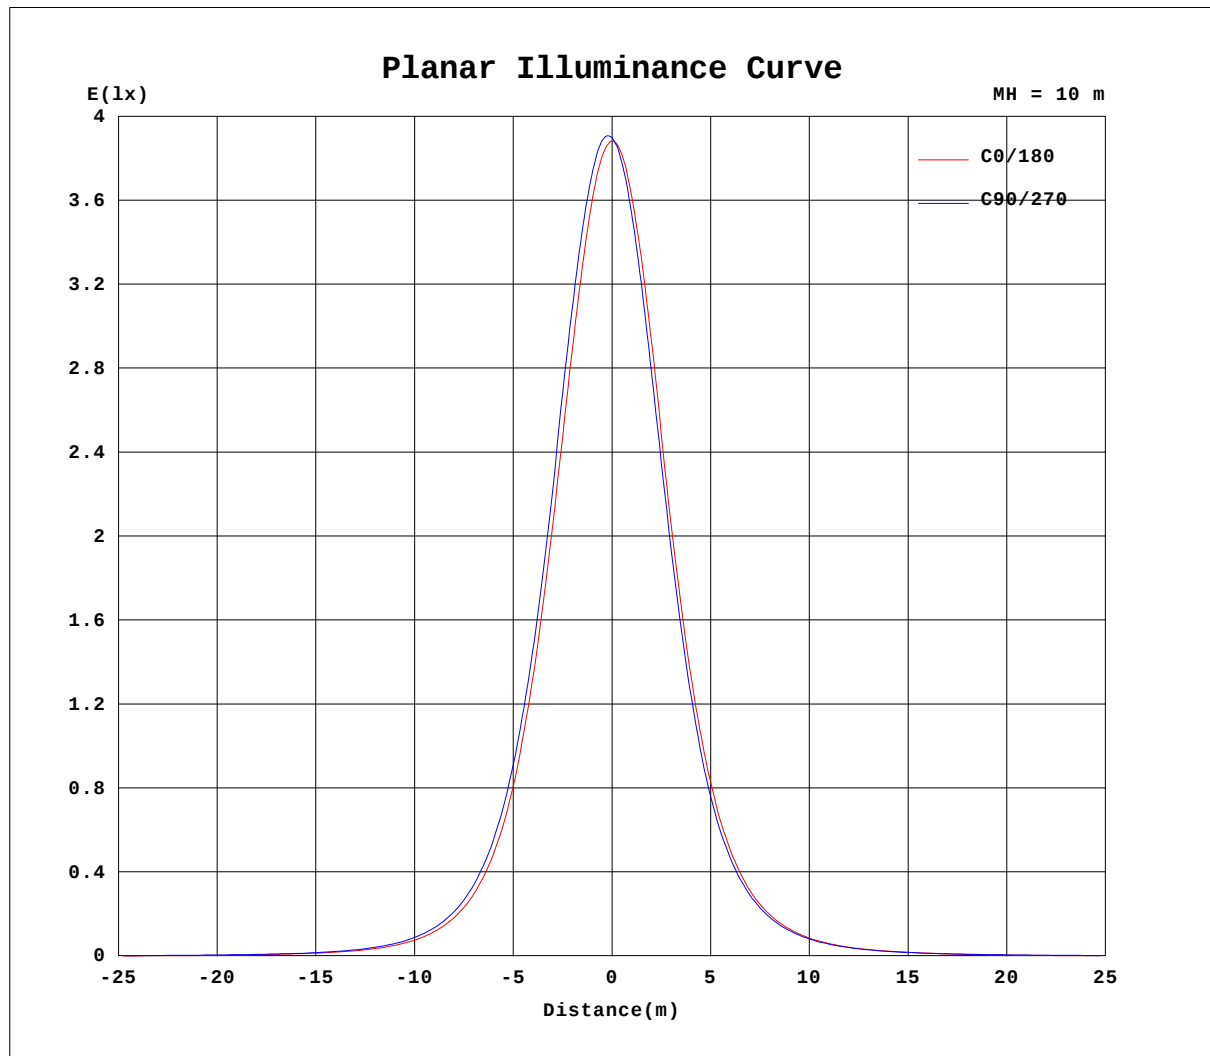


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-20

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME: Medusa-510mm-RGBW GREEN-40D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 40 DEG	DIM.: 510mm	SERIAL No.: IES001044-G
MFR.:	SUR.:	Shielding Angle:

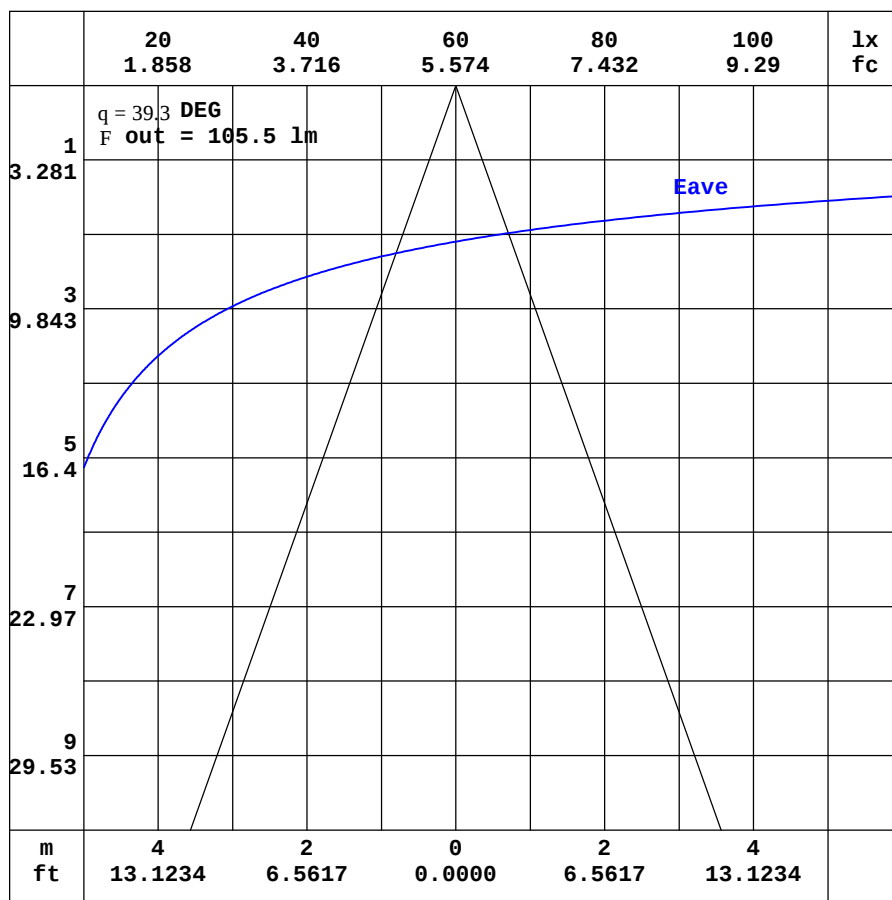

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-20

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Medusa-510mm-RGBW GREEN-40D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 40 DEG	DIM.: 510mm	SERIAL No.: IES001044-G
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.91	0.85	0.82	0.82	0.84	0.89	0.98	1.10	1.24	1.40	1.54	1.66	1.76	1.80	1.80	1.79	1.78	1.74	1.72
-170	0.91	0.83	0.78	0.77	0.77	0.80	0.85	0.92	1.00	1.08	1.16	1.21	1.25	1.26	1.25	1.26	1.36	1.43	1.53
-160	0.91	0.81	0.75	0.72	0.71	0.70	0.71	0.74	0.75	0.76	0.77	0.75	0.75	0.86	0.97	1.06	1.15	1.22	1.27
-150	0.91	0.80	0.72	0.68	0.64	0.61	0.59	0.56	0.53	0.48	0.44	0.51	0.58	0.66	0.73	0.80	0.88	0.93	0.96
-140	0.91	0.79	0.70	0.64	0.59	0.54	0.49	0.44	0.37	0.36	0.37	0.39	0.43	0.47	0.50	0.57	0.60	0.63	0.65
-130	0.91	0.79	0.69	0.61	0.54	0.48	0.41	0.34	0.32	0.31	0.31	0.32	0.33	0.34	0.35	0.38	0.40	0.42	0.43
-120	0.91	0.79	0.67	0.58	0.50	0.43	0.36	0.30	0.30	0.30	0.29	0.29	0.28	0.28	0.29	0.30	0.31	0.32	0.33
-110	0.91	0.79	0.67	0.57	0.47	0.38	0.31	0.28	0.28	0.27	0.28	0.27	0.27	0.27	0.28	0.28	0.28	0.29	0.29
-100	0.91	0.80	0.68	0.57	0.46	0.36	0.26	0.25	0.25	0.25	0.24	0.24	0.23	0.24	0.24	0.25	0.25	0.26	0.26
-90	0.91	0.80	0.69	0.58	0.47	0.35	0.24	0.25	0.26	0.28	0.29	0.30	0.31	0.30	0.29	0.28	0.27	0.26	0.26
-80	0.91	0.82	0.74	0.70	0.69	0.70	0.74	0.85	0.96	1.06	1.15	1.25	1.33	1.40	1.44	1.49	1.52	1.54	1.54
-70	0.91	0.84	0.84	0.90	1.02	1.19	1.43	1.68	1.93	2.18	2.42	2.66	2.88	3.09	3.26	3.41	3.52	3.60	3.63
-60	0.91	0.88	0.94	1.09	1.33	1.67	2.12	2.65	3.14	3.67	4.20	4.77	5.30	5.82	6.29	6.72	7.05	7.28	7.38
-50	0.91	0.92	1.04	1.26	1.60	2.10	2.95	3.83	4.69	5.67	6.80	8.11	9.55	11.1	12.6	14.0	15.1	15.9	16.2
-40	0.91	0.95	1.11	1.38	1.80	2.80	3.97	5.25	6.75	8.64	11.2	14.4	18.2	22.6	27.3	31.9	35.8	38.4	39.4
-30	0.91	0.98	1.16	1.46	2.15	3.50	5.11	7.13	9.64	13.1	18.1	25.3	34.5	46.0	58.9	72.4	84.4	92.9	95.7
-20	0.91	1.00	1.18	1.47	2.50	4.16	6.27	9.18	12.8	18.4	27.1	40.3	59.6	84.6	115	149	181	201	207
-10	0.91	1.02	1.20	1.44	2.72	4.52	7.30	10.7	15.3	22.8	34.7	53.2	81.8	123	178	239	296	331	343
0	0.91	1.03	1.19	1.36	2.76	4.69	7.73	11.4	16.4	24.4	36.8	56.7	86.9	131	189	257	327	372	388
10	0.91	1.03	1.24	1.51	2.83	4.69	7.51	10.9	15.4	22.5	33.5	50.2	75.3	111	159	214	265	305	312
20	0.91	1.04	1.27	1.62	2.72	4.48	6.69	9.65	13.1	18.3	25.9	37.0	52.4	73.3	99.1	128	155	172	177
30	0.91	1.03	1.28	1.67	2.47	3.94	5.71	7.82	10.4	13.6	18.0	24.1	31.9	41.5	52.4	63.6	72.8	78.8	80.1
40	0.91	1.02	1.26	1.63	2.19	3.32	4.68	6.15	7.78	9.67	12.0	14.8	18.1	22.0	26.0	29.5	32.4	34.3	34.7
50	0.91	1.00	1.20	1.54	2.03	2.68	3.70	4.78	5.77	6.78	7.91	9.16	10.5	11.9	13.2	14.3	15.2	15.7	15.8
60	0.91	0.97	1.12	1.38	1.76	2.25	2.89	3.57	4.08	4.63	5.21	5.80	6.40	6.94	7.37	7.72	7.98	8.12	8.15
70	0.91	0.95	1.04	1.20	1.43	1.74	2.12	2.44	2.72	3.00	3.26	3.52	3.76	3.97	4.13	4.26	4.35	4.40	4.41
80	0.91	0.93	0.97	1.02	1.11	1.22	1.36	1.48	1.58	1.68	1.78	1.87	1.96	2.02	2.07	2.11	2.13	2.14	2.14
90	0.91	0.92	0.93	0.94	0.95	0.96	0.96	0.96	0.95	0.94	0.93	0.93	0.92	0.92	0.93	0.94	0.94	0.95	0.95
100	0.91	0.91	0.91	0.90	0.90	0.90	0.90	0.88	0.86	0.85	0.83	0.83	0.82	0.82	0.82	0.82	0.82	0.82	0.82
110	0.91	0.90	0.88	0.87	0.86	0.85	0.84	0.84	0.82	0.82	0.82	0.82	0.82	0.83	0.82	0.82	0.81	0.81	0.80
120	0.91	0.89	0.86	0.84	0.83	0.83	0.82	0.82	0.82	0.83	0.85	0.88	0.91	0.93	0.94	0.95	0.96	0.97	0.97
130	0.91	0.87	0.84	0.83	0.82	0.82	0.82	0.83	0.85	0.90	0.96	1.02	1.08	1.14	1.19	1.22	1.24	1.26	1.27
140	0.91	0.86	0.83	0.82	0.82	0.83	0.84	0.88	0.94	1.02	1.11	1.21	1.31	1.40	1.47	1.52	1.56	1.57	1.57
150	0.91	0.85	0.82	0.82	0.82	0.84	0.88	0.96	1.05	1.15	1.27	1.38	1.50	1.61	1.70	1.76	1.79	1.80	1.79
160	0.91	0.85	0.82	0.82	0.83	0.86	0.93	1.03	1.15	1.28	1.41	1.52	1.63	1.73	1.79	1.85	1.87	1.87	1.86
170	0.91	0.85	0.82	0.82	0.84	0.88	0.97	1.08	1.21	1.36	1.50	1.62	1.72	1.78	1.80	1.81	1.81	1.81	1.86
180	0.91	0.85	0.82	0.82	0.84	0.89	0.98	1.10	1.24	1.40	1.54	1.66	1.76	1.80	1.80	1.79	1.78	1.74	1.75

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-05-20

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Medusa-510mm-RGBW GREEN-40D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:40 DEG	DIM.:510mm	SERIAL No.:IES001044-G
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	1.59	1.46	1.35	1.22	1.08	0.93	0.77	0.63	0.50	0.42	0.34	0.30	0.28	0.28	0.27	0.23	0.20	0.16
-170	1.45	1.40	1.33	1.20	1.06	0.91	0.76	0.62	0.50	0.42	0.34	0.30	0.29	0.28	0.27	0.23	0.21	0.16
-160	1.23	1.17	1.11	1.03	0.92	0.81	0.68	0.56	0.47	0.39	0.34	0.30	0.29	0.29	0.26	0.24	0.21	0.16
-150	0.94	0.90	0.84	0.77	0.71	0.63	0.56	0.49	0.42	0.37	0.33	0.30	0.30	0.29	0.26	0.24	0.21	0.16
-140	0.64	0.62	0.58	0.54	0.49	0.46	0.43	0.39	0.36	0.35	0.32	0.31	0.30	0.28	0.25	0.23	0.21	0.16
-130	0.43	0.42	0.40	0.37	0.34	0.35	0.33	0.33	0.32	0.32	0.32	0.30	0.29	0.27	0.25	0.23	0.21	0.16
-120	0.32	0.31	0.31	0.30	0.29	0.29	0.29	0.30	0.30	0.30	0.30	0.29	0.28	0.26	0.24	0.22	0.20	0.16
-110	0.29	0.29	0.29	0.28	0.28	0.28	0.28	0.29	0.29	0.29	0.29	0.28	0.27	0.25	0.23	0.22	0.20	0.16
-100	0.26	0.25	0.25	0.25	0.24	0.23	0.24	0.25	0.25	0.26	0.26	0.26	0.25	0.23	0.22	0.21	0.18	0.16
-90	0.26	0.26	0.26	0.26	0.26	0.26	0.26	0.25	0.25	0.25	0.24	0.24	0.23	0.21	0.20	0.18	0.17	0.16
-80	1.52	1.48	1.44	1.38	1.31	1.24	1.14	1.04	0.94	0.83	0.71	0.59	0.44	0.32	0.24	0.20	0.17	0.16
-70	3.58	3.48	3.35	3.18	2.99	2.76	2.53	2.28	2.04	1.79	1.53	1.24	0.87	0.58	0.37	0.24	0.18	0.16
-60	7.21	6.91	6.52	6.06	5.56	5.05	4.53	3.97	3.44	2.93	2.47	1.84	1.26	0.81	0.49	0.28	0.18	0.16
-50	15.7	14.8	13.5	12.0	10.5	9.01	7.63	6.37	5.30	4.38	3.49	2.56	1.68	0.98	0.57	0.31	0.19	0.16
-40	37.8	34.7	30.5	25.8	21.2	16.9	13.3	10.3	7.99	6.21	4.69	3.36	2.23	1.17	0.60	0.32	0.19	0.16
-30	91.1	81.2	68.3	54.8	42.3	31.5	22.9	16.5	11.8	8.53	6.27	4.29	2.80	1.50	0.56	0.31	0.18	0.16
-20	196	171	139	105	76.2	53.2	36.2	24.3	16.3	11.1	7.73	5.18	3.18	1.69	0.47	0.27	0.18	0.16
-10	322	279	221	164	113	75.4	48.8	31.4	20.2	13.1	8.80	6.02	3.39	1.77	0.42	0.21	0.17	0.16
0	371	323	258	189	129	84.3	53.8	34.0	21.5	13.8	9.17	6.26	3.46	1.72	0.32	0.14	0.16	0.16
10	295	250	197	147	103	70.3	46.5	30.5	20.0	13.3	9.03	6.23	3.54	1.89	0.49	0.25	0.19	0.16
20	167	146	119	91.0	66.9	47.6	33.8	23.6	16.4	11.5	8.21	5.58	3.49	1.91	0.61	0.34	0.21	0.16
30	76.9	69.5	59.5	48.6	38.3	29.3	22.2	16.6	12.4	9.33	6.97	4.86	3.23	1.81	0.76	0.41	0.24	0.16
40	33.7	31.3	28.2	24.4	20.6	17.0	13.8	11.2	9.04	7.22	5.54	4.04	2.75	1.53	0.83	0.45	0.26	0.16
50	15.5	14.8	13.8	12.6	11.3	9.92	8.65	7.46	6.37	5.39	4.41	3.30	2.24	1.37	0.83	0.46	0.27	0.16
60	8.05	7.83	7.51	7.09	6.62	6.07	5.49	4.92	4.36	3.84	3.34	2.55	1.80	1.20	0.75	0.46	0.28	0.16
70	4.36	4.27	4.14	3.98	3.78	3.57	3.33	3.07	2.81	2.53	2.25	1.87	1.36	0.95	0.66	0.45	0.29	0.16
80	2.12	2.08	2.04	1.98	1.91	1.82	1.73	1.63	1.52	1.41	1.30	1.19	0.96	0.76	0.58	0.43	0.29	0.16
90	0.94	0.94	0.93	0.92	0.91	0.91	0.91	0.92	0.93	0.93	0.94	0.95	0.81	0.68	0.55	0.42	0.29	0.16
100	0.82	0.82	0.82	0.82	0.82	0.82	0.82	0.83	0.84	0.85	0.86	0.87	0.77	0.66	0.54	0.43	0.30	0.16
110	0.81	0.82	0.82	0.83	0.83	0.83	0.82	0.82	0.82	0.82	0.83	0.81	0.72	0.62	0.52	0.42	0.30	0.16
120	0.98	0.97	0.97	0.96	0.95	0.92	0.89	0.86	0.84	0.83	0.82	0.76	0.67	0.59	0.49	0.40	0.30	0.16
130	1.27	1.26	1.24	1.22	1.17	1.12	1.05	0.99	0.93	0.88	0.81	0.71	0.63	0.54	0.47	0.38	0.29	0.16
140	1.58	1.57	1.54	1.51	1.43	1.35	1.25	1.16	1.06	0.94	0.78	0.66	0.58	0.51	0.43	0.36	0.28	0.16
150	1.80	1.80	1.78	1.72	1.64	1.54	1.44	1.32	1.11	0.90	0.74	0.61	0.53	0.47	0.39	0.34	0.26	0.16
160	1.87	1.86	1.85	1.82	1.75	1.67	1.44	1.21	0.99	0.80	0.65	0.52	0.45	0.41	0.35	0.30	0.24	0.16
170	1.80	1.81	1.82	1.72	1.55	1.35	1.16	0.96	0.79	0.64	0.51	0.42	0.37	0.35	0.31	0.27	0.22	0.16
180	1.59	1.46	1.35	1.22	1.08	0.93	0.77	0.63	0.50	0.42	0.34	0.30	0.28	0.28	0.27	0.23	0.20	0.16

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-05-20

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: