

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1583.9 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	78.8V x 78.3H
	At 50% of Imax	40.3V x 40.2H
	At 90% of Imax	16.2V x 16.5H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	823.6 lumens per klm.
	To 50% of Imax	438.5 lumens per klm.
	To 90% of Imax	94.5 lumens per klm.

Upward LOR	2.1 %
Downward LOR	98.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:medusa-510mm-RGBW RED-40D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:40 DEG	DIM.:510mm	SERIAL No.:IES001044-R
MFR.:	SUR.:	Shielding Angle:

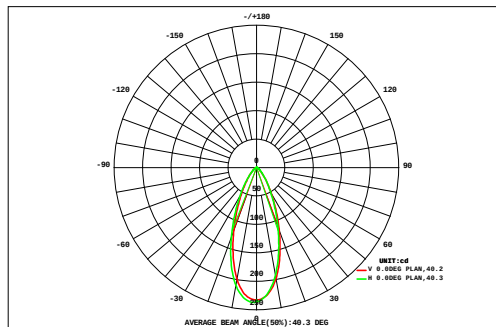

DATA OF LAMP		Eff:19.99lm/W	
MODEL		Imax(cd)	237.4
NOMINAL POWER(W)	7.5	AVAILABILITY(%)	82.3
RATED VOLTAGE(V)	48	Avai. FLUX(lm)	123.4
NOMINAL FLUX(lm)	149.9	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	149.9
TEST VOLTAGE(V)	48	q @50%(H,V)	40,40DEG

		AREA FLUX DIAGRAM														UNIT:lm				F t	F a
VERTICAL (DEG)	72	0.01	0.01	0.02	0.03	0.04	0.04	0.05	0.06	0.06	0.06	0.05	0.05	0.04	0.03	0.03	0.02	0.01	0.01	0.61	0.00
	64	0.01	0.02	0.03	0.04	0.05	0.07	0.08	0.09	0.09	0.09	0.09	0.08	0.06	0.05	0.04	0.03	0.02	0.01	0.93	0.00
	56	0.01	0.02	0.04	0.05	0.08	0.10	0.13	0.15	0.16	0.16	0.15	0.12	0.10	0.07	0.05	0.03	0.02	0.01	1.44	0.00
	48	0.01	0.02	0.05	0.07	0.11	0.16	0.22	0.27	0.30	0.29	0.26	0.21	0.15	0.11	0.07	0.04	0.02	0.01	2.37	0.00
	40	0.01	0.03	0.06	0.10	0.16	0.26	0.39	0.51	0.58	0.57	0.49	0.37	0.25	0.15	0.09	0.05	0.03	0.01	4.10	1.89
	32	0.01	0.03	0.07	0.13	0.24	0.42	0.68	0.96	1.14	1.12	0.92	0.64	0.39	0.22	0.12	0.06	0.03	0.01	7.21	5.89
	24	0.01	0.04	0.08	0.17	0.34	0.64	1.13	1.71	2.10	2.06	1.62	1.05	0.59	0.31	0.15	0.07	0.03	0.01	12.1	11.1
		0.02	0.04	0.09	0.20	0.43	0.89	1.67	2.64	3.33	3.26	2.51	1.55	0.83	0.40	0.18	0.08	0.03	0.01	18.2	17.3
		0.02	0.04	0.10	0.22	0.50	1.07	2.08	3.34	4.22	4.17	3.25	2.02	1.03	0.47	0.20	0.08	0.04	0.01	22.9	22.0
		0.02	0.04	0.10	0.23	0.51	1.12	2.20	3.55	4.41	4.31	3.40	2.11	1.07	0.48	0.20	0.08	0.03	0.01	23.9	23.0
		0.01	0.04	0.09	0.21	0.46	1.00	1.93	3.01	3.70	3.61	2.81	1.75	0.91	0.42	0.18	0.08	0.03	0.01	20.3	19.4
	-24	0.01	0.04	0.08	0.17	0.36	0.74	1.33	2.01	2.47	2.41	1.88	1.21	0.67	0.33	0.15	0.07	0.03	0.01	14.0	13.0
	-32	0.01	0.03	0.07	0.13	0.26	0.47	0.79	1.14	1.37	1.34	1.07	0.73	0.43	0.23	0.12	0.06	0.03	0.01	8.26	7.09
	-40	0.01	0.03	0.05	0.09	0.16	0.28	0.43	0.58	0.68	0.67	0.55	0.40	0.26	0.15	0.08	0.04	0.02	0.01	4.49	2.68
	-48	0.01	0.02	0.04	0.06	0.10	0.16	0.23	0.29	0.33	0.32	0.28	0.21	0.15	0.10	0.06	0.03	0.02	0.01	2.40	0.00
	-56	0.01	0.02	0.03	0.04	0.07	0.09	0.12	0.14	0.16	0.16	0.14	0.11	0.09	0.06	0.04	0.03	0.01	0.00	1.32	0.00
-64	0.01	0.01	0.02	0.03	0.04	0.06	0.07	0.08	0.08	0.08	0.08	0.07	0.05	0.04	0.03	0.02	0.01	0.00	0.78	0.00	
-72	0.00	0.01	0.01	0.02	0.03	0.03	0.04	0.04	0.05	0.05	0.04	0.04	0.03	0.03	0.02	0.01	0.01	0.00	0.47	0.00	
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72	
F t	0.20	0.50	1.02	2.00	3.94	7.61	13.6	20.6	25.2	24.8	19.6	12.7	7.11	3.65	1.81	0.90	0.42	0.14	146	---	
F a	0.00	0.00	0.00	0.00	1.96	6.11	12.2	19.2	23.9	23.4	18.2	11.3	5.55	1.51	0.00	0.00	0.00	0.00	---	123	

one-half-peak spread: U:20.0,D:20.6 , L:20.3,R:20.2


NEMA Beam Type: Type 5

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: medusa-510mm-RGBW RED-40D-Rev1	TYPE: RGBW-RED	WEIGHT:
SPEC.: 40 DEG	DIM.: 510mm	SERIAL No.: IES001044-R
MFR.:	SUR.:	Shielding Angle:

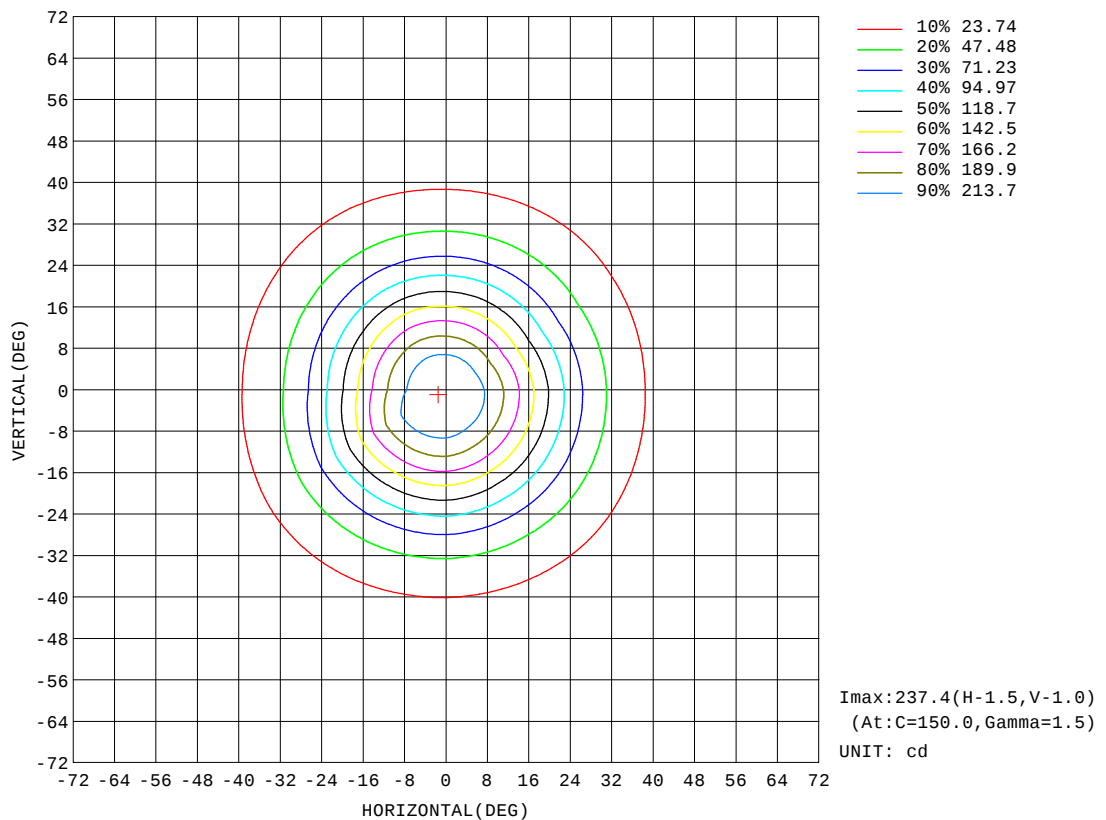


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME: medusa-510mm-RGBW RED-40D-Rev1	TYPE: RGBW-RED	WEIGHT:
SPEC.: 40 DEG	DIM.: 510mm	SERIAL No.: IES001044-R
MFR.:	SUR.:	Shielding Angle:

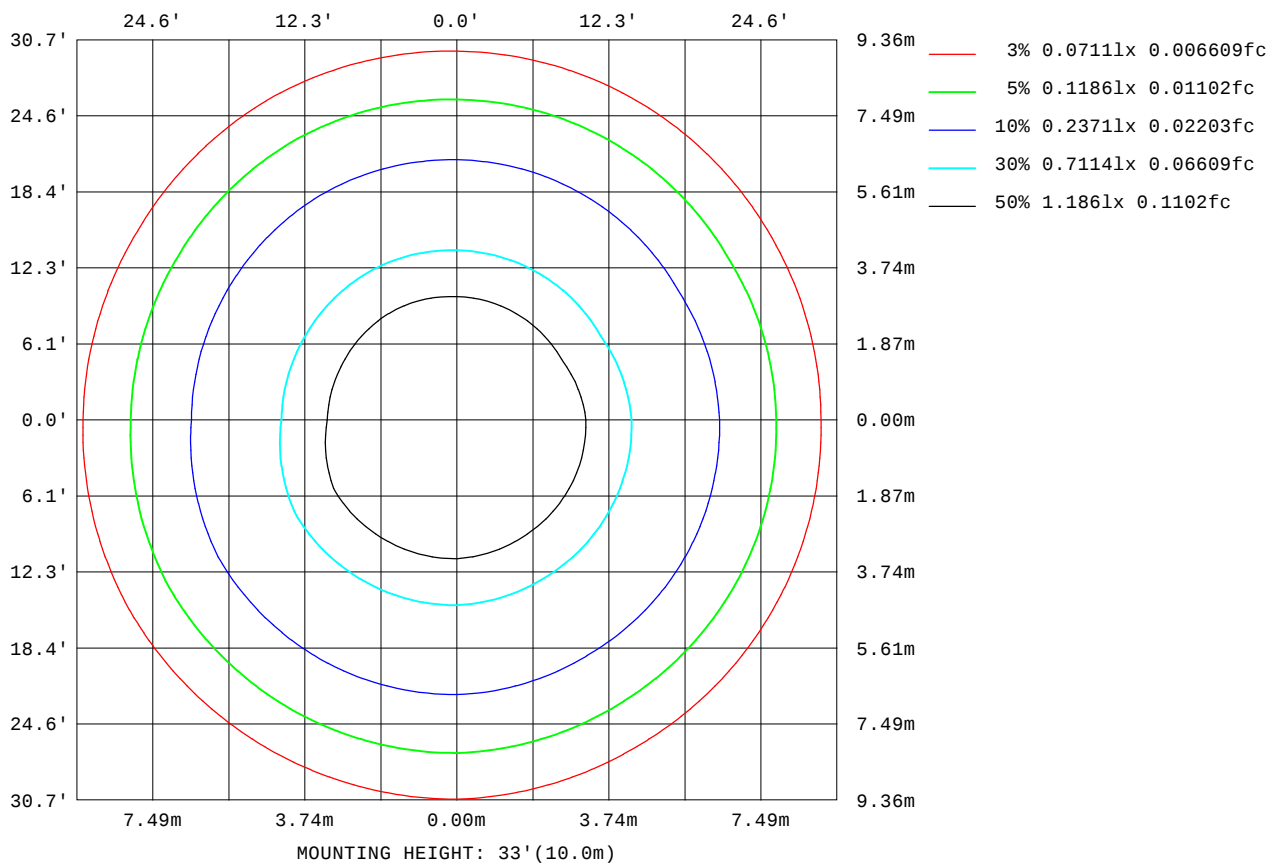

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

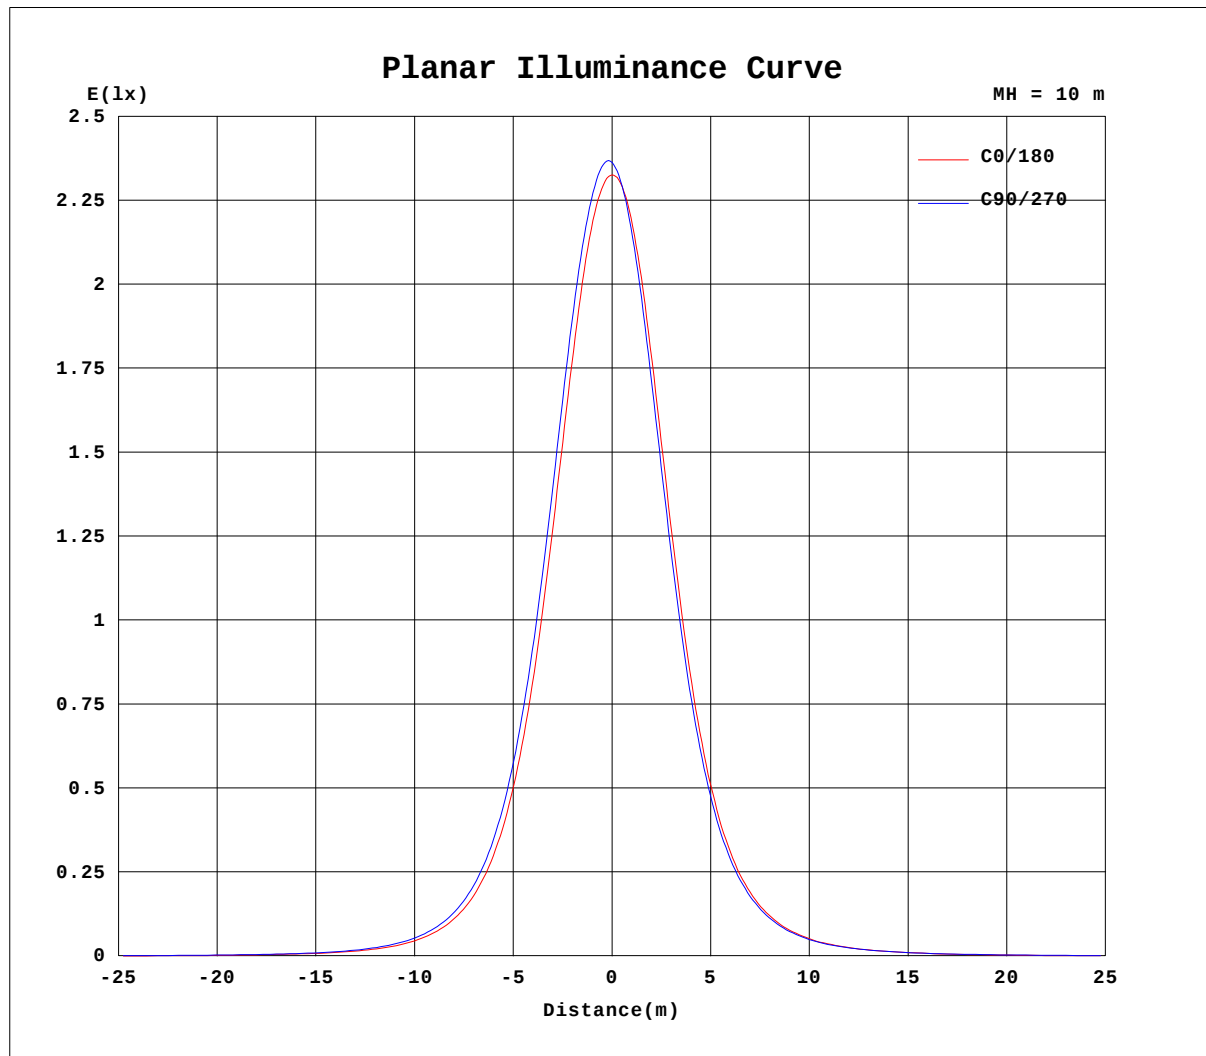


H(b) Range: -90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME: medusa-510mm-RGBW RED-40D-Rev1	TYPE: RGBW-RED	WEIGHT:
SPEC.: 40 DEG	DIM.: 510mm	SERIAL No.: IES001044-R
MFR.:	SUR.:	Shielding Angle:

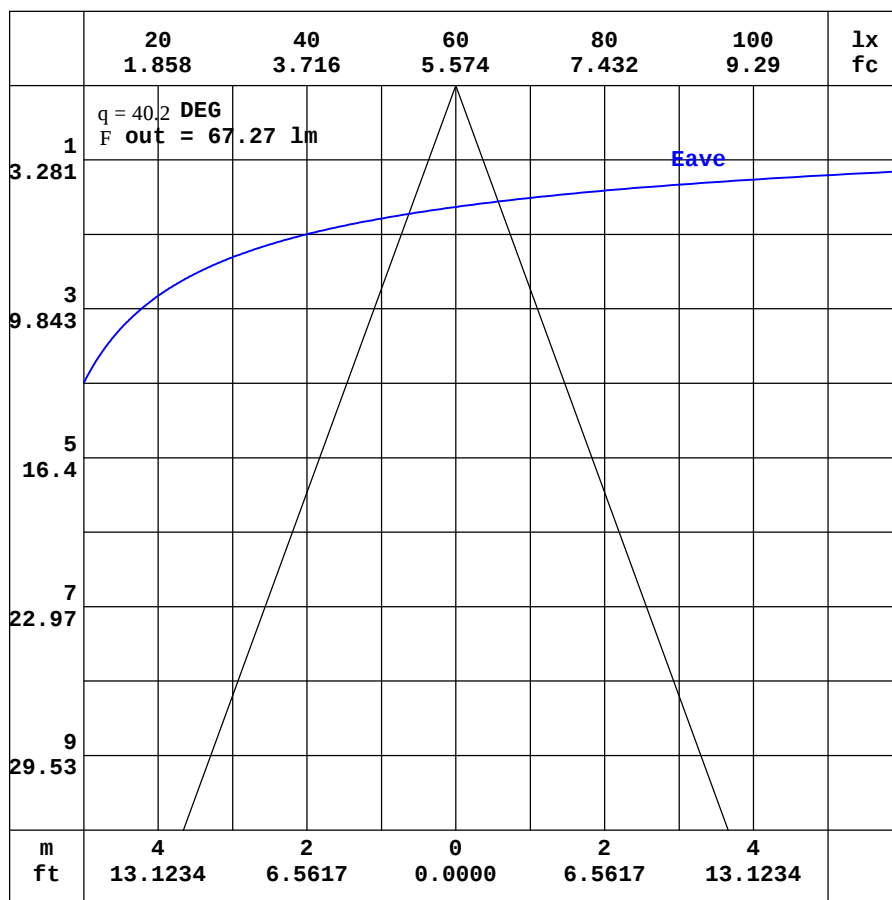

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:medusa-510mm-RGBW RED-40D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:40 DEG	DIM.:510mm	SERIAL No.:IES001044-R
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(DEC) V(DEC)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.51	0.48	0.47	0.47	0.49	0.52	0.57	0.66	0.74	0.84	0.93	1.01	1.07	1.08	1.08	1.07	1.06	1.06	1.06
-170	0.51	0.47	0.45	0.44	0.45	0.47	0.50	0.54	0.60	0.65	0.69	0.73	0.76	0.77	0.76	0.78	0.84	0.87	0.95
-160	0.51	0.46	0.43	0.42	0.41	0.41	0.42	0.43	0.44	0.45	0.46	0.45	0.45	0.52	0.59	0.64	0.69	0.74	0.78
-150	0.51	0.46	0.42	0.39	0.37	0.35	0.34	0.33	0.31	0.28	0.25	0.29	0.34	0.38	0.43	0.47	0.52	0.56	0.58
-140	0.51	0.45	0.40	0.37	0.34	0.31	0.28	0.25	0.21	0.20	0.21	0.22	0.23	0.26	0.28	0.31	0.35	0.37	0.39
-130	0.51	0.44	0.39	0.35	0.31	0.27	0.24	0.19	0.18	0.17	0.17	0.17	0.17	0.17	0.19	0.21	0.22	0.24	0.25
-120	0.51	0.44	0.38	0.33	0.29	0.25	0.20	0.17	0.17	0.16	0.15	0.15	0.15	0.14	0.14	0.15	0.16	0.17	0.18
-110	0.51	0.44	0.38	0.32	0.27	0.22	0.17	0.16	0.16	0.15	0.15	0.14	0.14	0.14	0.14	0.15	0.15	0.16	0.16
-100	0.51	0.44	0.38	0.32	0.26	0.20	0.15	0.14	0.14	0.14	0.14	0.13	0.13	0.13	0.14	0.14	0.14	0.15	0.15
-90	0.51	0.45	0.38	0.32	0.26	0.19	0.13	0.14	0.14	0.15	0.16	0.16	0.17	0.16	0.15	0.15	0.14	0.13	0.13
-80	0.51	0.46	0.41	0.39	0.37	0.38	0.40	0.46	0.53	0.58	0.65	0.71	0.76	0.79	0.81	0.83	0.85	0.85	0.85
-70	0.51	0.47	0.47	0.50	0.56	0.66	0.79	0.94	1.09	1.24	1.38	1.52	1.66	1.77	1.87	1.95	2.02	2.06	2.07
-60	0.51	0.50	0.53	0.61	0.75	0.94	1.20	1.49	1.78	2.09	2.42	2.76	3.09	3.40	3.67	3.91	4.10	4.23	4.29
-50	0.51	0.51	0.59	0.71	0.91	1.20	1.68	2.19	2.69	3.27	3.95	4.74	5.61	6.58	7.51	8.35	9.05	9.51	9.69
-40	0.51	0.54	0.63	0.79	1.03	1.61	2.29	3.02	3.90	5.07	6.63	8.57	11.0	13.8	16.7	19.6	22.0	23.6	24.2
-30	0.51	0.55	0.66	0.83	1.23	2.01	2.96	4.14	5.69	7.76	10.9	15.3	21.1	28.4	36.6	45.4	53.0	58.3	60.0
-20	0.51	0.57	0.68	0.85	1.47	2.45	3.62	5.40	7.57	11.0	16.4	24.6	36.7	52.6	72.2	93.3	112	126	130
-10	0.51	0.58	0.69	0.84	1.62	2.64	4.27	6.32	9.07	13.6	20.9	32.5	50.5	76.8	112	151	183	204	210
0	0.51	0.59	0.68	0.80	1.62	2.74	4.53	6.74	9.71	14.6	22.4	34.7	53.3	80.9	117	160	199	225	233
10	0.51	0.59	0.71	0.89	1.69	2.75	4.40	6.45	9.12	13.4	20.2	30.6	46.3	68.7	97.8	131	164	186	192
20	0.51	0.59	0.73	0.94	1.61	2.66	3.89	5.67	7.79	10.9	15.6	22.5	32.1	45.1	61.2	79.1	95.9	107	110
30	0.51	0.59	0.74	0.97	1.44	2.30	3.34	4.59	6.11	8.07	10.7	14.5	19.3	25.2	32.0	38.8	44.7	48.7	49.8
40	0.51	0.58	0.72	0.95	1.28	1.96	2.74	3.60	4.56	5.67	7.07	8.80	10.8	13.2	15.6	17.9	19.7	20.8	21.1
50	0.51	0.57	0.70	0.89	1.18	1.57	2.17	2.80	3.38	3.98	4.64	5.39	6.20	7.08	7.84	8.50	9.06	9.39	9.47
60	0.51	0.56	0.65	0.80	1.02	1.31	1.68	2.09	2.39	2.71	3.05	3.39	3.74	4.08	4.33	4.54	4.72	4.82	4.85
70	0.51	0.54	0.60	0.69	0.83	1.01	1.24	1.43	1.58	1.74	1.89	2.04	2.19	2.32	2.42	2.50	2.56	2.59	2.61
80	0.51	0.53	0.55	0.59	0.65	0.72	0.80	0.86	0.92	0.97	1.03	1.08	1.13	1.17	1.20	1.23	1.25	1.26	1.26
90	0.51	0.52	0.53	0.54	0.55	0.56	0.57	0.56	0.55	0.55	0.54	0.53	0.52	0.53	0.53	0.54	0.55	0.56	0.57
100	0.51	0.51	0.52	0.52	0.52	0.52	0.52	0.51	0.50	0.49	0.48	0.48	0.48	0.47	0.48	0.48	0.48	0.48	0.49
110	0.51	0.51	0.50	0.50	0.50	0.49	0.49	0.49	0.48	0.48	0.48	0.48	0.48	0.48	0.49	0.48	0.48	0.48	0.47
120	0.51	0.50	0.49	0.48	0.48	0.48	0.48	0.48	0.48	0.49	0.50	0.51	0.53	0.55	0.55	0.56	0.57	0.56	0.56
130	0.51	0.49	0.48	0.48	0.47	0.48	0.48	0.48	0.50	0.52	0.56	0.60	0.65	0.69	0.71	0.73	0.75	0.75	0.74
140	0.51	0.49	0.48	0.48	0.47	0.48	0.49	0.51	0.55	0.59	0.65	0.72	0.78	0.85	0.90	0.93	0.95	0.95	0.95
150	0.51	0.49	0.47	0.47	0.48	0.49	0.51	0.56	0.61	0.68	0.75	0.83	0.90	0.98	1.04	1.08	1.10	1.10	1.09
160	0.51	0.48	0.47	0.47	0.48	0.50	0.55	0.60	0.67	0.76	0.84	0.92	0.98	1.04	1.10	1.12	1.13	1.13	1.14
170	0.51	0.48	0.47	0.47	0.48	0.51	0.57	0.64	0.72	0.81	0.90	0.98	1.04	1.07	1.09	1.09	1.10	1.10	1.14
180	0.51	0.48	0.47	0.47	0.49	0.52	0.57	0.66	0.74	0.84	0.93	1.01	1.07	1.08	1.08	1.07	1.06	1.06	1.08

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:medusa-510mm-RGBW RED-40D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:40 DEG	DIM.:510mm	SERIAL No.:IES001044-R
MFR.:	SUR.:	Shielding Angle:

Table--2
UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.95	0.87	0.80	0.72	0.63	0.54	0.43	0.34	0.27	0.20	0.16	0.14	0.13	0.13	0.13	0.13	0.09	0.06
-170	0.87	0.84	0.80	0.72	0.63	0.53	0.44	0.35	0.28	0.21	0.17	0.15	0.14	0.14	0.13	0.13	0.09	0.06
-160	0.75	0.70	0.66	0.61	0.54	0.48	0.40	0.32	0.26	0.21	0.18	0.15	0.14	0.14	0.13	0.13	0.10	0.06
-150	0.56	0.53	0.48	0.45	0.40	0.36	0.32	0.28	0.23	0.20	0.18	0.16	0.15	0.14	0.13	0.12	0.10	0.06
-140	0.37	0.35	0.32	0.29	0.27	0.25	0.23	0.22	0.20	0.19	0.17	0.16	0.16	0.14	0.14	0.12	0.09	0.06
-130	0.24	0.22	0.21	0.19	0.18	0.17	0.17	0.18	0.17	0.17	0.17	0.17	0.16	0.14	0.14	0.11	0.09	0.06
-120	0.17	0.17	0.16	0.15	0.13	0.14	0.14	0.15	0.16	0.17	0.17	0.16	0.15	0.15	0.13	0.11	0.09	0.06
-110	0.16	0.15	0.14	0.14	0.13	0.13	0.14	0.14	0.15	0.15	0.16	0.16	0.15	0.13	0.12	0.11	0.09	0.06
-100	0.14	0.14	0.14	0.13	0.13	0.13	0.13	0.13	0.14	0.14	0.14	0.14	0.13	0.12	0.11	0.10	0.08	0.06
-90	0.13	0.13	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.13	0.13	0.12	0.11	0.10	0.09	0.07	0.06
-80	0.84	0.83	0.80	0.77	0.74	0.69	0.64	0.58	0.51	0.44	0.38	0.30	0.22	0.15	0.11	0.08	0.07	0.06
-70	2.04	1.99	1.91	1.81	1.70	1.58	1.43	1.29	1.14	0.99	0.84	0.66	0.46	0.29	0.18	0.10	0.07	0.06
-60	4.19	4.02	3.79	3.52	3.22	2.91	2.59	2.26	1.95	1.64	1.37	1.02	0.69	0.43	0.25	0.13	0.07	0.06
-50	9.39	8.82	8.04	7.16	6.20	5.27	4.42	3.67	3.03	2.48	1.96	1.43	0.93	0.53	0.30	0.15	0.08	0.06
-40	23.2	21.2	18.6	15.6	12.8	10.1	7.89	6.08	4.64	3.56	2.66	1.89	1.24	0.64	0.31	0.16	0.08	0.06
-30	56.9	50.5	42.3	33.7	25.9	19.2	13.8	9.81	6.94	4.96	3.60	2.44	1.57	0.83	0.29	0.15	0.08	0.06
-20	122	107	86.3	65.7	47.3	32.8	22.1	14.7	9.70	6.51	4.46	2.96	1.80	0.94	0.24	0.13	0.07	0.06
-10	197	172	138	102	70.5	46.6	29.9	19.0	12.1	7.73	5.09	3.44	1.91	1.00	0.21	0.10	0.07	0.06
0	224	198	159	117	79.9	52.1	32.9	20.6	12.9	8.15	5.30	3.60	1.94	0.97	0.15	0.06	0.06	0.06
10	181	156	123	91.4	64.4	43.5	28.6	18.6	12.0	7.88	5.26	3.59	2.03	1.08	0.26	0.12	0.08	0.06
20	105	91.6	74.5	56.9	41.7	29.6	20.8	14.4	9.88	6.85	4.81	3.26	2.02	1.10	0.34	0.18	0.10	0.06
30	47.8	43.2	36.9	30.1	23.6	18.0	13.5	10.1	7.50	5.53	4.11	2.86	1.88	1.04	0.43	0.22	0.11	0.06
40	20.6	19.1	17.1	14.8	12.5	10.3	8.35	6.70	5.40	4.31	3.29	2.38	1.62	0.89	0.48	0.25	0.12	0.06
50	9.29	8.87	8.26	7.55	6.75	5.93	5.15	4.44	3.79	3.22	2.63	1.96	1.32	0.80	0.48	0.26	0.13	0.06
60	4.78	4.65	4.45	4.19	3.90	3.58	3.23	2.91	2.58	2.28	1.98	1.52	1.06	0.71	0.43	0.25	0.14	0.06
70	2.58	2.52	2.44	2.34	2.22	2.08	1.95	1.80	1.65	1.49	1.33	1.11	0.81	0.56	0.37	0.24	0.14	0.06
80	1.25	1.22	1.19	1.15	1.11	1.05	1.01	0.95	0.90	0.83	0.77	0.71	0.57	0.44	0.33	0.23	0.15	0.06
90	0.56	0.55	0.54	0.53	0.53	0.52	0.53	0.54	0.55	0.55	0.56	0.57	0.49	0.40	0.32	0.23	0.15	0.06
100	0.49	0.48	0.48	0.48	0.48	0.48	0.48	0.49	0.50	0.50	0.51	0.52	0.45	0.38	0.31	0.23	0.15	0.06
110	0.48	0.48	0.49	0.49	0.49	0.49	0.49	0.49	0.49	0.49	0.49	0.48	0.42	0.36	0.30	0.23	0.15	0.06
120	0.57	0.57	0.57	0.57	0.56	0.55	0.53	0.51	0.49	0.49	0.49	0.45	0.39	0.34	0.28	0.22	0.15	0.06
130	0.75	0.76	0.75	0.74	0.72	0.67	0.63	0.58	0.55	0.50	0.47	0.41	0.37	0.31	0.27	0.20	0.15	0.06
140	0.96	0.96	0.95	0.92	0.88	0.81	0.75	0.70	0.64	0.54	0.45	0.38	0.33	0.29	0.24	0.20	0.14	0.06
150	1.11	1.11	1.10	1.06	1.01	0.95	0.87	0.79	0.66	0.52	0.42	0.34	0.29	0.25	0.22	0.18	0.13	0.06
160	1.14	1.14	1.13	1.11	1.08	1.01	0.87	0.72	0.58	0.46	0.37	0.29	0.24	0.21	0.19	0.16	0.12	0.06
170	1.09	1.12	1.13	1.06	0.94	0.82	0.69	0.57	0.45	0.35	0.27	0.22	0.19	0.17	0.16	0.15	0.10	0.06
180	0.95	0.87	0.80	0.72	0.63	0.54	0.43	0.34	0.27	0.20	0.16	0.14	0.13	0.13	0.13	0.13	0.09	0.06

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: