

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2129.8 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	58.8V x 81.4H
	At 50% of Imax	20.4V x 48.8H
	At 90% of Imax	7.8V x 23.1H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	780.1 lumens per klm.
	To 50% of Imax	380.1 lumens per klm.
	To 90% of Imax	87.6 lumens per klm.

Upward LOR	2.1 %
Downward LOR	97.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW 3000K-2050D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:20x50 DEG	DIM.:598MM	SERIAL No.:IES001884
MFR.:	SUR.:	Shielding Angle:

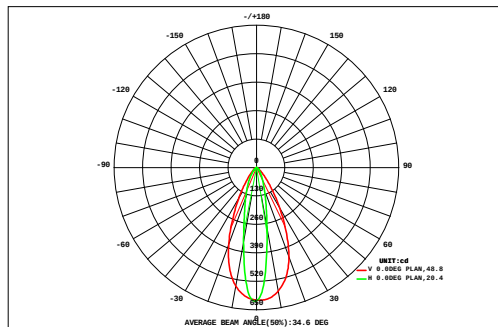

DATA OF LAMP		Eff:39.11lm/W	
MODEL		Imax(cd)	610.6
NOMINAL POWER(W)	7.37	AVAILABILITY(%)	78.1
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	224.0
NOMINAL FLUX(lm)	286.7	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	286.7
TEST VOLTAGE(V)	221.4	q @50%(H,V)	49,20DEG

		AREA FLUX DIAGRAM																UNIT:lm				F t	F a
		0.01	0.02	0.03	0.04	0.05	0.07	0.08	0.09	0.09	0.09	0.09	0.08	0.07	0.05	0.04	0.03	0.02	0.01	0.94	0.00		
VERTICAL (DEG)	72	0.01	0.02	0.03	0.04	0.05	0.07	0.08	0.09	0.09	0.09	0.09	0.08	0.07	0.05	0.04	0.03	0.02	0.01	0.94	0.00		
	64	0.01	0.03	0.04	0.07	0.09	0.11	0.13	0.14	0.15	0.15	0.14	0.13	0.11	0.09	0.07	0.05	0.03	0.01	1.54	0.00		
	56	0.02	0.04	0.06	0.10	0.13	0.17	0.20	0.22	0.23	0.23	0.22	0.20	0.17	0.13	0.10	0.06	0.04	0.02	2.34	0.00		
	48	0.02	0.05	0.09	0.13	0.19	0.25	0.30	0.35	0.36	0.37	0.35	0.31	0.26	0.20	0.14	0.09	0.05	0.02	3.52	0.00		
	40	0.03	0.06	0.11	0.18	0.27	0.38	0.48	0.56	0.60	0.62	0.59	0.51	0.41	0.29	0.19	0.11	0.06	0.02	5.50	0.00		
	32	0.03	0.08	0.14	0.24	0.40	0.62	0.83	0.99	1.10	1.13	1.07	0.93	0.70	0.45	0.26	0.14	0.07	0.03	9.20	1.91		
	24	0.04	0.09	0.17	0.33	0.61	1.02	1.55	1.90	2.13	2.21	2.11	1.79	1.20	0.71	0.37	0.17	0.08	0.03	16.5	13.1		
		0.04	0.10	0.21	0.44	0.94	1.83	3.00	4.16	4.57	4.77	4.63	3.50	2.23	1.15	0.50	0.21	0.09	0.03	32.4	30.1		
		0.04	0.11	0.23	0.54	1.32	2.97	5.56	8.12	9.66	9.99	8.79	6.45	3.71	1.65	0.63	0.23	0.09	0.03	60.1	58.2		
		0.04	0.10	0.23	0.54	1.34	3.04	5.74	8.44	10.2	10.5	9.16	6.69	3.82	1.69	0.64	0.23	0.09	0.03	62.5	60.6		
		0.04	0.09	0.20	0.44	0.99	1.98	3.38	4.80	5.51	5.77	5.42	4.06	2.52	1.25	0.52	0.21	0.08	0.03	37.3	35.1		
	-24	0.04	0.08	0.17	0.33	0.65	1.17	1.87	2.41	2.85	3.00	2.80	2.30	1.49	0.82	0.39	0.17	0.07	0.03	20.6	17.8		
	-32	0.03	0.07	0.13	0.23	0.42	0.71	1.03	1.32	1.59	1.68	1.54	1.27	0.89	0.52	0.27	0.13	0.06	0.02	11.9	7.29		
	-40	0.03	0.05	0.10	0.16	0.27	0.42	0.57	0.74	0.86	0.90	0.84	0.68	0.50	0.32	0.18	0.10	0.05	0.02	6.77	0.00		
	-48	0.02	0.04	0.07	0.11	0.17	0.24	0.32	0.39	0.44	0.46	0.43	0.36	0.28	0.19	0.12	0.07	0.04	0.01	3.77	0.00		
	-56	0.01	0.03	0.05	0.08	0.11	0.15	0.18	0.21	0.23	0.24	0.22	0.19	0.15	0.11	0.08	0.05	0.02	0.01	2.13	0.00		
-64	0.01	0.02	0.03	0.05	0.07	0.09	0.10	0.12	0.13	0.13	0.12	0.10	0.08	0.07	0.05	0.03	0.02	0.01	1.20	0.00			
-72	0.01	0.01	0.02	0.02	0.03	0.04	0.05	0.06	0.06	0.06	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.61	0.00			
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72			
F t	0.48	1.06	2.07	4.04	8.07	15.2	25.4	35.0	40.7	42.3	38.6	29.6	18.6	9.74	4.56	2.08	0.94	0.37	279	---			
F a	0.00	0.00	0.00	0.00	3.50	11.2	21.5	31.1	36.9	38.4	34.8	25.9	14.9	5.65	0.18	0.00	0.00	0.00	---	224			


one-half-peak spread: U:10.9,D:9.7 , L:25.2,RN21.8 Beam Type: Type 5 x 4 (H x V)

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW 3000K-2050D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:20x50 DEG	DIM.:598MM	SERIAL No.:IES001884
MFR.:	SUR.:	Shielding Angle:

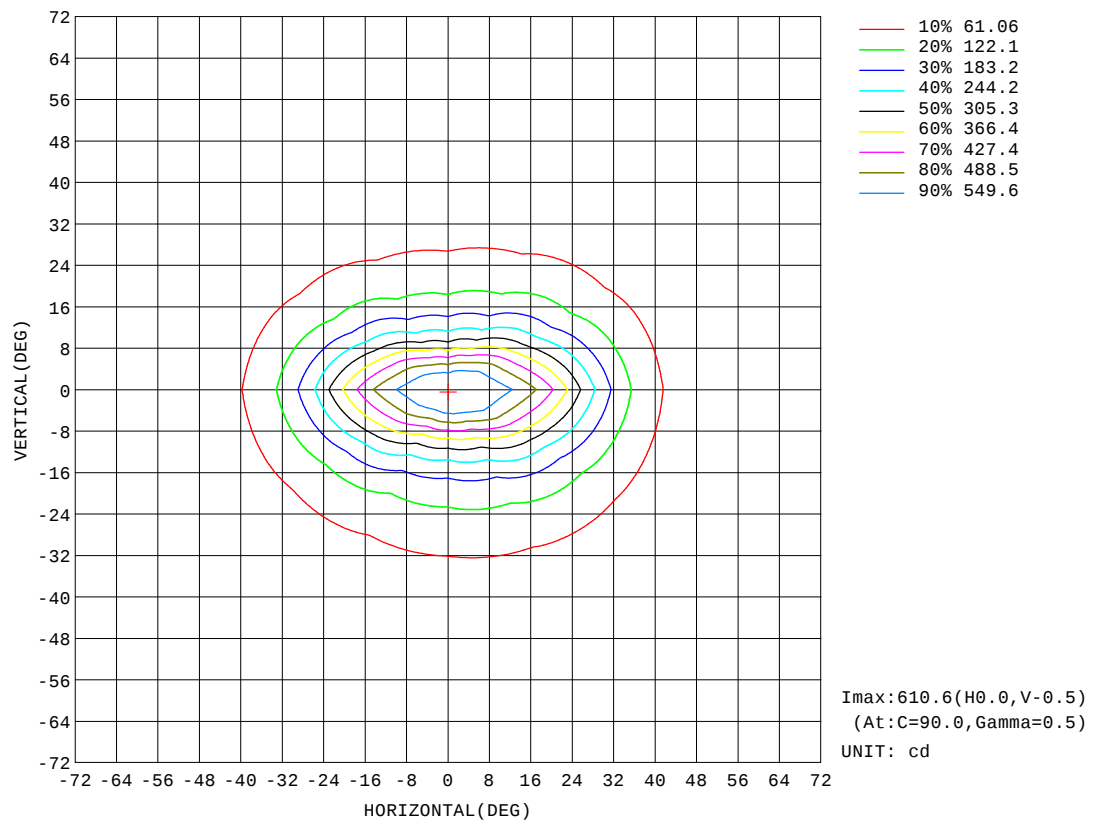


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW 3000K-2050D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:20x50 DEG	DIM.:598MM	SERIAL No.:IES001884
MFR.:	SUR.:	Shielding Angle:

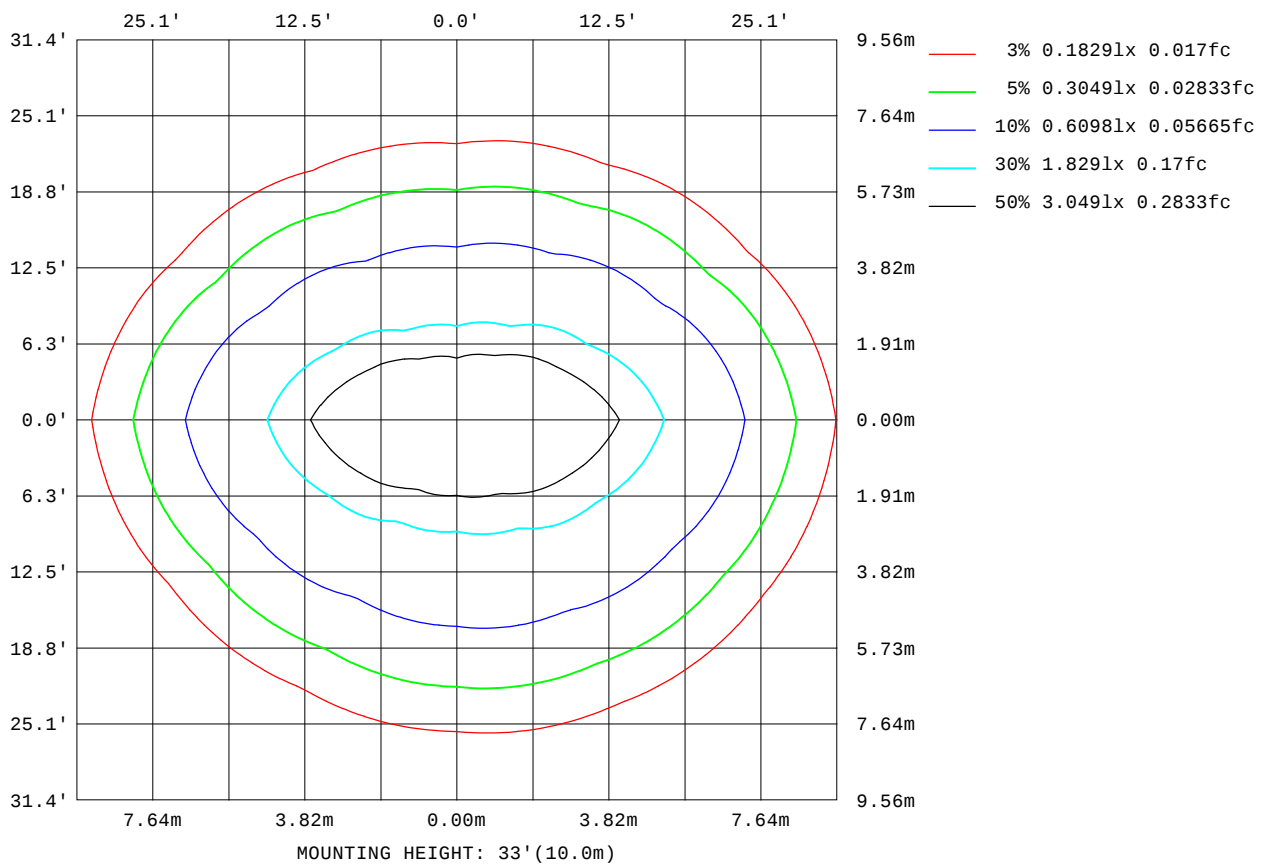

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

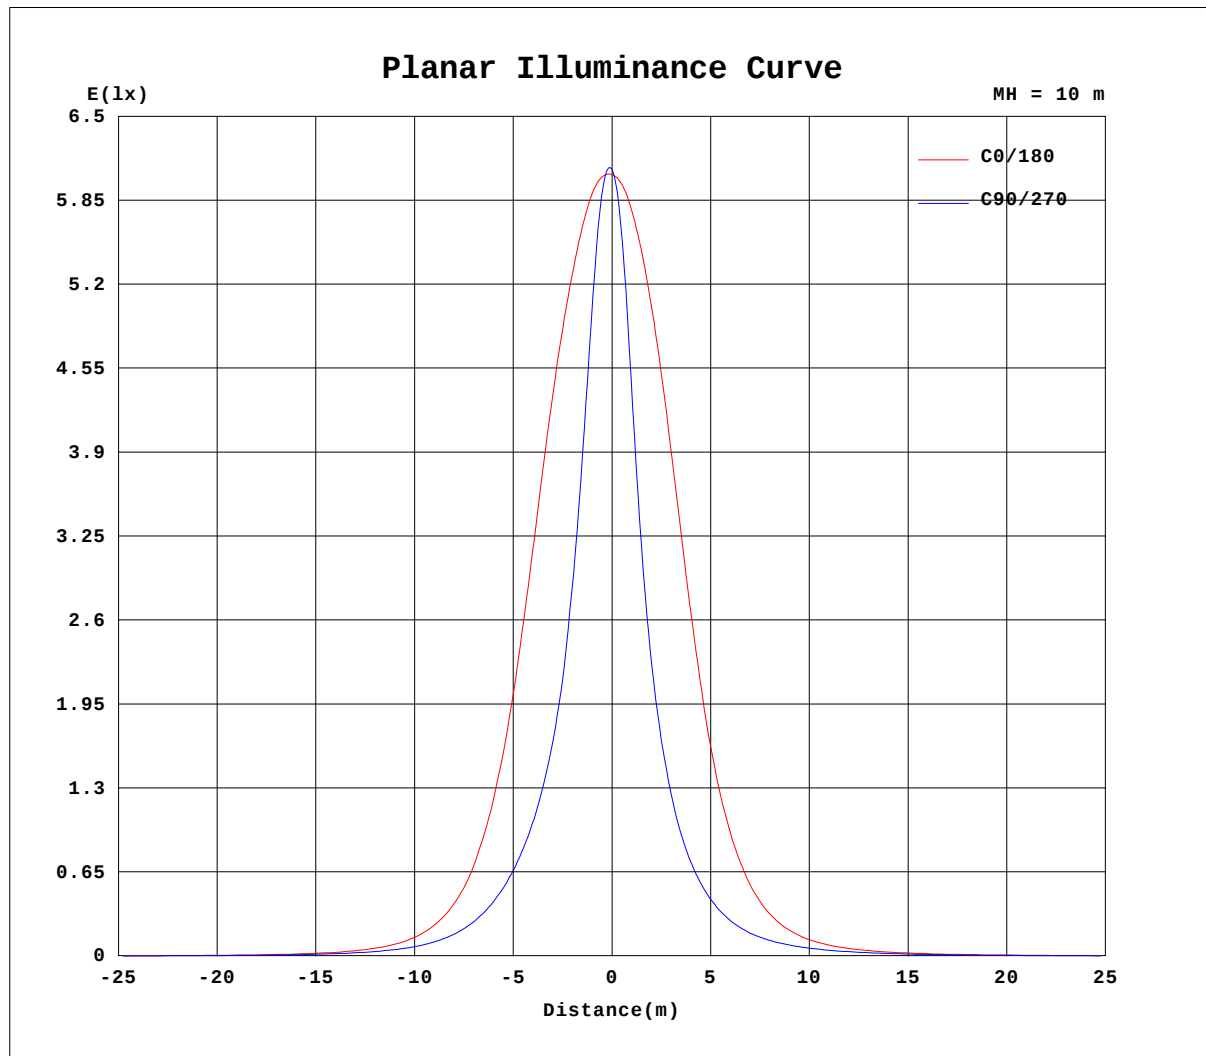


H(b) Range: -90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW 3000K-2050D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:20x50 DEG	DIM.:598MM	SERIAL No.:IES001884
MFR.:	SUR.:	Shielding Angle:

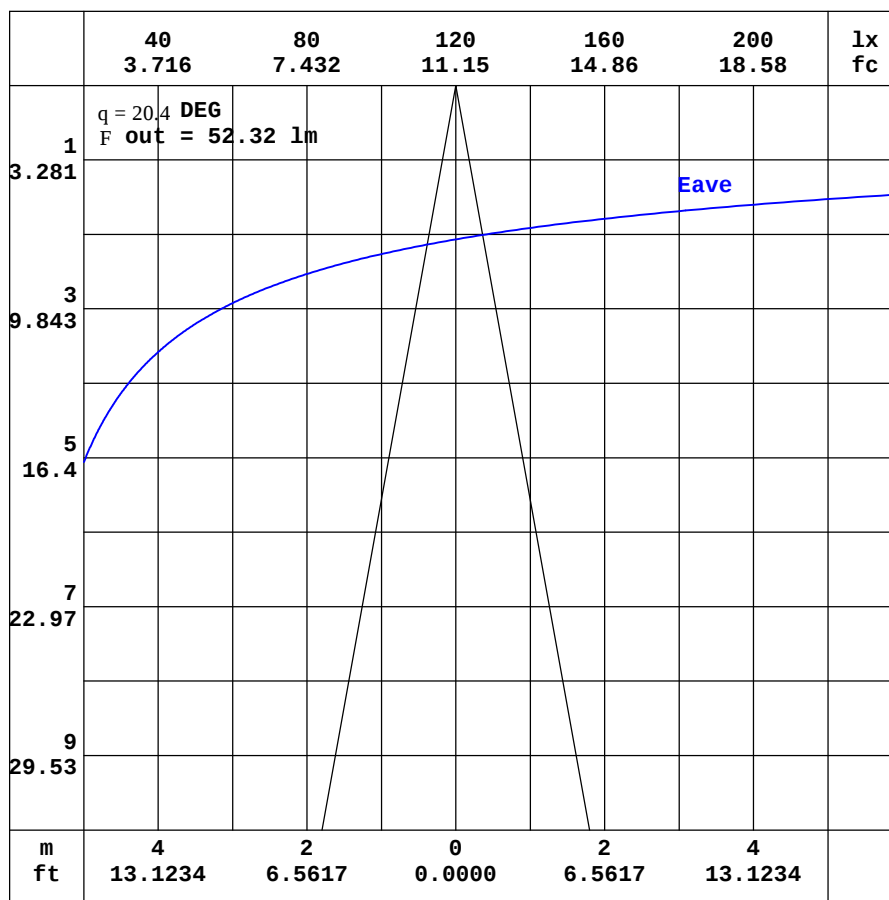

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW 3000K-2050D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:20x50 DEG	DIM.:598MM	SERIAL No.:IES001884
MFR.:	SUR.:	Shielding Angle:

Table--1
UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.05	0.96	0.95	0.96	1.01	1.11	1.24	1.41	1.57	1.73	1.87	1.99	2.06	2.07	2.04	2.01	1.95	1.91	1.87
-170	1.05	0.94	0.92	0.90	0.93	0.99	1.07	1.17	1.26	1.35	1.42	1.49	1.53	1.54	1.53	1.53	1.64	1.73	1.84
-160	1.05	0.92	0.88	0.85	0.85	0.86	0.89	0.92	0.94	0.95	0.96	0.95	0.97	1.09	1.23	1.34	1.44	1.53	1.57
-150	1.05	0.91	0.85	0.80	0.77	0.74	0.73	0.70	0.66	0.60	0.55	0.62	0.69	0.78	0.86	0.94	1.03	1.09	1.11
-140	1.05	0.91	0.82	0.76	0.70	0.65	0.59	0.52	0.44	0.41	0.42	0.43	0.45	0.47	0.50	0.56	0.60	0.63	0.64
-130	1.05	0.90	0.79	0.72	0.64	0.57	0.49	0.41	0.37	0.37	0.36	0.35	0.34	0.31	0.31	0.31	0.33	0.33	0.33
-120	1.05	0.90	0.77	0.68	0.60	0.51	0.43	0.37	0.36	0.36	0.36	0.35	0.34	0.33	0.31	0.30	0.29	0.28	0.27
-110	1.05	0.90	0.78	0.66	0.56	0.47	0.37	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.34	0.34
-100	1.05	0.91	0.78	0.66	0.55	0.44	0.34	0.32	0.33	0.33	0.34	0.34	0.35	0.34	0.35	0.35	0.35	0.35	0.35
-90	1.05	0.93	0.80	0.67	0.55	0.42	0.29	0.29	0.29	0.28	0.28	0.27	0.27	0.27	0.28	0.28	0.28	0.29	0.29
-80	1.05	0.94	0.82	0.70	0.57	0.44	0.29	0.30	0.34	0.37	0.41	0.45	0.48	0.50	0.52	0.54	0.55	0.56	0.55
-70	1.05	0.96	0.87	0.79	0.73	0.71	0.73	0.92	1.15	1.37	1.59	1.79	1.98	2.18	2.36	2.50	2.61	2.67	2.68
-60	1.05	0.98	0.96	1.00	1.15	1.43	1.75	2.13	2.66	3.21	3.75	4.28	4.76	5.22	5.66	6.02	6.28	6.43	6.46
-50	1.05	1.03	1.09	1.33	1.80	2.45	3.12	3.80	4.64	5.69	6.81	7.95	9.11	10.2	11.3	12.3	13.2	13.7	13.8
-40	1.05	1.08	1.25	1.75	2.60	3.61	4.72	5.93	7.29	9.05	11.4	14.1	17.1	20.1	22.9	26.2	29.0	31.0	31.8
-30	1.05	1.13	1.43	2.20	3.42	4.85	6.50	8.47	10.9	14.2	18.6	25.0	32.4	40.4	47.8	54.2	62.8	69.3	72.1
-20	1.05	1.18	1.61	2.64	4.16	6.02	8.26	11.2	15.4	21.6	30.8	43.4	58.6	79.1	101	118	127	144	148
-10	1.05	1.21	1.75	2.98	4.76	7.00	9.80	13.8	19.9	29.9	46.6	73.1	111	159	212	268	312	326	346
0	1.05	1.24	1.85	3.19	5.14	7.64	10.8	15.5	22.9	35.9	59.5	101	166	259	373	477	549	590	605
10	1.05	1.24	1.81	3.08	4.92	7.23	10.1	14.1	20.1	29.8	45.6	70.3	105	147	192	237	275	279	278
20	1.05	1.23	1.73	2.83	4.47	6.46	8.82	11.9	16.0	21.8	29.9	40.4	51.8	67.5	83.3	94.8	98.6	108	106
30	1.05	1.21	1.60	2.46	3.84	5.46	7.32	9.47	12.1	15.2	19.0	23.8	29.2	34.6	38.7	41.5	45.6	47.7	47.0
40	1.05	1.18	1.46	2.09	3.11	4.34	5.70	7.16	8.75	10.5	12.6	14.7	16.9	18.8	20.2	21.9	23.2	23.7	23.3
50	1.05	1.14	1.34	1.73	2.34	3.23	4.15	5.12	6.12	7.18	8.27	9.29	10.3	11.0	11.9	12.6	13.0	13.2	13.2
60	1.05	1.11	1.24	1.43	1.76	2.18	2.75	3.36	3.96	4.56	5.14	5.68	6.15	6.61	6.96	7.27	7.49	7.59	7.57
70	1.05	1.09	1.16	1.25	1.36	1.52	1.72	1.95	2.21	2.51	2.80	3.04	3.23	3.44	3.64	3.78	3.87	3.90	3.90
80	1.05	1.08	1.10	1.13	1.17	1.20	1.24	1.27	1.31	1.35	1.39	1.44	1.48	1.53	1.58	1.61	1.64	1.65	1.65
90	1.05	1.06	1.06	1.07	1.08	1.08	1.09	1.07	1.06	1.05	1.04	1.03	1.02	1.02	1.03	1.03	1.04	1.04	1.05
100	1.05	1.03	1.02	1.02	1.01	1.00	0.99	0.97	0.95	0.92	0.91	0.88	0.87	0.87	0.87	0.88	0.88	0.88	0.88
110	1.05	1.02	1.00	0.97	0.96	0.95	0.94	0.93	0.91	0.90	0.89	0.89	0.89	0.88	0.88	0.88	0.87	0.87	0.86
120	1.05	1.00	0.97	0.96	0.94	0.94	0.93	0.92	0.92	0.93	0.95	0.97	0.99	1.01	1.02	1.02	1.01	1.00	0.98
130	1.05	0.99	0.96	0.95	0.94	0.94	0.94	0.96	1.01	1.07	1.13	1.20	1.26	1.33	1.38	1.43	1.46	1.47	1.47
140	1.05	0.98	0.95	0.95	0.94	0.96	1.00	1.08	1.16	1.27	1.37	1.49	1.61	1.73	1.84	1.92	1.99	2.03	2.05
150	1.05	0.97	0.95	0.95	0.96	1.00	1.09	1.19	1.32	1.46	1.60	1.74	1.89	2.03	2.13	2.22	2.25	2.28	2.29
160	1.05	0.96	0.95	0.95	0.98	1.05	1.16	1.30	1.45	1.61	1.77	1.91	2.04	2.15	2.22	2.27	2.30	2.33	2.35
170	1.05	0.96	0.95	0.95	1.00	1.09	1.22	1.37	1.54	1.70	1.85	1.99	2.09	2.14	2.15	2.16	2.12	2.11	2.23
180	1.05	0.96	0.95	0.96	1.01	1.11	1.24	1.41	1.57	1.73	1.87	1.99	2.06	2.07	2.04	2.01	1.95	1.91	1.91

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW 3000K-2050D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:20x50 DEG	DIM.:598MM	SERIAL No.:IES001884
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	1.71	1.58	1.44	1.32	1.17	1.02	0.87	0.73	0.62	0.51	0.44	0.41	0.35	0.35	0.31	0.29	0.27	0.25
-170	1.76	1.67	1.55	1.40	1.22	1.04	0.87	0.73	0.60	0.50	0.44	0.41	0.35	0.35	0.32	0.30	0.27	0.25
-160	1.52	1.43	1.32	1.20	1.06	0.93	0.79	0.65	0.56	0.48	0.43	0.38	0.36	0.35	0.32	0.30	0.27	0.25
-150	1.09	1.03	0.94	0.85	0.77	0.68	0.61	0.56	0.49	0.44	0.41	0.38	0.36	0.35	0.32	0.30	0.27	0.25
-140	0.63	0.61	0.56	0.51	0.48	0.46	0.44	0.43	0.42	0.41	0.39	0.37	0.36	0.33	0.32	0.29	0.27	0.25
-130	0.33	0.33	0.33	0.33	0.34	0.36	0.37	0.38	0.38	0.38	0.38	0.37	0.35	0.33	0.31	0.29	0.26	0.25
-120	0.28	0.30	0.31	0.33	0.34	0.35	0.35	0.36	0.36	0.37	0.37	0.35	0.34	0.32	0.30	0.28	0.26	0.25
-110	0.34	0.34	0.34	0.34	0.34	0.34	0.35	0.35	0.35	0.35	0.35	0.34	0.32	0.31	0.29	0.27	0.26	0.25
-100	0.35	0.34	0.34	0.34	0.33	0.33	0.32	0.32	0.32	0.32	0.31	0.31	0.30	0.28	0.28	0.26	0.26	0.25
-90	0.28	0.27	0.27	0.26	0.25	0.25	0.25	0.26	0.26	0.27	0.27	0.27	0.27	0.27	0.26	0.26	0.26	0.25
-80	0.55	0.54	0.52	0.50	0.47	0.45	0.42	0.38	0.34	0.31	0.27	0.26	0.27	0.27	0.27	0.26	0.25	0.25
-70	2.64	2.56	2.43	2.26	2.06	1.86	1.69	1.50	1.29	1.08	0.84	0.63	0.50	0.38	0.31	0.28	0.26	0.25
-60	6.46	6.32	6.05	5.65	5.16	4.69	4.20	3.65	3.11	2.56	2.04	1.54	1.09	0.70	0.46	0.32	0.27	0.25
-50	14.0	13.8	13.2	12.1	10.9	9.70	8.37	7.06	5.81	4.67	3.66	2.75	1.94	1.24	0.70	0.39	0.28	0.25
-40	32.6	31.9	29.8	26.7	23.5	19.8	16.1	12.7	9.86	7.52	5.69	4.16	2.91	1.87	1.01	0.51	0.30	0.25
-30	74.0	71.4	65.2	59.0	50.4	40.3	30.6	22.4	16.0	11.4	8.10	5.73	3.91	2.48	1.36	0.63	0.31	0.25
-20	154	146	141	125	101	75.6	55.1	37.7	24.7	16.2	10.7	7.26	4.81	3.02	1.66	0.72	0.33	0.25
-10	345	344	309	253	198	142	92.6	57.5	34.6	20.9	13.1	8.46	5.50	3.40	1.88	0.80	0.34	0.25
0	602	572	519	434	320	212	128	73.2	41.3	23.7	14.3	9.09	5.86	3.58	1.97	0.83	0.34	0.25
10	294	303	269	225	179	130	86.2	54.5	33.5	20.7	13.3	8.76	5.74	3.58	1.99	0.87	0.37	0.25
20	113	108	108	96.3	79.0	60.7	47.2	34.1	23.7	16.3	11.3	7.85	5.29	3.36	1.89	0.86	0.38	0.25
30	49.5	48.7	44.8	42.9	38.5	32.6	26.4	20.7	16.1	12.2	9.09	6.60	4.58	2.97	1.67	0.82	0.39	0.25
40	24.1	23.9	22.7	21.1	19.8	17.9	15.6	13.3	11.0	9.00	6.99	5.23	3.73	2.45	1.40	0.75	0.40	0.25
50	13.3	13.2	12.7	12.1	11.3	10.5	9.57	8.48	7.37	6.26	5.12	3.91	2.83	1.87	1.15	0.67	0.40	0.25
60	7.59	7.49	7.29	7.00	6.61	6.18	5.71	5.19	4.61	4.02	3.43	2.70	1.97	1.38	0.94	0.62	0.41	0.25
70	3.90	3.85	3.76	3.62	3.44	3.24	3.03	2.82	2.57	2.29	2.02	1.74	1.38	1.05	0.79	0.58	0.40	0.25
80	1.65	1.64	1.62	1.58	1.54	1.50	1.46	1.42	1.38	1.35	1.32	1.28	1.09	0.91	0.73	0.56	0.40	0.25
90	1.04	1.04	1.03	1.03	1.03	1.02	1.04	1.06	1.07	1.09	1.11	1.12	0.98	0.83	0.69	0.54	0.40	0.25
100	0.88	0.88	0.88	0.88	0.88	0.88	0.90	0.92	0.94	0.97	0.99	1.01	0.90	0.77	0.65	0.52	0.39	0.25
110	0.87	0.87	0.88	0.88	0.88	0.89	0.89	0.90	0.91	0.92	0.93	0.91	0.82	0.73	0.62	0.50	0.38	0.25
120	1.00	1.00	1.01	1.01	1.00	0.98	0.96	0.94	0.92	0.92	0.93	0.86	0.77	0.67	0.58	0.49	0.37	0.25
130	1.47	1.45	1.41	1.37	1.31	1.24	1.16	1.10	1.04	0.99	0.90	0.81	0.72	0.63	0.55	0.46	0.36	0.25
140	2.03	1.99	1.92	1.83	1.71	1.57	1.45	1.33	1.22	1.09	0.90	0.76	0.67	0.58	0.51	0.43	0.34	0.25
150	2.29	2.27	2.23	2.14	2.01	1.86	1.70	1.54	1.29	1.06	0.87	0.71	0.60	0.54	0.47	0.40	0.33	0.25
160	2.34	2.33	2.30	2.25	2.15	2.02	1.73	1.44	1.18	0.95	0.78	0.63	0.54	0.48	0.42	0.37	0.31	0.25
170	2.20	2.23	2.24	2.08	1.87	1.63	1.38	1.15	0.93	0.76	0.63	0.54	0.45	0.41	0.37	0.33	0.29	0.25
180	1.71	1.58	1.44	1.32	1.17	1.02	0.87	0.73	0.62	0.51	0.44	0.41	0.35	0.35	0.31	0.29	0.27	0.25

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-12

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: