

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2121.6 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	59.1V x 82.1H
	At 50% of Imax	20.4V x 49.2H
	At 90% of Imax	7.2V x 22.6H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	785.2 lumens per klm.
	To 50% of Imax	372.7 lumens per klm.
	To 90% of Imax	79.7 lumens per klm.

Upward LOR	1.7 %
Downward LOR	98.3 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW BLUE-2050D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:20x50 DEG	DIM.:598MM	SERIAL No.:IES001883
MFR.:	SUR.:	Shielding Angle:

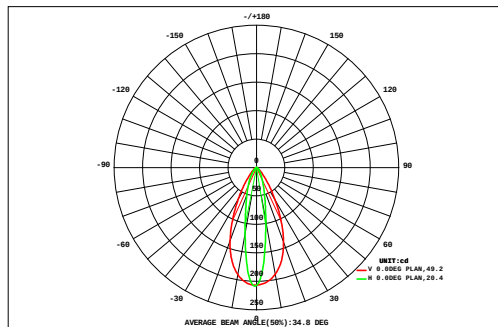

DATA OF LAMP		Eff:13.35lm/W	
MODEL		Imax(cd)	208.2
NOMINAL POWER(W)	7.34	AVAILABILITY(%)	78.5
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	77.05
NOMINAL FLUX(lm)	98.14	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	98.14
TEST VOLTAGE(V)	221.4	q @50%(H,V)	49,20DEG

72 64 56 48 40 32 24 -24 -32 -40 -48 -56 -64 -72 -72	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.32	0.00		
	0.00	0.01	0.02	0.02	0.03	0.04	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.03	0.02	0.02	0.01	0.00	0.53	0.00		
	0.01	0.01	0.02	0.03	0.05	0.06	0.07	0.08	0.08	0.08	0.08	0.07	0.06	0.04	0.03	0.02	0.01	0.01	0.82	0.00		
	0.01	0.02	0.03	0.05	0.07	0.09	0.11	0.13	0.13	0.13	0.12	0.10	0.09	0.07	0.05	0.03	0.02	0.01	1.24	0.00		
	0.01	0.02	0.04	0.07	0.11	0.15	0.18	0.21	0.22	0.21	0.20	0.17	0.13	0.10	0.06	0.04	0.02	0.01	1.94	0.00		
	0.01	0.03	0.05	0.10	0.16	0.24	0.32	0.37	0.40	0.39	0.35	0.30	0.22	0.14	0.08	0.05	0.02	0.01	3.24	0.77		
	0.01	0.03	0.07	0.13	0.25	0.41	0.61	0.72	0.77	0.75	0.68	0.56	0.37	0.22	0.11	0.06	0.03	0.01	5.79	4.65		
	0.02	0.04	0.08	0.18	0.38	0.73	1.14	1.51	1.60	1.59	1.48	1.10	0.69	0.35	0.15	0.07	0.03	0.01	11.1	10.4		
	0.02	0.04	0.09	0.22	0.53	1.16	2.04	2.83	3.27	3.31	2.85	2.06	1.17	0.51	0.19	0.07	0.03	0.01	20.4	19.7		
	0.02	0.04	0.09	0.22	0.55	1.20	2.12	2.97	3.49	3.52	3.00	2.13	1.19	0.51	0.19	0.07	0.03	0.01	21.4	20.7		
	0.01	0.04	0.08	0.19	0.42	0.82	1.32	1.76	1.93	1.92	1.73	1.26	0.76	0.37	0.16	0.06	0.03	0.01	12.9	12.1		
	0.01	0.03	0.07	0.14	0.29	0.51	0.77	0.94	1.02	0.98	0.85	0.68	0.43	0.24	0.11	0.05	0.02	0.01	7.15	6.18		
	0.01	0.03	0.05	0.10	0.19	0.31	0.43	0.52	0.57	0.54	0.46	0.36	0.25	0.15	0.08	0.04	0.02	0.01	4.12	2.52		
	0.01	0.02	0.04	0.07	0.12	0.18	0.24	0.29	0.31	0.29	0.25	0.20	0.15	0.09	0.06	0.03	0.02	0.01	2.35	0.00		
	0.01	0.01	0.03	0.05	0.07	0.10	0.13	0.15	0.16	0.15	0.14	0.11	0.08	0.06	0.04	0.02	0.01	0.00	1.32	0.00		
	0.00	0.01	0.02	0.03	0.04	0.06	0.07	0.08	0.08	0.08	0.07	0.06	0.05	0.04	0.02	0.01	0.01	0.00	0.75	0.00		
	0.00	0.01	0.01	0.02	0.02	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.02	0.01	0.01	0.00	0.00	0.42	0.00		
	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.20	0.00		
	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72			
F t	0.17	0.40	0.81	1.64	3.30	6.11	9.68	12.7	14.2	14.1	12.4	9.29	5.74	2.97	1.40	0.66	0.31	0.12	96	---		
F a	0.00	0.00	0.00	0.06	1.83	4.79	8.40	11.4	12.9	12.8	11.1	7.99	4.40	1.51	0.00	0.00	0.00	0.00	---	77		


one-half-peak spread: U:10.4,D:10.2 , L:24.1,NEZ:0. Beam Type: Type 5 x 4 (H x V)

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW BLUE-2050D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:20x50 DEG	DIM.:598MM	SERIAL No.:IES001883
MFR.:	SUR.:	Shielding Angle:

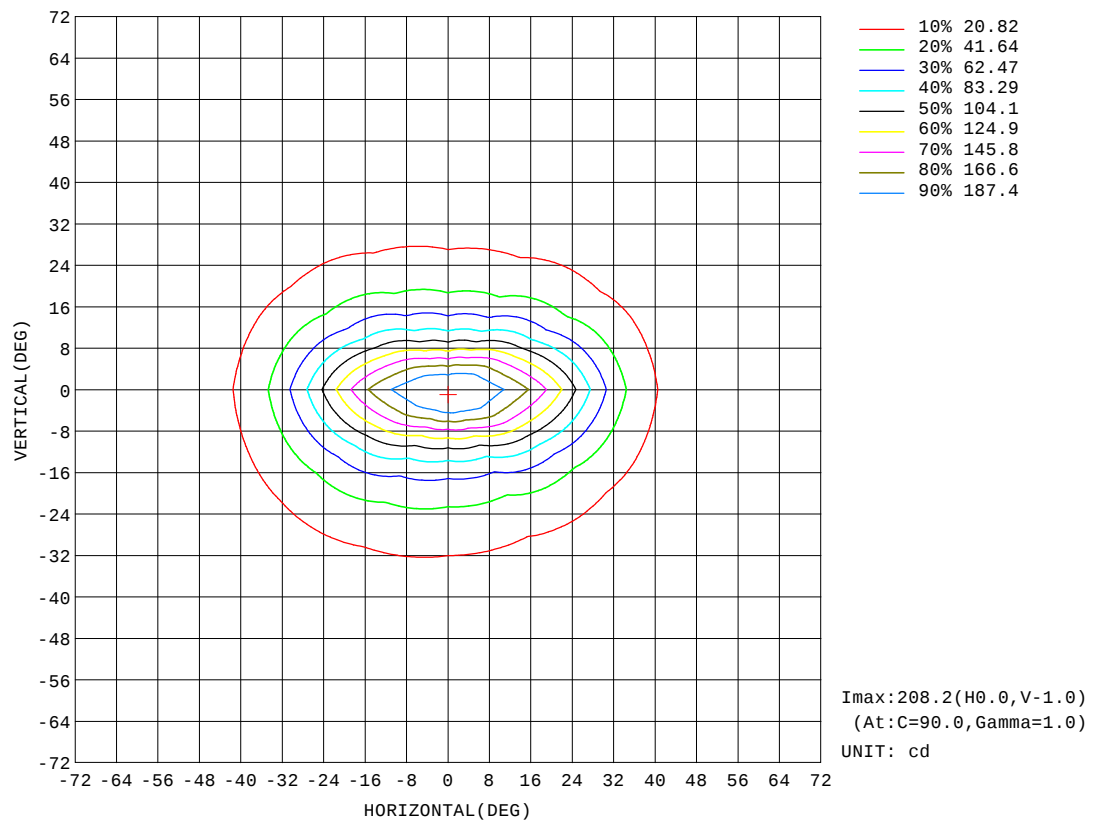


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW BLUE-2050D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:20x50 DEG	DIM.:598MM	SERIAL No.:IES001883
MFR.:	SUR.:	Shielding Angle:

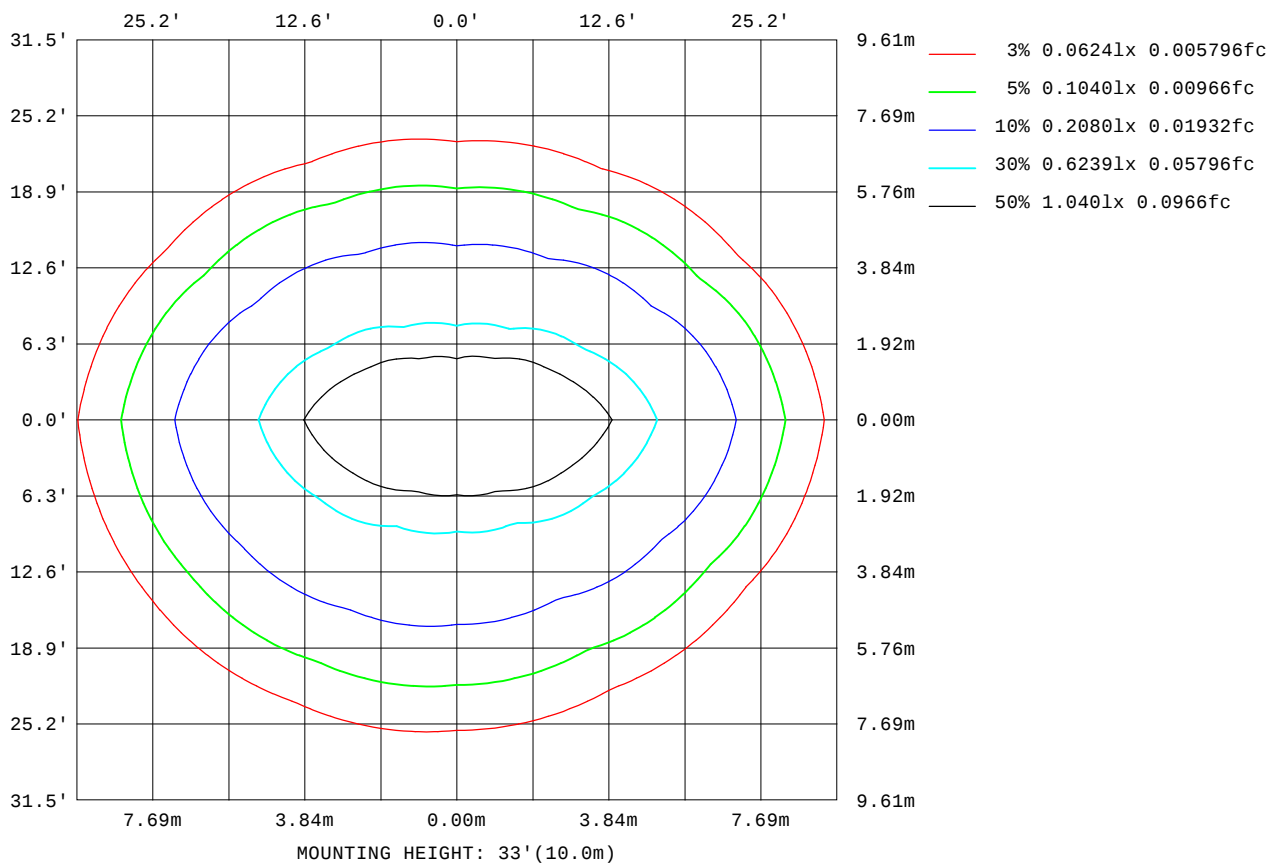

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

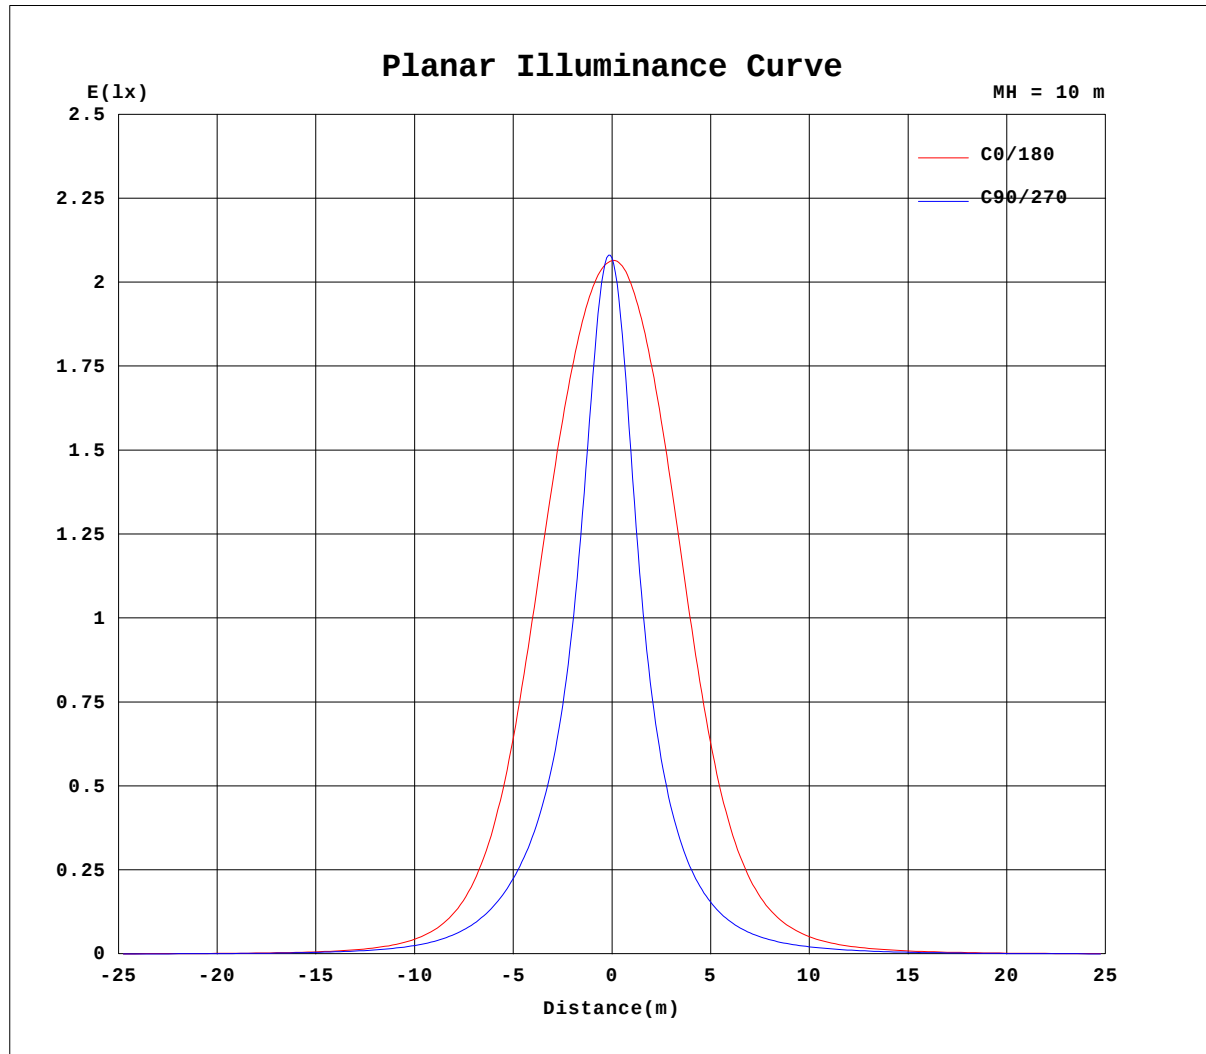


H(b) Range: -90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW BLUE-2050D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:20x50 DEG	DIM.:598MM	SERIAL No.:IES001883
MFR.:	SUR.:	Shielding Angle:

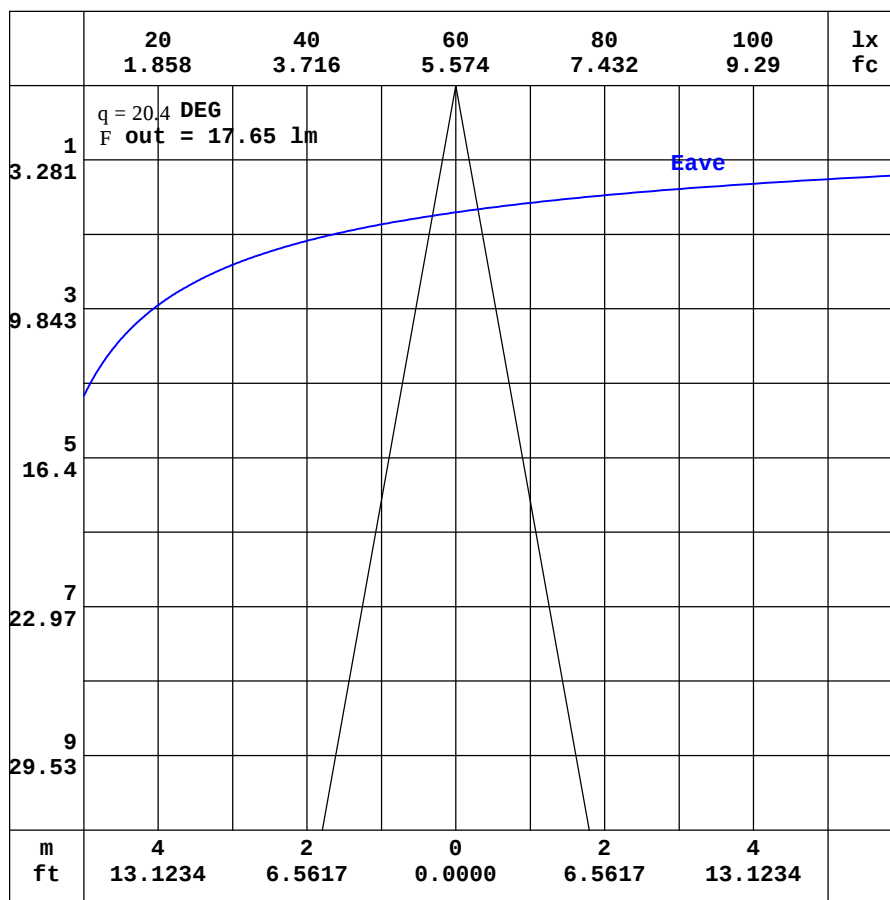

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW BLUE-2050D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:20x50 DEG	DIM.:598MM	SERIAL No.:IES001883
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.31	0.29	0.29	0.29	0.30	0.32	0.36	0.41	0.46	0.51	0.57	0.61	0.63	0.63	0.63	0.61	0.60	0.60	0.57
-170	0.31	0.28	0.27	0.27	0.27	0.28	0.30	0.33	0.36	0.39	0.41	0.44	0.45	0.45	0.45	0.46	0.48	0.50	0.57
-160	0.31	0.27	0.26	0.25	0.23	0.24	0.24	0.25	0.25	0.26	0.26	0.26	0.26	0.30	0.34	0.37	0.41	0.45	0.49
-150	0.31	0.27	0.25	0.23	0.21	0.19	0.18	0.17	0.16	0.14	0.12	0.14	0.16	0.18	0.21	0.23	0.28	0.31	0.33
-140	0.31	0.26	0.23	0.21	0.18	0.16	0.14	0.11	0.09	0.07	0.08	0.08	0.08	0.08	0.08	0.11	0.14	0.15	0.17
-130	0.31	0.26	0.22	0.19	0.17	0.13	0.10	0.07	0.06	0.06	0.06	0.05	0.05	0.04	0.04	0.04	0.05	0.05	0.06
-120	0.31	0.26	0.21	0.18	0.15	0.11	0.08	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.03	0.03
-110	0.31	0.25	0.21	0.17	0.13	0.10	0.06	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.03
-100	0.31	0.26	0.21	0.16	0.12	0.08	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.03	0.03	0.03	0.03	0.03
-90	0.31	0.26	0.22	0.17	0.12	0.07	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03
-80	0.31	0.27	0.23	0.18	0.13	0.08	0.03	0.02	0.03	0.05	0.07	0.09	0.11	0.11	0.12	0.12	0.12	0.12	0.12
-70	0.31	0.28	0.25	0.21	0.18	0.16	0.16	0.24	0.34	0.42	0.52	0.60	0.67	0.74	0.81	0.85	0.88	0.89	0.89
-60	0.31	0.29	0.28	0.28	0.33	0.43	0.55	0.71	0.93	1.16	1.38	1.59	1.79	1.96	2.11	2.22	2.28	2.29	2.26
-50	0.31	0.30	0.32	0.40	0.57	0.82	1.10	1.39	1.76	2.21	2.68	3.16	3.62	4.02	4.40	4.71	4.91	4.96	4.86
-40	0.31	0.32	0.37	0.55	0.88	1.28	1.75	2.28	2.91	3.74	4.77	5.93	7.16	8.35	9.30	10.3	11.0	11.2	10.9
-30	0.31	0.33	0.44	0.72	1.18	1.75	2.46	3.35	4.51	6.09	8.21	11.1	14.2	17.4	20.1	22.0	24.1	25.0	24.4
-20	0.31	0.35	0.51	0.88	1.48	2.23	3.19	4.48	6.37	9.21	13.5	19.2	26.0	33.9	41.6	47.0	49.0	51.9	50.5
-10	0.31	0.37	0.56	1.01	1.70	2.60	3.79	5.53	8.14	12.5	19.7	30.6	45.7	63.7	81.9	98.9	112	114	117
0	0.31	0.38	0.60	1.09	1.84	2.82	4.18	6.18	9.23	14.7	24.2	40.4	65.4	99.0	137	169	191	203	207
10	0.31	0.38	0.59	1.05	1.76	2.67	3.86	5.56	8.02	12.0	18.6	28.5	41.9	57.4	72.3	86.4	97.7	96.9	94.8
20	0.31	0.37	0.56	0.96	1.59	2.38	3.35	4.58	6.28	8.71	12.1	16.4	21.0	27.0	32.8	36.5	37.3	39.2	37.1
30	0.31	0.37	0.51	0.83	1.34	1.96	2.70	3.58	4.63	5.87	7.44	9.40	11.5	13.5	15.0	15.7	17.0	17.3	16.5
40	0.31	0.36	0.46	0.69	1.07	1.54	2.07	2.65	3.27	3.96	4.75	5.58	6.40	7.06	7.49	8.09	8.43	8.49	8.25
50	0.31	0.35	0.42	0.57	0.79	1.12	1.47	1.84	2.23	2.63	3.02	3.40	3.74	4.01	4.29	4.52	4.66	4.70	4.63
60	0.31	0.34	0.39	0.46	0.58	0.74	0.95	1.17	1.39	1.60	1.81	2.00	2.16	2.30	2.44	2.56	2.63	2.66	2.66
70	0.31	0.34	0.36	0.40	0.44	0.50	0.58	0.65	0.74	0.84	0.93	1.01	1.08	1.15	1.23	1.28	1.32	1.34	1.34
80	0.31	0.33	0.34	0.36	0.37	0.39	0.41	0.41	0.42	0.43	0.43	0.44	0.45	0.48	0.49	0.51	0.52	0.53	0.54
90	0.31	0.32	0.32	0.33	0.34	0.34	0.35	0.34	0.33	0.32	0.31	0.30	0.29	0.30	0.30	0.31	0.31	0.32	0.32
100	0.31	0.31	0.31	0.31	0.31	0.32	0.32	0.31	0.29	0.28	0.26	0.25	0.24	0.25	0.25	0.25	0.25	0.25	0.26
110	0.31	0.30	0.30	0.30	0.30	0.30	0.30	0.29	0.28	0.27	0.26	0.25	0.25	0.25	0.25	0.25	0.24	0.24	0.24
120	0.31	0.30	0.30	0.30	0.29	0.28	0.28	0.27	0.26	0.26	0.27	0.27	0.28	0.28	0.28	0.28	0.27	0.27	0.26
130	0.31	0.30	0.29	0.29	0.28	0.28	0.27	0.27	0.27	0.29	0.30	0.33	0.36	0.39	0.41	0.42	0.43	0.43	0.42
140	0.31	0.29	0.29	0.29	0.28	0.28	0.28	0.29	0.30	0.34	0.38	0.43	0.47	0.52	0.56	0.59	0.60	0.62	0.63
150	0.31	0.29	0.29	0.29	0.28	0.28	0.30	0.32	0.35	0.41	0.45	0.50	0.56	0.61	0.66	0.70	0.70	0.71	0.71
160	0.31	0.29	0.29	0.29	0.28	0.30	0.32	0.36	0.41	0.46	0.51	0.56	0.59	0.65	0.67	0.69	0.70	0.71	0.72
170	0.31	0.29	0.29	0.29	0.29	0.31	0.34	0.39	0.44	0.50	0.56	0.60	0.63	0.64	0.65	0.66	0.66	0.65	0.72
180	0.31	0.29	0.29	0.29	0.30	0.32	0.36	0.41	0.46	0.51	0.57	0.61	0.63	0.63	0.63	0.61	0.60	0.60	0.60

H_b Range: -90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-12

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW BLUE-2050D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:20x50 DEG	DIM.:598MM	SERIAL No.:IES001883
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.51	0.49	0.43	0.39	0.34	0.29	0.24	0.19	0.14	0.10	0.07	0.06	0.04	0.02	0.02	0.02	0.02	0.02
-170	0.54	0.52	0.49	0.44	0.38	0.31	0.25	0.19	0.14	0.10	0.07	0.06	0.04	0.03	0.03	0.02	0.02	0.02
-160	0.46	0.42	0.40	0.37	0.33	0.29	0.23	0.17	0.14	0.10	0.07	0.06	0.04	0.03	0.03	0.03	0.02	0.02
-150	0.32	0.29	0.26	0.23	0.21	0.19	0.16	0.15	0.11	0.08	0.07	0.06	0.04	0.03	0.03	0.03	0.02	0.02
-140	0.16	0.14	0.13	0.10	0.10	0.09	0.09	0.08	0.09	0.08	0.07	0.05	0.04	0.04	0.03	0.03	0.02	0.02
-130	0.06	0.05	0.05	0.03	0.02	0.04	0.05	0.05	0.06	0.06	0.06	0.05	0.04	0.04	0.03	0.03	0.02	0.02
-120	0.03	0.03	0.02	0.02	0.02	0.02	0.03	0.04	0.04	0.05	0.05	0.05	0.04	0.04	0.03	0.03	0.02	0.02
-110	0.03	0.03	0.02	0.02	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.02
-100	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.04	0.03	0.03	0.03	0.03	0.02	0.02
-90	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02
-80	0.12	0.12	0.12	0.11	0.10	0.10	0.09	0.06	0.06	0.03	0.03	0.02	0.03	0.03	0.03	0.03	0.03	0.02
-70	0.88	0.85	0.81	0.75	0.68	0.61	0.54	0.47	0.39	0.31	0.21	0.14	0.09	0.06	0.04	0.03	0.03	0.02
-60	2.23	2.16	2.05	1.91	1.74	1.57	1.39	1.20	1.01	0.82	0.63	0.47	0.31	0.18	0.09	0.05	0.03	0.02
-50	4.79	4.59	4.28	3.89	3.48	3.10	2.68	2.27	1.87	1.50	1.17	0.88	0.62	0.38	0.19	0.08	0.03	0.02
-40	10.7	10.1	9.12	7.96	7.01	5.93	4.87	3.90	3.08	2.38	1.82	1.36	0.95	0.60	0.30	0.12	0.04	0.02
-30	23.7	21.7	18.9	16.9	14.4	11.5	8.80	6.53	4.84	3.54	2.58	1.86	1.29	0.82	0.43	0.17	0.05	0.02
-20	49.7	44.5	42.2	36.7	29.1	21.5	15.7	10.9	7.35	4.97	3.39	2.35	1.59	1.00	0.54	0.20	0.05	0.02
-10	114	112	97.7	79.2	60.9	42.7	27.6	17.0	10.3	6.42	4.11	2.73	1.82	1.14	0.62	0.23	0.06	0.02
0	202	190	169	139	102	66.2	39.2	22.1	12.5	7.32	4.51	2.95	1.94	1.21	0.65	0.25	0.06	0.02
10	96.6	97.4	85.1	70.6	56.1	40.3	26.5	16.6	10.3	6.50	4.23	2.85	1.91	1.21	0.66	0.26	0.07	0.02
20	38.0	35.0	34.1	30.4	24.6	18.8	14.6	10.6	7.43	5.20	3.65	2.58	1.77	1.13	0.63	0.25	0.07	0.02
30	16.8	16.1	14.7	13.8	12.3	10.4	8.42	6.64	5.20	3.97	2.98	2.19	1.54	1.00	0.55	0.24	0.08	0.02
40	8.34	8.15	7.70	7.06	6.56	5.88	5.12	4.35	3.64	2.97	2.33	1.75	1.25	0.81	0.45	0.21	0.08	0.02
50	4.63	4.54	4.37	4.10	3.79	3.53	3.19	2.83	2.46	2.09	1.71	1.31	0.94	0.61	0.35	0.18	0.08	0.02
60	2.65	2.59	2.50	2.37	2.24	2.08	1.92	1.74	1.54	1.34	1.14	0.89	0.64	0.43	0.28	0.16	0.08	0.02
70	1.34	1.31	1.27	1.21	1.13	1.05	0.98	0.92	0.84	0.74	0.65	0.56	0.43	0.32	0.22	0.14	0.08	0.02
80	0.53	0.52	0.51	0.49	0.48	0.45	0.43	0.43	0.42	0.41	0.41	0.39	0.33	0.26	0.20	0.14	0.08	0.02
90	0.32	0.31	0.30	0.29	0.28	0.27	0.29	0.30	0.31	0.32	0.33	0.34	0.29	0.23	0.18	0.13	0.08	0.02
100	0.26	0.26	0.25	0.25	0.25	0.25	0.26	0.26	0.27	0.28	0.29	0.31	0.26	0.22	0.17	0.12	0.07	0.02
110	0.24	0.25	0.25	0.26	0.26	0.26	0.26	0.26	0.27	0.27	0.27	0.27	0.23	0.19	0.16	0.12	0.07	0.02
120	0.27	0.28	0.29	0.30	0.31	0.30	0.28	0.28	0.27	0.27	0.27	0.25	0.21	0.18	0.14	0.11	0.07	0.02
130	0.43	0.43	0.43	0.43	0.41	0.38	0.35	0.34	0.31	0.28	0.26	0.22	0.19	0.15	0.13	0.09	0.06	0.02
140	0.63	0.62	0.61	0.59	0.54	0.50	0.45	0.41	0.36	0.33	0.25	0.19	0.16	0.13	0.10	0.08	0.05	0.02
150	0.71	0.71	0.71	0.68	0.64	0.58	0.52	0.48	0.38	0.30	0.24	0.17	0.13	0.11	0.09	0.07	0.05	0.02
160	0.72	0.71	0.71	0.69	0.66	0.63	0.53	0.43	0.35	0.26	0.19	0.16	0.10	0.08	0.07	0.05	0.04	0.02
170	0.67	0.70	0.70	0.65	0.57	0.48	0.41	0.32	0.25	0.19	0.14	0.11	0.07	0.05	0.04	0.04	0.03	0.02
180	0.51	0.49	0.43	0.39	0.34	0.29	0.24	0.19	0.14	0.10	0.07	0.06	0.04	0.02	0.02	0.02	0.02	0.02

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-10-12

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks: