

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2160.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	57.9V x 81.5H
	At 50% of Imax	20.1V x 48.8H
	At 90% of Imax	7.5V x 22.8H
Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	778.6 lumens per klm.
	To 50% of Imax	373.6 lumens per klm.
	To 90% of Imax	82.0 lumens per klm.
Upward LOR		2.2 %
Downward LOR		97.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW GREEN-2050D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:20x50 DEG	DIM.:598MM	SERIAL No.:IES001882
MFR.:	SUR.:	Shielding Angle:

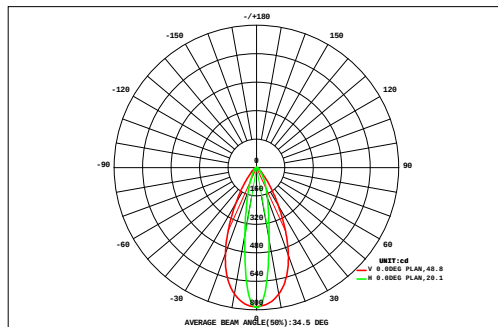

DATA OF LAMP		Eff:52.38lm/W	
MODEL		Imax(cd)	787.8
NOMINAL POWER(W)	6.93	AVAILABILITY(%)	78.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	284.3
NOMINAL FLUX(lm)	364.6	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	364.6
TEST VOLTAGE(V)	221.4	q @50%(H,V)	49,20DEG

		AREA FLUX DIAGRAM																UNIT:lm				F t	F a
		0.02	0.03	0.04	0.06	0.08	0.10	0.11	0.12	0.13	0.13	0.12	0.11	0.09	0.07	0.06	0.04	0.02	0.01	1.31	0.00		
VERTICAL (DEG)	72	0.02	0.03	0.04	0.06	0.08	0.10	0.11	0.12	0.13	0.13	0.12	0.11	0.09	0.07	0.06	0.04	0.02	0.01	1.31	0.00		
	64	0.02	0.04	0.06	0.09	0.13	0.16	0.19	0.21	0.22	0.22	0.21	0.18	0.15	0.12	0.09	0.06	0.03	0.02	2.21	0.00		
	56	0.03	0.05	0.09	0.14	0.20	0.27	0.32	0.36	0.38	0.37	0.34	0.30	0.24	0.18	0.13	0.08	0.05	0.02	3.55	0.00		
	48	0.03	0.07	0.13	0.21	0.31	0.43	0.55	0.63	0.66	0.64	0.58	0.48	0.37	0.27	0.18	0.11	0.06	0.03	5.74	0.00		
	40	0.04	0.09	0.17	0.29	0.47	0.71	0.94	1.13	1.20	1.16	1.02	0.81	0.60	0.40	0.25	0.14	0.07	0.03	9.51	0.14		
	32	0.05	0.11	0.21	0.40	0.71	1.16	1.64	1.98	2.13	2.04	1.75	1.39	0.97	0.59	0.33	0.17	0.08	0.03	15.7	9.72		
	24	0.05	0.13	0.26	0.54	1.06	1.87	2.85	3.46	3.69	3.55	3.10	2.48	1.56	0.89	0.44	0.21	0.10	0.04	26.3	22.5		
		0.06	0.14	0.31	0.69	1.53	3.01	4.92	6.57	7.01	6.90	6.32	4.57	2.76	1.36	0.58	0.24	0.10	0.04	47.1	44.3		
		0.06	0.15	0.34	0.82	2.00	4.43	7.97	11.3	13.1	13.2	11.3	7.98	4.42	1.90	0.70	0.26	0.11	0.04	80.0	77.5		
		0.06	0.15	0.33	0.79	1.93	4.27	7.62	10.6	12.5	12.8	10.9	7.78	4.34	1.86	0.69	0.26	0.10	0.04	77.1	74.6		
		0.05	0.13	0.28	0.62	1.35	2.59	4.10	5.53	6.09	6.14	5.64	4.12	2.55	1.27	0.54	0.22	0.10	0.04	41.4	38.4		
	-24	0.05	0.11	0.23	0.44	0.84	1.39	2.08	2.50	2.75	2.71	2.42	2.01	1.31	0.76	0.38	0.18	0.08	0.03	20.3	15.8		
	-32	0.04	0.09	0.17	0.30	0.51	0.79	1.04	1.20	1.31	1.29	1.15	0.98	0.73	0.45	0.26	0.14	0.07	0.03	10.5	1.23		
	-40	0.03	0.07	0.12	0.20	0.32	0.45	0.54	0.63	0.67	0.66	0.61	0.51	0.41	0.29	0.18	0.10	0.06	0.02	5.88	0.00		
	-48	0.03	0.05	0.09	0.14	0.20	0.26	0.31	0.36	0.38	0.37	0.35	0.30	0.24	0.18	0.12	0.08	0.04	0.02	3.53	0.00		
	-56	0.02	0.04	0.06	0.09	0.13	0.16	0.19	0.22	0.23	0.22	0.21	0.18	0.15	0.12	0.08	0.05	0.03	0.01	2.20	0.00		
-64	0.01	0.02	0.04	0.06	0.08	0.10	0.12	0.13	0.14	0.13	0.13	0.11	0.09	0.07	0.05	0.03	0.02	0.01	1.35	0.00			
-72	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.07	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.73	0.00			
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72			
F t	0.65	1.47	2.95	5.91	11.9	22.2	35.6	47.0	52.7	52.6	46.2	34.4	21.0	10.8	5.09	2.41	1.13	0.47	354	---			
F a	0.00	0.00	0.00	0.13	6.40	17.2	30.8	42.2	47.9	47.7	41.2	29.5	16.0	5.34	0.00	0.00	0.00	0.00	---	284			


one-half-peak spread: U:10.3,D:10.0 , L:23.8,MEAS Beam Type: Type 5 x 4 (H x V)

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW GREEN-2050D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:20x50 DEG	DIM.:598MM	SERIAL No.:IES001882
MFR.:	SUR.:	Shielding Angle:

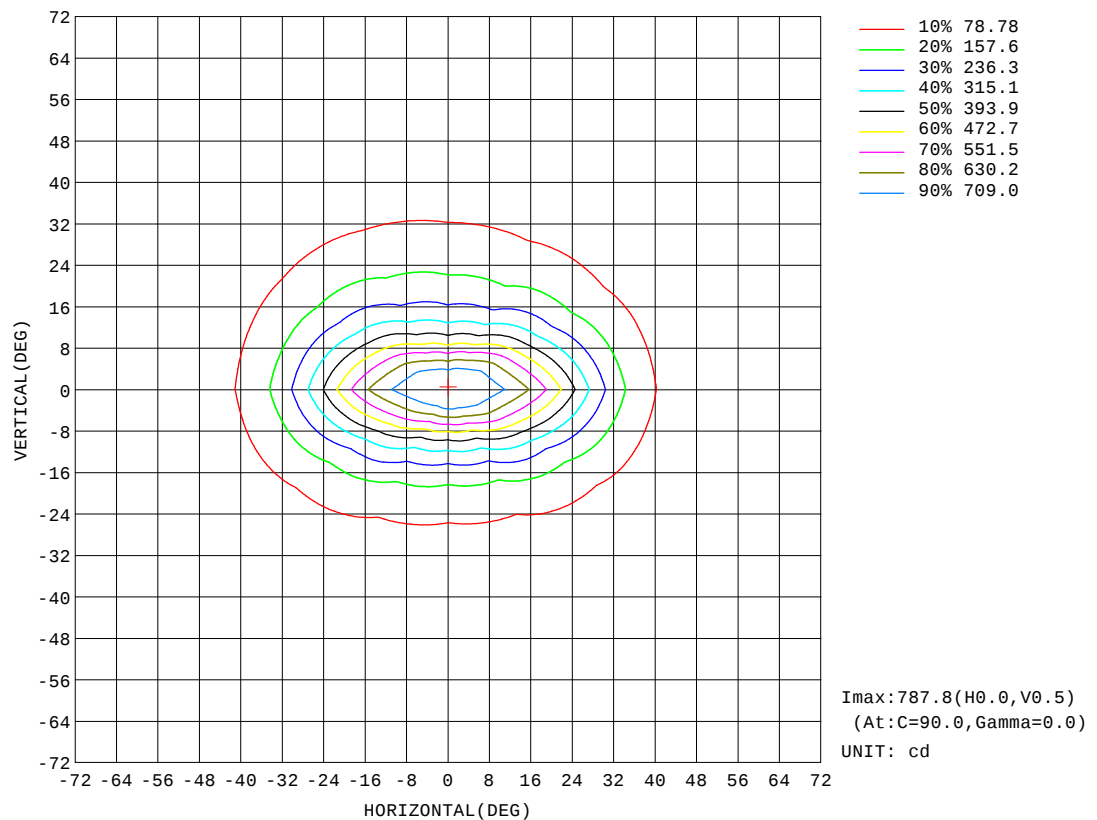


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW GREEN-2050D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:20x50 DEG	DIM.:598MM	SERIAL No.:IES001882
MFR.:	SUR.:	Shielding Angle:

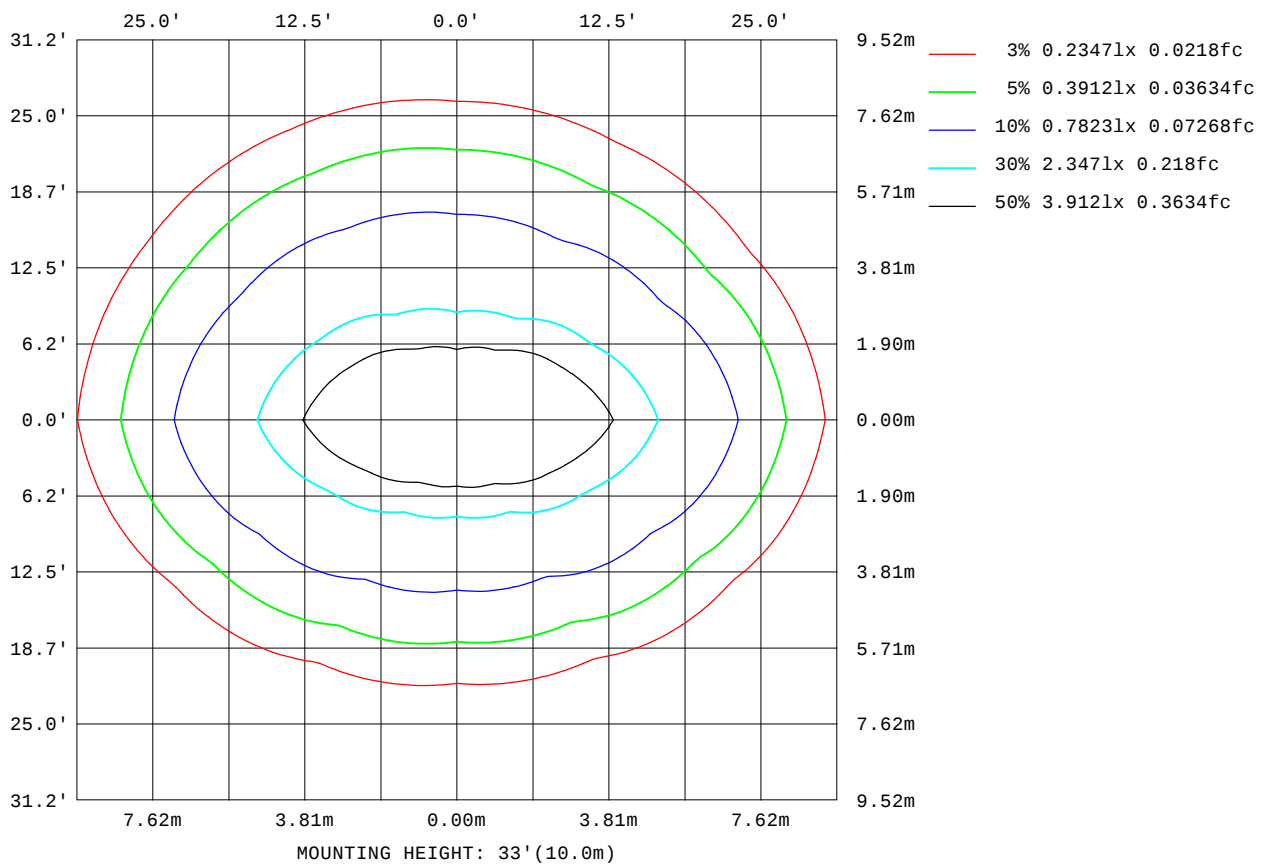

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

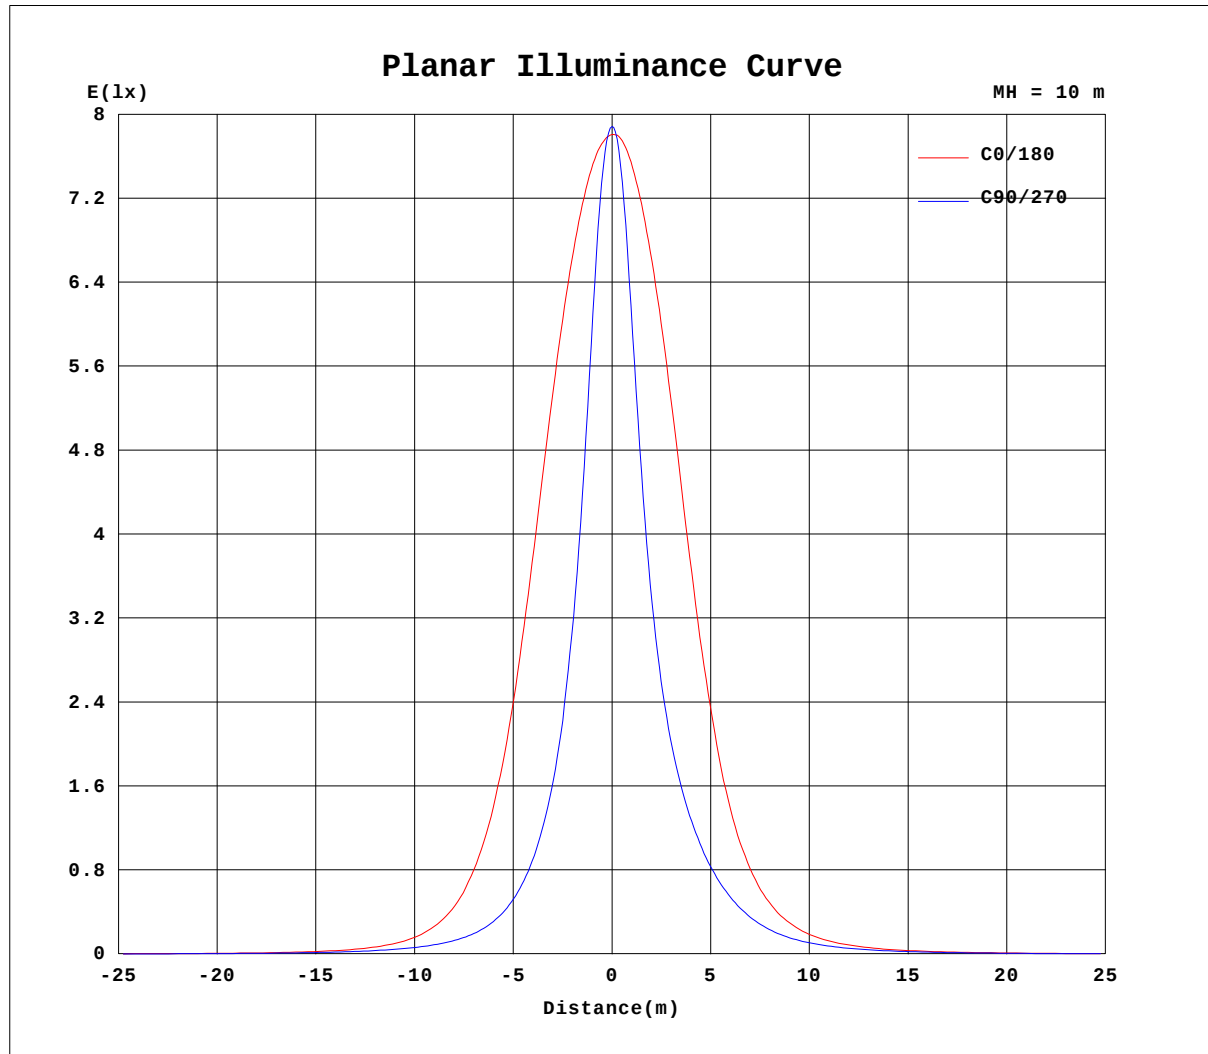


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW GREEN-2050D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:20x50 DEG	DIM.:598MM	SERIAL No.:IES001882
MFR.:	SUR.:	Shielding Angle:

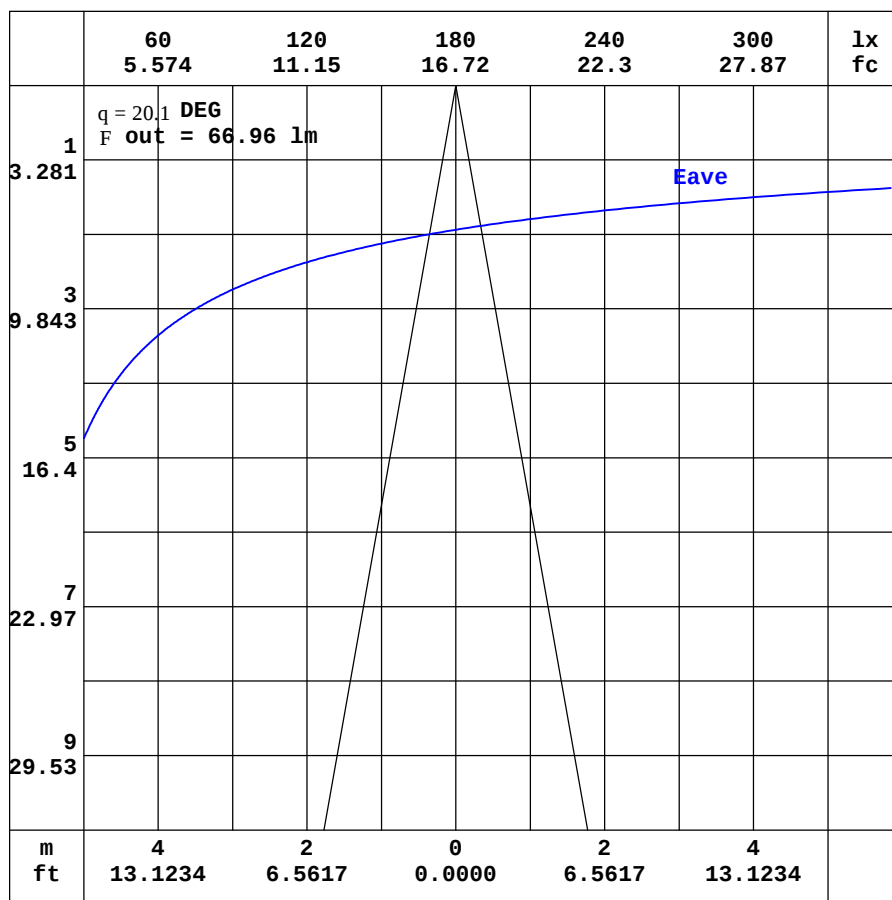

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW GREEN-2050D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:20x50 DEG	DIM.:598MM	SERIAL No.:IES001882
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.41	1.29	1.23	1.24	1.28	1.37	1.52	1.71	1.92	2.12	2.30	2.45	2.57	2.60	2.58	2.54	2.48	2.43	2.49
-170	1.41	1.26	1.19	1.17	1.17	1.23	1.32	1.43	1.55	1.66	1.77	1.86	1.93	1.96	1.95	1.98	2.14	2.27	2.43
-160	1.41	1.24	1.14	1.10	1.07	1.08	1.10	1.13	1.16	1.19	1.21	1.22	1.25	1.43	1.62	1.79	1.94	2.06	2.13
-150	1.41	1.23	1.10	1.03	0.98	0.93	0.90	0.87	0.82	0.76	0.72	0.81	0.93	1.06	1.19	1.32	1.44	1.53	1.58
-140	1.41	1.22	1.06	0.98	0.89	0.82	0.75	0.66	0.56	0.53	0.54	0.58	0.62	0.67	0.73	0.82	0.89	0.94	0.96
-130	1.41	1.21	1.05	0.92	0.82	0.72	0.62	0.51	0.47	0.47	0.46	0.46	0.44	0.42	0.44	0.47	0.49	0.50	0.51
-120	1.41	1.21	1.03	0.88	0.76	0.66	0.54	0.45	0.45	0.45	0.45	0.44	0.43	0.41	0.40	0.39	0.39	0.38	0.37
-110	1.41	1.21	1.03	0.87	0.72	0.59	0.47	0.44	0.44	0.44	0.44	0.43	0.43	0.43	0.43	0.42	0.42	0.42	0.42
-100	1.41	1.22	1.04	0.88	0.71	0.56	0.41	0.41	0.41	0.41	0.41	0.42	0.42	0.42	0.43	0.43	0.44	0.44	0.44
-90	1.41	1.24	1.07	0.89	0.72	0.54	0.37	0.37	0.37	0.37	0.36	0.36	0.36	0.37	0.37	0.37	0.38	0.38	0.39
-80	1.41	1.26	1.11	0.94	0.76	0.57	0.36	0.38	0.43	0.48	0.53	0.57	0.62	0.65	0.68	0.70	0.72	0.73	0.73
-70	1.41	1.30	1.18	1.06	0.98	0.94	0.92	1.14	1.43	1.69	1.95	2.18	2.37	2.58	2.79	2.95	3.06	3.12	3.13
-60	1.41	1.33	1.30	1.34	1.51	1.83	2.22	2.67	3.31	3.95	4.55	5.10	5.56	5.95	6.38	6.68	6.89	6.98	6.94
-50	1.41	1.39	1.47	1.78	2.35	3.15	4.00	4.81	5.83	7.01	8.19	9.32	10.3	11.0	11.8	12.5	13.0	13.1	13.0
-40	1.41	1.46	1.69	2.31	3.41	4.72	6.16	7.69	9.21	11.2	13.7	16.4	18.8	20.7	21.6	23.7	25.0	25.3	24.7
-30	1.41	1.52	1.93	2.90	4.48	6.36	8.62	11.2	14.4	18.2	23.0	29.6	36.7	43.0	47.2	49.1	53.9	55.8	53.8
-20	1.41	1.58	2.17	3.48	5.53	8.09	11.2	15.3	20.9	29.0	40.6	55.2	71.0	92.0	112	125	129	140	135
-10	1.41	1.64	2.36	3.96	6.36	9.47	13.6	19.4	28.1	42.4	65.6	101	150	208	262	317	362	367	382
0	1.41	1.69	2.49	4.26	6.89	10.4	15.3	22.3	33.4	53.0	88.1	149	240	369	512	638	721	769	781
10	1.41	1.68	2.45	4.12	6.64	9.95	14.4	20.8	30.4	46.1	71.9	112	168	236	306	372	419	420	410
20	1.41	1.66	2.34	3.78	6.05	8.98	12.7	17.6	24.6	35.0	50.2	70.8	95.1	125	155	175	181	189	181
30	1.41	1.63	2.17	3.31	5.17	7.51	10.4	14.0	18.6	24.6	32.5	42.5	54.3	66.6	77.4	85.3	92.5	95.0	92.3
40	1.41	1.59	2.00	2.80	4.20	5.95	8.06	10.5	13.2	16.6	20.4	25.0	29.7	34.5	38.6	42.2	44.6	45.3	44.1
50	1.41	1.55	1.83	2.36	3.17	4.38	5.75	7.32	8.96	10.8	12.6	14.6	16.5	18.3	19.9	21.2	21.8	21.9	21.4
60	1.41	1.51	1.69	1.96	2.39	2.96	3.75	4.64	5.56	6.51	7.44	8.31	9.10	9.88	10.5	11.0	11.3	11.4	11.3
70	1.41	1.48	1.58	1.70	1.86	2.08	2.35	2.67	3.05	3.46	3.87	4.23	4.55	4.88	5.15	5.33	5.44	5.48	5.45
80	1.41	1.45	1.49	1.54	1.60	1.65	1.70	1.74	1.80	1.86	1.93	2.01	2.08	2.14	2.19	2.23	2.25	2.26	2.25
90	1.41	1.43	1.44	1.45	1.46	1.47	1.48	1.47	1.46	1.45	1.44	1.43	1.41	1.41	1.41	1.41	1.41	1.41	1.41
100	1.41	1.40	1.39	1.37	1.36	1.35	1.34	1.31	1.28	1.25	1.22	1.19	1.16	1.15	1.15	1.15	1.15	1.15	1.15
110	1.41	1.37	1.34	1.31	1.28	1.26	1.24	1.21	1.18	1.16	1.13	1.12	1.10	1.10	1.09	1.08	1.08	1.07	1.07
120	1.41	1.36	1.30	1.26	1.24	1.22	1.20	1.18	1.17	1.16	1.16	1.17	1.18	1.19	1.19	1.19	1.18	1.16	1.14
130	1.41	1.33	1.28	1.24	1.22	1.21	1.20	1.20	1.23	1.28	1.33	1.39	1.46	1.53	1.59	1.64	1.69	1.71	1.71
140	1.41	1.32	1.25	1.23	1.22	1.22	1.24	1.31	1.39	1.49	1.61	1.74	1.88	2.03	2.16	2.28	2.38	2.44	2.47
150	1.41	1.31	1.24	1.23	1.23	1.25	1.33	1.44	1.58	1.73	1.90	2.08	2.27	2.44	2.60	2.71	2.79	2.83	2.85
160	1.41	1.30	1.24	1.23	1.24	1.30	1.42	1.56	1.74	1.93	2.13	2.32	2.50	2.66	2.79	2.89	2.94	2.98	3.02
170	1.41	1.29	1.23	1.23	1.26	1.35	1.48	1.66	1.86	2.06	2.26	2.44	2.59	2.69	2.74	2.77	2.77	2.78	2.93
180	1.41	1.29	1.23	1.24	1.28	1.37	1.52	1.71	1.92	2.12	2.30	2.45	2.57	2.60	2.58	2.54	2.48	2.43	2.52

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-12

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW GREEN-2050D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:20x50 DEG	DIM.:598MM	SERIAL No.:IES001882
MFR.:	SUR.:	Shielding Angle:

Table--2
UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	2.18	2.01	1.87	1.72	1.56	1.37	1.19	1.01	0.85	0.72	0.61	0.52	0.48	0.44	0.41	0.40	0.35	0.35
-170	2.32	2.20	2.05	1.86	1.64	1.42	1.21	1.02	0.85	0.71	0.60	0.53	0.49	0.45	0.42	0.40	0.35	0.35
-160	2.07	1.97	1.83	1.67	1.49	1.31	1.11	0.93	0.78	0.66	0.58	0.51	0.47	0.45	0.42	0.40	0.36	0.35
-150	1.55	1.48	1.39	1.27	1.14	1.01	0.89	0.79	0.69	0.60	0.54	0.50	0.47	0.44	0.43	0.39	0.36	0.35
-140	0.96	0.93	0.88	0.81	0.75	0.70	0.65	0.61	0.58	0.55	0.51	0.48	0.46	0.44	0.42	0.38	0.36	0.35
-130	0.52	0.52	0.51	0.49	0.49	0.48	0.50	0.51	0.51	0.50	0.49	0.48	0.45	0.44	0.41	0.38	0.36	0.35
-120	0.39	0.40	0.41	0.43	0.44	0.45	0.46	0.47	0.47	0.48	0.47	0.47	0.45	0.43	0.40	0.37	0.36	0.35
-110	0.42	0.43	0.43	0.44	0.44	0.44	0.45	0.45	0.46	0.46	0.45	0.45	0.43	0.41	0.39	0.37	0.36	0.35
-100	0.44	0.44	0.44	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.42	0.42	0.41	0.39	0.38	0.37	0.36	0.35
-90	0.38	0.38	0.37	0.37	0.36	0.36	0.36	0.37	0.37	0.38	0.38	0.39	0.38	0.38	0.37	0.36	0.36	0.35
-80	0.73	0.72	0.70	0.67	0.64	0.61	0.58	0.54	0.49	0.46	0.41	0.38	0.38	0.38	0.38	0.37	0.36	0.35
-70	3.09	3.00	2.86	2.68	2.46	2.25	2.07	1.86	1.64	1.39	1.12	0.86	0.68	0.54	0.43	0.39	0.37	0.35
-60	6.89	6.71	6.43	6.05	5.59	5.17	4.73	4.21	3.66	3.09	2.52	1.97	1.42	0.94	0.64	0.44	0.37	0.35
-50	12.9	12.6	12.0	11.2	10.3	9.51	8.52	7.44	6.36	5.30	4.29	3.35	2.44	1.61	0.94	0.55	0.39	0.35
-40	24.9	24.3	22.7	20.5	19.3	17.2	14.8	12.4	10.1	8.08	6.43	4.92	3.57	2.37	1.33	0.70	0.41	0.35
-30	54.7	52.0	46.7	44.4	39.9	33.4	26.5	20.4	15.7	11.9	8.95	6.65	4.72	3.11	1.76	0.84	0.43	0.35
-20	137	124	121	108	87.2	65.6	50.1	35.7	24.6	16.9	11.8	8.35	5.78	3.75	2.14	0.96	0.45	0.35
-10	374	373	326	265	208	148	96.7	59.2	36.0	22.4	14.5	9.77	6.61	4.22	2.40	1.05	0.46	0.35
0	766	722	644	525	380	247	146	81.0	45.4	26.4	16.2	10.6	7.07	4.45	2.51	1.09	0.47	0.35
10	415	412	359	289	222	157	102	62.9	38.4	24.0	15.6	10.5	7.05	4.47	2.55	1.14	0.50	0.35
20	179	162	154	134	105	78.3	58.9	41.7	28.7	19.7	13.6	9.58	6.58	4.23	2.43	1.12	0.52	0.35
30	90.1	83.4	73.7	65.6	55.7	45.0	35.1	26.9	20.4	15.2	11.3	8.24	5.75	3.76	2.16	1.07	0.53	0.35
40	43.5	41.2	37.8	33.7	29.7	25.5	21.3	17.6	14.3	11.4	8.87	6.63	4.72	3.13	1.81	0.99	0.54	0.35
50	21.3	20.6	19.6	18.1	16.4	14.8	13.0	11.3	9.65	8.11	6.54	4.98	3.61	2.41	1.49	0.88	0.54	0.35
60	11.2	10.9	10.5	9.87	9.24	8.47	7.72	6.90	6.03	5.20	4.38	3.45	2.52	1.77	1.22	0.81	0.54	0.35
70	5.43	5.34	5.19	4.96	4.66	4.33	4.05	3.72	3.36	2.96	2.60	2.22	1.77	1.36	1.03	0.76	0.54	0.35
80	2.25	2.23	2.19	2.14	2.08	2.01	1.94	1.88	1.81	1.75	1.69	1.63	1.39	1.16	0.94	0.73	0.53	0.35
90	1.40	1.40	1.39	1.38	1.38	1.37	1.38	1.39	1.40	1.41	1.42	1.43	1.25	1.07	0.89	0.71	0.53	0.35
100	1.15	1.15	1.14	1.14	1.14	1.15	1.17	1.19	1.22	1.25	1.28	1.30	1.15	1.00	0.85	0.69	0.53	0.35
110	1.08	1.09	1.09	1.10	1.10	1.11	1.13	1.14	1.15	1.17	1.19	1.18	1.06	0.93	0.80	0.66	0.51	0.35
120	1.17	1.19	1.21	1.21	1.21	1.21	1.20	1.19	1.18	1.17	1.18	1.10	0.99	0.88	0.76	0.63	0.50	0.35
130	1.72	1.71	1.68	1.64	1.58	1.51	1.45	1.38	1.32	1.27	1.16	1.03	0.92	0.82	0.71	0.59	0.48	0.35
140	2.46	2.42	2.35	2.24	2.11	1.96	1.82	1.68	1.56	1.38	1.16	0.98	0.85	0.75	0.67	0.56	0.46	0.35
150	2.86	2.84	2.80	2.68	2.53	2.36	2.18	1.98	1.67	1.37	1.12	0.93	0.78	0.69	0.61	0.53	0.43	0.35
160	3.02	3.02	2.98	2.88	2.76	2.60	2.24	1.86	1.53	1.25	1.02	0.83	0.70	0.61	0.55	0.49	0.41	0.35
170	2.92	2.92	2.91	2.71	2.42	2.11	1.81	1.52	1.26	1.03	0.83	0.70	0.60	0.53	0.48	0.44	0.38	0.35
180	2.18	2.01	1.87	1.72	1.56	1.37	1.19	1.01	0.85	0.72	0.61	0.52	0.48	0.44	0.41	0.40	0.35	0.35

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: