

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2200.9 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	57.1V x 80.9H
	At 50% of Imax	19.9V x 48.2H
	At 90% of Imax	8.1V x 23.5H
Beam Flux	Total	999.9 lumens per klm.
	To 10% of Imax	780.4 lumens per klm.
	To 50% of Imax	382.3 lumens per klm.
	To 90% of Imax	90.9 lumens per klm.
	Upward LOR	2.2 %
	Downward LOR	97.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW RED-2050D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:20x50 DEG	DIM.:598MM	SERIAL No.:IES001881
MFR.:	SUR.:	Shielding Angle:

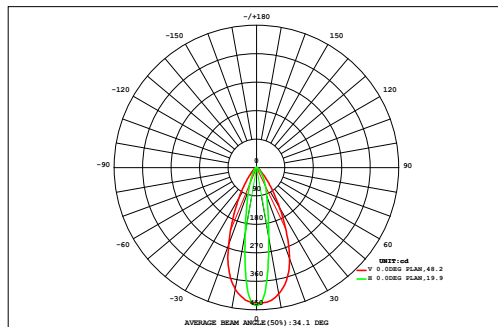

DATA OF LAMP		Eff:34.93lm/W	
MODEL		Imax(cd)	436.0
NOMINAL POWER(W)	5.63	AVAILABILITY(%)	78.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	154.5
NOMINAL FLUX(lm)	198.1	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	198.1
TEST VOLTAGE(V)	221.4	q @50%(H,V)	48,20DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.06	0.07	0.07	0.06	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.68	0.00
72	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.06	0.07	0.07	0.06	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.68	0.00
64	0.01	0.02	0.03	0.05	0.06	0.08	0.10	0.11	0.11	0.12	0.11	0.10	0.08	0.07	0.05	0.03	0.02	0.01	1.15	0.00
56	0.01	0.03	0.04	0.07	0.10	0.13	0.16	0.18	0.19	0.20	0.19	0.17	0.14	0.10	0.07	0.05	0.03	0.01	1.85	0.00
48	0.02	0.03	0.06	0.10	0.14	0.20	0.26	0.31	0.34	0.35	0.33	0.29	0.22	0.16	0.11	0.06	0.03	0.01	3.01	0.00
40	0.02	0.04	0.08	0.13	0.21	0.31	0.43	0.54	0.61	0.64	0.61	0.51	0.38	0.25	0.15	0.08	0.04	0.02	5.05	0.00
32	0.02	0.05	0.10	0.18	0.31	0.50	0.73	0.92	1.09	1.15	1.08	0.90	0.63	0.38	0.21	0.10	0.05	0.02	8.42	4.98
24	0.03	0.06	0.12	0.24	0.46	0.80	1.27	1.63	1.88	1.99	1.91	1.59	1.03	0.58	0.28	0.13	0.05	0.02	14.1	11.9
	0.03	0.07	0.14	0.31	0.68	1.35	2.31	3.31	3.68	3.88	3.77	2.84	1.74	0.87	0.37	0.15	0.06	0.02	25.6	24.0
	0.03	0.07	0.16	0.37	0.92	2.09	3.98	6.01	7.20	7.47	6.54	4.72	2.65	1.18	0.44	0.16	0.06	0.02	44.1	42.7
	0.03	0.07	0.15	0.36	0.90	2.04	3.85	5.75	7.02	7.24	6.28	4.54	2.57	1.14	0.43	0.16	0.06	0.02	42.6	41.2
	0.03	0.06	0.13	0.28	0.63	1.23	2.04	2.88	3.28	3.45	3.26	2.44	1.53	0.78	0.33	0.13	0.05	0.02	22.6	20.9
	0.02	0.05	0.11	0.21	0.39	0.65	1.01	1.24	1.43	1.49	1.40	1.19	0.79	0.46	0.23	0.10	0.05	0.02	10.8	8.26
-24	0.02	0.04	0.08	0.14	0.24	0.37	0.50	0.59	0.68	0.70	0.65	0.57	0.43	0.27	0.15	0.08	0.04	0.02	5.57	0.51
-32	0.02	0.03	0.06	0.10	0.15	0.22	0.27	0.32	0.34	0.35	0.33	0.29	0.23	0.16	0.10	0.06	0.03	0.01	3.07	0.00
-40	0.01	0.03	0.04	0.07	0.10	0.13	0.16	0.18	0.19	0.20	0.19	0.16	0.13	0.10	0.07	0.04	0.02	0.01	1.83	0.00
-48	0.01	0.02	0.03	0.05	0.06	0.08	0.10	0.11	0.12	0.12	0.11	0.10	0.08	0.06	0.04	0.03	0.02	0.01	1.13	0.00
-56	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.07	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.00	0.68	0.00
-64	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.36	0.00
-72	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.36	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
F t	0.32	0.70	1.38	2.70	5.43	10.3	17.3	24.2	28.3	29.5	26.9	20.6	12.8	6.66	3.10	1.40	0.63	0.25	193	---
F a	0.00	0.00	0.00	0.00	2.17	7.42	14.6	21.5	25.6	26.9	24.3	18.0	10.1	3.78	0.10	0.00	0.00	0.00	---	155


one-half-peak spread: U:10.2,D:9.9 , L:23.8,R:24.7 Beam Type: Type 5 x 4 (H x V)

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW RED-2050D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:20x50 DEG	DIM.:598MM	SERIAL No.:IES001881
MFR.:	SUR.:	Shielding Angle:

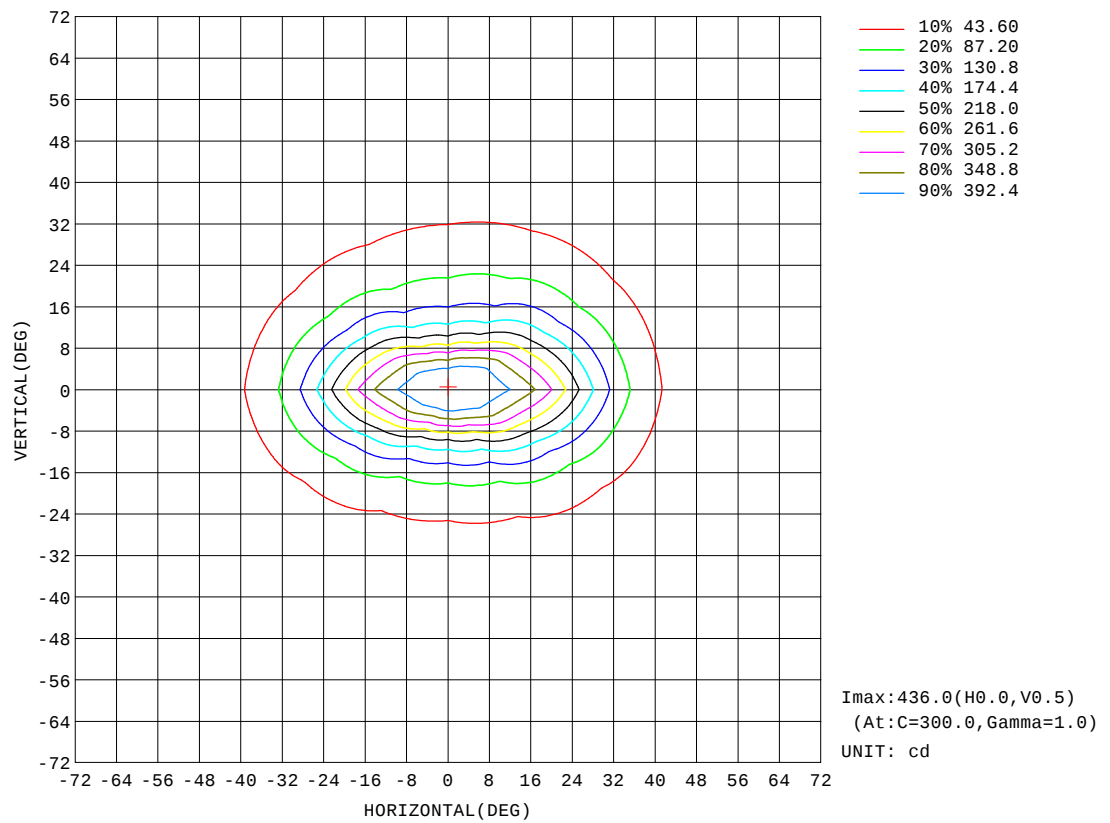


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW RED-2050D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:20x50 DEG	DIM.:598MM	SERIAL No.:IES001881
MFR.:	SUR.:	Shielding Angle:

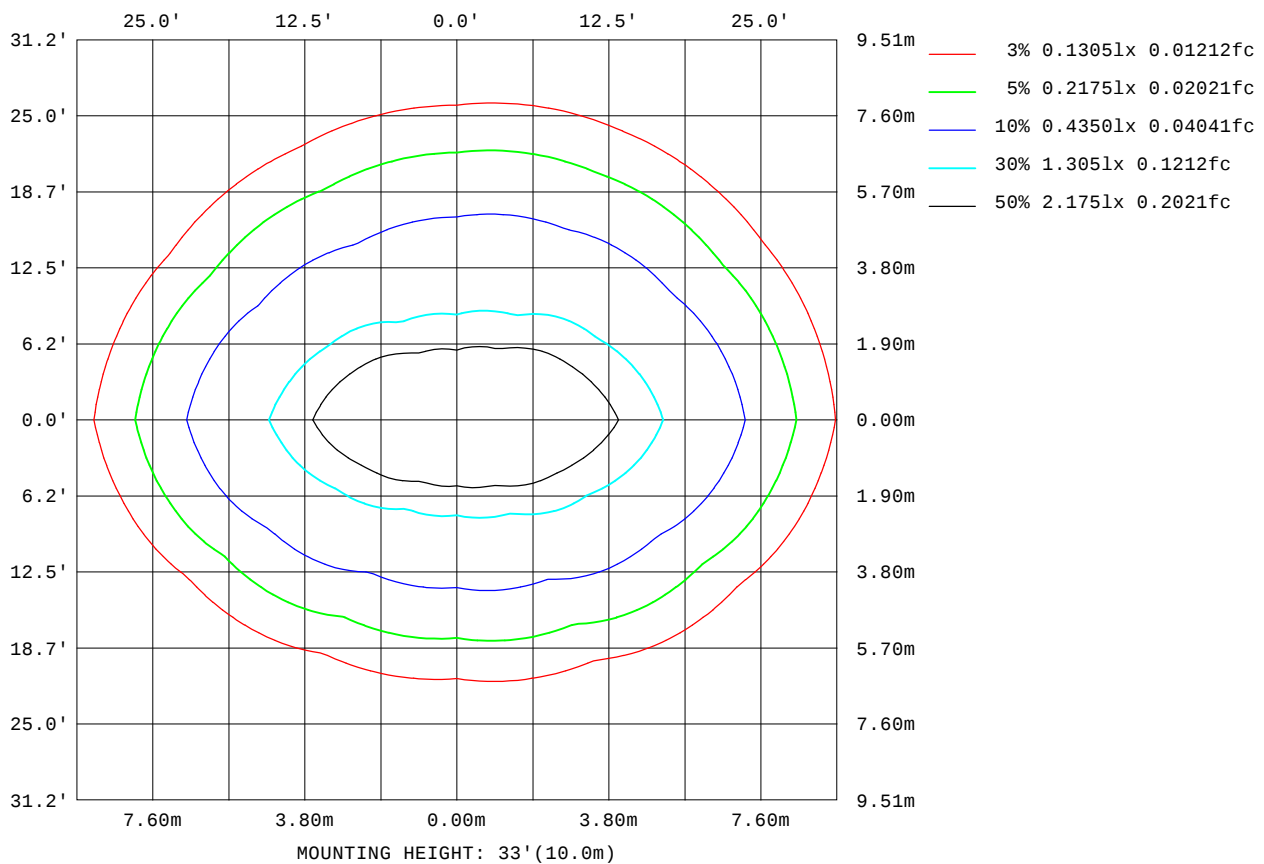

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

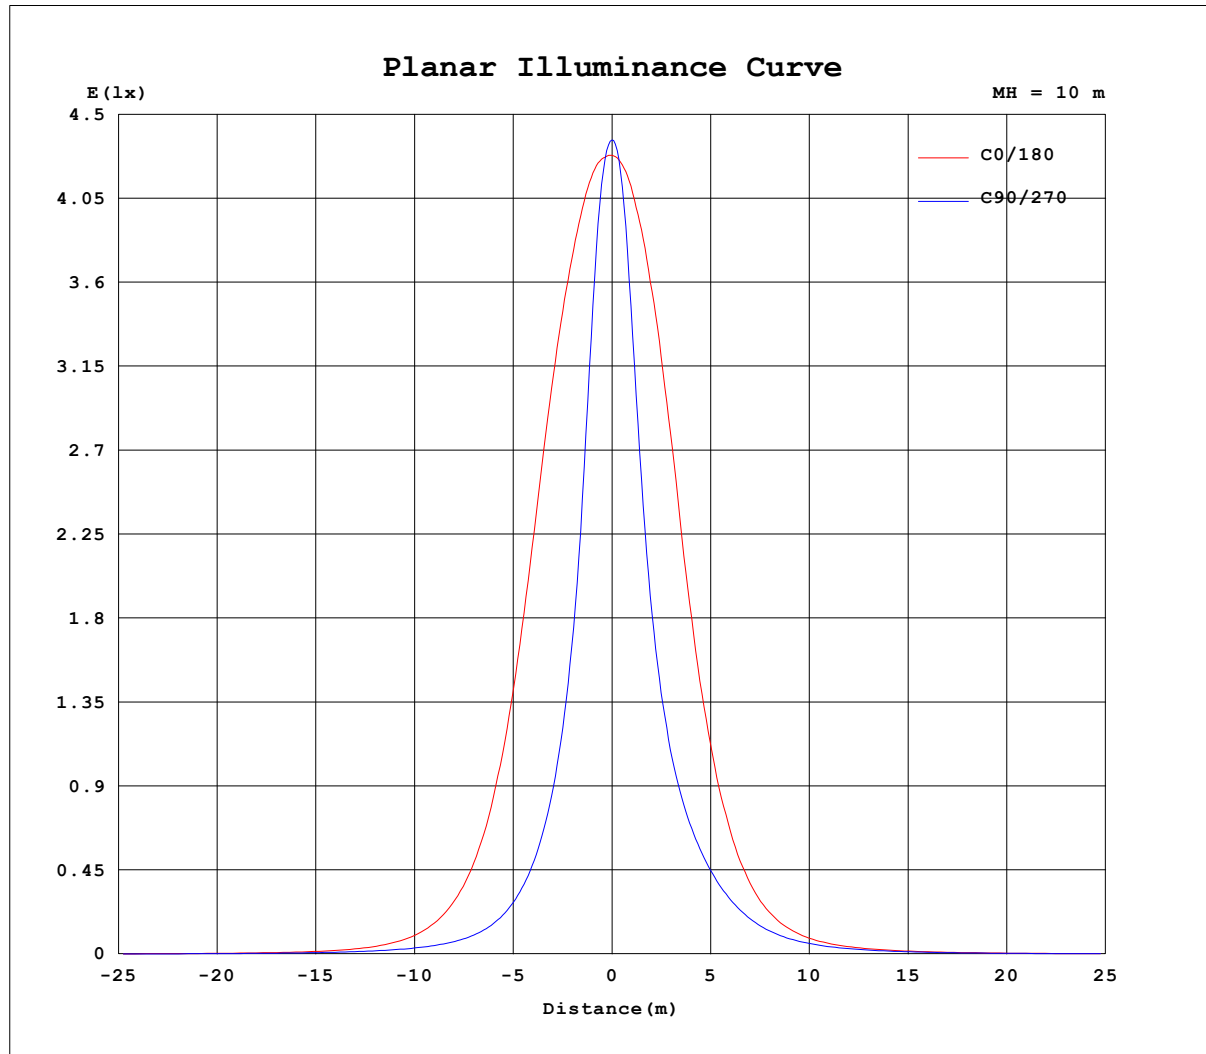


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW RED-2050D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:20x50 DEG	DIM.:598MM	SERIAL No.:IES001881
MFR.:	SUR.:	Shielding Angle:

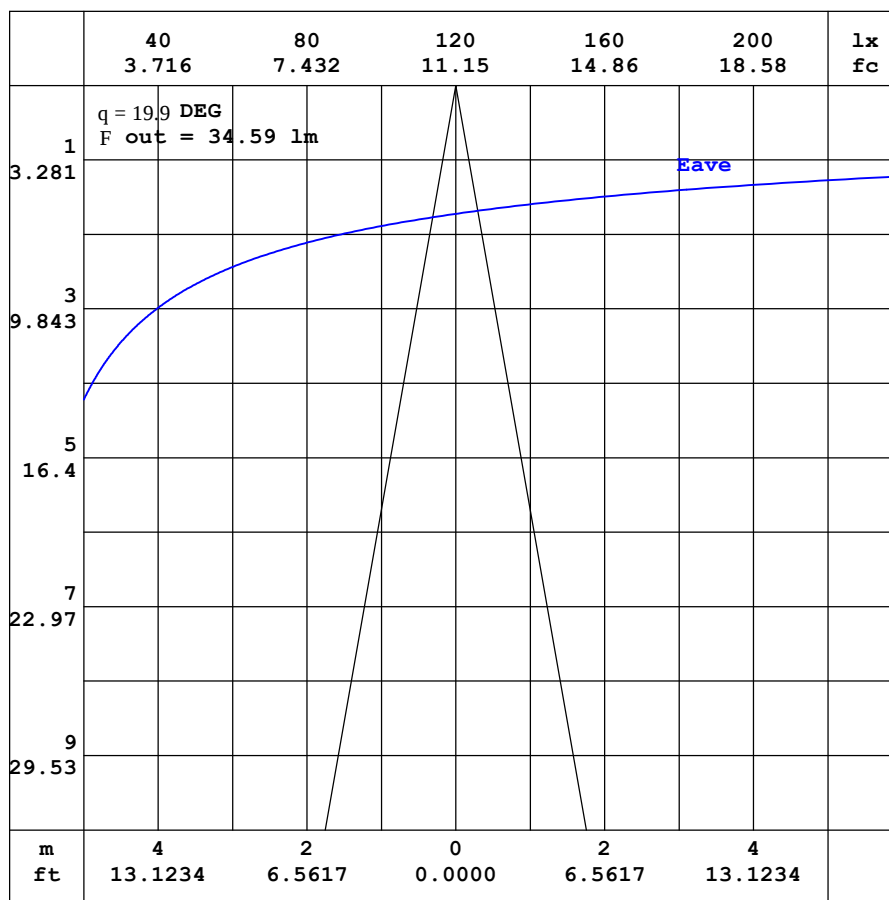

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW RED-2050D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:20x50 DEG	DIM.:598MM	SERIAL No.:IES001881
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.70	0.66	0.66	0.68	0.72	0.80	0.90	1.00	1.10	1.21	1.31	1.38	1.44	1.47	1.50	1.51	1.51	1.51	1.60
-170	0.70	0.65	0.63	0.64	0.66	0.71	0.77	0.83	0.89	0.95	1.01	1.06	1.11	1.14	1.17	1.22	1.33	1.44	1.60
-160	0.70	0.63	0.61	0.59	0.60	0.62	0.64	0.66	0.67	0.68	0.69	0.70	0.73	0.84	0.96	1.07	1.19	1.30	1.37
-150	0.70	0.62	0.59	0.55	0.54	0.53	0.51	0.50	0.47	0.43	0.41	0.46	0.53	0.60	0.68	0.75	0.84	0.91	0.94
-140	0.70	0.61	0.56	0.52	0.48	0.45	0.41	0.36	0.30	0.29	0.30	0.30	0.33	0.36	0.39	0.44	0.49	0.53	0.54
-130	0.70	0.60	0.54	0.49	0.44	0.39	0.34	0.27	0.25	0.25	0.24	0.24	0.23	0.21	0.21	0.23	0.25	0.27	0.28
-120	0.70	0.60	0.53	0.47	0.41	0.35	0.28	0.24	0.23	0.23	0.23	0.22	0.21	0.21	0.20	0.20	0.20	0.20	0.19
-110	0.70	0.60	0.52	0.45	0.38	0.32	0.25	0.23	0.23	0.22	0.22	0.21	0.21	0.21	0.20	0.20	0.20	0.20	0.20
-100	0.70	0.61	0.52	0.44	0.37	0.29	0.22	0.21	0.21	0.21	0.21	0.20	0.20	0.20	0.20	0.21	0.21	0.21	0.21
-90	0.70	0.62	0.53	0.45	0.36	0.28	0.19	0.19	0.19	0.19	0.19	0.19	0.18	0.19	0.19	0.20	0.20	0.20	0.21
-80	0.70	0.62	0.55	0.47	0.38	0.29	0.19	0.19	0.21	0.24	0.27	0.29	0.31	0.32	0.33	0.34	0.34	0.34	0.33
-70	0.70	0.64	0.59	0.53	0.48	0.45	0.45	0.56	0.71	0.85	0.98	1.10	1.20	1.31	1.41	1.48	1.53	1.56	1.55
-60	0.70	0.66	0.65	0.66	0.75	0.91	1.10	1.31	1.64	1.96	2.26	2.55	2.80	3.02	3.24	3.40	3.51	3.56	3.54
-50	0.70	0.69	0.72	0.88	1.16	1.57	1.97	2.35	2.84	3.43	4.03	4.60	5.12	5.52	5.96	6.35	6.63	6.77	6.74
-40	0.70	0.72	0.83	1.15	1.70	2.34	3.01	3.72	4.46	5.45	6.64	7.89	9.16	10.2	10.8	11.9	12.6	13.0	12.8
-30	0.70	0.75	0.96	1.44	2.22	3.13	4.17	5.38	6.82	8.57	10.8	13.9	17.3	20.5	22.8	24.1	27.0	28.6	28.3
-20	0.70	0.78	1.08	1.75	2.75	3.95	5.37	7.21	9.79	13.4	18.7	25.4	33.0	43.7	54.4	61.7	64.1	71.9	72.3
-10	0.70	0.81	1.18	1.99	3.16	4.60	6.48	9.05	13.0	19.4	30.0	46.8	70.9	100	131	164	193	199	208
0	0.70	0.84	1.24	2.14	3.43	5.04	7.25	10.3	15.3	24.0	40.3	69.2	115	178	257	337	390	419	428
10	0.70	0.83	1.22	2.07	3.30	4.83	6.82	9.58	13.8	20.6	32.0	50.1	75.9	108	146	187	217	220	225
20	0.70	0.82	1.17	1.90	3.01	4.37	6.00	8.14	11.2	15.5	21.9	30.4	40.3	54.0	68.6	79.9	85.5	95.0	96.5
30	0.70	0.81	1.09	1.65	2.58	3.68	4.99	6.55	8.52	11.0	14.1	18.4	23.5	29.1	34.3	38.7	44.2	48.1	49.7
40	0.70	0.79	1.00	1.41	2.11	2.96	3.91	4.97	6.16	7.60	9.32	11.3	13.4	15.7	17.7	19.9	21.8	23.0	23.4
50	0.70	0.77	0.91	1.19	1.59	2.20	2.85	3.55	4.29	5.11	5.98	6.90	7.84	8.70	9.54	10.3	10.9	11.2	11.2
60	0.70	0.75	0.85	0.99	1.21	1.50	1.90	2.32	2.76	3.20	3.64	4.07	4.48	4.86	5.22	5.51	5.72	5.84	5.86
70	0.70	0.73	0.79	0.86	0.95	1.06	1.20	1.36	1.54	1.74	1.94	2.12	2.28	2.44	2.59	2.71	2.79	2.84	2.85
80	0.70	0.72	0.75	0.78	0.81	0.84	0.88	0.90	0.93	0.95	0.98	1.02	1.05	1.09	1.12	1.15	1.18	1.19	1.20
90	0.70	0.71	0.72	0.73	0.75	0.76	0.77	0.76	0.75	0.74	0.73	0.72	0.72	0.72	0.73	0.73	0.74	0.75	0.75
100	0.70	0.70	0.69	0.69	0.69	0.70	0.70	0.67	0.66	0.64	0.62	0.60	0.58	0.58	0.59	0.59	0.60	0.60	0.61
110	0.70	0.68	0.68	0.68	0.67	0.66	0.65	0.63	0.61	0.60	0.59	0.58	0.57	0.57	0.57	0.57	0.57	0.56	0.56
120	0.70	0.67	0.67	0.66	0.65	0.64	0.63	0.62	0.61	0.61	0.61	0.62	0.62	0.63	0.63	0.62	0.62	0.60	0.59
130	0.70	0.67	0.66	0.65	0.64	0.64	0.64	0.64	0.66	0.69	0.73	0.76	0.80	0.84	0.87	0.91	0.93	0.94	0.94
140	0.70	0.66	0.66	0.65	0.65	0.66	0.67	0.72	0.76	0.83	0.89	0.97	1.05	1.14	1.21	1.29	1.34	1.37	1.38
150	0.70	0.66	0.66	0.65	0.67	0.70	0.74	0.81	0.88	0.96	1.06	1.16	1.27	1.38	1.47	1.55	1.59	1.62	1.64
160	0.70	0.66	0.66	0.66	0.69	0.74	0.81	0.90	0.99	1.09	1.20	1.30	1.39	1.50	1.58	1.68	1.75	1.78	1.82
170	0.70	0.66	0.66	0.67	0.71	0.77	0.86	0.96	1.07	1.17	1.28	1.37	1.45	1.52	1.56	1.59	1.64	1.70	1.86
180	0.70	0.66	0.66	0.68	0.72	0.80	0.90	1.00	1.10	1.21	1.31	1.38	1.44	1.47	1.50	1.51	1.51	1.51	1.63

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-12

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW RED-2050D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:20x50 DEG	DIM.:598MM	SERIAL No.:IES001881
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.46	1.36	1.23	1.09	0.93	0.78	0.65	0.54	0.45	0.33	0.27	0.23	0.21	0.20	0.19	0.17	0.16	0.17	
-170	1.53	1.45	1.33	1.16	0.98	0.81	0.67	0.54	0.45	0.34	0.29	0.24	0.22	0.20	0.19	0.17	0.16	0.17	
-160	1.32	1.23	1.13	0.99	0.86	0.74	0.61	0.51	0.41	0.33	0.29	0.25	0.23	0.21	0.20	0.18	0.16	0.17	
-150	0.92	0.87	0.80	0.72	0.62	0.54	0.48	0.42	0.37	0.33	0.28	0.25	0.23	0.22	0.20	0.18	0.17	0.17	
-140	0.53	0.51	0.47	0.42	0.38	0.35	0.34	0.33	0.32	0.30	0.27	0.25	0.23	0.22	0.20	0.18	0.17	0.17	
-130	0.28	0.27	0.26	0.23	0.22	0.25	0.26	0.27	0.27	0.27	0.26	0.25	0.23	0.21	0.19	0.18	0.17	0.17	
-120	0.20	0.20	0.21	0.21	0.22	0.22	0.23	0.24	0.25	0.25	0.25	0.24	0.22	0.21	0.19	0.18	0.17	0.17	
-110	0.20	0.20	0.21	0.21	0.21	0.22	0.23	0.23	0.24	0.23	0.23	0.23	0.21	0.20	0.19	0.18	0.17	0.17	
-100	0.21	0.21	0.21	0.21	0.20	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.20	0.19	0.18	0.17	0.17	
-90	0.20	0.20	0.19	0.18	0.18	0.17	0.17	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.17	0.17	0.17	
-80	0.34	0.33	0.33	0.32	0.31	0.29	0.27	0.24	0.22	0.20	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	
-70	1.54	1.50	1.43	1.34	1.23	1.13	1.03	0.92	0.80	0.67	0.52	0.40	0.31	0.24	0.20	0.18	0.17	0.17	
-60	3.53	3.45	3.32	3.13	2.89	2.67	2.44	2.17	1.87	1.56	1.26	0.97	0.69	0.45	0.30	0.21	0.17	0.17	
-50	6.77	6.64	6.34	5.92	5.46	5.09	4.58	4.00	3.39	2.79	2.23	1.71	1.24	0.80	0.46	0.26	0.18	0.17	
-40	13.2	13.0	12.3	11.2	10.7	9.66	8.28	6.88	5.58	4.43	3.47	2.60	1.85	1.21	0.66	0.34	0.19	0.17	
-30	29.7	29.0	26.4	25.6	23.3	19.6	15.6	11.9	9.03	6.77	4.99	3.60	2.51	1.61	0.89	0.41	0.20	0.17	
-20	75.8	70.9	71.2	64.4	52.5	39.8	30.6	21.8	14.7	9.90	6.76	4.62	3.12	1.97	1.10	0.48	0.21	0.17	
-10	213	216	190	157	124	89.1	59.1	36.9	22.2	13.5	8.47	5.53	3.60	2.24	1.24	0.53	0.22	0.17	
0	426	405	368	306	223	147	89.0	51.1	28.5	16.1	9.58	6.08	3.86	2.38	1.31	0.55	0.23	0.17	
10	235	242	218	178	137	97.8	64.6	40.3	24.3	14.7	9.20	5.97	3.87	2.40	1.33	0.58	0.24	0.17	
20	102	98.7	97.2	86.1	69.3	52.1	38.7	26.9	18.0	11.9	8.02	5.41	3.61	2.27	1.28	0.58	0.25	0.17	
30	51.6	50.5	46.8	42.3	36.1	29.1	22.6	17.0	12.5	9.08	6.50	4.60	3.15	2.02	1.14	0.55	0.26	0.17	
40	24.2	23.9	22.6	20.6	18.2	15.5	13.0	10.5	8.46	6.62	5.00	3.66	2.57	1.68	0.96	0.51	0.27	0.17	
50	11.5	11.4	11.0	10.3	9.37	8.47	7.45	6.42	5.45	4.53	3.64	2.74	1.96	1.29	0.79	0.46	0.27	0.17	
60	5.90	5.83	5.64	5.38	5.08	4.65	4.24	3.78	3.32	2.86	2.42	1.89	1.37	0.96	0.65	0.42	0.27	0.17	
70	2.85	2.82	2.75	2.64	2.48	2.32	2.17	2.01	1.82	1.61	1.43	1.23	0.97	0.74	0.55	0.40	0.28	0.17	
80	1.20	1.18	1.16	1.14	1.11	1.07	1.04	1.02	0.98	0.95	0.93	0.91	0.77	0.63	0.50	0.39	0.27	0.17	
90	0.75	0.74	0.74	0.73	0.73	0.73	0.73	0.74	0.75	0.76	0.77	0.78	0.68	0.58	0.47	0.37	0.27	0.17	
100	0.60	0.60	0.60	0.59	0.58	0.58	0.60	0.62	0.64	0.66	0.68	0.70	0.62	0.53	0.45	0.36	0.26	0.17	
110	0.56	0.57	0.57	0.57	0.57	0.58	0.59	0.59	0.60	0.62	0.63	0.63	0.56	0.49	0.42	0.34	0.25	0.17	
120	0.60	0.61	0.62	0.63	0.63	0.62	0.61	0.61	0.61	0.61	0.62	0.58	0.52	0.45	0.38	0.32	0.25	0.17	
130	0.94	0.93	0.91	0.87	0.83	0.79	0.75	0.70	0.67	0.64	0.60	0.53	0.47	0.42	0.36	0.30	0.23	0.17	
140	1.38	1.35	1.30	1.23	1.14	1.04	0.96	0.87	0.79	0.70	0.58	0.49	0.43	0.38	0.33	0.27	0.22	0.17	
150	1.63	1.62	1.59	1.51	1.40	1.28	1.15	1.04	0.86	0.69	0.55	0.45	0.39	0.34	0.30	0.25	0.21	0.17	
160	1.83	1.83	1.76	1.67	1.55	1.43	1.20	0.99	0.80	0.62	0.50	0.40	0.33	0.30	0.27	0.22	0.19	0.17	
170	1.82	1.80	1.75	1.61	1.40	1.18	0.99	0.81	0.66	0.49	0.40	0.32	0.28	0.25	0.23	0.20	0.18	0.17	
180	1.46	1.36	1.23	1.09	0.93	0.78	0.65	0.54	0.45	0.33	0.27	0.23	0.21	0.20	0.19	0.17	0.16	0.17	

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-12

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: