

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	4438.9 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	45.7V x 45.6H
	At 50% of Imax	19.3V x 19.3H
	At 90% of Imax	6.9V x 6.9H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	674.1 lumens per klm.
	To 50% of Imax	280.6 lumens per klm.
	To 90% of Imax	51.1 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW 3000K-20D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:20 DEG	DIM.:598MM	SERIAL No.:IES001868
MFR.:	SUR.:	Shielding Angle:

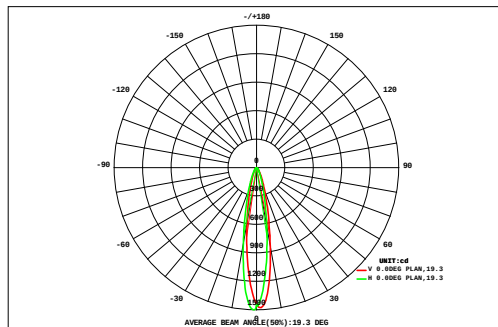

DATA OF LAMP		Eff:45.86lm/W	
MODEL		Imax(cd)	1499
NOMINAL POWER(W)	7.37	AVAILABILITY(%)	67.4
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	227.4
NOMINAL FLUX(lm)	337.6	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	337.6
TEST VOLTAGE(V)	221.4	q @50%(H,V)	19,19DEG

		AREA FLUX DIAGRAM															UNIT:lm				F t	F a
		0.10	0.12	0.14	0.17	0.19	0.22	0.24	0.26	0.27	0.27	0.27	0.25	0.23	0.21	0.19	0.16	0.14	0.12	3.55	0.00	
VERTICAL (DEG)	27	0.11	0.14	0.17	0.20	0.24	0.28	0.32	0.35	0.37	0.37	0.36	0.34	0.30	0.27	0.23	0.20	0.17	0.14	4.56	0.05	
	24	0.13	0.16	0.20	0.25	0.31	0.37	0.43	0.48	0.51	0.51	0.49	0.45	0.40	0.35	0.29	0.24	0.20	0.16	5.95	2.99	
	21	0.15	0.19	0.24	0.31	0.40	0.49	0.59	0.68	0.73	0.74	0.70	0.63	0.54	0.45	0.37	0.29	0.23	0.19	7.91	5.68	
	18	0.17	0.22	0.29	0.38	0.50	0.66	0.83	0.98	1.07	1.08	1.02	0.89	0.73	0.58	0.45	0.35	0.28	0.22	10.7	8.93	
	15	0.19	0.25	0.34	0.46	0.64	0.87	1.15	1.42	1.58	1.61	1.49	1.24	0.97	0.74	0.56	0.43	0.33	0.25	14.5	13.2	
	12	0.21	0.28	0.39	0.54	0.77	1.10	1.53	1.99	2.28	2.34	2.12	1.69	1.26	0.93	0.69	0.51	0.38	0.28	19.3	18.1	
	9	0.22	0.30	0.42	0.61	0.90	1.32	1.89	2.53	3.04	3.16	2.79	2.18	1.62	1.17	0.83	0.60	0.43	0.31	24.3	23.3	
		0.23	0.31	0.44	0.65	0.98	1.47	2.14	2.90	3.60	3.83	3.43	2.75	2.00	1.39	0.96	0.66	0.47	0.33	28.5	27.7	
		0.23	0.32	0.45	0.67	1.03	1.56	2.32	3.20	3.91	4.04	3.69	2.95	2.14	1.47	1.01	0.69	0.48	0.34	30.5	29.7	
		0.23	0.32	0.45	0.67	1.03	1.57	2.29	3.02	3.55	3.66	3.30	2.68	1.98	1.40	0.97	0.68	0.47	0.34	28.6	27.8	
		0.22	0.30	0.43	0.63	0.93	1.36	1.87	2.39	2.81	2.89	2.62	2.17	1.68	1.24	0.88	0.63	0.45	0.32	23.8	22.9	
		0.20	0.27	0.38	0.54	0.77	1.06	1.40	1.75	2.03	2.09	1.93	1.65	1.32	1.02	0.76	0.56	0.41	0.30	18.4	17.4	
		0.18	0.24	0.33	0.45	0.60	0.80	1.02	1.24	1.41	1.46	1.37	1.21	1.01	0.80	0.62	0.48	0.36	0.27	13.8	12.5	
		0.16	0.21	0.27	0.36	0.47	0.60	0.74	0.87	0.97	1.01	0.97	0.88	0.76	0.62	0.50	0.39	0.31	0.24	10.3	8.62	
		0.13	0.17	0.22	0.29	0.36	0.45	0.54	0.62	0.68	0.71	0.69	0.64	0.57	0.48	0.40	0.32	0.26	0.20	7.72	5.60	
	0.12	0.15	0.18	0.23	0.28	0.34	0.40	0.45	0.48	0.50	0.49	0.47	0.42	0.37	0.31	0.26	0.21	0.17	5.82	2.88		
	0.10	0.12	0.15	0.18	0.22	0.25	0.29	0.33	0.35	0.36	0.36	0.34	0.32	0.28	0.25	0.21	0.17	0.14	4.43	0.00		
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27		
	F t	3.06	4.08	5.52	7.61	10.6	14.8	20.0	25.5	29.6	30.6	28.1	23.4	18.2	13.8	10.3	7.65	5.73	4.30	263	---	
	F a	0.00	0.00	2.41	5.37	8.77	13.4	18.8	24.4	28.6	29.7	27.1	22.4	17.1	12.3	8.48	5.46	2.85	0.25	---	227	

one-half-peak spread: U:9.8,D:9.7 , L:9.8,R:9.7


NEMA Beam Type: Type 3

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW 3000K-20D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:20 DEG	DIM.:598MM	SERIAL No.:IES001868
MFR.:	SUR.:	Shielding Angle:

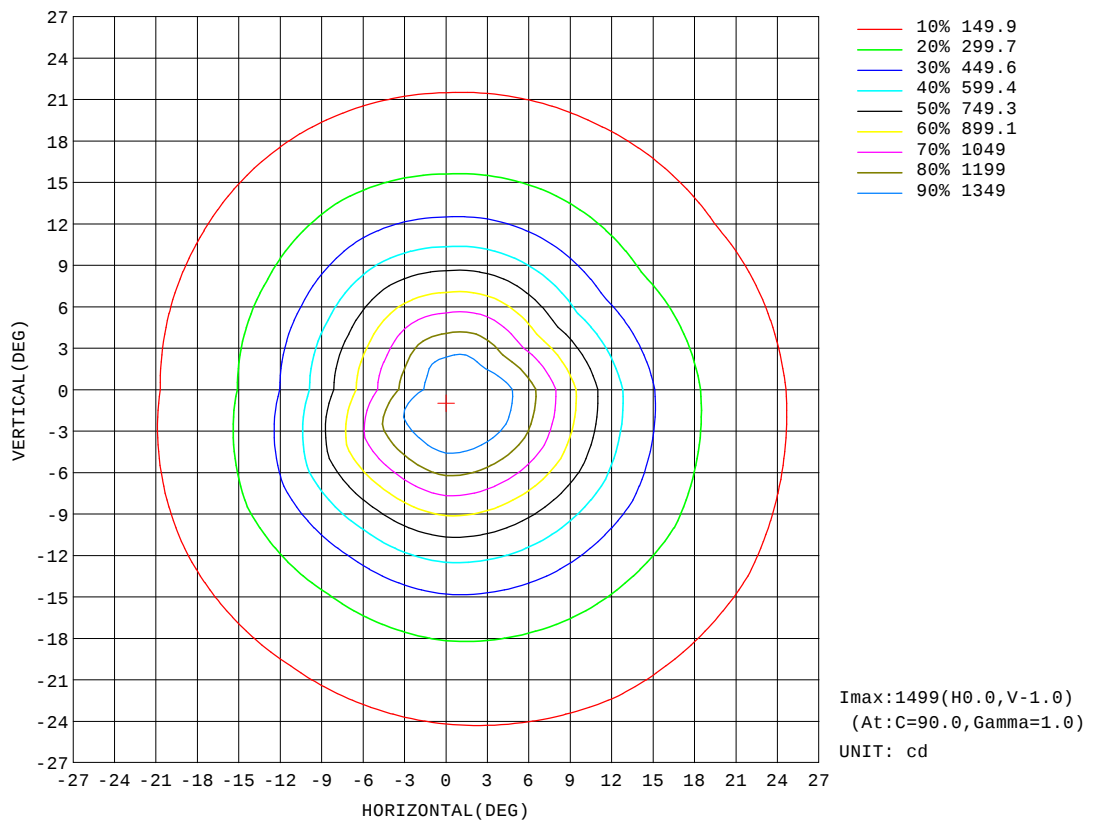


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW 3000K-20D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:20 DEG	DIM.:598MM	SERIAL No.:IES001868
MFR.:	SUR.:	Shielding Angle:

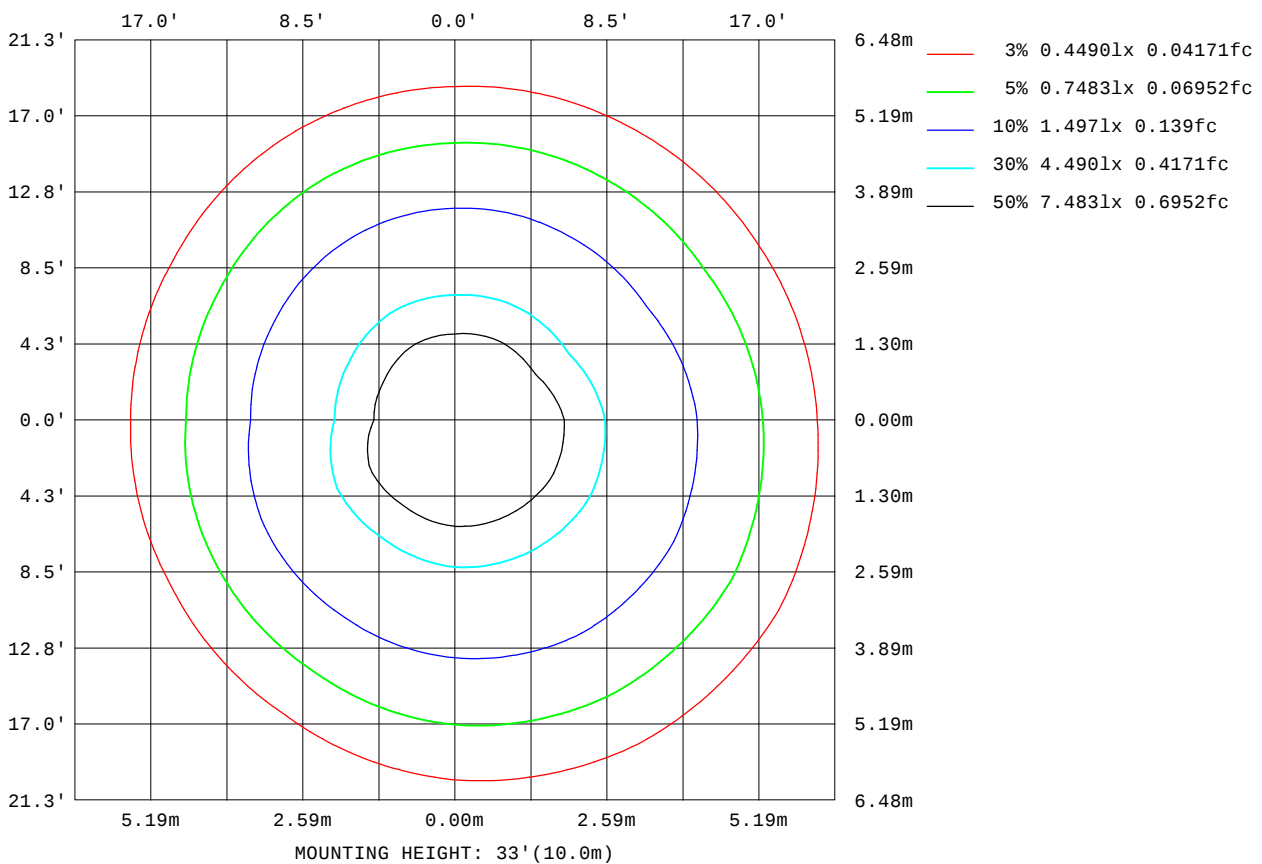

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

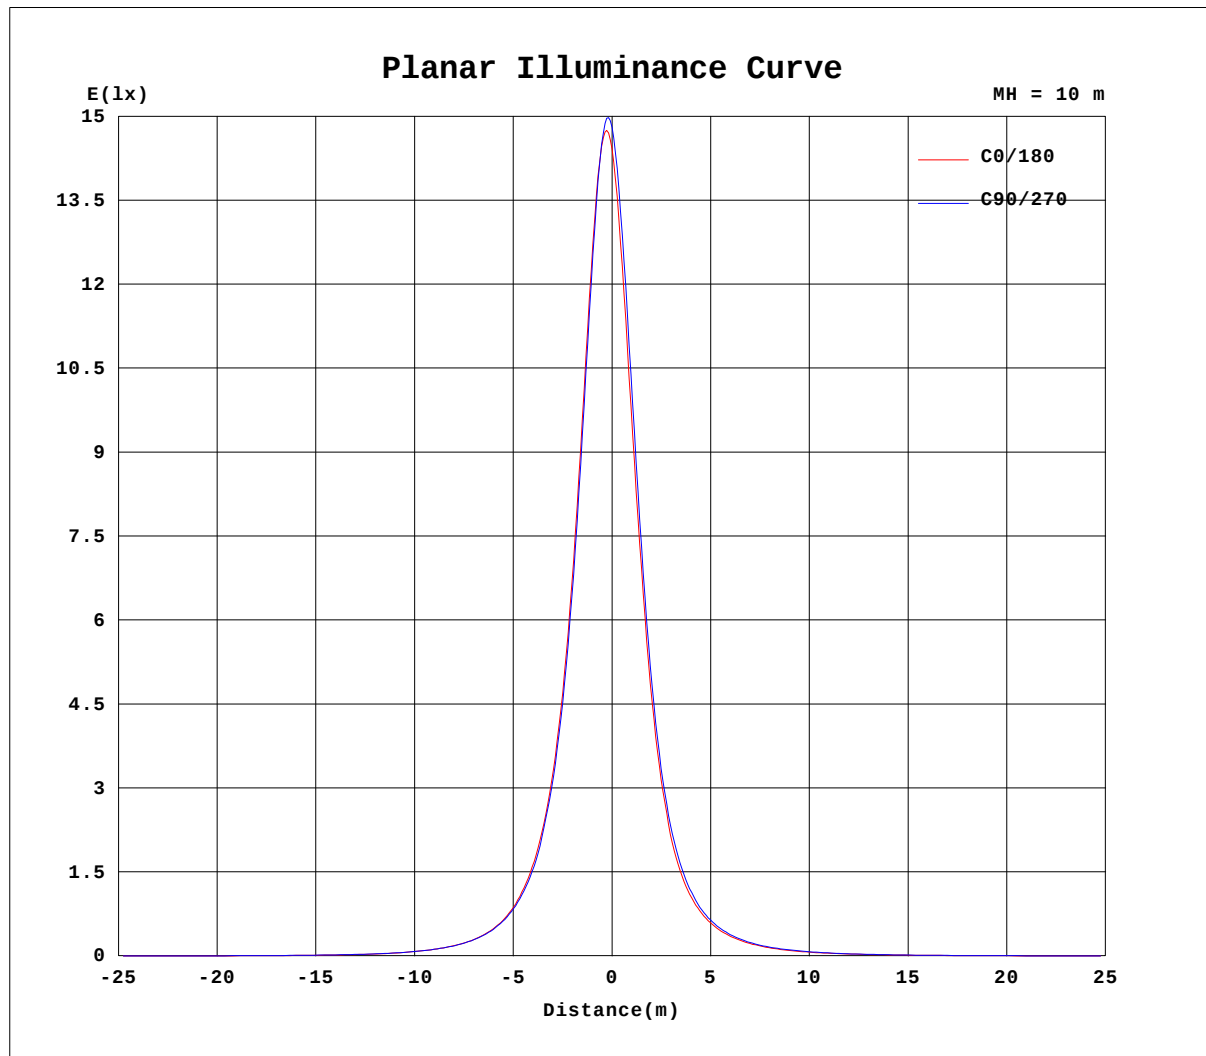


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW 3000K-20D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:20 DEG	DIM.:598MM	SERIAL No.:IES001868
MFR.:	SUR.:	Shielding Angle:

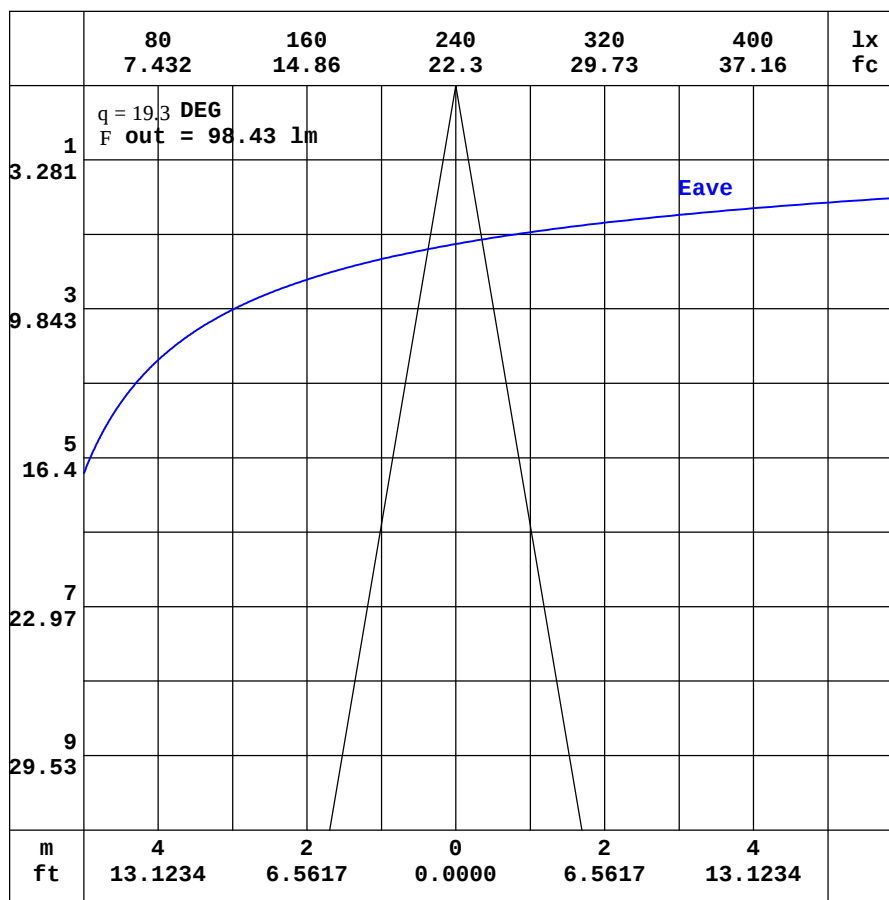

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW 3000K-20D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:20 DEG	DIM.:598MM	SERIAL No.:IES001868
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.15	1.05	0.99	0.99	1.04	1.13	1.28	1.54	1.87	2.21	2.48	2.63	2.66	2.65	2.65	2.63	2.59	2.59	2.64
-170	1.15	1.03	0.96	0.95	0.96	1.01	1.10	1.25	1.44	1.65	1.81	1.90	1.94	1.97	2.02	2.11	2.29	2.45	2.59
-160	1.15	1.02	0.93	0.90	0.89	0.89	0.91	0.95	1.01	1.06	1.10	1.11	1.12	1.36	1.59	1.81	2.00	2.14	2.22
-150	1.15	1.01	0.91	0.86	0.82	0.79	0.75	0.71	0.66	0.58	0.51	0.63	0.78	0.94	1.10	1.24	1.38	1.47	1.51
-140	1.15	1.00	0.89	0.83	0.77	0.71	0.64	0.55	0.44	0.40	0.40	0.42	0.47	0.54	0.62	0.71	0.79	0.83	0.86
-130	1.15	1.00	0.88	0.80	0.73	0.66	0.58	0.48	0.42	0.40	0.39	0.38	0.38	0.37	0.38	0.40	0.43	0.45	0.47
-120	1.15	1.00	0.88	0.78	0.70	0.62	0.54	0.48	0.48	0.47	0.46	0.45	0.44	0.42	0.40	0.40	0.39	0.39	0.39
-110	1.15	1.01	0.88	0.78	0.68	0.59	0.51	0.49	0.49	0.49	0.49	0.49	0.49	0.49	0.49	0.49	0.49	0.48	0.48
-100	1.15	1.02	0.89	0.77	0.67	0.57	0.49	0.48	0.48	0.48	0.48	0.49	0.49	0.50	0.49	0.49	0.49	0.49	0.50
-90	1.15	1.03	0.90	0.77	0.65	0.52	0.40	0.39	0.38	0.38	0.37	0.36	0.36	0.36	0.37	0.37	0.38	0.38	0.39
-80	1.15	1.04	0.93	0.80	0.66	0.51	0.36	0.35	0.37	0.40	0.44	0.48	0.52	0.56	0.60	0.63	0.65	0.67	0.68
-70	1.15	1.07	0.97	0.87	0.76	0.70	0.69	0.83	1.05	1.29	1.54	1.80	2.05	2.31	2.54	2.74	2.90	3.02	3.08
-60	1.15	1.09	1.04	1.02	1.11	1.29	1.53	1.83	2.34	2.89	3.47	4.08	4.68	5.26	5.82	6.33	6.76	7.10	7.31
-50	1.15	1.13	1.14	1.30	1.64	2.11	2.62	3.15	3.91	4.88	5.97	7.18	8.47	9.83	11.3	12.7	13.9	15.0	15.6
-40	1.15	1.17	1.28	1.65	2.29	3.04	3.88	4.81	5.84	7.31	9.28	11.7	14.6	17.8	21.4	25.5	29.3	32.6	34.7
-30	1.15	1.21	1.44	2.02	2.92	3.98	5.20	6.63	8.37	10.6	13.6	18.2	24.1	31.9	41.3	52.5	65.2	76.5	83.7
-20	1.15	1.25	1.59	2.38	3.50	4.84	6.45	8.45	11.0	14.6	19.6	26.8	37.6	55.1	80.8	117	162	209	238
-10	1.15	1.29	1.72	2.67	3.96	5.55	7.50	9.96	13.3	18.1	25.2	36.3	54.3	85.4	143	249	431	654	813
0	1.15	1.32	1.81	2.85	4.25	6.00	8.16	10.9	14.7	20.0	28.2	40.8	61.1	95.9	162	304	589	1045	1441
10	1.15	1.32	1.79	2.79	4.14	5.82	7.88	10.5	14.0	18.9	26.1	37.0	53.9	81.0	128	210	353	536	625
20	1.15	1.31	1.73	2.61	3.86	5.37	7.16	9.41	12.2	16.1	21.3	28.6	38.9	53.7	74.2	102	134	163	176
30	1.15	1.29	1.63	2.34	3.42	4.70	6.17	7.91	10.0	12.6	15.9	20.4	25.8	32.5	40.4	49.0	57.1	63.3	66.1
40	1.15	1.27	1.52	2.04	2.88	3.88	5.02	6.28	7.71	9.44	11.5	13.9	16.5	19.5	22.5	25.4	27.9	29.7	30.5
50	1.15	1.25	1.42	1.75	2.29	3.02	3.83	4.70	5.65	6.75	7.96	9.23	10.5	11.9	13.1	14.2	15.1	15.7	16.0
60	1.15	1.23	1.34	1.51	1.79	2.19	2.71	3.26	3.85	4.49	5.16	5.82	6.49	7.12	7.65	8.11	8.47	8.71	8.83
70	1.15	1.21	1.27	1.35	1.45	1.61	1.80	2.04	2.32	2.63	2.94	3.24	3.54	3.80	4.05	4.25	4.40	4.51	4.56
80	1.15	1.18	1.22	1.25	1.29	1.33	1.37	1.40	1.45	1.50	1.57	1.63	1.69	1.76	1.82	1.88	1.92	1.95	1.97
90	1.15	1.16	1.17	1.18	1.19	1.20	1.21	1.20	1.19	1.19	1.18	1.17	1.16	1.17	1.17	1.18	1.19	1.20	1.21
100	1.15	1.14	1.13	1.12	1.11	1.10	1.10	1.07	1.05	1.02	1.01	0.99	0.97	0.97	0.98	0.98	0.99	0.99	1.00
110	1.15	1.12	1.09	1.07	1.04	1.03	1.01	0.99	0.98	0.97	0.97	0.97	0.97	0.98	0.98	0.97	0.97	0.97	0.96
120	1.15	1.10	1.06	1.03	1.01	0.99	0.98	0.97	0.97	0.98	1.00	1.03	1.07	1.10	1.12	1.14	1.15	1.15	1.14
130	1.15	1.08	1.03	1.00	0.99	0.98	0.98	0.99	1.03	1.10	1.19	1.28	1.39	1.50	1.60	1.69	1.75	1.79	1.80
140	1.15	1.07	1.01	0.99	0.99	0.99	1.02	1.09	1.20	1.34	1.52	1.73	1.94	2.13	2.29	2.40	2.47	2.51	2.52
150	1.15	1.06	1.00	0.99	0.99	1.02	1.10	1.23	1.41	1.66	1.93	2.19	2.41	2.58	2.71	2.80	2.85	2.87	2.87
160	1.15	1.05	0.99	0.99	1.00	1.06	1.19	1.37	1.64	1.95	2.25	2.47	2.63	2.75	2.84	2.93	3.02	3.06	3.10
170	1.15	1.05	0.99	0.99	1.02	1.11	1.25	1.48	1.80	2.14	2.43	2.61	2.69	2.73	2.77	2.81	2.84	2.87	2.97
180	1.15	1.05	0.99	0.99	1.04	1.13	1.28	1.54	1.87	2.21	2.48	2.63	2.66	2.65	2.65	2.63	2.59	2.59	2.68

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW 3000K-20D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:20 DEG	DIM.:598MM	SERIAL No.:IES001868
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	2.43	2.32	2.14	1.92	1.65	1.37	1.09	0.83	0.61	0.41	0.39	0.41	0.46	0.49	0.49	0.46	0.40	0.34
-170	2.49	2.39	2.19	1.93	1.64	1.34	1.05	0.79	0.59	0.43	0.40	0.42	0.46	0.49	0.49	0.46	0.40	0.34
-160	2.15	2.02	1.84	1.62	1.37	1.12	0.88	0.68	0.51	0.43	0.42	0.43	0.47	0.49	0.49	0.46	0.40	0.34
-150	1.48	1.40	1.28	1.12	0.95	0.79	0.64	0.54	0.46	0.43	0.43	0.44	0.49	0.49	0.49	0.45	0.40	0.34
-140	0.84	0.79	0.72	0.62	0.56	0.49	0.45	0.44	0.44	0.44	0.45	0.47	0.50	0.49	0.49	0.45	0.38	0.34
-130	0.46	0.44	0.41	0.39	0.38	0.40	0.41	0.43	0.44	0.45	0.49	0.50	0.50	0.49	0.48	0.43	0.37	0.34
-120	0.39	0.40	0.40	0.41	0.43	0.45	0.46	0.48	0.49	0.50	0.50	0.50	0.50	0.49	0.46	0.42	0.36	0.34
-110	0.48	0.49	0.49	0.49	0.49	0.49	0.49	0.49	0.50	0.50	0.50	0.51	0.48	0.46	0.43	0.39	0.35	0.34
-100	0.49	0.49	0.49	0.48	0.48	0.47	0.47	0.47	0.47	0.47	0.46	0.45	0.43	0.41	0.39	0.36	0.35	0.34
-90	0.38	0.37	0.37	0.36	0.35	0.34	0.35	0.35	0.36	0.36	0.37	0.37	0.36	0.36	0.35	0.35	0.34	0.34
-80	0.68	0.66	0.63	0.60	0.57	0.53	0.49	0.45	0.40	0.36	0.33	0.33	0.33	0.33	0.34	0.34	0.34	0.34
-70	3.04	2.95	2.80	2.61	2.38	2.13	1.88	1.63	1.37	1.13	0.88	0.65	0.51	0.40	0.35	0.34	0.34	0.34
-60	7.28	7.10	6.80	6.36	5.82	5.18	4.51	3.82	3.17	2.56	2.01	1.51	1.07	0.69	0.47	0.36	0.34	0.34
-50	15.6	15.2	14.3	13.1	11.7	10.0	8.40	6.94	5.60	4.44	3.44	2.58	1.83	1.19	0.67	0.41	0.34	0.34
-40	34.9	33.5	30.9	27.4	23.1	18.8	15.0	11.6	8.86	6.74	5.09	3.74	2.64	1.71	0.96	0.50	0.34	0.34
-30	83.9	78.4	68.9	56.6	44.8	34.3	25.7	18.8	13.3	9.49	6.84	4.91	3.41	2.21	1.27	0.60	0.35	0.34
-20	234	203	158	115	82.3	57.7	39.6	26.9	18.2	12.3	8.49	5.92	4.06	2.62	1.50	0.67	0.36	0.34
-10	731	531	344	208	127	79.7	51.1	33.4	21.9	14.4	9.66	6.61	4.49	2.90	1.65	0.73	0.37	0.34
0	1335	843	457	251	144	86.0	54.0	34.9	22.8	14.9	9.98	6.84	4.64	3.00	1.71	0.75	0.37	0.34
10	564	393	250	163	106	70.5	47.3	32.0	21.7	14.6	10.0	6.97	4.77	3.09	1.78	0.81	0.40	0.34
20	169	145	115	87.6	65.6	48.6	35.6	25.7	18.3	13.0	9.30	6.60	4.59	3.00	1.74	0.82	0.42	0.34
30	65.4	60.8	53.8	45.7	37.8	30.6	24.3	19.0	14.4	10.8	8.04	5.88	4.15	2.74	1.62	0.81	0.44	0.34
40	30.4	29.3	27.2	24.6	21.7	18.6	15.7	13.0	10.6	8.50	6.55	4.91	3.52	2.35	1.38	0.77	0.46	0.34
50	16.0	15.6	14.9	13.9	12.7	11.4	10.0	8.68	7.39	6.20	5.03	3.84	2.79	1.89	1.16	0.71	0.47	0.34
60	8.81	8.65	8.37	7.97	7.48	6.85	6.17	5.49	4.80	4.15	3.52	2.78	2.05	1.44	1.00	0.68	0.48	0.34
70	4.53	4.46	4.32	4.14	3.91	3.66	3.38	3.09	2.80	2.49	2.19	1.88	1.49	1.15	0.88	0.67	0.49	0.34
80	1.96	1.94	1.91	1.87	1.81	1.75	1.70	1.64	1.58	1.52	1.48	1.43	1.22	1.02	0.83	0.66	0.49	0.34
90	1.21	1.20	1.20	1.20	1.20	1.19	1.20	1.22	1.23	1.24	1.25	1.26	1.10	0.95	0.80	0.64	0.49	0.34
100	0.99	0.99	0.98	0.98	0.99	0.99	1.00	1.02	1.04	1.07	1.10	1.11	1.01	0.89	0.76	0.63	0.49	0.34
110	0.96	0.96	0.96	0.96	0.95	0.95	0.95	0.96	0.97	0.98	1.00	1.00	0.93	0.84	0.74	0.62	0.48	0.34
120	1.14	1.13	1.11	1.09	1.06	1.03	1.00	0.97	0.97	0.96	0.97	0.92	0.86	0.79	0.71	0.61	0.48	0.34
130	1.78	1.73	1.65	1.55	1.44	1.33	1.21	1.12	1.03	0.98	0.94	0.87	0.80	0.75	0.68	0.59	0.47	0.34
140	2.50	2.46	2.38	2.26	2.08	1.87	1.65	1.44	1.25	1.07	0.90	0.81	0.75	0.70	0.65	0.57	0.46	0.34
150	2.88	2.85	2.81	2.70	2.56	2.36	2.12	1.84	1.41	1.08	0.87	0.74	0.70	0.65	0.62	0.55	0.46	0.34
160	3.07	3.04	2.98	2.88	2.77	2.61	2.22	1.77	1.33	0.99	0.77	0.66	0.62	0.60	0.57	0.52	0.44	0.34
170	2.91	2.94	2.91	2.73	2.43	2.10	1.75	1.39	1.05	0.75	0.61	0.54	0.54	0.55	0.53	0.49	0.42	0.34
180	2.43	2.32	2.14	1.92	1.65	1.37	1.09	0.83	0.61	0.41	0.39	0.41	0.46	0.49	0.49	0.46	0.40	0.34

H_b Range:-90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-12

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: