

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		4509.1 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	45.3V x 45.5H
	At 50% of Imax	19.4V x 19.6H
	At 90% of Imax	7.0V x 7.0H
Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	677.2 lumens per klm.
	To 50% of Imax	285.0 lumens per klm.
	To 90% of Imax	45.2 lumens per klm.
	Upward LOR	2.2 %
	Downward LOR	97.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(θ) Range:-180 - 180DEG
V(θ) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW RED-20D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:20 DEG	DIM.:598MM	SERIAL No.:IES001865
MFR.:	SUR.:	Shielding Angle:

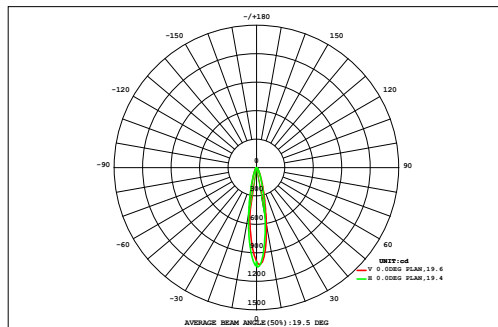

DATA OF LAMP		Eff:40.96lm/W	
MODEL		Imax(cd)	1053
NOMINAL POWER(W)	5.67	AVAILABILITY(%)	67.8
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	158.3
NOMINAL FLUX(lm)	233.5	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	233.5
TEST VOLTAGE(V)	221.4	q @50%(H,V)	20,19DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.08	0.09	0.11	0.13	0.16	0.18	0.20	0.22	0.24	0.25	0.25	0.24	0.22	0.20	0.18	0.15	0.13	0.11	3.14	0.00
27	0.08	0.09	0.11	0.13	0.16	0.18	0.20	0.22	0.24	0.25	0.25	0.24	0.22	0.20	0.18	0.15	0.13	0.11	3.14	0.00
24	0.09	0.11	0.13	0.16	0.19	0.23	0.27	0.30	0.32	0.33	0.33	0.32	0.29	0.26	0.22	0.18	0.15	0.12	4.01	1.62
21	0.10	0.12	0.16	0.20	0.24	0.30	0.36	0.41	0.44	0.46	0.45	0.43	0.38	0.33	0.27	0.22	0.18	0.14	5.19	3.60
18	0.11	0.14	0.18	0.24	0.31	0.39	0.48	0.56	0.63	0.65	0.64	0.59	0.51	0.42	0.33	0.27	0.21	0.17	6.82	5.60
15	0.12	0.16	0.22	0.29	0.39	0.51	0.66	0.81	0.91	0.94	0.91	0.82	0.67	0.53	0.41	0.31	0.24	0.18	9.07	8.06
12	0.14	0.18	0.25	0.34	0.48	0.66	0.90	1.14	1.31	1.37	1.30	1.10	0.86	0.65	0.49	0.37	0.27	0.20	12.0	11.2
9	0.15	0.20	0.28	0.40	0.57	0.82	1.16	1.55	1.83	1.92	1.77	1.43	1.08	0.79	0.57	0.41	0.30	0.22	15.4	14.7
6	0.16	0.21	0.30	0.44	0.65	0.96	1.39	1.91	2.36	2.49	2.21	1.74	1.29	0.92	0.64	0.45	0.32	0.22	18.7	18.0
3	0.16	0.22	0.32	0.46	0.70	1.05	1.51	2.06	2.60	2.80	2.51	2.02	1.47	1.02	0.69	0.47	0.32	0.23	20.6	20.0
0	0.16	0.22	0.32	0.47	0.72	1.09	1.57	2.13	2.60	2.72	2.51	2.03	1.47	1.01	0.68	0.46	0.32	0.22	20.7	20.1
-3	0.15	0.22	0.31	0.47	0.71	1.07	1.51	1.92	2.23	2.32	2.12	1.73	1.27	0.89	0.61	0.42	0.29	0.21	18.5	17.8
-6	0.14	0.20	0.29	0.43	0.64	0.91	1.22	1.50	1.72	1.77	1.60	1.33	1.01	0.72	0.51	0.36	0.26	0.19	14.8	14.0
-9	0.13	0.18	0.26	0.36	0.51	0.70	0.90	1.09	1.23	1.24	1.13	0.94	0.75	0.56	0.41	0.30	0.22	0.16	11.1	10.2
-12	0.11	0.16	0.21	0.29	0.39	0.51	0.63	0.75	0.83	0.83	0.77	0.65	0.54	0.42	0.33	0.25	0.19	0.14	8.00	6.86
-15	0.10	0.13	0.17	0.23	0.29	0.37	0.44	0.51	0.55	0.55	0.52	0.46	0.39	0.32	0.25	0.20	0.15	0.12	5.73	4.29
-18	0.08	0.11	0.14	0.17	0.22	0.26	0.31	0.35	0.37	0.37	0.36	0.32	0.28	0.23	0.19	0.16	0.13	0.10	4.14	2.13
-21	0.07	0.09	0.11	0.13	0.16	0.19	0.22	0.24	0.26	0.26	0.25	0.23	0.20	0.17	0.15	0.12	0.10	0.08	3.04	0.10
-24	0.06	0.07	0.09	0.10	0.12	0.14	0.16	0.17	0.18	0.18	0.18	0.16	0.15	0.13	0.11	0.10	0.08	0.07	2.26	0.00
-27	0.06	0.07	0.09	0.10	0.12	0.14	0.16	0.17	0.18	0.18	0.18	0.16	0.15	0.13	0.11	0.10	0.08	0.07	2.26	0.00
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)	6	9	12	15	18	21	24	27			
F t	2.10	2.82	3.84	5.33	7.45	10.3	13.9	17.6	20.6	21.5	19.8	16.5	12.8	9.56	7.04	5.20	3.86	2.89	183	---
F a	0.00	0.00	1.66	3.79	6.27	9.32	13.0	16.8	19.9	20.8	19.1	15.8	12.0	8.57	5.77	3.66	1.75	0.00	---	158

one-half-peak spread: U:10.0,D:9.6 , L:10.4,R:9.4


NEMA Beam Type: Type 3

H(B) Range:-90 - 90DEG
 H(B) Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-10-12

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW RED-20D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:20 DEG	DIM.:598MM	SERIAL No.:IES001865
MFR.:	SUR.:	Shielding Angle:

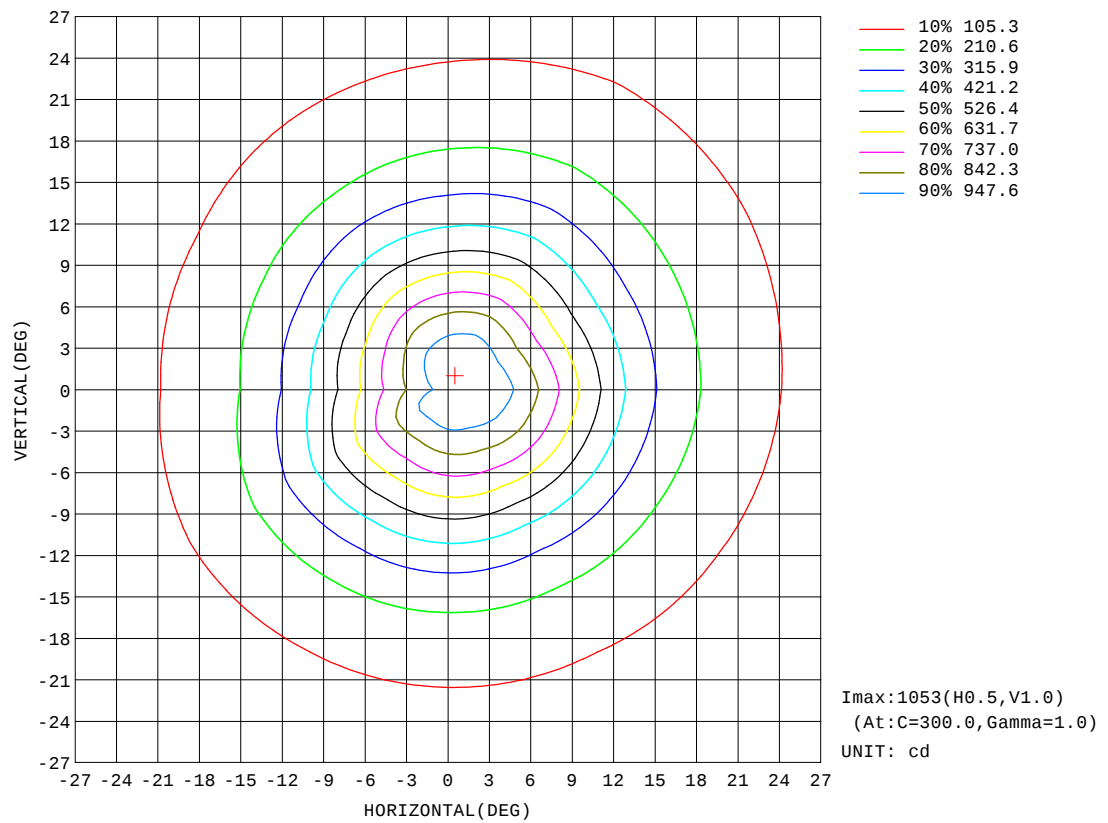


H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW RED-20D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:20 DEG	DIM.:598MM	SERIAL No.:IES001865
MFR.:	SUR.:	Shielding Angle:

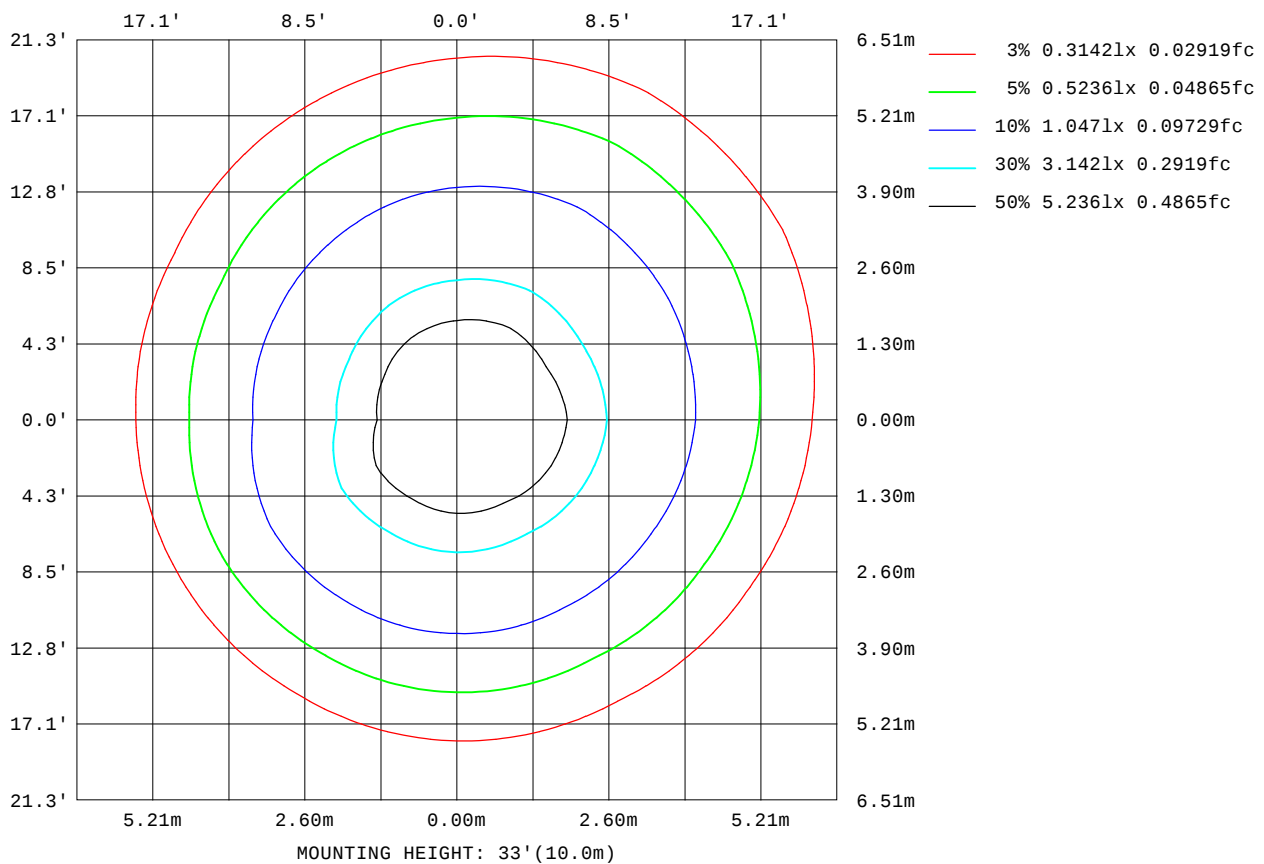

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

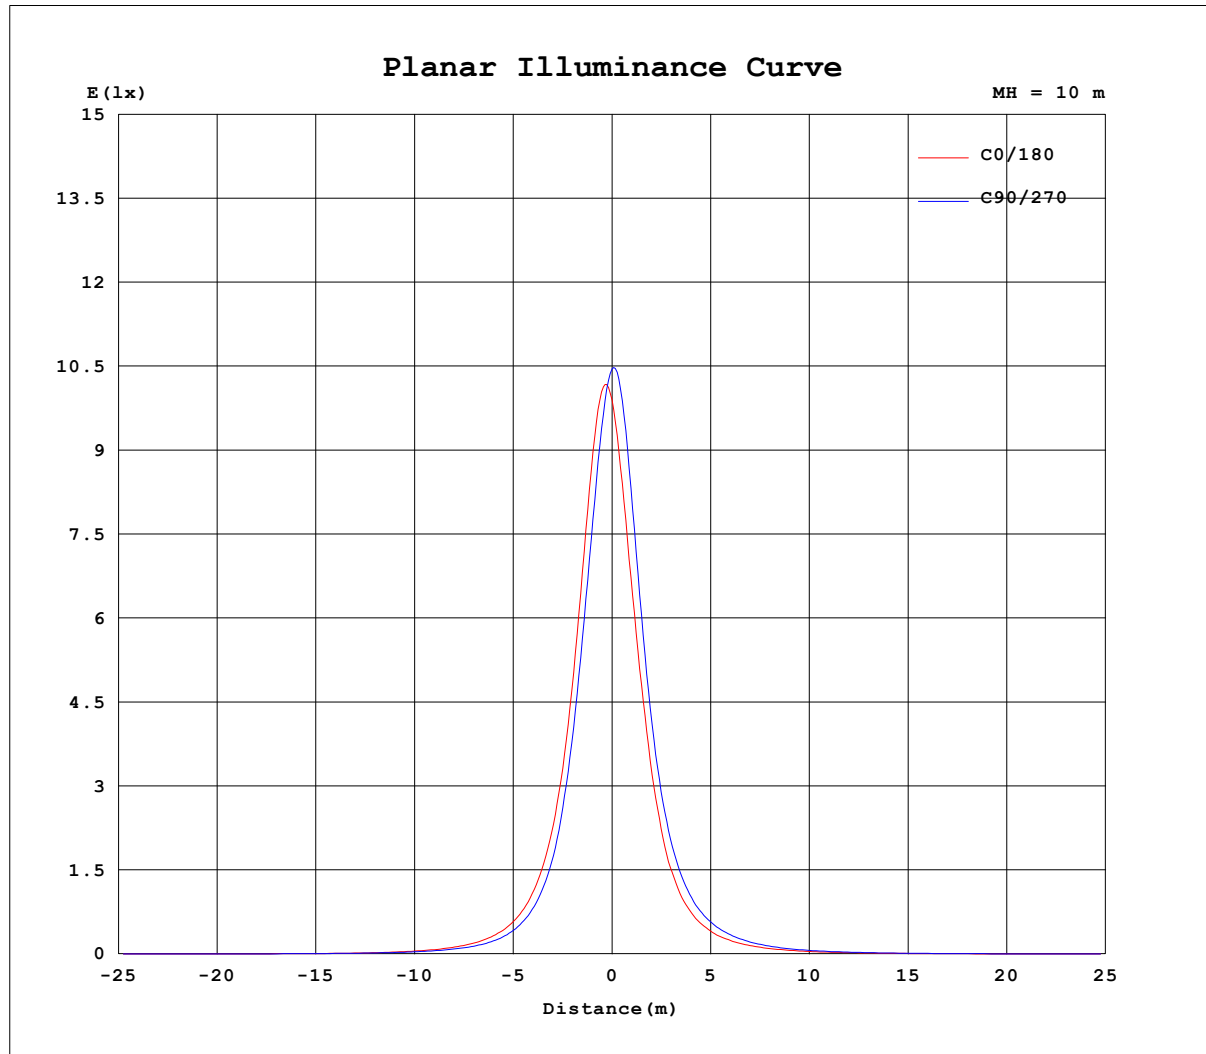


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW RED-20D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:20 DEG	DIM.:598MM	SERIAL No.:IES001865
MFR.:	SUR.:	Shielding Angle:

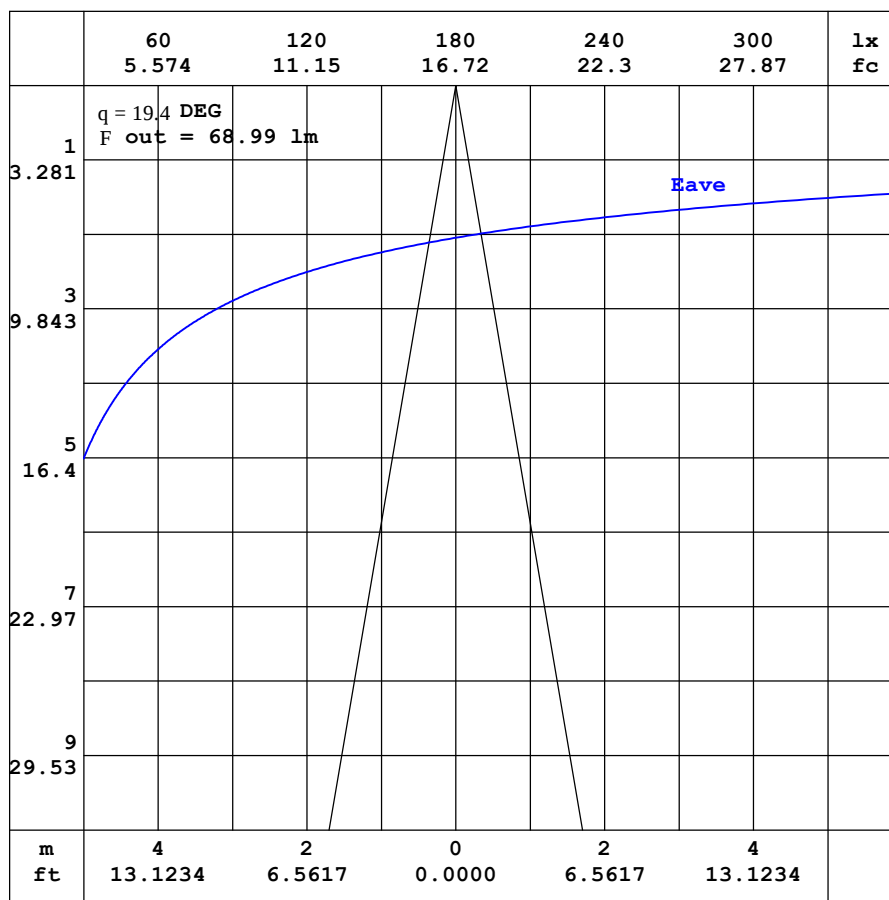

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW RED-20D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:20 DEG	DIM.:598MM	SERIAL No.:IES001865
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.77	0.69	0.67	0.68	0.70	0.77	0.88	1.05	1.28	1.51	1.71	1.81	1.84	1.85	1.85	1.85	1.85	1.85	1.99
-170	0.77	0.68	0.65	0.64	0.65	0.68	0.75	0.85	0.99	1.14	1.26	1.33	1.37	1.41	1.46	1.54	1.67	1.79	1.91
-160	0.77	0.68	0.63	0.61	0.59	0.60	0.62	0.65	0.69	0.74	0.77	0.79	0.82	1.00	1.18	1.35	1.50	1.61	1.69
-150	0.77	0.67	0.61	0.58	0.55	0.52	0.50	0.48	0.45	0.40	0.37	0.46	0.58	0.70	0.84	0.95	1.05	1.13	1.17
-140	0.77	0.67	0.59	0.56	0.52	0.47	0.42	0.36	0.29	0.27	0.27	0.30	0.34	0.41	0.47	0.54	0.60	0.65	0.67
-130	0.77	0.66	0.59	0.53	0.49	0.43	0.37	0.30	0.27	0.26	0.26	0.25	0.24	0.24	0.25	0.29	0.31	0.33	0.35
-120	0.77	0.67	0.58	0.52	0.46	0.41	0.35	0.30	0.30	0.29	0.29	0.29	0.28	0.26	0.26	0.25	0.25	0.25	0.25
-110	0.77	0.67	0.59	0.52	0.45	0.39	0.33	0.32	0.32	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.30	0.30	0.28
-100	0.77	0.68	0.59	0.52	0.45	0.38	0.32	0.31	0.31	0.31	0.31	0.30	0.30	0.31	0.32	0.32	0.32	0.32	0.32
-90	0.77	0.68	0.60	0.52	0.44	0.36	0.27	0.27	0.27	0.26	0.26	0.26	0.25	0.26	0.26	0.27	0.27	0.28	0.28
-80	0.77	0.70	0.62	0.53	0.44	0.34	0.24	0.23	0.24	0.26	0.29	0.31	0.34	0.35	0.37	0.38	0.39	0.40	0.40
-70	0.77	0.71	0.65	0.58	0.51	0.44	0.41	0.49	0.63	0.77	0.92	1.07	1.22	1.36	1.48	1.58	1.65	1.70	1.72
-60	0.77	0.73	0.70	0.68	0.71	0.81	0.93	1.10	1.41	1.74	2.08	2.44	2.79	3.10	3.39	3.63	3.82	3.95	4.01
-50	0.77	0.76	0.77	0.85	1.05	1.32	1.62	1.93	2.39	2.98	3.62	4.29	5.00	5.71	6.40	7.03	7.57	7.95	8.13
-40	0.77	0.78	0.85	1.06	1.46	1.92	2.43	3.00	3.63	4.51	5.67	7.03	8.56	10.2	11.9	13.7	15.3	16.4	16.9
-30	0.77	0.81	0.96	1.31	1.87	2.53	3.30	4.21	5.29	6.66	8.42	11.0	14.4	18.5	23.5	29.0	34.7	39.2	41.2
-20	0.77	0.84	1.06	1.55	2.25	3.13	4.17	5.45	7.13	9.34	12.5	16.9	23.4	33.9	49.2	70.0	94.5	117	128
-10	0.77	0.87	1.14	1.73	2.57	3.60	4.87	6.55	8.75	11.9	16.5	23.7	35.5	56.3	95.7	169	284	410	487
0	0.77	0.89	1.20	1.86	2.76	3.90	5.36	7.28	9.79	13.5	19.1	27.8	42.1	67.1	114	212	417	714	989
10	0.77	0.89	1.19	1.82	2.71	3.82	5.21	7.06	9.50	13.0	18.1	25.9	38.2	58.2	92.9	157	270	425	523
20	0.77	0.89	1.16	1.72	2.53	3.55	4.79	6.36	8.45	11.2	15.2	20.6	28.4	40.0	56.5	79.8	110	138	156
30	0.77	0.87	1.10	1.55	2.25	3.10	4.11	5.37	6.92	8.90	11.5	15.0	19.4	24.9	31.9	39.5	47.9	55.0	59.2
40	0.77	0.86	1.03	1.35	1.90	2.58	3.35	4.25	5.30	6.63	8.25	10.2	12.5	15.1	17.8	20.6	23.4	25.6	26.9
50	0.77	0.85	0.97	1.19	1.53	2.01	2.56	3.16	3.86	4.68	5.63	6.67	7.79	8.92	10.1	11.1	12.1	12.8	13.2
60	0.77	0.83	0.91	1.04	1.22	1.47	1.81	2.19	2.61	3.06	3.55	4.09	4.60	5.13	5.62	6.03	6.37	6.63	6.78
70	0.77	0.81	0.87	0.93	1.01	1.12	1.24	1.39	1.58	1.79	2.00	2.21	2.41	2.63	2.83	3.01	3.14	3.23	3.29
80	0.77	0.80	0.83	0.86	0.90	0.93	0.96	0.99	1.02	1.06	1.10	1.14	1.19	1.24	1.30	1.34	1.37	1.39	1.41
90	0.77	0.78	0.80	0.81	0.83	0.84	0.86	0.85	0.85	0.84	0.84	0.84	0.83	0.84	0.85	0.86	0.86	0.87	0.88
100	0.77	0.77	0.77	0.77	0.77	0.76	0.76	0.75	0.73	0.71	0.69	0.67	0.65	0.65	0.66	0.67	0.68	0.68	0.69
110	0.77	0.75	0.74	0.73	0.71	0.70	0.69	0.67	0.66	0.65	0.64	0.64	0.64	0.64	0.64	0.64	0.64	0.64	0.64
120	0.77	0.74	0.71	0.70	0.68	0.67	0.66	0.65	0.65	0.64	0.65	0.65	0.67	0.69	0.69	0.70	0.71	0.71	0.70
130	0.77	0.73	0.70	0.68	0.67	0.66	0.66	0.65	0.65	0.69	0.74	0.80	0.87	0.94	1.00	1.05	1.10	1.12	1.12
140	0.77	0.72	0.68	0.67	0.67	0.67	0.67	0.69	0.75	0.84	0.96	1.11	1.25	1.39	1.50	1.59	1.64	1.67	1.67
150	0.77	0.71	0.68	0.67	0.67	0.69	0.72	0.80	0.91	1.07	1.26	1.45	1.61	1.74	1.85	1.93	1.96	1.98	1.98
160	0.77	0.70	0.67	0.67	0.68	0.71	0.78	0.91	1.08	1.30	1.51	1.67	1.79	1.89	1.98	2.06	2.15	2.18	2.22
170	0.77	0.70	0.67	0.67	0.69	0.74	0.84	1.00	1.22	1.45	1.65	1.79	1.86	1.91	1.95	2.00	2.06	2.11	2.24
180	0.77	0.69	0.67	0.68	0.70	0.77	0.88	1.05	1.28	1.51	1.71	1.81	1.84	1.85	1.85	1.85	1.85	1.85	2.01

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-12

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW RED-20D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:20 DEG	DIM.:598MM	SERIAL No.:IES001865
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.76	1.69	1.57	1.37	1.18	0.95	0.74	0.55	0.41	0.24	0.24	0.26	0.30	0.30	0.30	0.29	0.26	0.22	
-170	1.83	1.76	1.61	1.41	1.19	0.96	0.74	0.54	0.39	0.27	0.25	0.27	0.30	0.30	0.30	0.29	0.26	0.22	
-160	1.62	1.52	1.38	1.21	1.01	0.82	0.62	0.47	0.34	0.28	0.27	0.28	0.29	0.30	0.30	0.29	0.25	0.22	
-150	1.14	1.07	0.96	0.84	0.70	0.56	0.45	0.37	0.31	0.28	0.27	0.28	0.30	0.30	0.30	0.29	0.25	0.22	
-140	0.65	0.60	0.54	0.45	0.39	0.33	0.30	0.28	0.28	0.28	0.28	0.29	0.30	0.30	0.30	0.28	0.24	0.22	
-130	0.33	0.30	0.28	0.25	0.25	0.25	0.26	0.27	0.28	0.28	0.29	0.30	0.30	0.30	0.30	0.27	0.24	0.22	
-120	0.25	0.25	0.25	0.26	0.27	0.28	0.29	0.30	0.30	0.30	0.31	0.31	0.31	0.30	0.29	0.27	0.23	0.22	
-110	0.29	0.29	0.30	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.30	0.29	0.28	0.25	0.23	0.22
-100	0.32	0.32	0.32	0.32	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.30	0.28	0.26	0.24	0.23	0.22
-90	0.28	0.27	0.26	0.25	0.24	0.23	0.24	0.24	0.24	0.25	0.25	0.25	0.25	0.24	0.24	0.23	0.23	0.22	
-80	0.40	0.39	0.38	0.37	0.35	0.34	0.31	0.29	0.26	0.24	0.23	0.22	0.22	0.22	0.23	0.23	0.22	0.22	
-70	1.70	1.65	1.57	1.47	1.34	1.21	1.07	0.93	0.79	0.65	0.51	0.39	0.31	0.26	0.24	0.22	0.22	0.22	
-60	3.97	3.86	3.69	3.46	3.17	2.86	2.51	2.15	1.80	1.46	1.14	0.87	0.63	0.42	0.30	0.24	0.23	0.22	
-50	8.06	7.79	7.32	6.70	6.02	5.31	4.57	3.85	3.16	2.53	1.98	1.50	1.08	0.71	0.42	0.27	0.23	0.22	
-40	16.7	15.9	14.6	12.9	11.2	9.55	7.87	6.33	4.98	3.86	2.98	2.22	1.57	1.03	0.58	0.33	0.23	0.22	
-30	40.1	36.4	31.2	26.1	21.2	16.9	13.1	9.97	7.48	5.55	4.09	2.97	2.07	1.34	0.78	0.38	0.24	0.22	
-20	120	98.8	76.4	56.2	40.3	28.7	20.7	14.9	10.5	7.41	5.20	3.67	2.51	1.61	0.92	0.43	0.24	0.22	
-10	426	304	188	115	71.1	45.2	29.7	20.0	13.5	9.01	6.11	4.19	2.83	1.80	1.02	0.47	0.25	0.22	
0	936	600	321	172	95.9	57.2	35.8	23.1	15.1	9.87	6.56	4.45	2.98	1.88	1.06	0.48	0.25	0.22	
10	494	347	220	138	85.9	55.0	35.8	23.6	15.6	10.3	6.88	4.68	3.13	1.98	1.13	0.52	0.27	0.22	
20	156	138	108	80.6	58.9	42.5	29.7	20.4	14.0	9.52	6.56	4.53	3.06	1.95	1.12	0.54	0.29	0.22	
30	60.3	57.6	51.7	43.1	34.5	26.9	20.6	15.4	11.1	8.02	5.74	4.07	2.79	1.80	1.05	0.54	0.30	0.22	
40	27.3	26.6	24.9	22.5	19.2	15.9	12.8	10.3	8.10	6.25	4.68	3.40	2.38	1.56	0.92	0.52	0.31	0.22	
50	13.3	13.1	12.5	11.6	10.5	9.13	7.82	6.58	5.47	4.47	3.55	2.65	1.89	1.28	0.80	0.49	0.32	0.22	
60	6.79	6.68	6.46	6.14	5.73	5.18	4.56	3.98	3.43	2.92	2.45	1.92	1.41	0.99	0.70	0.48	0.33	0.22	
70	3.28	3.22	3.12	2.98	2.81	2.61	2.39	2.17	1.95	1.74	1.53	1.32	1.05	0.81	0.62	0.46	0.33	0.22	
80	1.40	1.39	1.36	1.33	1.29	1.24	1.21	1.17	1.12	1.09	1.06	1.02	0.87	0.72	0.59	0.45	0.33	0.22	
90	0.87	0.87	0.86	0.85	0.85	0.84	0.85	0.86	0.87	0.87	0.88	0.89	0.78	0.67	0.55	0.44	0.33	0.22	
100	0.69	0.68	0.68	0.67	0.66	0.67	0.68	0.71	0.73	0.75	0.77	0.78	0.70	0.62	0.53	0.43	0.33	0.22	
110	0.64	0.64	0.64	0.64	0.64	0.64	0.64	0.64	0.66	0.67	0.68	0.69	0.63	0.58	0.51	0.41	0.32	0.22	
120	0.71	0.71	0.70	0.69	0.69	0.67	0.65	0.65	0.65	0.65	0.65	0.62	0.58	0.53	0.48	0.41	0.31	0.22	
130	1.12	1.09	1.05	0.99	0.92	0.85	0.79	0.72	0.67	0.65	0.63	0.58	0.53	0.50	0.45	0.39	0.30	0.22	
140	1.66	1.63	1.57	1.49	1.36	1.22	1.08	0.94	0.82	0.69	0.58	0.54	0.49	0.45	0.43	0.37	0.29	0.22	
150	1.99	1.98	1.94	1.85	1.74	1.59	1.42	1.22	0.93	0.71	0.56	0.48	0.45	0.42	0.39	0.36	0.29	0.22	
160	2.21	2.20	2.12	2.03	1.93	1.81	1.51	1.19	0.88	0.64	0.50	0.43	0.40	0.38	0.36	0.34	0.28	0.22	
170	2.17	2.15	2.11	1.96	1.72	1.47	1.20	0.93	0.70	0.48	0.39	0.35	0.35	0.34	0.33	0.32	0.27	0.22	
180	1.76	1.69	1.57	1.37	1.18	0.95	0.74	0.55	0.41	0.24	0.24	0.26	0.30	0.30	0.30	0.29	0.26	0.22	

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-12

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: