

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2146.4 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	67.5V x 67.7H
	At 50% of Imax	32.3V x 32.6H
	At 90% of Imax	11.9V x 12.0H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	788.4 lumens per klm.
	To 50% of Imax	385.0 lumens per klm.
	To 90% of Imax	71.4 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW 3000K-30D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001873
MFR.:	SUR.:	Shielding Angle:

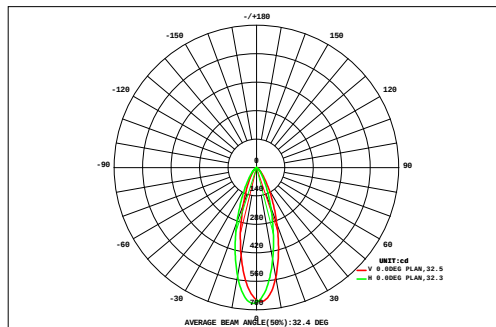

DATA OF LAMP		Eff:42.35lm/W	
MODEL		Imax(cd)	668.2
NOMINAL POWER(W)	7.36	AVAILABILITY(%)	78.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	245.5
NOMINAL FLUX(lm)	311.3	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	311.3
TEST VOLTAGE(V)	221.4	q @50%(H,V)	33,32DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.05	0.07	0.09	0.11	0.13	0.16	0.18	0.20	0.21	0.21	0.20	0.19	0.17	0.15	0.12	0.10	0.08	0.06	2.47	0.00
45	0.05	0.07	0.09	0.11	0.13	0.16	0.18	0.20	0.21	0.21	0.20	0.19	0.17	0.15	0.12	0.10	0.08	0.06	2.47	0.00
40	0.06	0.08	0.11	0.14	0.18	0.22	0.26	0.29	0.31	0.31	0.30	0.28	0.25	0.21	0.17	0.13	0.10	0.07	3.47	0.00
35	0.07	0.10	0.14	0.19	0.25	0.31	0.38	0.44	0.48	0.49	0.47	0.42	0.36	0.29	0.23	0.17	0.12	0.09	5.00	0.72
30	0.09	0.12	0.17	0.25	0.34	0.45	0.58	0.68	0.75	0.77	0.74	0.65	0.53	0.41	0.31	0.22	0.16	0.11	7.33	4.73
25	0.10	0.15	0.22	0.32	0.47	0.65	0.86	1.07	1.21	1.25	1.17	1.00	0.79	0.58	0.41	0.29	0.19	0.13	10.8	8.89
20	0.11	0.17	0.27	0.41	0.62	0.91	1.27	1.64	1.90	1.97	1.83	1.51	1.14	0.80	0.54	0.36	0.24	0.15	15.8	14.2
15	0.13	0.20	0.32	0.50	0.78	1.21	1.78	2.42	2.86	2.96	2.71	2.16	1.56	1.07	0.70	0.45	0.28	0.17	22.3	20.9
10	0.14	0.22	0.36	0.58	0.95	1.51	2.29	3.19	3.87	4.02	3.60	2.83	2.04	1.37	0.87	0.53	0.32	0.19	28.9	27.7
5	0.14	0.23	0.38	0.63	1.05	1.72	2.67	3.72	4.56	4.79	4.29	3.41	2.44	1.61	1.00	0.60	0.35	0.20	33.8	32.7
0	0.14	0.23	0.39	0.65	1.09	1.81	2.84	3.96	4.81	4.98	4.50	3.59	2.57	1.69	1.05	0.62	0.36	0.20	35.5	34.3
-5	0.14	0.22	0.37	0.62	1.05	1.73	2.69	3.65	4.34	4.50	4.07	3.30	2.41	1.59	1.00	0.60	0.35	0.20	32.8	31.7
-10	0.12	0.20	0.33	0.55	0.91	1.45	2.17	2.90	3.46	3.60	3.29	2.71	2.03	1.38	0.89	0.54	0.32	0.19	27.1	25.9
-15	0.11	0.17	0.28	0.45	0.72	1.11	1.60	2.10	2.50	2.62	2.43	2.04	1.55	1.10	0.74	0.47	0.28	0.17	20.5	19.1
-20	0.09	0.14	0.23	0.35	0.54	0.80	1.10	1.42	1.67	1.75	1.66	1.44	1.13	0.82	0.57	0.38	0.24	0.14	14.5	12.9
-25	0.08	0.12	0.18	0.27	0.39	0.55	0.73	0.92	1.06	1.12	1.08	0.96	0.78	0.59	0.42	0.29	0.19	0.12	9.84	7.84
-30	0.06	0.09	0.14	0.20	0.28	0.37	0.48	0.58	0.66	0.70	0.68	0.62	0.53	0.41	0.31	0.22	0.15	0.09	6.56	3.77
-35	0.05	0.07	0.10	0.14	0.19	0.25	0.31	0.37	0.42	0.44	0.43	0.40	0.35	0.28	0.21	0.16	0.11	0.07	4.35	0.21
-40	0.04	0.06	0.08	0.10	0.13	0.17	0.20	0.24	0.26	0.27	0.27	0.25	0.22	0.19	0.15	0.11	0.08	0.06	2.89	0.00
-45	0.04	0.06	0.08	0.10	0.13	0.17	0.20	0.24	0.26	0.27	0.27	0.25	0.22	0.19	0.15	0.11	0.08	0.06	2.89	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
F t	1.73	2.65	4.14	6.47	10.1	15.4	22.4	29.8	35.3	36.8	33.7	27.8	20.8	14.6	9.70	6.24	3.92	2.41	284	---
F a	0.00	0.00	0.29	3.73	7.92	13.5	20.7	28.2	33.9	35.4	32.3	26.2	19.2	12.7	7.55	3.62	0.28	0.00	---	246

one-half-peak spread: U:16.5,D:16.0 , L:16.2,R:16.6


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW 3000K-30D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001873
MFR.:	SUR.:	Shielding Angle:

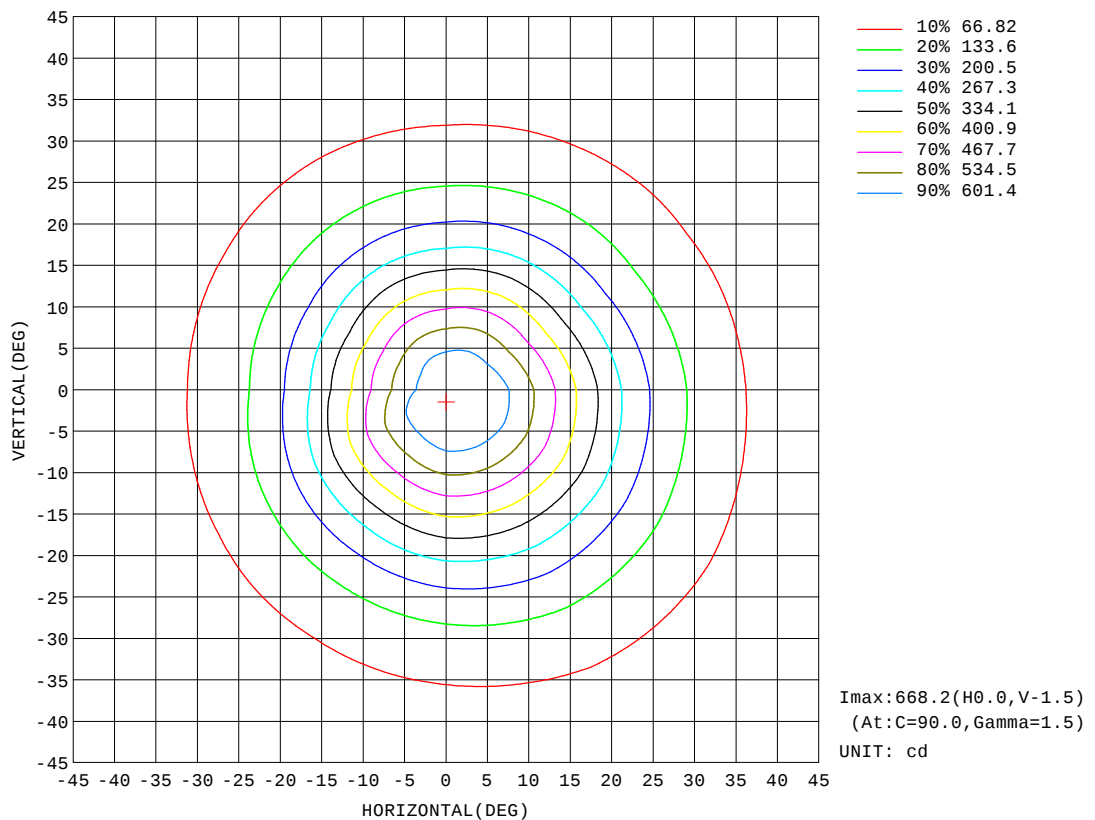


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW 3000K-30D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001873
MFR.:	SUR.:	Shielding Angle:

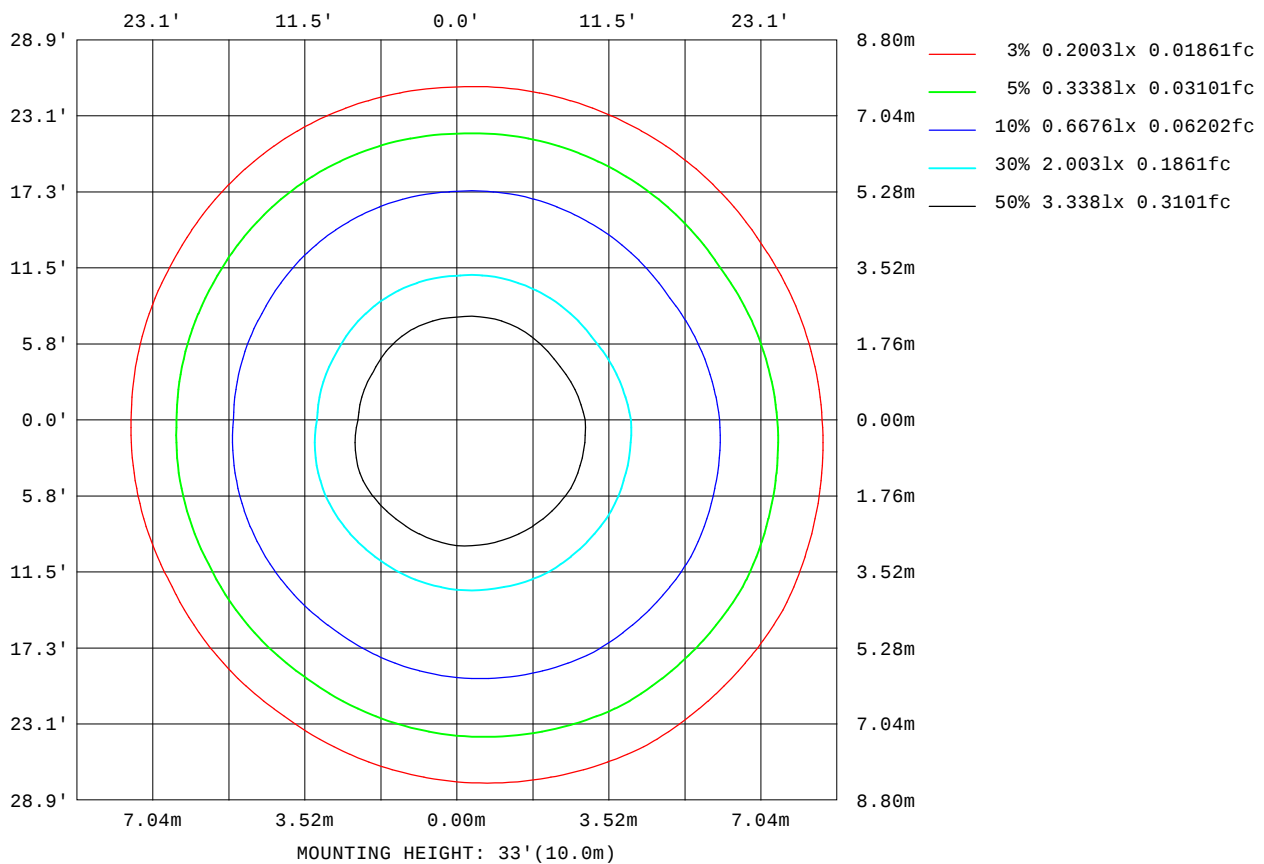

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

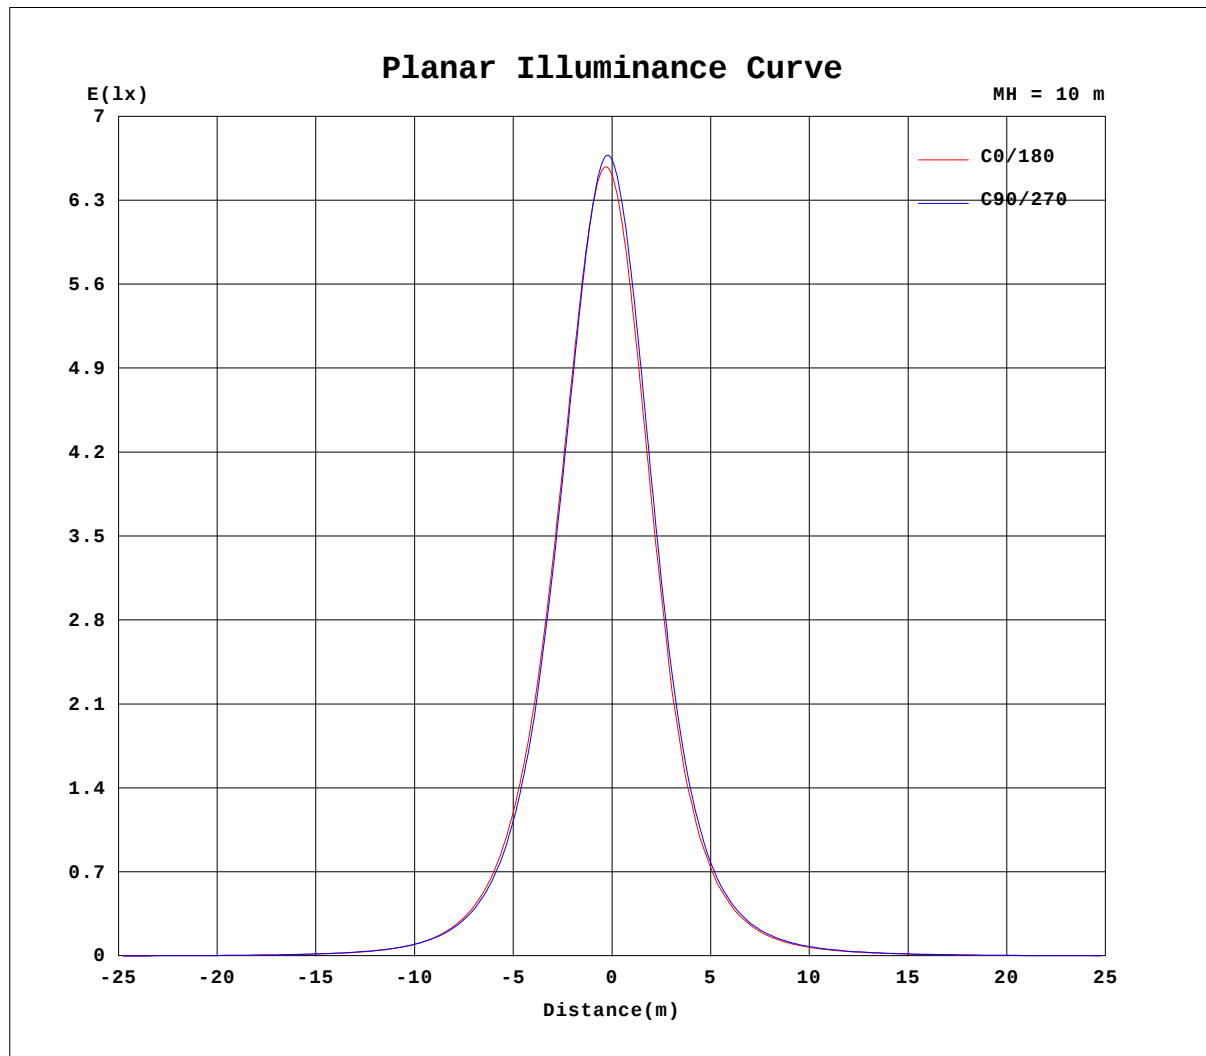


H(b) Range: -90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW 3000K-30D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001873
MFR.:	SUR.:	Shielding Angle:

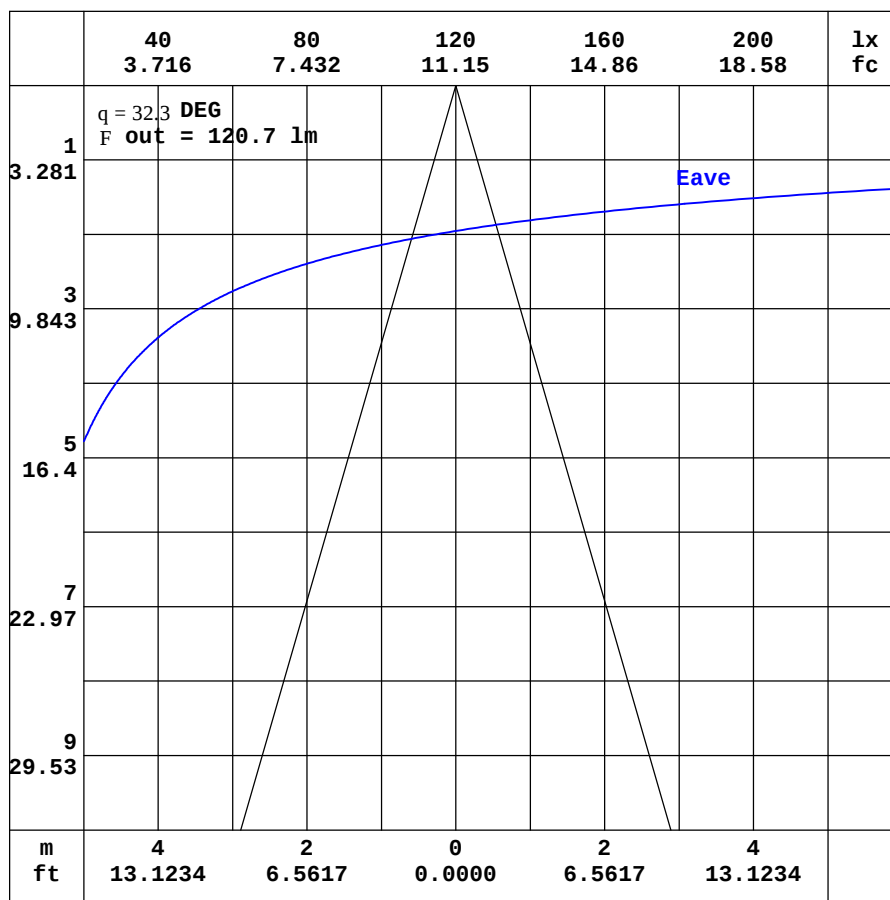

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW 3000K-30D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001873
MFR.:	SUR.:	Shielding Angle:

Table--1
UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.06	0.99	0.98	0.99	1.05	1.17	1.33	1.53	1.77	2.01	2.22	2.36	2.44	2.46	2.46	2.46	2.44	2.44	2.49
-170	1.06	0.97	0.95	0.93	0.97	1.04	1.14	1.26	1.40	1.53	1.65	1.72	1.76	1.78	1.77	1.82	1.98	2.10	2.24
-160	1.06	0.96	0.92	0.88	0.88	0.90	0.94	0.98	1.01	1.04	1.05	1.05	1.05	1.22	1.40	1.56	1.70	1.81	1.88
-150	1.06	0.94	0.88	0.83	0.80	0.78	0.76	0.73	0.68	0.62	0.57	0.66	0.77	0.89	1.01	1.12	1.22	1.29	1.33
-140	1.06	0.93	0.86	0.79	0.73	0.68	0.63	0.55	0.46	0.42	0.44	0.47	0.52	0.57	0.63	0.71	0.76	0.80	0.82
-130	1.06	0.93	0.83	0.76	0.68	0.61	0.53	0.44	0.40	0.40	0.40	0.40	0.40	0.39	0.42	0.44	0.47	0.50	0.51
-120	1.06	0.92	0.81	0.73	0.64	0.56	0.47	0.40	0.40	0.40	0.39	0.39	0.39	0.39	0.39	0.39	0.40	0.40	0.41
-110	1.06	0.93	0.81	0.71	0.61	0.53	0.43	0.40	0.40	0.40	0.39	0.39	0.39	0.39	0.39	0.39	0.40	0.40	0.40
-100	1.06	0.94	0.81	0.70	0.59	0.49	0.40	0.39	0.38	0.38	0.38	0.38	0.37	0.38	0.38	0.39	0.39	0.40	0.41
-90	1.06	0.94	0.82	0.71	0.59	0.47	0.35	0.34	0.33	0.33	0.32	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.32
-80	1.06	0.96	0.85	0.73	0.60	0.47	0.32	0.32	0.35	0.38	0.43	0.47	0.51	0.54	0.58	0.61	0.64	0.66	0.67
-70	1.06	0.98	0.90	0.81	0.72	0.68	0.66	0.81	1.03	1.25	1.49	1.75	2.00	2.26	2.51	2.73	2.91	3.05	3.14
-60	1.06	1.01	0.98	0.97	1.06	1.25	1.49	1.79	2.29	2.85	3.44	4.07	4.70	5.34	5.99	6.59	7.10	7.52	7.80
-50	1.06	1.05	1.08	1.24	1.58	2.07	2.57	3.10	3.87	4.88	6.02	7.34	8.78	10.4	12.1	13.9	15.6	17.0	17.9
-40	1.06	1.09	1.21	1.58	2.23	2.97	3.81	4.75	5.82	7.38	9.52	12.3	15.9	20.2	25.2	30.9	36.4	41.2	44.3
-30	1.06	1.14	1.36	1.93	2.84	3.90	5.11	6.57	8.38	10.8	14.4	20.4	28.7	39.8	53.6	70.0	87.9	104	114
-20	1.06	1.18	1.52	2.29	3.41	4.76	6.38	8.41	11.1	15.2	21.7	31.9	47.8	72.7	108	154	205	253	283
-10	1.06	1.22	1.64	2.59	3.88	5.45	7.37	9.87	13.4	19.1	28.2	43.4	68.7	110	176	275	387	483	542
0	1.06	1.25	1.73	2.77	4.17	5.88	8.00	10.8	14.8	20.9	30.8	47.5	75.1	119	190	305	442	573	651
10	1.06	1.24	1.71	2.69	4.05	5.70	7.71	10.3	13.9	19.4	28.1	42.2	64.4	99.2	153	227	325	417	460
20	1.06	1.23	1.64	2.50	3.74	5.24	7.01	9.23	12.1	16.1	22.1	31.2	44.6	63.8	90.0	123	159	189	204
30	1.06	1.22	1.54	2.22	3.30	4.55	6.00	7.69	9.80	12.4	15.9	20.9	27.6	36.1	46.2	57.3	67.7	75.7	79.2
40	1.06	1.19	1.43	1.94	2.78	3.75	4.86	6.08	7.47	9.17	11.2	13.7	16.6	20.0	23.6	27.0	30.0	32.2	33.1
50	1.06	1.16	1.34	1.66	2.17	2.90	3.68	4.52	5.46	6.53	7.69	8.92	10.3	11.6	12.9	14.1	15.0	15.6	15.9
60	1.06	1.14	1.25	1.42	1.69	2.06	2.56	3.10	3.69	4.29	4.96	5.58	6.24	6.87	7.35	7.83	8.21	8.46	8.58
70	1.06	1.11	1.18	1.26	1.37	1.51	1.69	1.91	2.18	2.48	2.79	3.07	3.34	3.62	3.87	4.07	4.22	4.33	4.38
80	1.06	1.09	1.13	1.16	1.20	1.23	1.27	1.31	1.35	1.40	1.45	1.51	1.57	1.64	1.70	1.75	1.79	1.82	1.84
90	1.06	1.07	1.09	1.10	1.11	1.12	1.13	1.12	1.12	1.11	1.10	1.09	1.09	1.09	1.10	1.11	1.12	1.12	1.13
100	1.06	1.07	1.05	1.05	1.05	1.04	1.03	1.01	0.99	0.97	0.96	0.96	0.96	0.96	0.96	0.97	0.97	0.97	0.97
110	1.06	1.04	1.03	1.01	1.01	1.00	0.99	0.98	0.97	0.97	0.97	0.97	0.97	0.98	0.98	0.98	0.97	0.96	0.95
120	1.06	1.03	1.00	0.99	0.99	0.98	0.97	0.97	0.98	1.00	1.04	1.07	1.12	1.15	1.18	1.19	1.20	1.21	1.20
130	1.06	1.02	0.99	0.99	0.98	0.98	0.99	1.01	1.08	1.15	1.24	1.33	1.43	1.51	1.59	1.64	1.68	1.70	1.70
140	1.06	1.01	0.99	0.98	0.98	1.00	1.05	1.13	1.24	1.37	1.52	1.67	1.82	1.96	2.08	2.15	2.20	2.23	2.23
150	1.06	1.00	0.99	0.98	1.00	1.04	1.14	1.27	1.43	1.62	1.80	1.99	2.15	2.29	2.40	2.50	2.53	2.56	2.56
160	1.06	1.00	0.98	0.98	1.02	1.10	1.23	1.40	1.60	1.82	2.02	2.20	2.32	2.43	2.52	2.57	2.62	2.67	2.73
170	1.06	0.99	0.98	0.99	1.04	1.14	1.29	1.49	1.72	1.96	2.16	2.32	2.41	2.45	2.46	2.48	2.51	2.52	2.61
180	1.06	0.99	0.98	0.99	1.05	1.17	1.33	1.53	1.77	2.01	2.22	2.36	2.44	2.46	2.46	2.46	2.44	2.44	2.51

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW 3000K-30D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001873
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	2.30	2.15	1.98	1.75	1.49	1.24	0.99	0.77	0.62	0.46	0.37	0.37	0.37	0.37	0.37	0.35	0.30	0.28
-170	2.15	2.07	1.92	1.69	1.44	1.19	0.95	0.75	0.60	0.45	0.39	0.38	0.38	0.38	0.37	0.35	0.30	0.28
-160	1.82	1.71	1.57	1.41	1.21	1.01	0.83	0.66	0.54	0.45	0.41	0.40	0.39	0.38	0.37	0.35	0.30	0.28
-150	1.30	1.22	1.13	1.00	0.88	0.75	0.64	0.56	0.49	0.44	0.42	0.40	0.40	0.39	0.38	0.35	0.30	0.28
-140	0.80	0.76	0.70	0.63	0.57	0.52	0.48	0.46	0.45	0.44	0.42	0.41	0.40	0.39	0.37	0.34	0.29	0.28
-130	0.50	0.47	0.44	0.42	0.40	0.40	0.41	0.42	0.42	0.43	0.42	0.42	0.41	0.39	0.36	0.33	0.29	0.28
-120	0.40	0.40	0.39	0.39	0.38	0.39	0.40	0.40	0.41	0.42	0.43	0.42	0.40	0.38	0.35	0.32	0.29	0.28
-110	0.40	0.39	0.39	0.39	0.39	0.39	0.39	0.40	0.41	0.40	0.40	0.39	0.38	0.36	0.33	0.31	0.29	0.28
-100	0.40	0.39	0.38	0.37	0.36	0.35	0.36	0.36	0.36	0.37	0.36	0.36	0.34	0.33	0.31	0.30	0.29	0.28
-90	0.31	0.30	0.30	0.29	0.29	0.28	0.29	0.29	0.30	0.30	0.31	0.31	0.31	0.30	0.30	0.29	0.29	0.28
-80	0.66	0.65	0.62	0.59	0.55	0.52	0.47	0.43	0.38	0.34	0.29	0.28	0.29	0.29	0.29	0.29	0.29	0.28
-70	3.10	3.00	2.84	2.64	2.40	2.15	1.88	1.63	1.36	1.12	0.87	0.63	0.49	0.38	0.32	0.30	0.29	0.28
-60	7.81	7.66	7.36	6.89	6.29	5.53	4.73	3.97	3.26	2.62	2.03	1.51	1.06	0.67	0.45	0.32	0.30	0.28
-50	18.2	17.8	16.8	15.4	13.6	11.4	9.41	7.61	6.06	4.71	3.58	2.63	1.83	1.17	0.66	0.39	0.30	0.28
-40	45.2	43.7	40.4	35.6	29.2	23.1	17.8	13.4	9.98	7.36	5.44	3.90	2.69	1.72	0.94	0.49	0.31	0.28
-30	115	109	96.6	79.0	61.3	45.7	32.8	22.8	15.5	10.7	7.45	5.20	3.52	2.23	1.25	0.58	0.32	0.28
-20	279	253	208	159	115	79.9	53.3	34.4	21.8	14.1	9.38	6.34	4.22	2.66	1.50	0.66	0.33	0.28
-10	523	454	360	258	173	112	70.6	43.8	26.7	16.6	10.7	7.13	4.69	2.94	1.66	0.72	0.34	0.28
0	641	549	420	294	193	121	75.3	46.1	27.8	17.2	11.0	7.36	4.83	3.04	1.72	0.75	0.34	0.28
10	451	382	290	208	142	94.2	61.5	39.5	25.1	16.2	10.8	7.38	4.91	3.12	1.78	0.79	0.37	0.28
20	202	181	148	113	82.6	58.9	42.0	29.1	20.0	13.9	9.77	6.84	4.67	3.01	1.73	0.80	0.39	0.28
30	79.4	74.2	64.7	54.4	43.8	34.2	26.2	19.8	14.9	11.2	8.28	5.98	4.18	2.72	1.58	0.79	0.41	0.28
40	33.2	31.9	29.5	26.4	22.9	19.3	16.1	13.2	10.7	8.60	6.60	4.91	3.50	2.32	1.34	0.74	0.42	0.28
50	16.0	15.6	15.0	13.9	12.7	11.4	9.98	8.67	7.37	6.16	4.99	3.79	2.74	1.83	1.13	0.68	0.43	0.28
60	8.58	8.44	8.16	7.76	7.32	6.71	6.03	5.39	4.70	4.06	3.44	2.71	1.98	1.39	0.96	0.64	0.44	0.28
70	4.37	4.30	4.18	4.01	3.78	3.52	3.27	3.00	2.70	2.39	2.11	1.80	1.43	1.10	0.83	0.62	0.44	0.28
80	1.83	1.82	1.79	1.76	1.71	1.66	1.60	1.54	1.49	1.45	1.41	1.36	1.16	0.96	0.78	0.60	0.44	0.28
90	1.13	1.13	1.13	1.12	1.12	1.12	1.13	1.15	1.16	1.17	1.18	1.19	1.04	0.89	0.74	0.59	0.44	0.28
100	0.97	0.96	0.96	0.96	0.96	0.96	0.95	0.98	1.00	1.02	1.04	1.06	1.07	0.96	0.83	0.70	0.57	0.43
110	0.95	0.96	0.96	0.96	0.96	0.96	0.95	0.96	0.96	0.97	0.99	0.98	0.88	0.78	0.67	0.55	0.42	0.28
120	1.20	1.18	1.16	1.13	1.09	1.06	1.02	0.98	0.97	0.96	0.96	0.90	0.82	0.73	0.64	0.53	0.41	0.28
130	1.69	1.65	1.59	1.52	1.44	1.34	1.24	1.15	1.06	0.99	0.93	0.84	0.76	0.68	0.60	0.51	0.39	0.28
140	2.22	2.17	2.10	2.00	1.88	1.72	1.56	1.40	1.25	1.08	0.90	0.77	0.70	0.63	0.56	0.48	0.37	0.28
150	2.56	2.53	2.49	2.38	2.24	2.07	1.88	1.67	1.35	1.07	0.86	0.72	0.63	0.57	0.52	0.45	0.36	0.28
160	2.69	2.66	2.62	2.56	2.44	2.29	1.94	1.58	1.24	0.96	0.76	0.63	0.55	0.51	0.47	0.42	0.34	0.28
170	2.55	2.59	2.59	2.43	2.16	1.87	1.55	1.25	0.99	0.74	0.59	0.51	0.47	0.44	0.42	0.39	0.32	0.28
180	2.30	2.15	1.98	1.75	1.49	1.24	0.99	0.77	0.62	0.46	0.37	0.37	0.37	0.37	0.37	0.35	0.30	0.28

H_b Range: -90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-12

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: