

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2131.6 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	68.0V x 68.1H
	At 50% of Imax	32.4V x 32.5H
	At 90% of Imax	12.0V x 12.2H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	789.3 lumens per klm.
	To 50% of Imax	378.4 lumens per klm.
	To 90% of Imax	66.8 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW ALL-30D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001869
MFR.:	SUR.:	Shielding Angle:

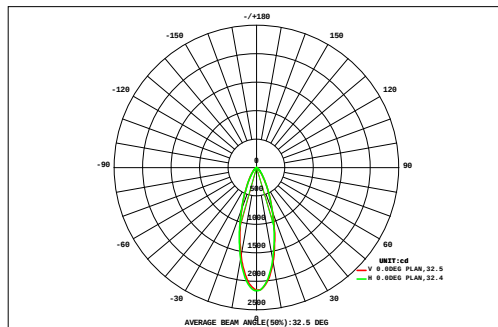

DATA OF LAMP		Eff:42.16lm/W	
MODEL		Imax(cd)	2166
NOMINAL POWER(W)	24.4	AVAILABILITY(%)	78.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	801.2
NOMINAL FLUX(lm)	1016	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1016
TEST VOLTAGE(V)	221.4	q @50%(H,V)	32,32DEG

		AREA FLUX DIAGRAM															UNIT:lm				F t	F a
		0.21	0.27	0.36	0.45	0.56	0.66	0.75	0.82	0.85	0.84	0.80	0.73	0.64	0.54	0.43	0.34	0.26	0.20	9.72	0.00	
VERTICAL (DEG)	45	0.21	0.27	0.36	0.45	0.56	0.66	0.75	0.82	0.85	0.84	0.80	0.73	0.64	0.54	0.43	0.34	0.26	0.20	9.72	0.00	
	40	0.25	0.34	0.46	0.61	0.78	0.96	1.11	1.23	1.30	1.29	1.21	1.08	0.92	0.75	0.58	0.44	0.33	0.24	13.9	0.00	
	35	0.30	0.42	0.59	0.81	1.09	1.39	1.67	1.90	2.01	2.00	1.86	1.62	1.34	1.04	0.78	0.57	0.40	0.28	20.1	9.36	
	30	0.35	0.52	0.76	1.09	1.51	2.02	2.54	2.94	3.16	3.15	2.90	2.47	1.95	1.45	1.05	0.73	0.50	0.33	29.4	22.3	
	25	0.41	0.62	0.95	1.42	2.06	2.87	3.76	4.51	4.94	4.92	4.46	3.69	2.80	2.00	1.37	0.92	0.60	0.39	42.7	37.0	
	20	0.47	0.74	1.16	1.79	2.70	3.92	5.37	6.70	7.47	7.46	6.65	5.30	3.86	2.64	1.75	1.13	0.71	0.44	60.3	55.6	
	15	0.52	0.84	1.35	2.16	3.37	5.08	7.20	9.33	10.6	10.6	9.29	7.17	5.05	3.36	2.16	1.35	0.82	0.49	80.8	76.6	
	-15	0.56	0.91	1.50	2.46	3.96	6.12	8.88	11.8	13.7	13.7	11.8	8.94	6.27	4.10	2.54	1.53	0.91	0.52	100	96.4	
		0.57	0.95	1.57	2.62	4.28	6.73	9.90	13.2	15.6	15.6	13.5	10.4	7.22	4.62	2.80	1.65	0.95	0.54	113	109	
		0.56	0.93	1.56	2.61	4.27	6.76	10.00	13.4	15.6	15.7	13.8	10.6	7.32	4.67	2.82	1.65	0.95	0.53	114	110	
		0.53	0.87	1.44	2.41	3.93	6.18	9.04	11.8	13.5	13.6	11.9	9.30	6.52	4.23	2.59	1.54	0.89	0.51	101	97.0	
		0.48	0.78	1.26	2.07	3.30	5.02	7.07	9.02	10.4	10.4	9.18	7.29	5.26	3.51	2.22	1.34	0.80	0.47	79.8	75.7	
		0.42	0.66	1.04	1.64	2.54	3.70	5.03	6.31	7.18	7.23	6.46	5.23	3.90	2.71	1.77	1.11	0.68	0.41	58.0	53.2	
		0.35	0.54	0.82	1.24	1.84	2.58	3.38	4.16	4.66	4.70	4.27	3.54	2.73	1.97	1.34	0.88	0.56	0.35	39.9	34.2	
		0.28	0.42	0.63	0.92	1.29	1.73	2.21	2.64	2.92	2.94	2.72	2.32	1.84	1.38	0.98	0.67	0.45	0.29	26.6	19.3	
	-30	0.23	0.33	0.47	0.66	0.89	1.15	1.42	1.64	1.79	1.80	1.69	1.48	1.22	0.95	0.70	0.50	0.35	0.23	17.5	5.19	
-35	0.18	0.26	0.35	0.47	0.61	0.76	0.91	1.03	1.10	1.11	1.06	0.95	0.80	0.64	0.50	0.37	0.26	0.19	11.5	0.00		
-40	0.15	0.20	0.26	0.34	0.42	0.51	0.59	0.66	0.69	0.70	0.67	0.61	0.53	0.44	0.35	0.27	0.20	0.15	7.72	0.00		
-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45			
F t	6.81	10.6	16.5	25.8	39.4	58.1	80.8	103	117	118	104	82.8	60.2	41.0	26.7	17.0	10.6	6.55	925	---		
F a	0.00	0.00	5.61	18.0	32.9	52.6	75.7	98.2	113	113	99.4	77.8	54.6	34.7	19.2	6.39	0.00	0.00	---	801		

one-half-peak spread: U:16.7,D:16.0 , L:16.3,R:16.5


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW ALL-30D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001869
MFR.:	SUR.:	Shielding Angle:

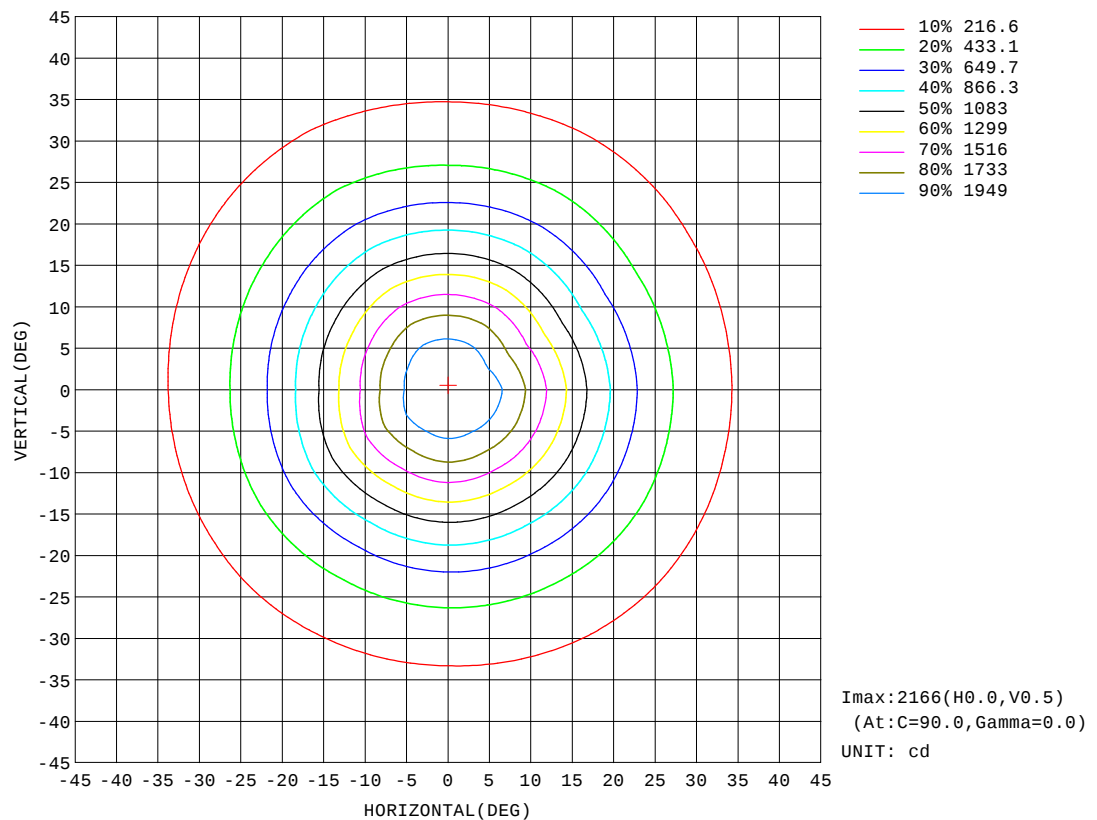


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW ALL-30D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001869
MFR.:	SUR.:	Shielding Angle:

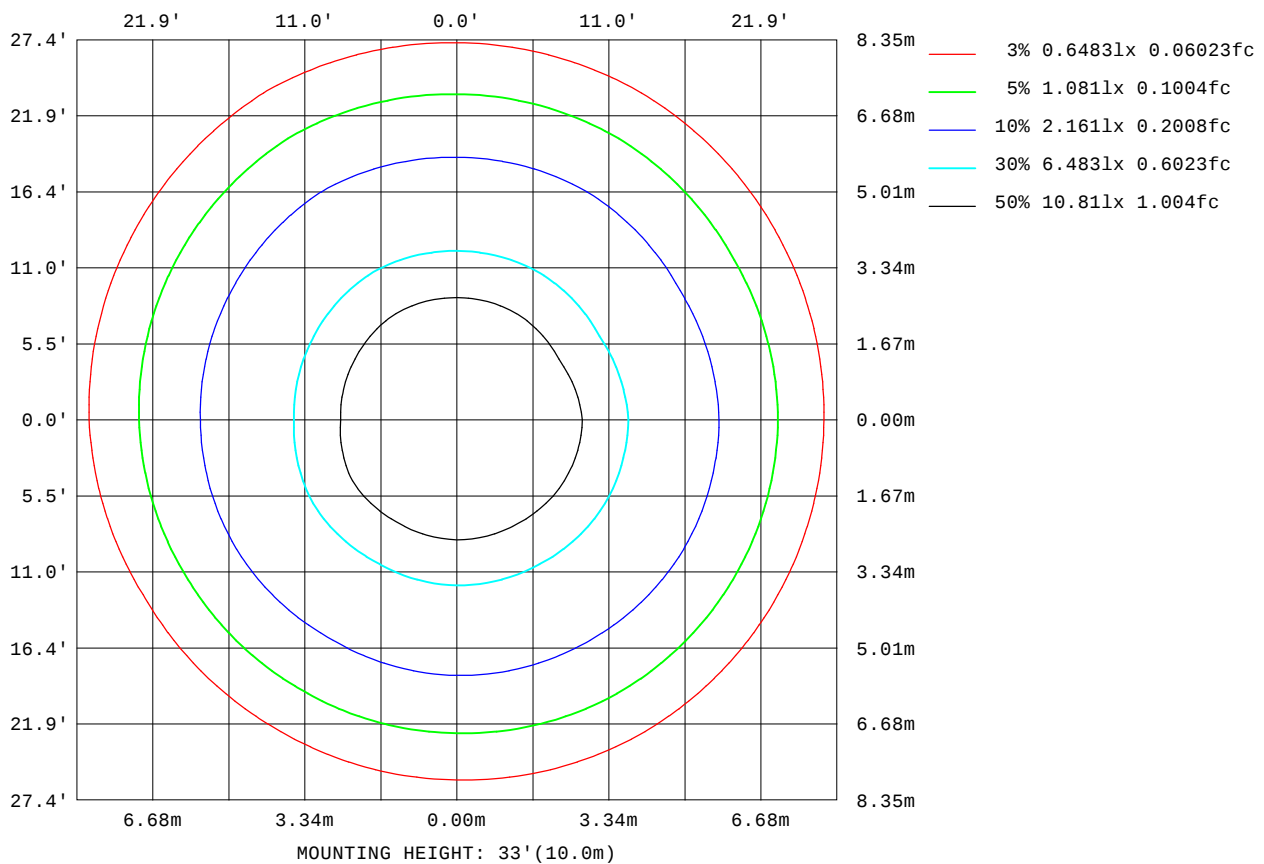

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

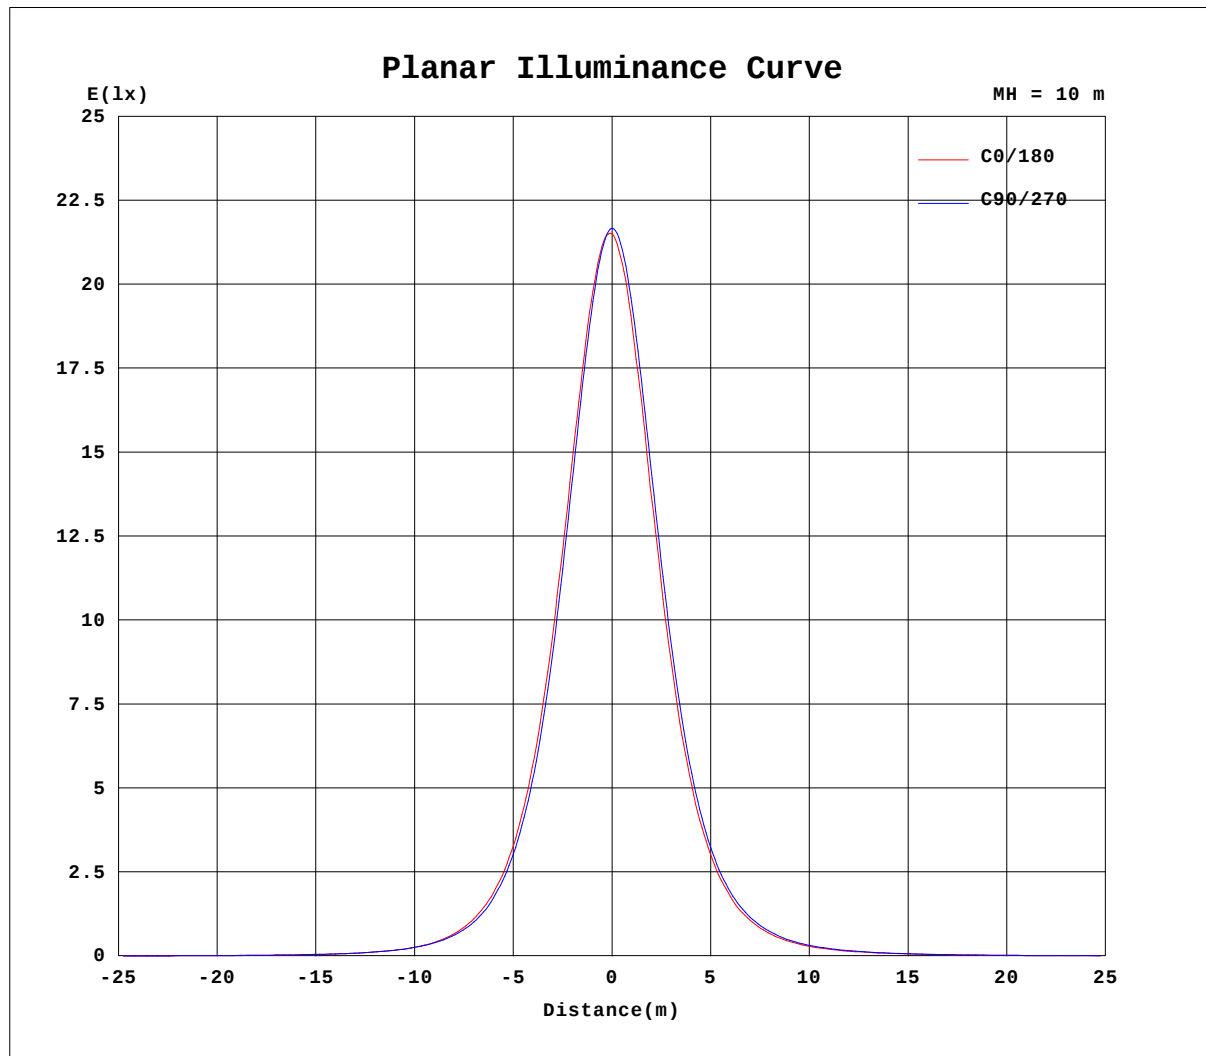


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW ALL-30D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001869
MFR.:	SUR.:	Shielding Angle:

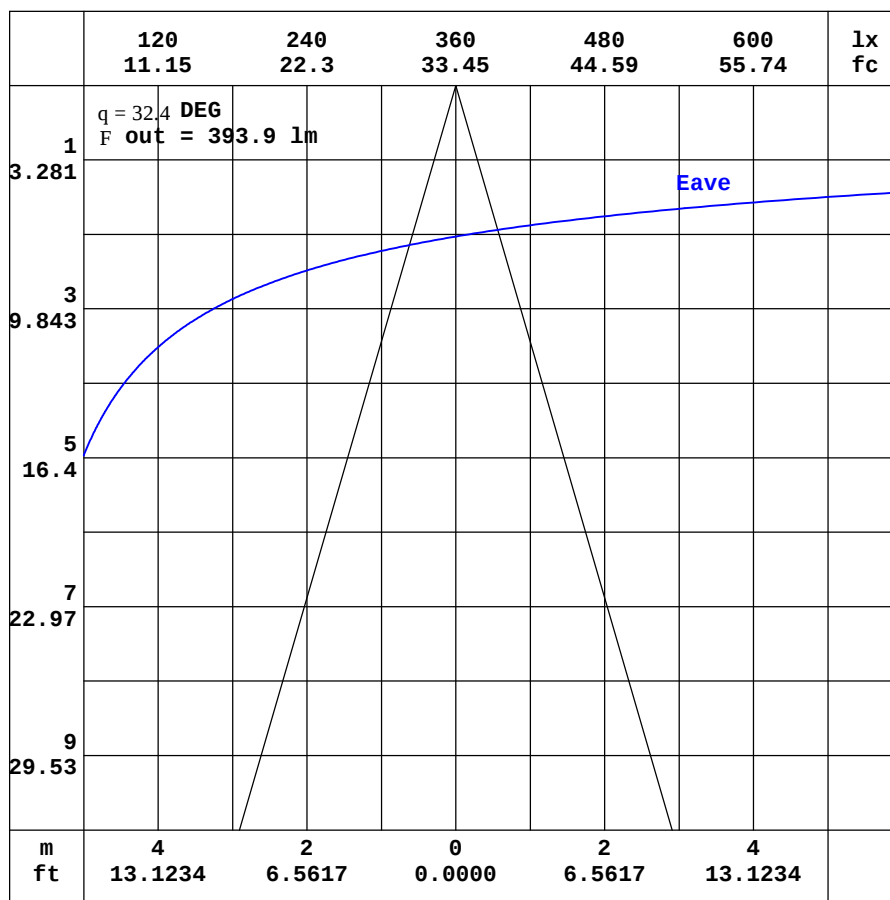

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW ALL-30D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001869
MFR.:	SUR.:	Shielding Angle:

Table--1
UNIT: cd

H(°)\V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	3.94	3.62	3.40	3.36	3.43	3.70	4.15	4.79	5.55	6.35	7.07	7.59	7.93	8.06	8.05	7.98	7.84	7.70	7.90
-170	3.94	3.56	3.30	3.19	3.18	3.32	3.58	3.97	4.42	4.88	5.28	5.57	5.71	5.77	5.72	5.83	6.33	6.72	6.99
-160	3.94	3.51	3.21	3.02	2.93	2.94	3.01	3.12	3.25	3.37	3.43	3.43	3.44	4.05	4.65	5.18	5.62	5.90	6.06
-150	3.94	3.47	3.11	2.87	2.70	2.59	2.50	2.39	2.26	2.07	1.92	2.26	2.67	3.11	3.55	3.96	4.28	4.50	4.61
-140	3.94	3.44	3.05	2.74	2.51	2.30	2.11	1.88	1.58	1.48	1.57	1.72	1.91	2.14	2.38	2.62	2.81	2.95	3.01
-130	3.94	3.42	3.00	2.66	2.36	2.10	1.83	1.55	1.42	1.42	1.42	1.43	1.46	1.52	1.60	1.69	1.77	1.83	1.86
-120	3.94	3.41	2.96	2.59	2.26	1.95	1.65	1.43	1.43	1.43	1.43	1.42	1.41	1.40	1.40	1.41	1.42	1.42	1.43
-110	3.94	3.41	2.96	2.55	2.18	1.84	1.53	1.43	1.43	1.44	1.44	1.44	1.44	1.44	1.44	1.43	1.43	1.42	1.42
-100	3.94	3.45	2.98	2.54	2.13	1.74	1.37	1.36	1.37	1.38	1.40	1.41	1.42	1.43	1.43	1.44	1.45	1.45	1.46
-90	3.94	3.49	3.03	2.58	2.12	1.66	1.21	1.20	1.20	1.20	1.20	1.19	1.19	1.19	1.20	1.20	1.20	1.20	1.21
-80	3.94	3.55	3.12	2.67	2.21	1.71	1.18	1.21	1.31	1.43	1.54	1.66	1.77	1.90	2.03	2.14	2.24	2.32	2.37
-70	3.94	3.63	3.30	2.97	2.70	2.49	2.38	2.86	3.53	4.22	4.94	5.70	6.41	7.14	7.82	8.39	8.83	9.13	9.29
-60	3.94	3.72	3.58	3.58	3.86	4.43	5.13	6.07	7.69	9.44	11.3	13.2	15.0	16.8	18.4	19.8	20.9	21.6	22.0
-50	3.94	3.86	3.97	4.54	5.61	7.18	8.88	10.6	13.2	16.4	20.0	24.0	28.3	32.6	37.0	41.1	44.5	46.8	47.9
-40	3.94	4.02	4.46	5.68	7.83	10.4	13.3	16.5	20.3	25.5	32.8	41.8	52.5	64.7	77.7	91.2	103	111	115
-30	3.94	4.18	5.01	6.91	10.00	13.7	18.1	23.4	30.1	39.1	52.3	72.4	98.8	132	172	215	257	290	304
-20	3.94	4.34	5.55	8.16	12.1	17.0	22.9	30.4	41.1	56.9	81.3	118	174	255	364	491	620	730	778
-10	3.94	4.47	5.98	9.20	13.8	19.6	26.9	36.9	51.1	73.6	110	168	264	414	637	934	1250	1503	1624
0	3.94	4.58	6.29	9.85	14.9	21.2	29.7	40.7	56.8	82.4	125	194	310	487	756	1125	1573	1967	2151
10	3.94	4.57	6.21	9.61	14.5	20.7	28.6	39.3	54.6	78.4	117	179	275	424	639	927	1258	1546	1644
20	3.94	4.53	5.99	8.95	13.5	19.1	26.0	34.9	47.3	65.4	93.0	135	196	282	395	533	675	774	810
30	3.94	4.47	5.65	8.00	11.8	16.5	22.2	29.1	38.0	49.6	65.9	89.2	120	159	205	253	297	323	331
40	3.94	4.38	5.25	6.99	9.95	13.5	17.8	22.8	28.6	35.8	44.8	56.1	69.4	85.1	102	116	127	135	137
50	3.94	4.28	4.89	6.04	7.80	10.4	13.3	16.7	20.4	24.7	29.5	34.8	40.7	46.6	52.1	56.7	60.1	62.1	62.6
60	3.94	4.17	4.58	5.17	6.14	7.45	9.23	11.2	13.4	15.8	18.3	20.9	23.4	26.0	27.8	29.5	30.9	31.6	31.9
70	3.94	4.11	4.33	4.60	4.96	5.47	6.09	6.93	7.91	8.99	10.1	11.1	12.1	13.1	14.0	14.7	15.2	15.5	15.7
80	3.94	4.04	4.13	4.23	4.36	4.48	4.59	4.73	4.91	5.10	5.33	5.58	5.83	6.02	6.19	6.33	6.44	6.50	6.53
90	3.94	3.96	3.99	4.01	4.03	4.05	4.07	4.07	4.06	4.05	4.04	4.03	4.02	4.01	4.01	4.01	4.00	4.00	3.99
100	3.94	3.91	3.85	3.82	3.79	3.75	3.72	3.67	3.62	3.57	3.52	3.48	3.44	3.41	3.40	3.39	3.38	3.38	3.38
110	3.94	3.83	3.75	3.67	3.59	3.52	3.46	3.41	3.35	3.32	3.30	3.29	3.28	3.28	3.28	3.27	3.26	3.26	3.24
120	3.94	3.78	3.65	3.54	3.44	3.38	3.34	3.33	3.32	3.34	3.40	3.48	3.56	3.63	3.72	3.78	3.83	3.86	3.87
130	3.94	3.75	3.58	3.45	3.37	3.35	3.34	3.39	3.52	3.70	3.91	4.15	4.39	4.64	4.87	5.06	5.22	5.31	5.35
140	3.94	3.70	3.51	3.38	3.35	3.36	3.47	3.67	3.95	4.33	4.74	5.19	5.63	6.04	6.39	6.69	6.89	7.02	7.07
150	3.94	3.67	3.47	3.36	3.36	3.44	3.67	4.03	4.50	5.07	5.67	6.25	6.79	7.25	7.62	7.91	8.10	8.20	8.25
160	3.94	3.65	3.44	3.36	3.38	3.56	3.89	4.39	5.03	5.73	6.43	7.03	7.51	7.89	8.16	8.38	8.51	8.58	8.66
170	3.94	3.63	3.42	3.36	3.41	3.65	4.06	4.67	5.39	6.17	6.89	7.46	7.85	8.06	8.12	8.16	8.16	8.18	8.30
180	3.94	3.62	3.40	3.36	3.43	3.70	4.15	4.79	5.55	6.35	7.07	7.59	7.93	8.06	8.05	7.98	7.84	7.70	7.91

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW ALL-30D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001869
MFR.:	SUR.:	Shielding Angle:

Table--2
UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	7.06	6.63	6.17	5.64	4.99	4.28	3.56	2.89	2.32	1.85	1.55	1.44	1.45	1.45	1.45	1.41	1.28	1.15
-170	6.72	6.48	6.06	5.51	4.86	4.15	3.45	2.79	2.25	1.80	1.54	1.45	1.45	1.45	1.45	1.41	1.28	1.15
-160	5.93	5.68	5.31	4.81	4.22	3.62	3.02	2.48	2.03	1.69	1.51	1.46	1.45	1.45	1.45	1.40	1.28	1.15
-150	4.54	4.36	4.07	3.69	3.25	2.81	2.39	2.05	1.76	1.57	1.48	1.46	1.46	1.46	1.45	1.40	1.28	1.15
-140	2.97	2.87	2.69	2.47	2.24	2.01	1.81	1.66	1.55	1.49	1.47	1.46	1.46	1.46	1.44	1.37	1.25	1.15
-130	1.85	1.80	1.74	1.65	1.58	1.51	1.48	1.46	1.46	1.47	1.47	1.47	1.46	1.45	1.42	1.35	1.23	1.15
-120	1.43	1.43	1.42	1.42	1.42	1.43	1.44	1.46	1.46	1.47	1.47	1.47	1.46	1.44	1.38	1.31	1.22	1.15
-110	1.42	1.43	1.44	1.44	1.45	1.45	1.45	1.46	1.46	1.47	1.47	1.46	1.42	1.39	1.33	1.26	1.19	1.15
-100	1.46	1.45	1.44	1.44	1.43	1.42	1.42	1.42	1.41	1.40	1.39	1.38	1.35	1.30	1.26	1.21	1.17	1.15
-90	1.21	1.20	1.20	1.20	1.20	1.20	1.20	1.21	1.22	1.22	1.23	1.24	1.22	1.21	1.19	1.18	1.16	1.15
-80	2.33	2.26	2.17	2.06	1.94	1.82	1.72	1.61	1.50	1.39	1.29	1.21	1.20	1.20	1.19	1.18	1.17	1.15
-70	9.11	8.79	8.33	7.75	7.06	6.35	5.67	4.96	4.29	3.61	2.95	2.30	1.85	1.53	1.30	1.21	1.17	1.15
-60	21.7	21.0	19.9	18.5	16.8	15.0	13.1	11.2	9.36	7.65	6.10	4.73	3.51	2.38	1.72	1.32	1.20	1.15
-50	47.3	45.2	42.1	38.1	33.6	28.9	24.3	20.1	16.3	13.0	10.2	7.79	5.66	3.84	2.33	1.52	1.22	1.15
-40	113	106	95.4	82.2	68.1	54.8	43.1	33.4	25.7	19.7	15.0	11.2	8.04	5.38	3.19	1.82	1.24	1.15
-30	296	267	228	183	142	105	76.4	54.3	38.7	28.0	20.4	14.8	10.4	6.86	4.08	2.08	1.28	1.15
-20	742	643	516	387	275	187	125	82.6	54.5	36.8	25.5	17.9	12.4	8.11	4.81	2.32	1.32	1.15
-10	1519	1275	967	675	444	283	177	110	68.5	44.1	29.5	20.2	13.8	8.95	5.27	2.50	1.35	1.15
0	2034	1681	1243	835	534	330	202	121	74.2	46.9	31.1	21.1	14.4	9.29	5.46	2.56	1.36	1.15
10	1541	1256	926	645	430	279	179	112	71.4	46.6	31.5	21.7	14.8	9.61	5.67	2.72	1.45	1.15
20	770	666	523	386	274	190	131	88.5	60.2	41.7	29.4	20.7	14.3	9.37	5.58	2.75	1.51	1.15
30	320	290	243	197	153	115	85.8	63.5	46.9	34.6	25.5	18.5	13.0	8.59	5.15	2.70	1.55	1.15
40	134	124	112	97.6	81.6	66.7	54.0	43.2	34.4	27.1	20.7	15.4	11.0	7.41	4.46	2.58	1.59	1.15
50	61.6	59.1	55.3	50.4	45.0	39.3	33.6	28.5	23.9	19.7	15.8	12.0	8.76	5.99	3.78	2.40	1.61	1.15
60	31.5	30.5	29.0	27.3	25.3	22.7	20.3	17.8	15.4	13.1	11.0	8.71	6.46	4.59	3.26	2.28	1.64	1.15
70	15.5	15.1	14.5	13.8	13.0	12.0	10.9	9.94	8.93	7.90	6.92	5.89	4.73	3.70	2.87	2.20	1.63	1.15
80	6.49	6.42	6.31	6.16	5.99	5.80	5.56	5.32	5.08	4.88	4.70	4.51	3.87	3.27	2.69	2.14	1.64	1.15
90	3.99	3.99	3.98	3.98	3.97	3.97	3.97	3.98	3.98	3.99	3.99	4.00	3.52	3.05	2.57	2.10	1.62	1.15
100	3.38	3.37	3.37	3.38	3.38	3.39	3.43	3.47	3.51	3.55	3.60	3.62	3.26	2.88	2.48	2.05	1.60	1.15
110	3.25	3.25	3.26	3.26	3.25	3.25	3.25	3.25	3.27	3.29	3.34	3.31	3.03	2.73	2.40	2.02	1.59	1.15
120	3.86	3.83	3.78	3.71	3.63	3.54	3.45	3.37	3.31	3.28	3.27	3.08	2.82	2.58	2.29	1.97	1.58	1.15
130	5.32	5.23	5.08	4.88	4.65	4.41	4.15	3.90	3.68	3.50	3.24	2.90	2.65	2.41	2.18	1.90	1.54	1.15
140	7.03	6.91	6.72	6.44	6.08	5.67	5.23	4.77	4.33	3.80	3.20	2.76	2.47	2.25	2.05	1.82	1.51	1.15
150	8.22	8.13	7.96	7.68	7.32	6.86	6.32	5.72	4.69	3.76	3.07	2.60	2.28	2.08	1.91	1.73	1.47	1.15
160	8.61	8.58	8.47	8.26	7.99	7.61	6.55	5.41	4.35	3.43	2.75	2.31	2.05	1.88	1.77	1.63	1.42	1.15
170	8.17	8.25	8.30	7.84	7.10	6.24	5.31	4.37	3.52	2.76	2.23	1.92	1.77	1.67	1.61	1.53	1.35	1.15
180	7.06	6.63	6.17	5.64	4.99	4.28	3.56	2.89	2.32	1.85	1.55	1.44	1.45	1.45	1.45	1.41	1.28	1.15

H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: