

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2165.7 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	67.7V x 67.3H
	At 50% of Imax	32.4V x 32.6H
	At 90% of Imax	12.0V x 11.9H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	788.1 lumens per klm.
	To 50% of Imax	379.4 lumens per klm.
	To 90% of Imax	64.2 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW GREEN-30D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001871
MFR.:	SUR.:	Shielding Angle:

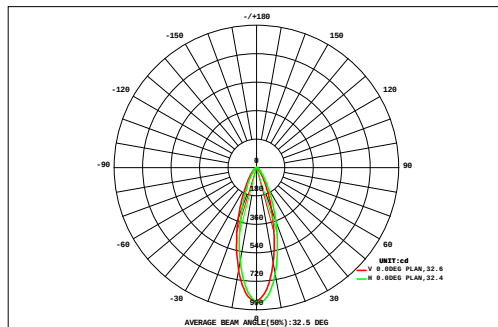

DATA OF LAMP		Eff:56.64lm/W	
MODEL		Imax(cd)	855.0
NOMINAL POWER(W)	6.96	AVAILABILITY(%)	78.7
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	310.9
NOMINAL FLUX(lm)	394.8	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	394.8
TEST VOLTAGE(V)	221.4	q @50%(H,V)	33,32DEG

45 40 35 30 25 20 15 10 5 0 -5 -10 -15 -20 -25 -30 -35 -40 -45 -45	AREA FLUX DIAGRAM																UNIT:lm				F t	F a						
	0.09	0.13	0.17	0.22	0.27	0.32	0.36	0.38	0.39	0.37	0.34	0.30	0.25	0.21	0.16	0.13	0.10	0.07	4.27	0.00								
	0.12	0.16	0.22	0.30	0.39	0.47	0.54	0.58	0.59	0.57	0.51	0.44	0.36	0.28	0.22	0.16	0.12	0.09	6.11	0.43								
	0.14	0.20	0.29	0.41	0.54	0.69	0.81	0.89	0.92	0.88	0.78	0.65	0.52	0.39	0.28	0.20	0.14	0.10	8.84	5.33								
	0.17	0.25	0.38	0.54	0.75	1.00	1.22	1.38	1.44	1.37	1.20	0.97	0.73	0.53	0.37	0.25	0.17	0.11	12.8	10.2								
	0.20	0.31	0.47	0.70	1.02	1.40	1.80	2.10	2.23	2.12	1.82	1.42	1.03	0.71	0.47	0.31	0.20	0.13	18.4	16.3								
	0.22	0.36	0.57	0.88	1.33	1.90	2.54	3.07	3.29	3.15	2.67	2.03	1.41	0.93	0.59	0.37	0.23	0.14	25.7	23.9								
	0.25	0.40	0.65	1.05	1.64	2.43	3.32	4.14	4.54	4.36	3.65	2.70	1.81	1.16	0.71	0.43	0.26	0.15	33.7	32.1								
	0.26	0.43	0.71	1.17	1.87	2.84	3.98	5.07	5.71	5.47	4.51	3.29	2.20	1.38	0.82	0.48	0.28	0.16	40.6	39.2								
	0.27	0.44	0.74	1.21	1.96	3.02	4.28	5.53	6.32	6.06	5.05	3.75	2.48	1.51	0.88	0.50	0.28	0.16	44.4	43.0								
	0.26	0.43	0.71	1.16	1.89	2.93	4.19	5.40	6.09	5.96	5.03	3.72	2.45	1.49	0.86	0.49	0.28	0.16	43.5	42.0								
	0.24	0.39	0.64	1.04	1.68	2.60	3.68	4.63	5.15	5.01	4.24	3.16	2.11	1.31	0.78	0.45	0.26	0.15	37.5	36.0								
	0.21	0.34	0.54	0.87	1.35	2.04	2.79	3.43	3.83	3.72	3.16	2.40	1.64	1.06	0.66	0.39	0.23	0.14	28.8	27.1								
	0.18	0.28	0.44	0.67	1.01	1.44	1.91	2.32	2.55	2.49	2.14	1.67	1.20	0.81	0.52	0.32	0.20	0.12	20.3	18.3								
	0.15	0.22	0.33	0.50	0.71	0.97	1.24	1.47	1.59	1.55	1.37	1.10	0.82	0.58	0.39	0.25	0.16	0.10	13.5	11.1								
	0.12	0.17	0.25	0.36	0.49	0.63	0.78	0.91	0.97	0.95	0.85	0.70	0.55	0.40	0.28	0.19	0.13	0.09	8.83	5.46								
	0.09	0.13	0.19	0.25	0.33	0.41	0.49	0.56	0.59	0.58	0.53	0.45	0.36	0.28	0.20	0.15	0.10	0.07	5.77	0.47								
	0.07	0.10	0.14	0.18	0.22	0.27	0.32	0.35	0.36	0.36	0.33	0.29	0.24	0.19	0.15	0.11	0.08	0.06	3.81	0.00								
	0.06	0.08	0.10	0.13	0.15	0.18	0.20	0.22	0.23	0.23	0.21	0.19	0.16	0.13	0.11	0.08	0.06	0.05	2.57	0.00								
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)												10	15	20	25	30	35	40	45
F t	3.09	4.85	7.54	11.6	17.6	25.5	34.5	42.4	46.8	45.2	38.4	29.2	20.3	13.3	8.45	5.27	3.27	2.05	360	---								
F a	0.00	0.17	4.00	8.88	15.3	23.5	32.6	40.6	44.9	43.3	36.5	27.1	17.9	10.6	5.05	0.41	0.00	0.00	---		311							

one-half-peak spread: U:15.9,D:16.8 , L:17.0,R:15.9


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW GREEN-30D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001871
MFR.:	SUR.:	Shielding Angle:

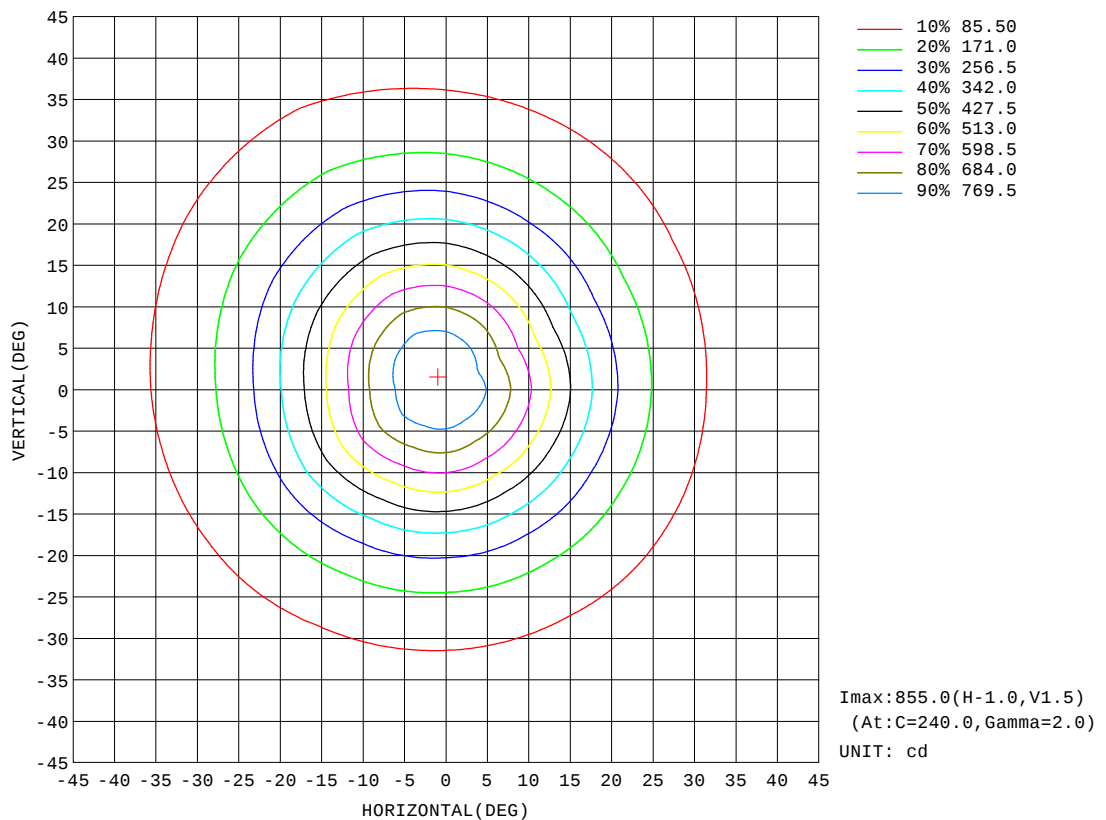


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW GREEN-30D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001871
MFR.:	SUR.:	Shielding Angle:

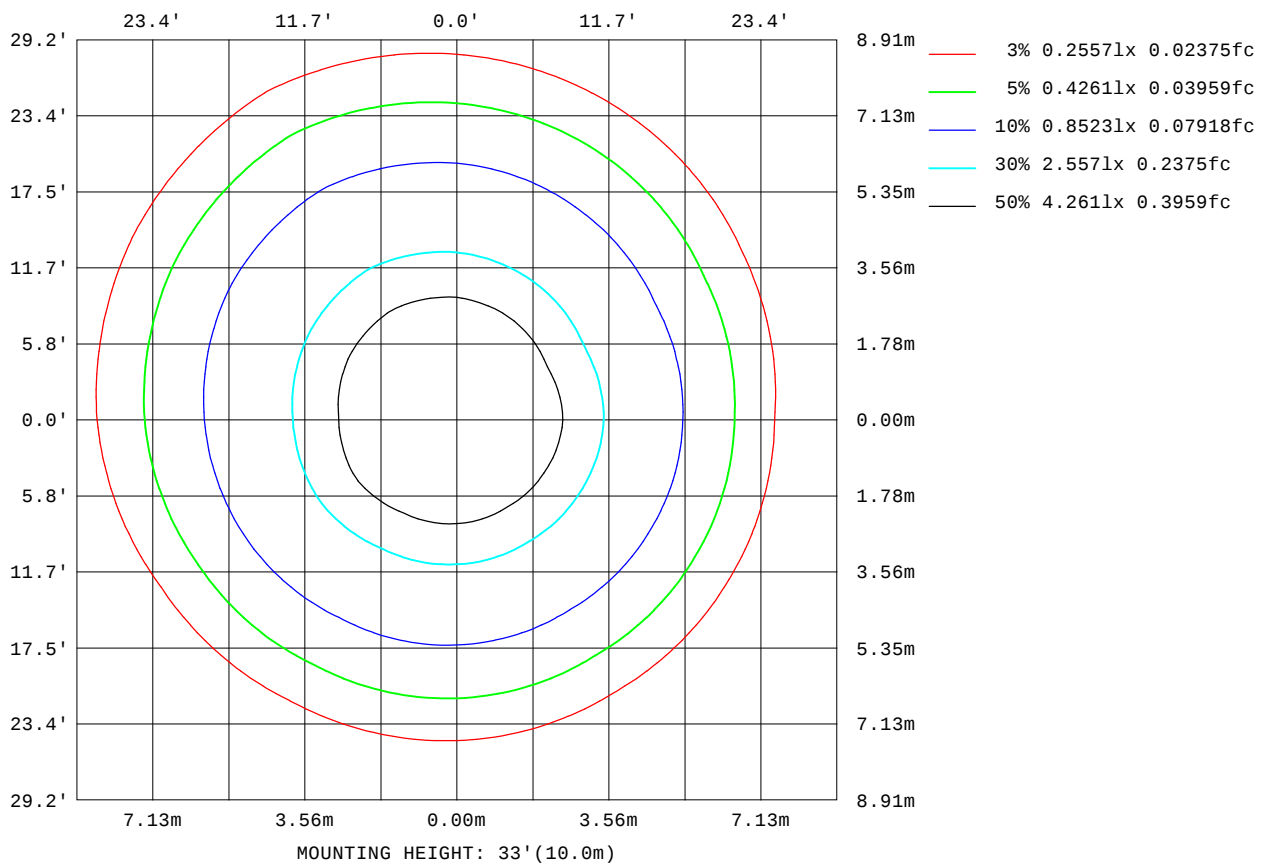

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

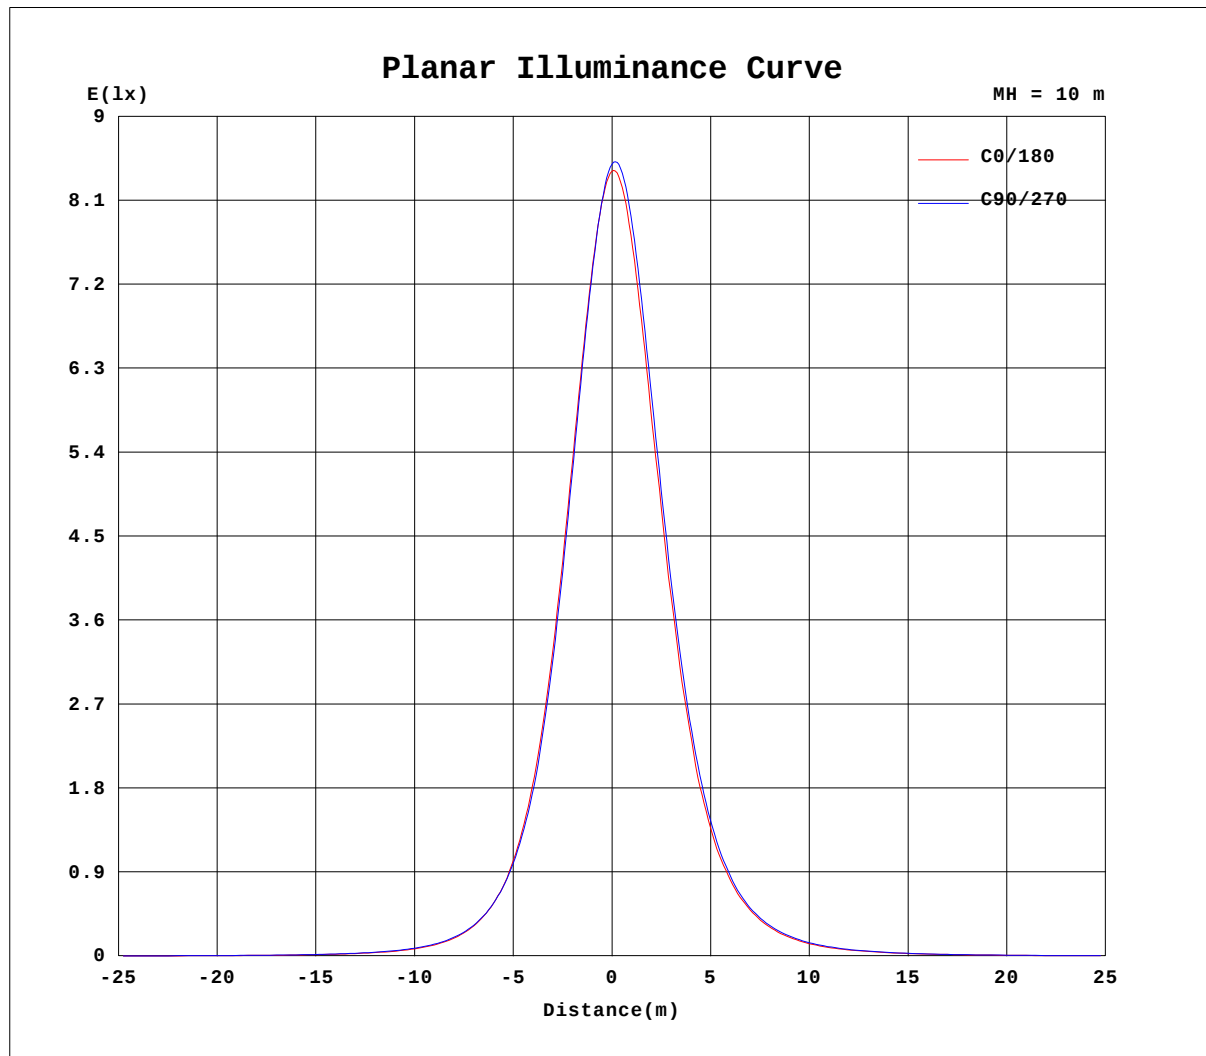


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW GREEN-30D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001871
MFR.:	SUR.:	Shielding Angle:

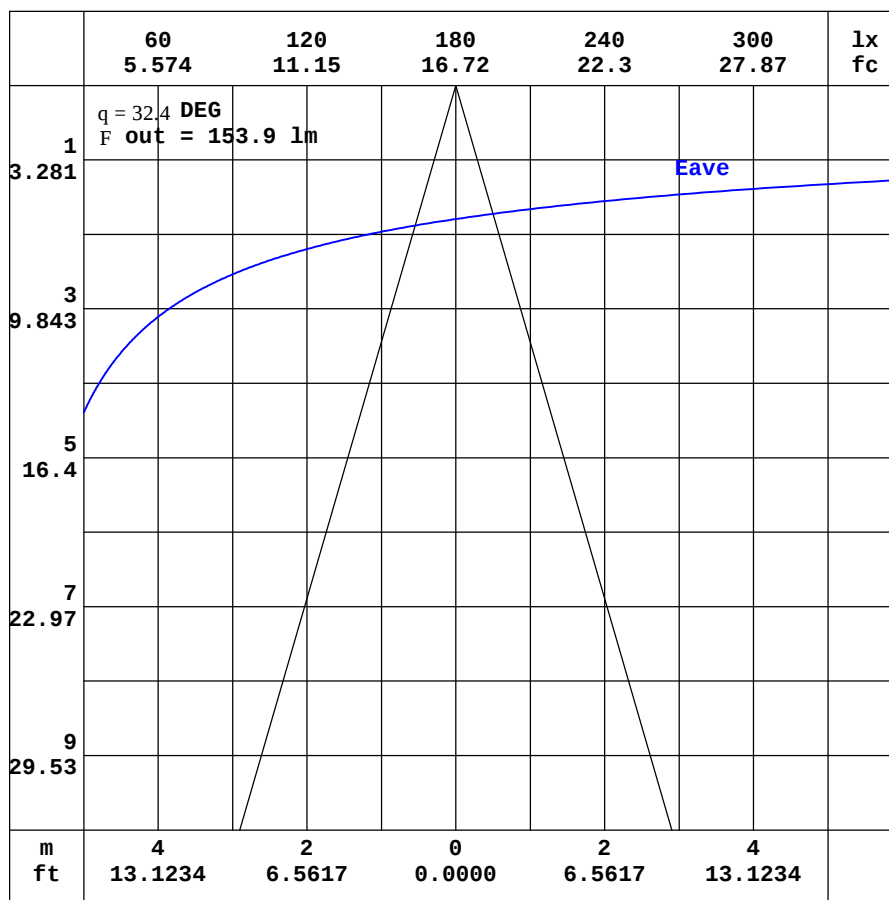

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW GREEN-30D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001871
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.50	1.37	1.27	1.27	1.29	1.37	1.51	1.74	2.02	2.32	2.61	2.85	3.01	3.10	3.11	3.10	3.09	3.08	3.23
-170	1.50	1.34	1.23	1.20	1.19	1.23	1.31	1.44	1.60	1.78	1.94	2.07	2.15	2.19	2.20	2.27	2.51	2.71	2.89
-160	1.50	1.32	1.19	1.13	1.09	1.09	1.10	1.13	1.17	1.22	1.25	1.26	1.28	1.52	1.78	2.02	2.23	2.39	2.51
-150	1.50	1.30	1.16	1.07	1.01	0.96	0.91	0.87	0.81	0.74	0.69	0.82	0.98	1.17	1.35	1.53	1.69	1.82	1.91
-140	1.50	1.29	1.13	1.02	0.93	0.85	0.77	0.68	0.56	0.52	0.55	0.61	0.69	0.78	0.89	1.01	1.11	1.19	1.25
-130	1.50	1.29	1.11	0.97	0.87	0.77	0.66	0.55	0.50	0.50	0.50	0.50	0.51	0.53	0.58	0.63	0.68	0.73	0.76
-120	1.50	1.28	1.11	0.95	0.82	0.71	0.59	0.50	0.50	0.50	0.50	0.49	0.49	0.49	0.49	0.50	0.51	0.52	0.53
-110	1.50	1.29	1.10	0.94	0.79	0.66	0.54	0.50	0.50	0.50	0.49	0.49	0.49	0.49	0.49	0.49	0.50	0.50	0.50
-100	1.50	1.31	1.11	0.94	0.77	0.62	0.47	0.46	0.46	0.47	0.47	0.47	0.47	0.47	0.48	0.49	0.49	0.50	0.50
-90	1.50	1.32	1.13	0.95	0.76	0.58	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.41	0.41	0.42	0.43	0.43
-80	1.50	1.34	1.17	0.99	0.80	0.60	0.38	0.38	0.43	0.48	0.54	0.59	0.64	0.69	0.73	0.77	0.80	0.82	0.84
-70	1.50	1.38	1.24	1.11	0.99	0.91	0.85	1.05	1.32	1.60	1.89	2.16	2.42	2.68	2.92	3.11	3.26	3.35	3.38
-60	1.50	1.41	1.36	1.35	1.47	1.71	2.01	2.39	3.04	3.71	4.40	5.08	5.71	6.29	6.83	7.25	7.54	7.70	7.72
-50	1.50	1.48	1.52	1.75	2.21	2.88	3.59	4.31	5.31	6.56	7.90	9.30	10.8	12.1	13.5	14.6	15.5	16.0	16.0
-40	1.50	1.54	1.72	2.23	3.16	4.26	5.47	6.83	8.27	10.3	13.1	16.4	20.1	24.1	28.1	32.1	35.3	37.2	37.4
-30	1.50	1.60	1.95	2.77	4.08	5.67	7.56	9.79	12.5	16.2	21.4	29.1	38.7	50.3	63.0	76.2	88.9	97.3	98.9
-20	1.50	1.66	2.17	3.30	5.01	7.10	9.66	13.0	17.6	24.3	34.5	49.4	70.8	102	141	185	227	258	265
-10	1.50	1.72	2.35	3.73	5.74	8.24	11.6	16.0	22.4	32.5	48.6	74.2	114	175	266	382	493	573	600
0	1.50	1.77	2.48	4.01	6.21	8.99	12.8	17.9	25.5	37.6	58.0	90.4	141	220	339	492	659	794	841
10	1.50	1.76	2.45	3.92	6.07	8.80	12.5	17.5	24.9	36.7	55.7	85.8	133	203	306	432	560	663	681
20	1.50	1.75	2.36	3.64	5.62	8.14	11.3	15.6	21.7	30.9	45.3	66.8	97.2	140	194	257	320	353	357
30	1.50	1.72	2.23	3.24	4.89	7.01	9.65	13.0	17.4	23.3	31.9	44.1	59.8	79.4	102	125	141	150	149
40	1.50	1.69	2.06	2.80	4.09	5.70	7.67	10.0	12.9	16.5	21.0	26.7	33.7	41.7	50.3	56.3	60.5	62.3	61.3
50	1.50	1.65	1.91	2.41	3.18	4.31	5.64	7.21	8.98	11.0	13.4	15.9	18.8	22.0	24.3	26.2	27.4	27.9	27.6
60	1.50	1.60	1.78	2.04	2.46	3.03	3.82	4.71	5.70	6.80	7.94	9.12	10.4	11.5	12.3	13.0	13.5	13.7	13.6
70	1.50	1.58	1.67	1.80	1.96	2.19	2.47	2.82	3.25	3.72	4.19	4.68	5.14	5.53	5.86	6.13	6.32	6.43	6.46
80	1.50	1.55	1.60	1.64	1.71	1.77	1.83	1.88	1.95	2.03	2.12	2.22	2.32	2.39	2.47	2.52	2.56	2.58	2.58
90	1.50	1.52	1.53	1.55	1.57	1.58	1.60	1.59	1.58	1.57	1.57	1.56	1.55	1.55	1.55	1.54	1.54	1.54	1.54
100	1.50	1.50	1.48	1.47	1.46	1.45	1.44	1.41	1.38	1.36	1.33	1.31	1.29	1.28	1.28	1.28	1.28	1.28	1.28
110	1.50	1.46	1.43	1.40	1.37	1.34	1.32	1.29	1.26	1.24	1.23	1.22	1.21	1.21	1.21	1.21	1.21	1.20	1.20
120	1.50	1.44	1.39	1.34	1.30	1.28	1.25	1.24	1.23	1.22	1.23	1.25	1.28	1.30	1.32	1.35	1.36	1.37	1.37
130	1.50	1.42	1.35	1.29	1.27	1.25	1.24	1.23	1.24	1.30	1.37	1.46	1.54	1.64	1.73	1.81	1.87	1.91	1.93
140	1.50	1.40	1.32	1.27	1.26	1.25	1.26	1.30	1.38	1.50	1.65	1.82	2.00	2.17	2.32	2.44	2.54	2.61	2.64
150	1.50	1.38	1.30	1.27	1.26	1.27	1.33	1.42	1.58	1.77	1.99	2.23	2.45	2.66	2.83	2.98	3.07	3.13	3.15
160	1.50	1.38	1.28	1.26	1.27	1.31	1.40	1.56	1.78	2.04	2.31	2.55	2.76	2.95	3.10	3.24	3.35	3.41	3.45
170	1.50	1.37	1.27	1.27	1.28	1.34	1.47	1.68	1.93	2.23	2.52	2.76	2.94	3.07	3.14	3.19	3.25	3.32	3.41
180	1.50	1.37	1.27	1.27	1.29	1.37	1.51	1.74	2.02	2.32	2.61	2.85	3.01	3.10	3.11	3.10	3.09	3.08	3.27

H_b Range:-90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-12

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW GREEN-30D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001871
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	2.87	2.73	2.53	2.31	2.03	1.74	1.44	1.16	0.92	0.69	0.55	0.50	0.50	0.49	0.49	0.48	0.44	0.42
-170	2.79	2.69	2.52	2.29	2.02	1.72	1.42	1.15	0.91	0.69	0.57	0.51	0.50	0.49	0.49	0.48	0.44	0.42
-160	2.46	2.35	2.21	2.01	1.78	1.53	1.27	1.04	0.83	0.66	0.56	0.52	0.51	0.50	0.49	0.48	0.44	0.42
-150	1.89	1.82	1.71	1.55	1.37	1.19	1.01	0.86	0.72	0.61	0.55	0.53	0.51	0.50	0.50	0.48	0.43	0.42
-140	1.24	1.20	1.13	1.03	0.93	0.83	0.74	0.66	0.61	0.57	0.54	0.52	0.51	0.51	0.50	0.47	0.43	0.42
-130	0.75	0.73	0.69	0.65	0.60	0.58	0.56	0.54	0.54	0.54	0.53	0.52	0.52	0.51	0.50	0.46	0.43	0.42
-120	0.52	0.51	0.51	0.50	0.49	0.50	0.51	0.51	0.52	0.52	0.53	0.53	0.52	0.51	0.48	0.46	0.42	0.42
-110	0.50	0.50	0.50	0.49	0.49	0.49	0.50	0.51	0.51	0.52	0.52	0.52	0.52	0.51	0.49	0.47	0.44	0.42
-100	0.50	0.50	0.50	0.49	0.49	0.49	0.50	0.50	0.50	0.50	0.50	0.51	0.49	0.47	0.45	0.44	0.42	0.42
-90	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.44	0.45	0.45	0.46	0.46	0.46	0.45	0.44	0.43	0.43	0.42
-80	0.83	0.81	0.78	0.75	0.71	0.67	0.63	0.58	0.54	0.50	0.46	0.44	0.44	0.44	0.44	0.44	0.43	0.42
-70	3.30	3.17	3.00	2.78	2.53	2.27	2.03	1.77	1.53	1.29	1.05	0.81	0.66	0.55	0.48	0.45	0.43	0.42
-60	7.53	7.20	6.77	6.26	5.67	5.09	4.47	3.85	3.27	2.69	2.16	1.68	1.24	0.85	0.62	0.49	0.45	0.42
-50	15.5	14.6	13.4	12.1	10.6	9.22	7.88	6.60	5.46	4.42	3.53	2.73	2.01	1.37	0.84	0.56	0.45	0.42
-40	35.9	32.9	28.9	24.5	20.3	16.5	13.2	10.4	8.21	6.47	5.07	3.87	2.83	1.91	1.14	0.67	0.46	0.42
-30	93.4	82.0	67.6	53.6	41.0	30.4	22.1	16.0	11.8	8.87	6.70	5.00	3.61	2.43	1.46	0.76	0.48	0.42
-20	245	205	159	116	80.5	54.1	35.9	23.9	16.3	11.4	8.28	6.00	4.27	2.86	1.72	0.85	0.49	0.42
-10	541	437	314	209	134	83.3	51.3	31.8	20.3	13.6	9.47	6.72	4.72	3.16	1.88	0.91	0.50	0.42
0	766	610	430	276	168	99.3	59.1	35.5	22.2	14.5	10.00	7.02	4.92	3.28	1.95	0.93	0.51	0.42
10	610	478	336	224	144	89.1	55.5	34.9	22.5	15.1	10.5	7.40	5.16	3.42	2.04	0.99	0.54	0.42
20	322	261	196	139	94.9	63.7	43.1	29.2	20.1	14.1	10.1	7.24	5.07	3.37	2.01	1.01	0.56	0.42
30	137	117	95.1	74.0	55.7	41.0	30.1	22.1	16.4	12.2	9.03	6.59	4.67	3.11	1.87	1.00	0.58	0.42
40	57.7	52.0	45.1	37.8	30.9	24.8	19.9	15.8	12.5	9.85	7.51	5.60	4.02	2.71	1.63	0.96	0.59	0.42
50	26.4	24.7	22.4	19.9	17.5	15.1	12.8	10.7	8.91	7.28	5.83	4.43	3.22	2.20	1.40	0.89	0.60	0.42
60	13.2	12.6	11.8	10.9	9.94	8.81	7.80	6.77	5.81	4.92	4.10	3.23	2.38	1.70	1.21	0.85	0.61	0.42
70	6.32	6.10	5.82	5.47	5.06	4.62	4.21	3.80	3.38	2.96	2.57	2.19	1.76	1.37	1.07	0.82	0.60	0.42
80	2.55	2.50	2.44	2.37	2.28	2.19	2.09	1.99	1.89	1.82	1.75	1.67	1.44	1.21	1.00	0.79	0.60	0.42
90	1.53	1.52	1.51	1.50	1.49	1.48	1.48	1.48	1.48	1.48	1.48	1.48	1.31	1.13	0.95	0.77	0.60	0.42
100	1.27	1.26	1.25	1.25	1.25	1.24	1.26	1.28	1.30	1.32	1.33	1.34	1.20	1.06	0.91	0.75	0.59	0.42
110	1.21	1.21	1.21	1.21	1.21	1.21	1.21	1.21	1.22	1.23	1.25	1.23	1.12	1.00	0.87	0.72	0.57	0.42
120	1.39	1.39	1.38	1.37	1.35	1.32	1.29	1.26	1.23	1.22	1.23	1.15	1.04	0.94	0.82	0.70	0.56	0.42
130	1.95	1.93	1.89	1.83	1.76	1.67	1.58	1.48	1.39	1.31	1.20	1.07	0.97	0.88	0.79	0.67	0.54	0.42
140	2.65	2.62	2.57	2.47	2.35	2.19	2.02	1.84	1.67	1.44	1.20	1.03	0.90	0.81	0.73	0.64	0.52	0.42
150	3.18	3.17	3.11	3.01	2.86	2.68	2.47	2.23	1.82	1.44	1.15	0.96	0.82	0.74	0.67	0.61	0.50	0.42
160	3.44	3.42	3.37	3.28	3.16	3.01	2.58	2.13	1.70	1.31	1.03	0.85	0.73	0.66	0.62	0.57	0.48	0.42
170	3.34	3.35	3.32	3.14	2.83	2.49	2.11	1.74	1.39	1.05	0.83	0.69	0.62	0.58	0.55	0.53	0.46	0.42
180	2.87	2.73	2.53	2.31	2.03	1.74	1.44	1.16	0.92	0.69	0.55	0.50	0.50	0.49	0.49	0.48	0.44	0.42

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-12

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: